



1	2	3	4	5	6	7	8
Cabinet schematic — Pump cabinet Pump cabinet Two direct-on-line motor starters, controlled and monitored by a WAGO 750 PLC through a relay interface board.							
</							



1	2	3	4	5	6	7	8
Notes The upstream board protects the incoming cable with a C16 breaker. The cable lands there on terminals +EXT-X0, the only part of the upstream board in this model. The relay interface board -U2 has its own drawing set. These pages show it only as its two headers inside a dash-dot outline.							
Title Pump cabinet				Number SKX-PC-2	Revision 1.6	Revision date 2026-10-06	
Customer	Author fransys-examples	Page title Notes		Scope Pump cabinet	Sheet	Page 2 of 11	
1	2	3	4	5	6	7	8

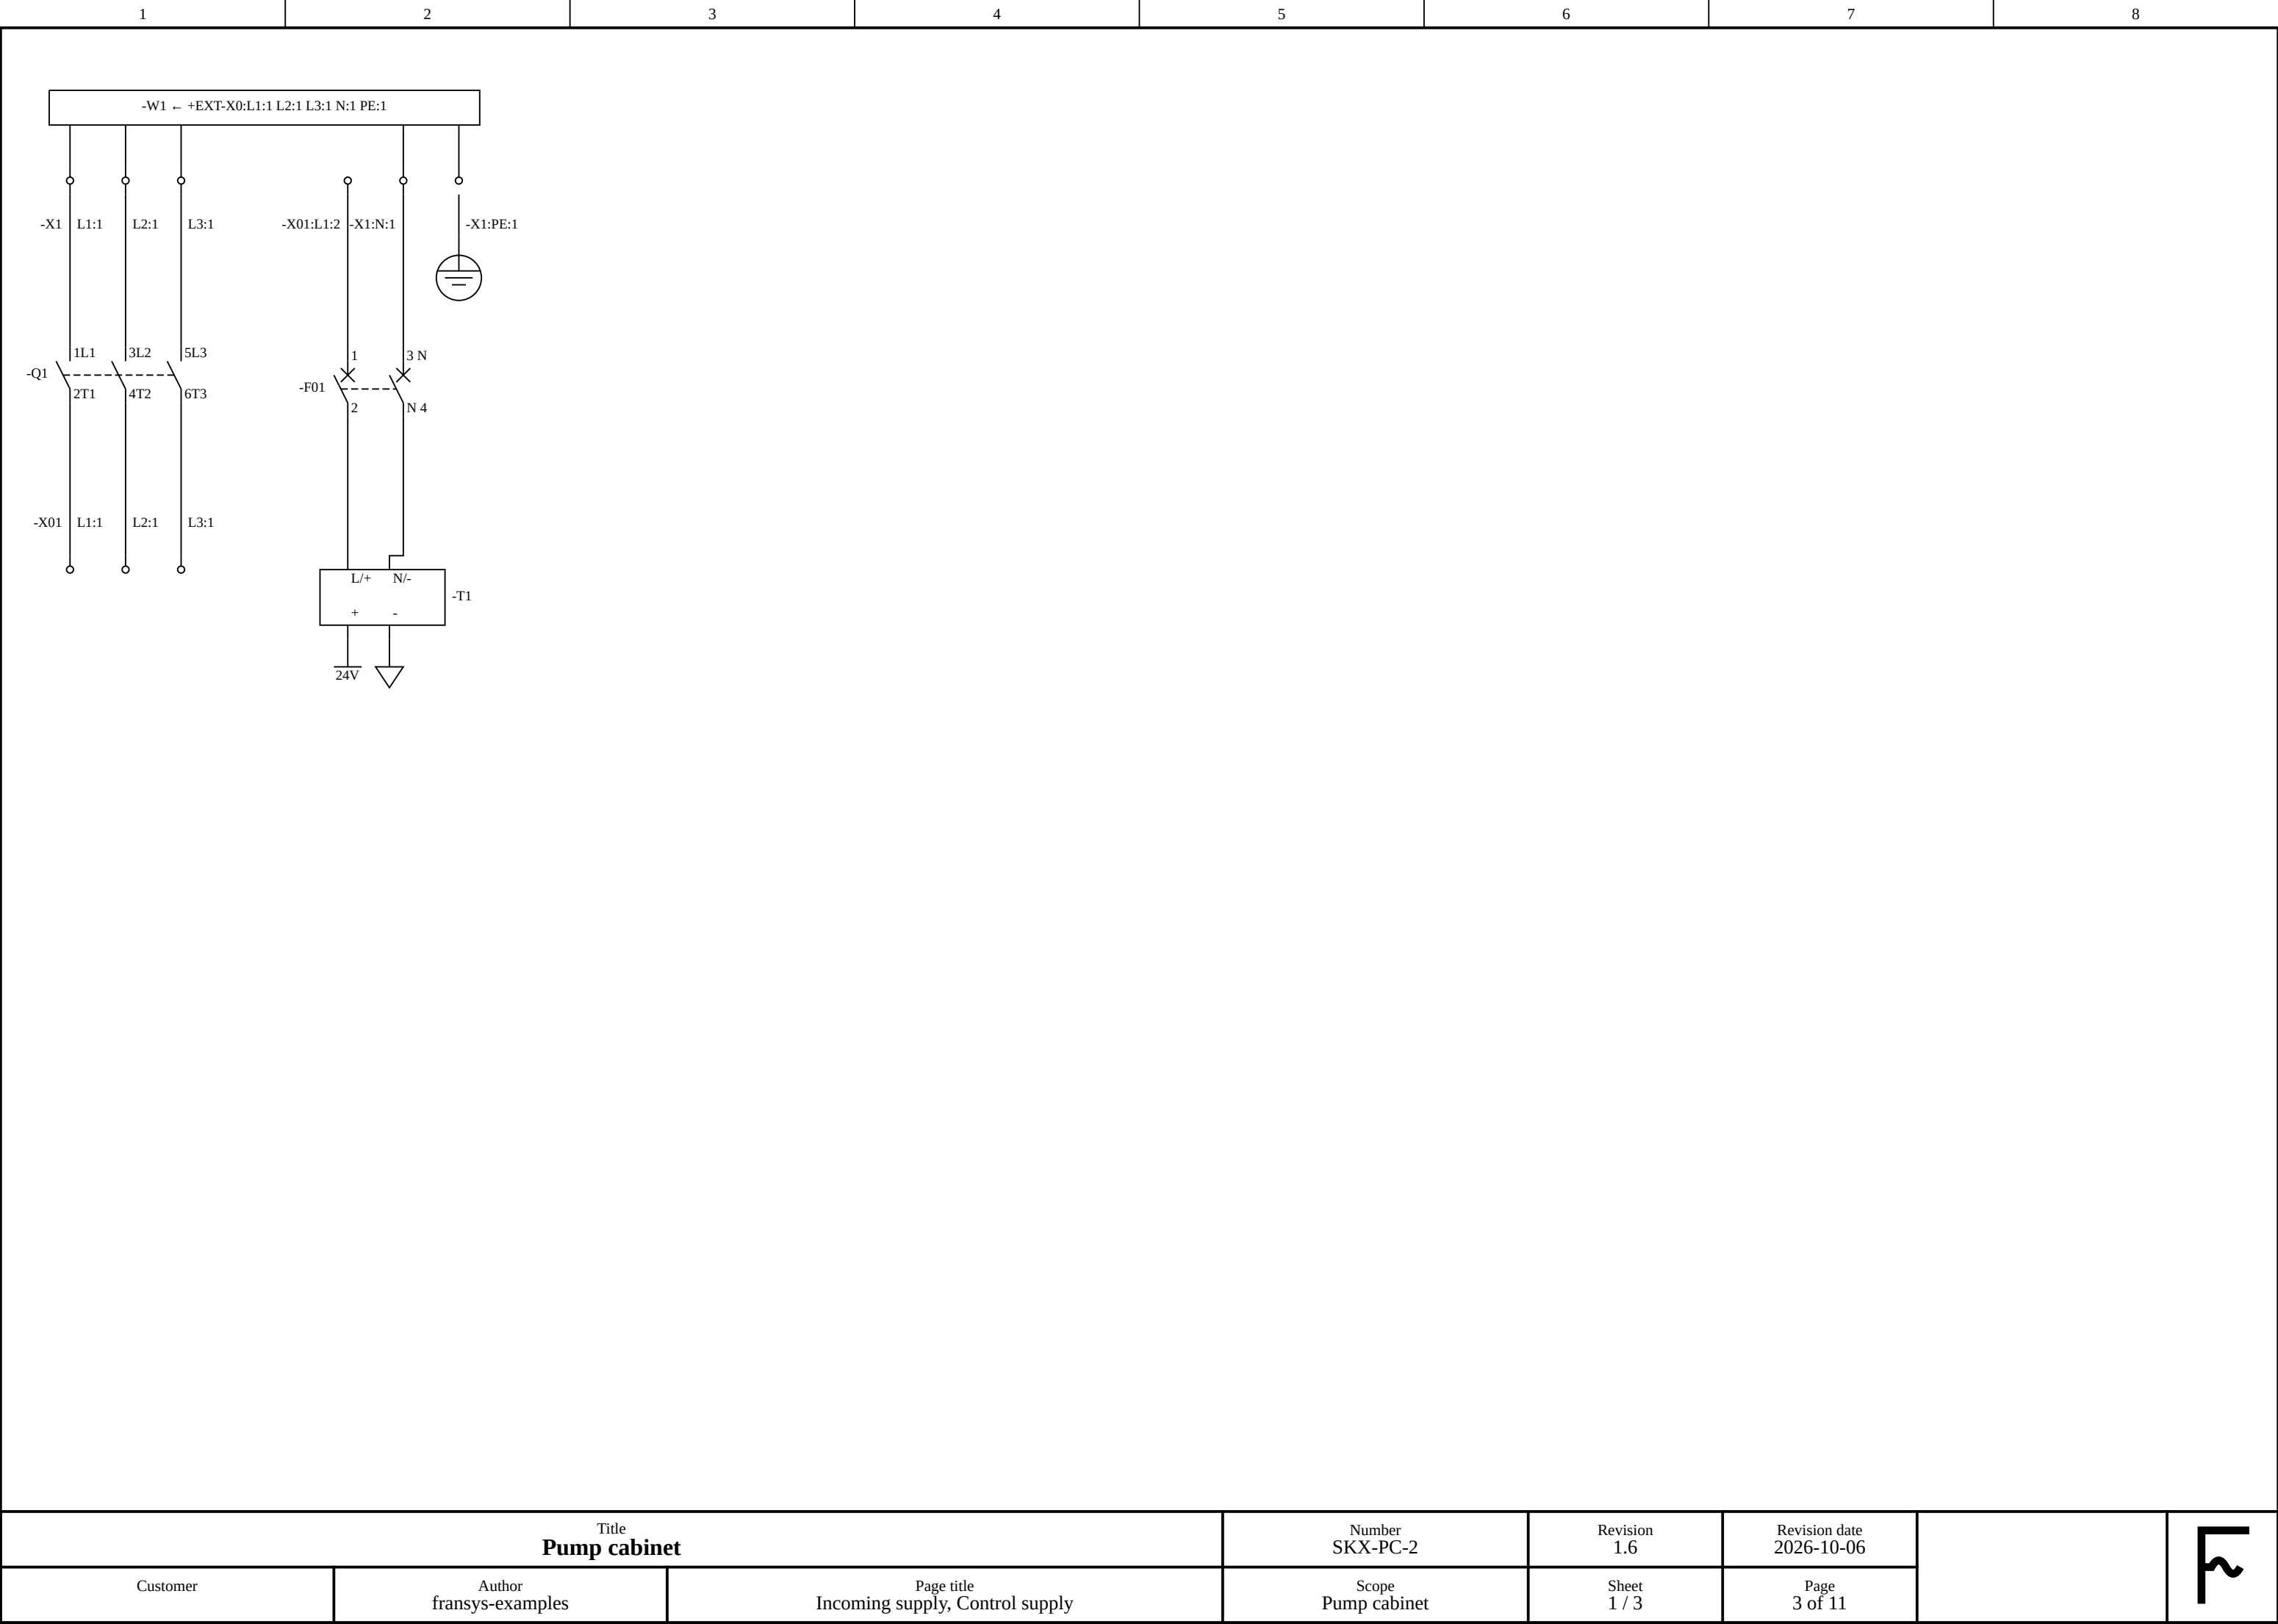

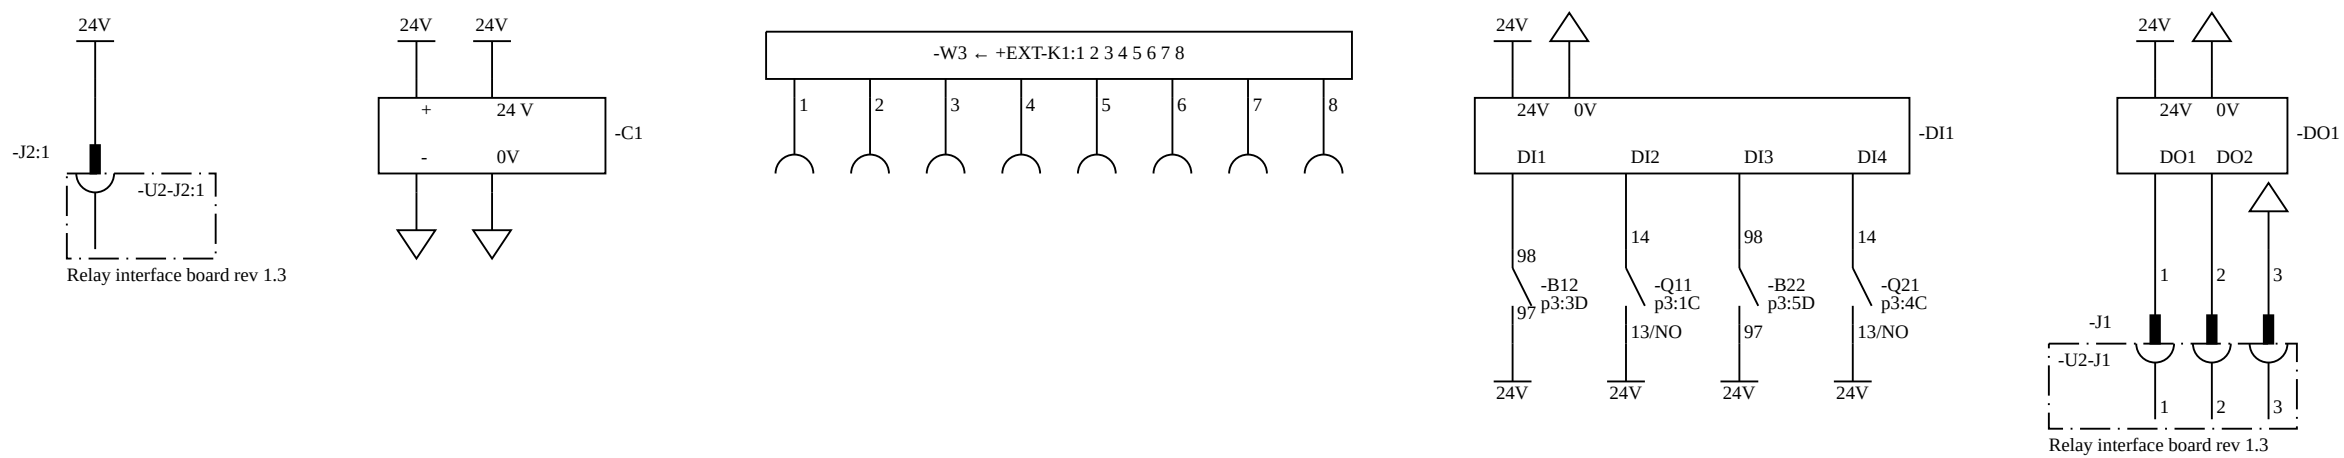

Title Pump cabinet			Number SKX-PC-2	Revision 1.6	Revision date 2026-10-06	
Customer	Author fransys-examples	Page title WAGO PLC	Scope Pump cabinet	Sheet 2 / 3	Page 4 of 11	

1		2		3		4		5		6		7		8	
Channel designation	Signal	Wired to						Signal name							
-DI1:1	di	-B12:98						P1_OVERLOAD							
-DI1:2	di	-Q11:14						P1_RUNNING							
-DI1:3	di	-B22:98						P2_OVERLOAD							
-DI1:4	di	-Q21:14						P2_RUNNING							
-DO1:1	do	-J1:1						P1_RUN							
-DO1:2	do	-J1:2						P2_RUN							
-DO1:3	do														
-DO1:4	do														

	1	2	3	4	5	6	7	8
-X01								
Designation	Group	Index	Side A	Bridge				
-X01:L1:1	L1	1	-Q1:2T1	T				
-X01:L1:2	L1	2	-F01:1	+				
-X01:L1:3	L1	3	-F11:1	+				
-X01:L1:4	L1	4	-F21:1	T				
-X01:L2:1	L2	1	-Q1:4T2	T				
-X01:L2:2	L2	2		+				
-X01:L2:3	L2	3	-F11:3	+				
-X01:L2:4	L2	4	-F21:3	T				
-X01:L3:1	L3	1	-Q1:6T3	T				
-X01:L3:2	L3	2		+				
-X01:L3:3	L3	3	-F11:5	+				
-X01:L3:4	L3	4	-F21:5	T				
</								

	1		2		3		4		5		6		7		8
-X2															
	Designation	Group	Index	Side A											Bridge
	-X2:24V:1	24V	1	-T1:+											┤
	-X2:24V:2	24V	2	-C1:24 V											┤
	-X2:24V:3	24V	3	-C1:+											┤
	-X2:24V:4	24V	4	-J2:1											┤
	-X2:24V:5	24V	5	-Q11:53/NO											┤
	-X2:24V:6	24V	6	-B12:97											┤
	-X2:24V:7	24V	7	-Q11:13/NO											┤
	-X2:24V:8	24V	8	-Q21:53/NO											┤
	-X2:24V:9	24V	9	-B22:97											┤
	-X2:24V:10	24V	10	-Q21:13/NO											┤
	-X2:GND:1	GND	1	-T1:-											┤
	-X2:GND:2	GND	2	-C1:0V											┤
	-X2:GND:3	GND	3	-C1:-											┤
	-X2:GND:4	GND	4	-Q11:A2											┤
	-X2:GND:5	GND	5	-P1:X2											┤
	-X2:GND:6	GND	6	-Q21:A2											┤
	-X2:GND:7	GND	7	-P2:X2											┤

1		2		3		4		5		6		7		8																																														
-X3 <table><tr><th>Designation</th><th>Group</th><th>Index</th><th>Side A</th><th>Side B</th></tr><tr><td>-X3:PE:1</td><td>PE</td><td>1</td><td>-X1:PE:1</td><td>+EXT-M1:PE</td></tr><tr><td>-X3:PE:2</td><td>PE</td><td>2</td><td>-X1:PE:1</td><td>+EXT-M2:PE</td></tr><tr><td>-X3:U:1</td><td>U</td><td>1</td><td>-B12:2/T1</td><td>+EXT-M1:U1</td></tr><tr><td>-X3:U:2</td><td>U</td><td>2</td><td>-B22:2/T1</td><td>+EXT-M2:U1</td></tr><tr><td>-X3:V:1</td><td>V</td><td>1</td><td>-B12:4/T2</td><td>+EXT-M1:V1</td></tr><tr><td>-X3:V:2</td><td>V</td><td>2</td><td>-B22:4/T2</td><td>+EXT-M2:V1</td></tr><tr><td>-X3:W:1</td><td>W</td><td>1</td><td>-B12:6/T3</td><td>+EXT-M1:W1</td></tr><tr><td>-X3:W:2</td><td>W</td><td>2</td><td>-B22:6/T3</td><td>+EXT-M2:W1</td></tr></table>																Designation	Group	Index	Side A	Side B	-X3:PE:1	PE	1	-X1:PE:1	+EXT-M1:PE	-X3:PE:2	PE	2	-X1:PE:1	+EXT-M2:PE	-X3:U:1	U	1	-B12:2/T1	+EXT-M1:U1	-X3:U:2	U	2	-B22:2/T1	+EXT-M2:U1	-X3:V:1	V	1	-B12:4/T2	+EXT-M1:V1	-X3:V:2	V	2	-B22:4/T2	+EXT-M2:V1	-X3:W:1	W	1	-B12:6/T3	+EXT-M1:W1	-X3:W:2	W	2	-B22:6/T3	+EXT-M2:W1
Designation	Group	Index	Side A	Side B																																																								
-X3:PE:1	PE	1	-X1:PE:1	+EXT-M1:PE																																																								
-X3:PE:2	PE	2	-X1:PE:1	+EXT-M2:PE																																																								
-X3:U:1	U	1	-B12:2/T1	+EXT-M1:U1																																																								
-X3:U:2	U	2	-B22:2/T1	+EXT-M2:U1																																																								
-X3:V:1	V	1	-B12:4/T2	+EXT-M1:V1																																																								
-X3:V:2	V	2	-B22:4/T2	+EXT-M2:V1																																																								
-X3:W:1	W	1	-B12:6/T3	+EXT-M1:W1																																																								
-X3:W:2	W	2	-B22:6/T3	+EXT-M2:W1																																																								



1		2		3		4		5		6		7		8	
Mpn	Revision	Manufacturer	Description	Count	Designations										
1757022		Phoenix Contact	PCB connector plug, 3-pin, 5.08 mm pitch	2	-J1; -J2										
2002-1201		WAGO	TOPJOB S feed-through terminal block, 2.5 mm2, grey; 24 A; 800 V	39	-X01:L1:1; -X01:L1:2; -X01:L1:3; -X01:L1:4; -X01:L2:1; -X01:L2:2; -X01:L2:3; -X01:L2:4; -X01:L3:1; -X01:L3:2; -X01:L3:3; -X01:L3:4; -X1:L1:1; -X1:L2:1; -X1:L3:1; -X1:N:1; -X2:24V:1; -X2:24V:2; -X2:24V:3; -X2:24V:4; -X2:24V:5; -X2:24V:6; -X2:24V:7; -X2:24V:8; -X2:24V:9; -X2:24V:10; -X2:GND:1; -X2:GND:2; -X2:GND:3; -X2:GND:4; -X2:GND:5; -X2:GND:6; -X2:GND:7; -X3:U:1; -X3:U:2; -X3:V:1; -X3:V:2; -X3:W:1; -X3:W:2										
2002-1207		WAGO	TOPJOB S ground terminal block, 2.5 mm2, green-yellow	3	-X1:PE:1; -X3:PE:1; -X3:PE:2										
3LD2054-0TK51		Siemens	Switch-disconnector, 3-pole; 16 A	1	-Q1										
3NW7033		Siemens	Fuse holder, 3-pole, 10x38 mm; 32 A	2	-F11; -F21										
3NW8004-1		Siemens	SENTRON cylindrical fuse link, 10x38 mm, aM; 4 A	6	-F11; -F21										
3SU1102-6AA40-1AA0		Siemens	Pilot light 22 mm, green, integrated LED 24 V AC/DC	2	-P1; -P2										
5SY6506-7		Siemens	Miniature circuit breaker, 1P+N, curve C; 6 A	1	-F01										
750-402		WAGO	4-channel digital input module, 24 V DC	1	-DI1										
750-504		WAGO	4-channel digital output module, 24 V DC; 0.5 A	1	-DO1										
750-600		WAGO	End module, terminates the internal data bus; no data contacts	1	-E1										
750-8212		WAGO	PFC200 controller, 2nd generation, 2x ETHERNET, RS-232/-485	1	-C1										
LADN11		Schneider Electric	TeSys D front-mount auxiliary contact block, 1 NO + 1 NC	2	-Q11; -Q21										
LC1D09BD		Schneider Electric	TeSys D contactor, 3-pole, AC-3 9 A, 1 NO + 1 NC auxiliary, 24 V DC coil	2	-Q11; -Q21										
LRD08		Schneider Electric	TeSys thermal overload relay, class 10A, 2.5-4 A, 1 NO + 1 NC	2	-B12; -B22										
QUINT4-PS/1AC/24DC/2.5/SC		Phoenix Contact	Power supply, 1-phase, 24 V DC; 2.5 A	1	-T1										
SKX-RIB-2	1.3		Relay interface board	1	-U2										