

Order PCBs Easily at JLCPCB: A Step-by-Step Guide

It is possible to order Open Source printed circuit boards (PCB) directly at the source. This is the PCB manufacturing plant of JLCPCB in China. You can ofcourse use other PCB manufacturers as well. JLCPCB is by far the cheapest possible way to get all kind of decent DCC decoders.

This page contains an elaborate step by step tutorial about how to do this.

1. [Ordering](#)
2. [Step 1: Download the necessary files.](#)
3. [Step 2: Open Google Chrome and surf to JLCPCB.com](#)
4. [step 3: upload the gerber files and adjust a setting or two](#)
5. [Step 4: Select your BOM and CPL](#)
6. [Step 5: Pick your components.](#)
7. [Step 6: Verify component positions](#)
8. [Step 7: Put the PCB in your basket and make the purchase](#)
9. [Step 8, flashing firmware](#)

Ordering

Ordering a bare PCB @ JLCPCB is incredible simple thing to do. Nevertheless, caution is advised. It is possible to screw something up. To make use of the SMT assembly service does take some efforts. I therefor made a guide how to make use of their SMT assemble services.

disclaimer: Be aware that ordering my design is at your own risc. If you screw something up and get defective boards don't look at me.

Step 1: Download the necessary files.

In order to download the files you need. You need to download the entire Train-Science-DIY repository. <https://github.com/bask185/Train-Science-DIY/tree/master> click on the green code button and click download ZIP.

Once the zip file is downloaded, extract it.


Step 2: Open Google Chrome and surf to JLCPCB.com

The website is sometimes updated and I found that this may come with bugs from time to time. It is therefore imperative to use the Google Chrome browser for the following steps. So no edge, safari or firefox. Surf to JLCPCB.com and create an account. You can also login with your Google account. You will need an account for ordering PCBs. Having an account also makes it easier to repeat previously made orders.

step 3: upload the gerber files and adjust a setting or two

Gerber files are files which contain the physical properties and information about the PCB design itself. They are needed to order PCBs. They are stored in a zip file. This zip file you need to upload

Uploading the gerber files can be done by clicking on the 'add gerber files'. A window will pop-up. Navigate to your newly downloaded folder and click on the zip files which is named GERBERS.zip.

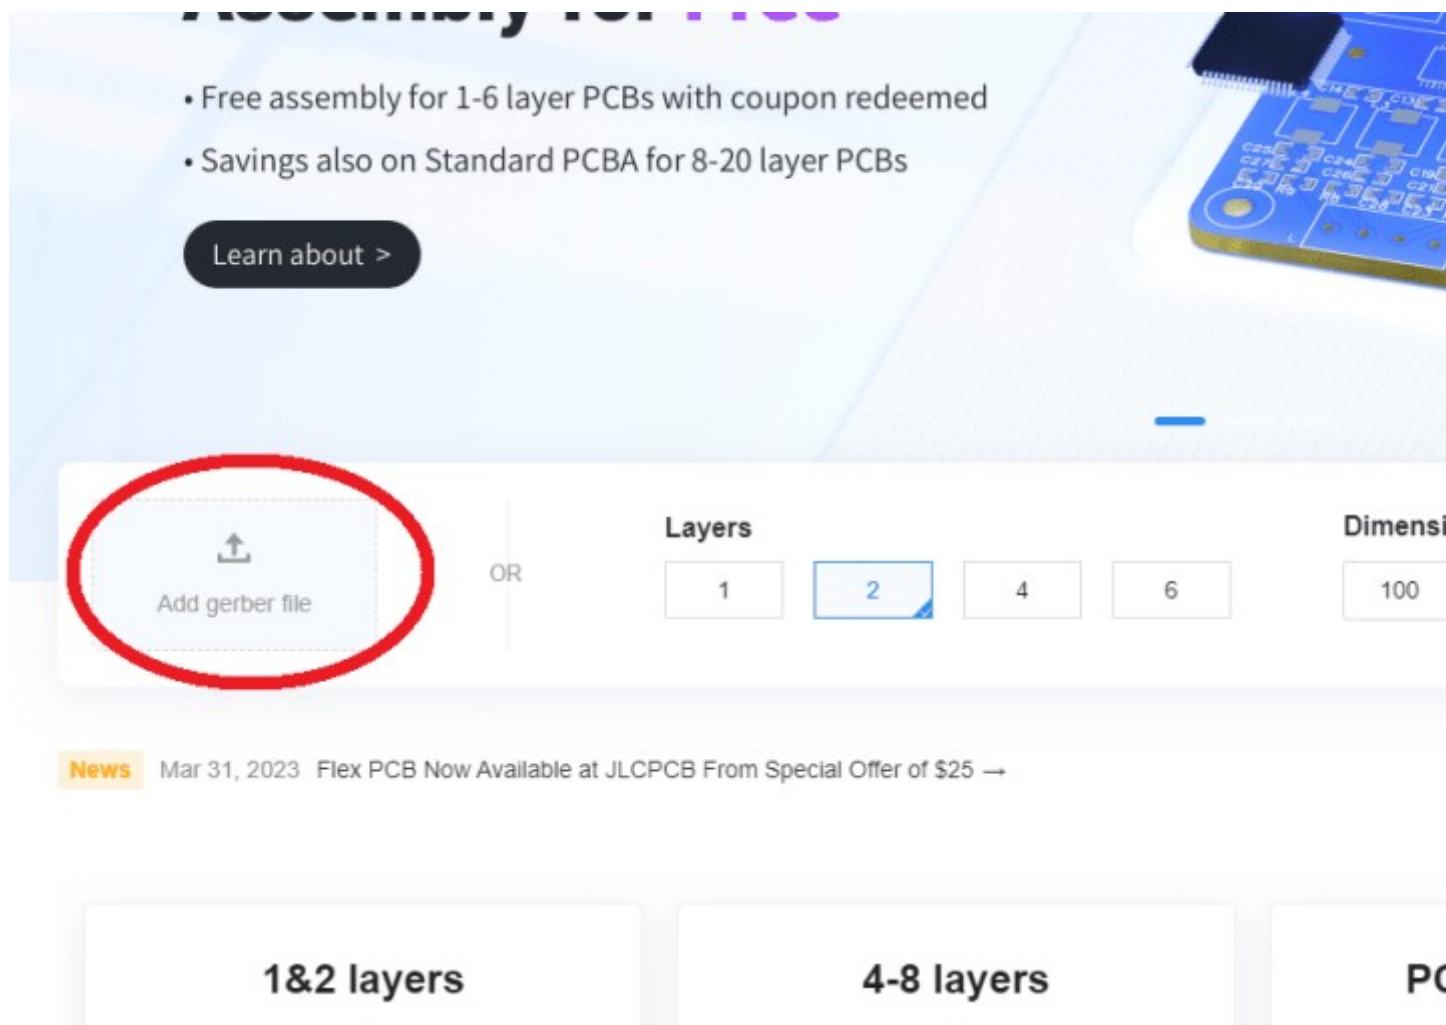

This will lead you to the next screen on JLCPCB.com. There are a lot of settings there but you only need to touch a few of them.

You need to select the amount of boards you want to order. JLCPCB has a cheap and more expensive service. With the cheap service you can order up to 50 assembled PCBs. Ordering 50 boards will give you a fairly low price per unit.

The absolute minimum number is 5. If you order 5 you have a special option to do SMT assembly on only 2 of them. Bear in mind that this will increase the price per unit. More boards -> less \$ or € per board

The most important setting of all. Select your color!! You are free to order any color of choice. However anything else but green and black will be more expensive for SMT assembly. Black also takes slightly longer to be produced. So that may cost a day or three more. With black you may order 30 units max (for economic service) if you pick green you can order up to 50. Otherwise you may use the more expensive service.

JLCPCB

Standard PCB/PCBA Advanced PCB/PCBA SMT-Stencil 3D/CNC

Detected 2 layer board of 53.5x95.25mm(2.11x3.75 inches)

Base Material: FR-4, Flex, Aluminum, Copper Core, Rogers, PTFE Teflon

Layers: 1, 2, 4, High Precision PCB, 6, 8, 10, 12, 14, 16, 18, 20

Dimensions: 95.25 * 53.5 mm

PCB Qty: 5 (Quantity)

Product Type: Industrial/Consumer electronics, Aerospace, Medical

PCB Specifications

Different Design: 1, 2, 3, 4

Delivery Format: Single PCB, Panel by Customer, Panel by JLCPCB

PCB Thickness: 0.4, 0.6, 0.8, 1.0, 1.2, 1.6, 2.0

PCB Color: Green, Purple, Red, Yellow, Blue, White, Black

COLOR

The last setting you need to do is to select SMT assembly. It is somewhere at the bottom of the screen. Also make sure that you select top side behind the 'assembly side' setting if it isn't selected already.

I also recommend to check 'Yes' behind Confirm Parts Placement. This will let their personal double check your work. And it only costs a few cents.

Lastly, by default JLCPCB places an order number in silk on your board. You can set a setting behind 'Removed Order Number' to prevent JLCPCB from doing so. This costs a few cents as well.

Board Outline Tolerance ☒ $\pm 0.2\text{mm}$ (Regular) $\pm 0.1\text{mm}$ (Precision)

Confirm Production file ☐ No ☒ Yes **Does not hurt**

Remove Order Number ☐ No ☒ Yes Specify a location **Optional, just cosmetic really**

Flying Probe Test ☒ Fully Test

Gold Fingers ☐ No ☐ Yes

Castellated Holes ☐ No ☐ Yes

Advanced Options



PCB Remark

Check this



PCB Assembly

COUPON Free Assembly for your PCB order

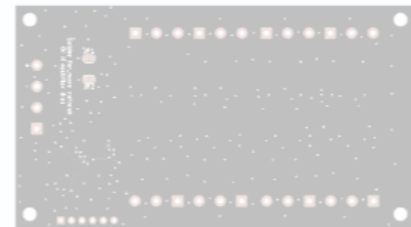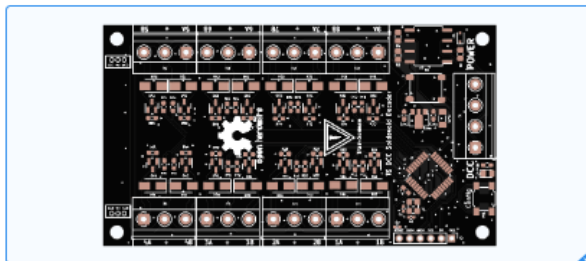

☒ Assemble top side

☐ Assemble bottom side

PCBA Type ☒ **Economic** ☐ Standard [What's the difference?](#) **Cheap**

Assembly Side ☒ Top Side ☐ Bottom Side ☐ Both Sides **Top side should be default**


PCBA Qty **If you order five boards, you can let 2 be assembled**

Tooling holes ☒ Added by JLCPCB ☐ Added by Customer

Confirm Parts Placement ☐ No ☒ Yes **Highly recommended**

If you press Next you get to the next screen. This one only wants to know if you want to do the top or bottom side. It should already say top side, so can just press next.

Top Bottom

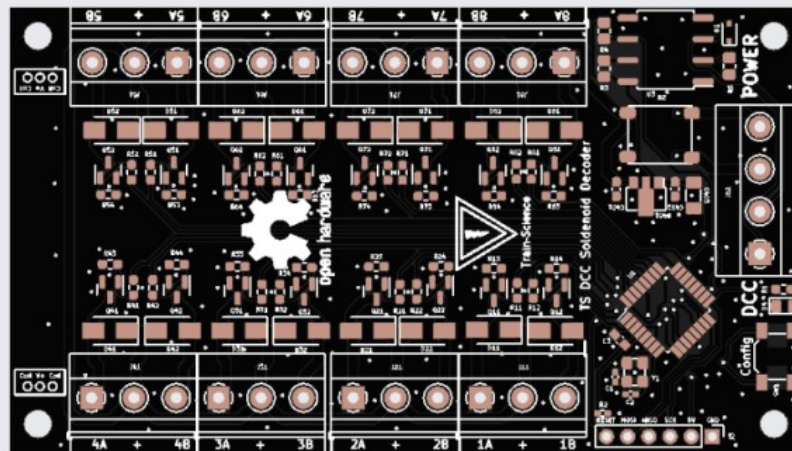[← Change PCB specifications](#)

PCBA Type: Economic

Assembly Side: Top Side

PCBA Qty: 5

NEXT

Step 4: Select your BOM and CPL

Here you need to upload two more files. That is the Bill Of Material (BOM) and the Component Placing List (CPL), Click on the zones where you see upload and select the appropriate files from your downloaded folder. They are named BOM and CPL and are hard to miss. Press Next when you are finished.

The screenshot shows the JLCPCB website interface. At the top, there's a navigation bar with links: Why JLCPCB?, Capabilities, Support, Resources, Order now, My file, and a shopping cart icon. Below this, the breadcrumb path is 'GERBER-solenoidDecoder'. The main navigation tabs are 'PCB', 'Bill of Materials' (active), 'Component Placements', and 'Quote & Order'. A status bar indicates 'Automatically saved, last updated on 6 July, 22:56'.

The 'Bill of Materials' section contains two large light blue boxes. The left box has a red 'Click' label and a blue button 'Add BOM File'. Below the button, it says 'Only accept XLS,XLSX,CSV. [View Sample BOM](#)'. The right box has a red 'Do the same for CPL' label and a blue button 'Add CPL File'. Below the button, it says 'Pick&Place File, Only accept XLS,XLSX,CSV. [View Sample CPL](#)'. At the bottom right of this section is a grey button 'Process BOM & CPL'. A link 'Not sure where to start? Check our [SMT FAQs](#) page.' is on the left.

Overlaid on the website is a Windows 'Open' file explorer window. The address bar shows the path 'Train-Science-DIY > OpenSourceDccDecoder > PCB'. The left sidebar shows the 'Downloads' folder selected. The main pane displays a table of files:

Name	Date modified	Type	Size
jlcpcb	7/6/2023 9:34 PM	File folder	
BOM-solenoidDecoder	7/6/2023 9:35 PM	CSV File	3 KB
CPL-solenoidDecoder	7/6/2023 9:35 PM	CSV File	6 KB

The 'BOM-solenoidDecoder' file is selected. A red text overlay 'select BOM and click Open' is positioned over the file. The 'File name' field at the bottom contains 'BOM-solenoidDecoder', and the file type is set to 'Custom Files'. 'Open' and 'Cancel' buttons are at the bottom right.

The website footer on the right includes the JLCPCB logo, 'CONNECT WITH US' with social media icons, and a 'Privacy Policy Terms & Conditions' link.

Press 'Process BOM & CPL' when you are ready.

Step 5: Pick your components.

If I did my job properly you won't have to do anything at all, besides pressing Next. In this page you can select parts and search for them. This information is already in the BOM you just uploaded. So you can just hit Next and go to step 6.

I do will explain a few things. JLCPCB has 'basic' parts and 'extended' parts. Basic parts are already in their assembly lines. Extended parts need a roll with components to be swapped by hand. A fee of 3\$ is charged for this. I always try to avoid extended parts but it cannot always be ommited. There are also 'preferred extended' this means that they still have to swap a component roll but without the fee. So essentially it counts as a basic.

I also try to avoid through hole parts for as much is possible. Things like terminal blocks and such are included in the BOM and CPL but if you want to be extra cheap, you can deselect these parts. The people at JLCPCB need to handsolder these components and for this a fee is charged as well. It is in my opinion a small price to pay for the labour.

In the bottom of the list the components are placed which don't have components. In this example that is every screw terminal.

Uploaded BOM Data			Review Matched Parts					
Top Designator	Comment	Footprint	Matched Part Detail	Qty	Source	Lib Type	Total Cost	Select
U3	6N137	SOP-8_6.62x9....	6N137S1(TA) C110020 Optocouplers SMD RoHS	5	JLCPCB	Basic	€1.3911	☒
Y1	Crystal_GND2	crystal_arduino	X322516MLB4SI C13738 16MHz 9pF ±10ppm SMD3225-4P Crystals RO...	5	JLCPCB	Basic	€0.2819	☒
C3,C402	100nF	C_0603_1608...	CC0603KRX7R9BB104 C14663 50V 100nF X7R ±10% 0603 Multilayer Ceramic...	10	JLCPCB	Basic	€0.0211	☒
U1	ATmega328-A	TQFP-32_7x7...	ATMEGA328P-AU C14877 32KB 2KB FLASH 23 AVR 20MHz TQFP-32(7x...	5	JLCPCB	Basic	€10.7911	☒
C403	100uF	C_1206_3216...	CL31A107MQHNNNE C15008 6.3V 100uF X5R ±20% 1206 Multilayer Cerami...	5	JLCPCB	Basic	€0.2722	☒
C1,C2	12pF	C_0402_1005...	0402CG120J500NT C1547 50V 12pF C0G ±5% 0402 Multilayer Ceramic C...	10	JLCPCB	Basic	€0.0083	☒
C401	330nF	C_0603_1608...	0603B334K250NT C1615 25V 330nF X7R ±10% 0603 Multilayer Ceramic...	5	JLCPCB	Basic	€0.0441	☒
D2	~	4Arectifier	FMSB40M C169511 95A 1.3V@4A 4A 1kV UMSB Bridge Rectifiers ...	5	JLCPCB	Extended	€0.5248	☒
R3,R4	10k	R_0805_2012...	0805W8F1002T5E C17414 125mW Thick Film Resistors ±100ppm/°C ±1% ...	10	JLCPCB	Basic	€0.0092	☒
R5	1k	R_0805_2012...	0805W8F1001T5E C17513 125mW Thick Film Resistors ±100ppm/°C ±1% ...	5	JLCPCB	Basic	€0.0073	☒
R13,R14,R23,R2...	~	R_0603_1608...	1206W4F1002T5E C17902 250mW Thick Film Resistors ±100ppm/°C ±1% ...	80	JLCPCB	Basic	€0.2057	☒
R11,R12,R21,R2...	~	R_0603_1608...	1206W4F220JT5E C17958 250mW Thick Film Resistors ±100ppm/°C ±1% ...	80	JLCPCB	Basic	€0.2057	☒
Q11,Q12,Q21,Q2...	~	SOT-23	AO3400A C20917 30V 5.7A 26.5mΩ@10V,5.7A 1.4W N Channel ...	80	JLCPCB	Basic	€4.1576	☒
D1	D	D_SOD-323	1N4148WS C2128 100V 200mW Single 1.25V@150mA 4ns 150m...	5	JLCPCB	Basic	€0.0459	☒
R2	10k	R_0402_1005...	0402WGF1002TCE C25744 62.5mW Thick Film Resistors ±100ppm/°C ±1% ...	5	JLCPCB	Basic	€0.0028	☒
SW1	SW_SPST	SW_SPST_SK...	TS-1187A-B-A-B C318884 No NO 50mA 100000 Times 160gf 12V Brick n...	5	JLCPCB	Basic	€0.0670	☒
R6	6k2	R_0603_1608...	0603WAF6201T5E C4260 100mW Thick Film Resistors ±100ppm/°C ±1% ...	5	JLCPCB	Basic	€0.0046	☒
U401	L78L05_SOT89	SOT-89-3	78L05G-AB3-R C71136 100mA Fixed 5V-5V Positive 30V SOT-89-3 Li...	5	JLCPCB	Basic	€0.3044	☒
D4	LED	LED_0805_201...	NCD0805R1 C84256 Red 0805 Light Emitting Diodes (LED) ROHS	5	JLCPCB	Basic	€0.0496	☒
D11,D12,D21,D2...	~	D_SMA	SS34 C8678 40V Single 3A 0.55V@3A SMA(DO-214AC) Sc...	80	JLCPCB	Basic	€1.6748	☒
J31	~	TerminalBlock_...	No part selected Search Pre-order					
J61	~	TerminalBlock	No part selected Search Pre-order					

In absolute worst case scenario it may occur that a component is out of stock. I did check stock amounts when I picked the components. So with a little luck it shouldn't ever happen. You can however pre-order parts whenever needed. But you need to do this before you can place an SMT


order. To pre-order parts, surf to [JLCPCB.com/parts](https://jlcpcb.com/parts), find the lacking component. Easiest way is to enter the LCSC number in the search bar, fill in the number that you will need and click the pre-order button.

Alternatively you can purchase the missing component from somewhere on the www and solder it by hand. I pick relative large components which should not be too hard to solder.

Step 6: Verify component positions

In this step we need to visually examine our board design and our component placing. Take extra care as this step is very crucial.

This is what you should see. In this step it is often needed that you need to manually rotate components using the site's editor. Everything with more than 2 connections must be visually examined. Especially symmetrical IC's. You can use the pictures that are present in the github folder for visual confirmation.

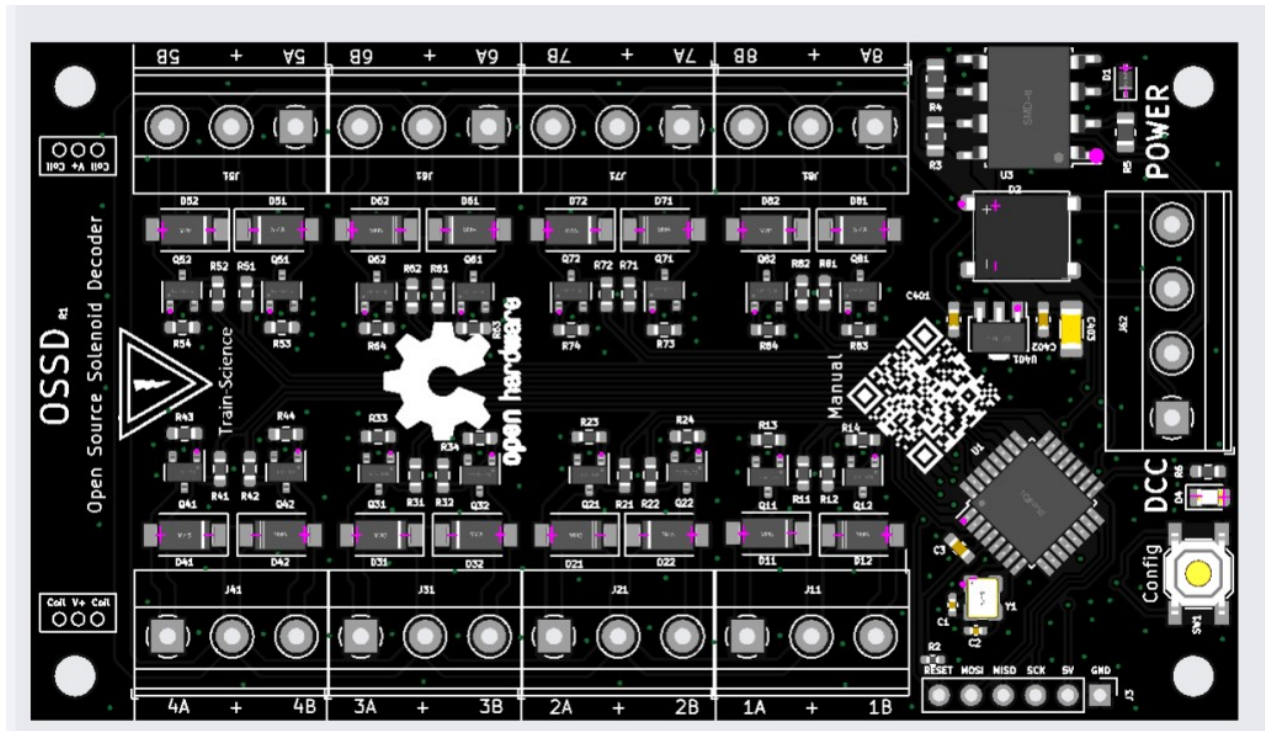

When you are sure about the component places and rotations, click on Next.

Step 7: Put the PCB in your basket and make the purchase

For some dark reason you need to enter a product description on the right side. I usually select 'other' and 'other' again and then I type something like 'model railway' but it does not really matter.

Product Description ?

Others / Others

Model railway


SAVE TO CART

If all above steps are completed without any errors. You are ready to place the order. Do so now. Click on save to cart and don't back down. You are almost there!

Charge Details	
PCB Price	
Via Covering:	€0.00
Special Offer:	€1.84
Confirm Production file:	€0.39
Economic PCBA Price	
Setup Fee:	€7.35
Stencil:	€1.57
Panel:	€0.00
Large Size:	€0.00
Components(20 items):	€20.07
Extended components fee: ?	€2.64
SMT Assembly ?	€1.63
Confirm Parts Placement:	€0.39
Build Time: ?	
PCB: 3-4 days	€0.00
Assembly: ☒ 1-2 days	€0.00

Total Price:	€35.87
Weight ?	451.50g
Product Description ?	Select
SAVE TO CART	
By placing your order, you agree to the Terms and Conditions of JLCPCB assembly Service .	


The final thing you can do, is to alter the amount of PCBs you want to order. Yes you already did this before and now can change your mind and buy even more PCBs. If you are ok with the quantity, click on 'secure checkout'.

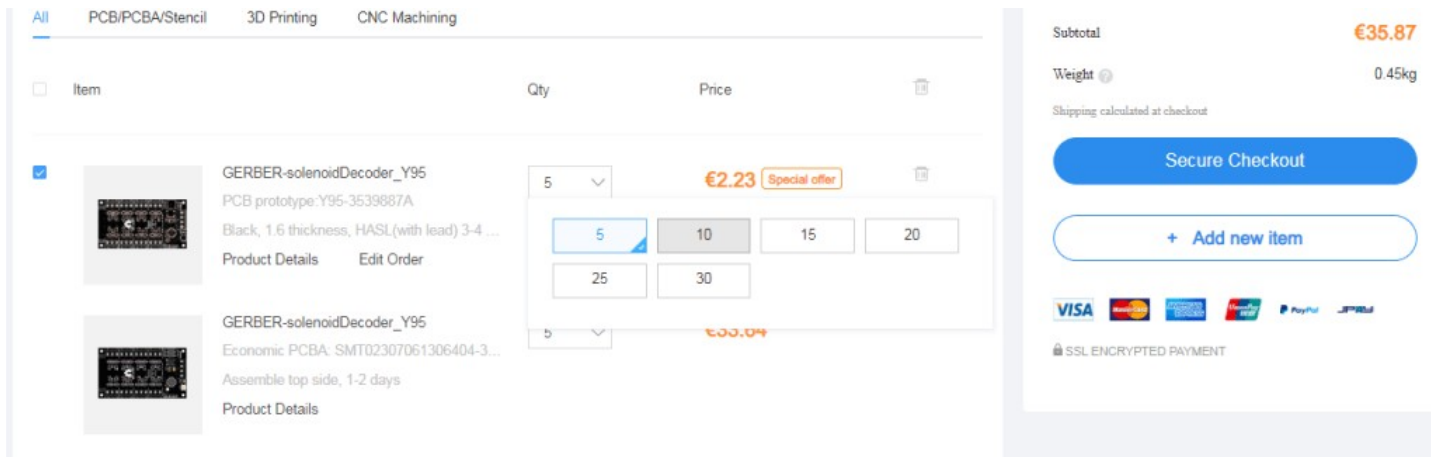

On the next screen you just need to fill in your address. With an account JLCPCB will remember this for the next time. So fill everything in and hit continue.

You will see that the shipping is sorta expensive. However you are able to select much cheaper shipping services.

The global standard direct line is often cheapest (and slowest). It often takes 1.5 week for livery. This service is only available when the order (shipping including) is under the \$150. Otherwise you can make use of FedEx, because this is simply the cheapest. Do take note that you will receive an extra bill of FedEx after delivery. You will have to pay taxes.

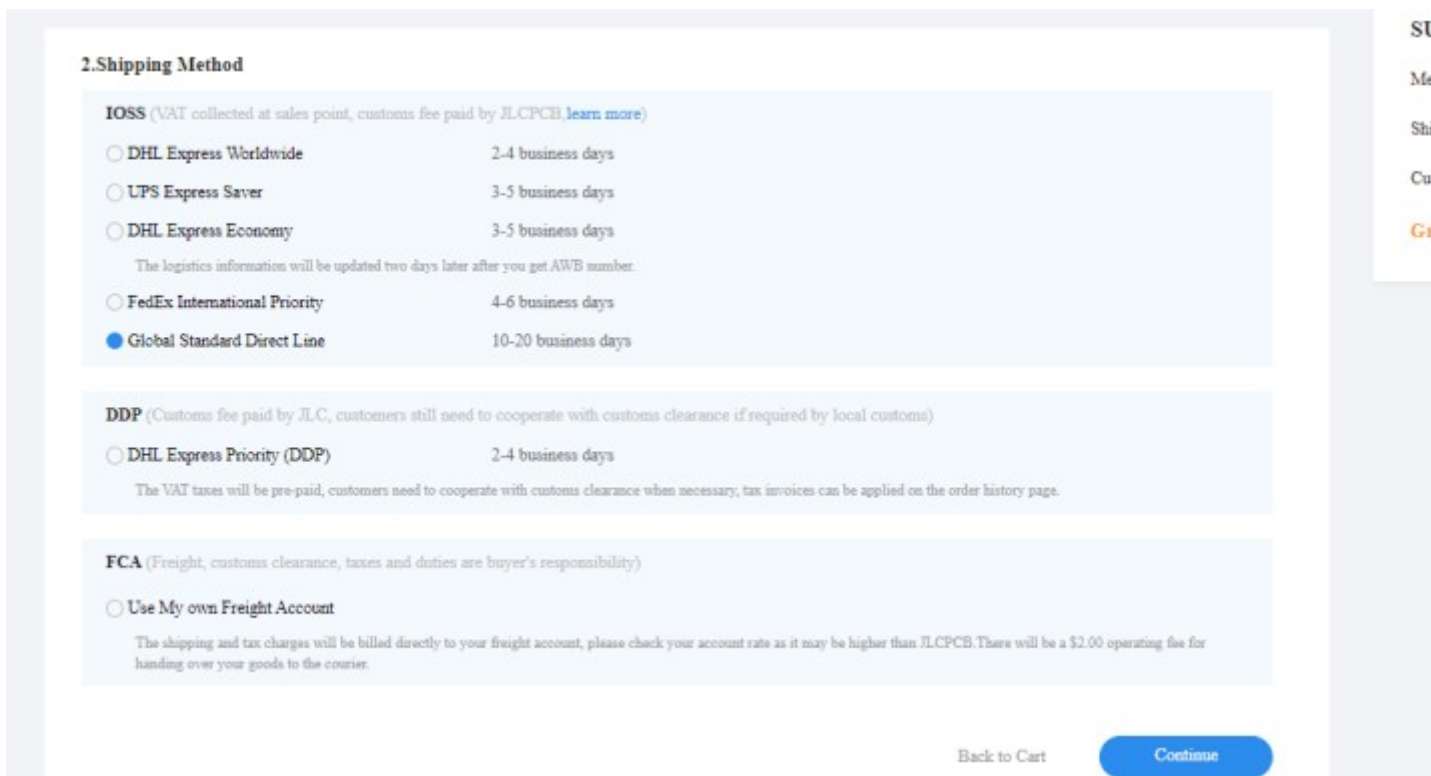

As you can see, for 5 PCBs of a OSSD you have to pay around €56,-. So every board is around €11. If you purchase 50 boards, you will pay around €7.50 per board*. A commercial equivalent is easily €60+.

If you made a new account you may also make use of a coupon for your first order. You will be granted with coupons quite regularly.

So just complete the purchase and ... well just wait for it.

If you are happy with your decoder and you want to order more for personal or commercial purposes, you can easily re-order the boards using the order history @JLCPCB. You don't have to repeat the above steps for this.

So feel free to manufacture them and sell em on. My designs are not licensed with the exception of the Open Source Hardware license.

Step 8, flashing firmare

If it is a design that needs firmware, open up the next tutorial to flash the firmware