




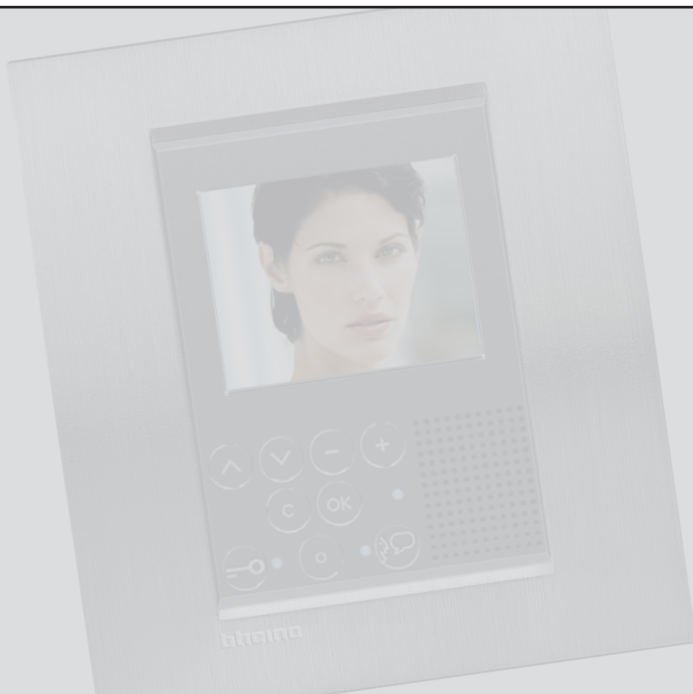

1 Introduction and basic functions 6

- 1.1 General information 6
- 1.2 Your Video Display: use it now! 6
 - 1.2.1 Video door entry function keys 7
 - 1.2.2 Navigation keys 7
- 1.3 Menu functions 8
 - 1.3.1 Volume adjustment 10
 - 1.3.2 Monitor adjustment (day/night) 11
 - 1.3.3 Camera swing 12
 - 1.3.4 Bells adjustment 13
 - 1.3.5 Paging 14

2 Trouble shooting 16

- 2.1 Push to Talk mode 16

3 CCTV functions 20

- 3.1 Activation 20
- 3.2 Intercommunication 20
- 3.3 Camera 21
- 3.4 Cycle cameras 21
- 3.5 Staircase lights 22
- 3.6 Call exclusion 22

4 House automation functions 24

- 4.1 Scenarios 24
- 4.2 Alarms 25
- 4.3 Sound system 26
- 4.4 Temperature control 27
- 4.5 Multimedia menu 29

5 Services 32

- 5.1 The "Settings" menu 32
- 5.2 Services 33
 - 5.2.1 Professional studio 33
 - 5.2.2 Hands free 33
 - 5.2.3 Door state 34
 - 5.2.4 Alarm messages 34
- 5.3 Messages 35

Introduction and basic functions

1.1	General information	6
1.2	Your Video Display: use it now!	6
1.3	Menu functions	8



1.1 General information

The Video Display offers the normal video door entry and CCTV functions and can also interact with your My home system.

Fitting in with My Home

- **Scenarios:**
Runs the scenarios saved in the Scenario module.
- **Alarms:**
Signals the last alarm events which have occurred and the division of the system.
- **Sound system:**
Manages the BTicino digital sound system.
- **Temperature control:**
Displays and adjusts the temperature in the various zones of the home and the state of the control unit.

LCD screen note


The LCD screen has been manufactured using advanced high precision technology. It is however possible that sometimes up to 5 small black or coloured dots (red, blue, green) may appear on the LCD screen. This is an absolutely normal result of the manufacturing process and is not indicative of a malfunction and/or fault.



Incorrect use of the Video Display and of all the devices connected to it excludes any guarantee!

For cleaning only use a damp or antistatic cloth. Avoid the use of alcohol or chemical detergents.

1.2 Your Video Display: use it now!

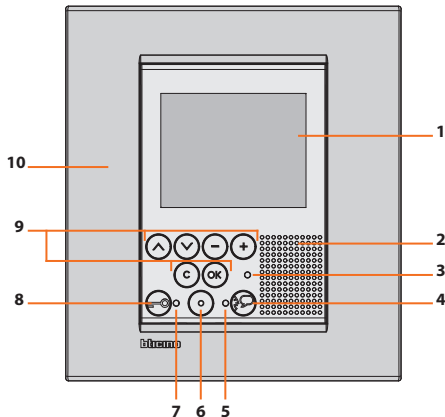

1 - LCD 2,5" colour display

2 - Loudspeaker

3 - Call exclusion LED*

4 - Connection key

5 - Connection LED

6 - Entrance panel and cycling switching ON key

7 - Door lock LED

8 - Door lock key

9 - Navigation keys

10 - Microphone

* It lights up when the bell volume is set to 0.

1.2.1 Video door entry function keys

**Activation Entrance Panel/Cycling**

It activates the switching on of the associated Entrance Panel and, if present, allows the cycling display of the other Entrance Panels/cameras.

**Door lock key**

When there is a call it opens the door lock of the Entrance Panel from which the call was made, at rest that of the associated Entrance Panel. The LED signals that it is activated.

**Connection key**

Activates/deactivates the audio connection. When a call has been received the LED flashes; press once to answer: the LED shines steadily. At rest activates the paging function (if enabled).

1.2.2 Navigation keys

**OK key**

Allows access to the menu; confirms the selection made.

**^ v keys**

Inside the menu they select the previous or next item.

**= + keys**


Inside the menu they change the value set. In audio/video connection they allow rapid access to the volume and monitor settings.

**C keys**

Returns to the previous screen, if already on the first screen, it can be used to turn the display off; during a call, it can be used to switch from day to night mode, and vice versa (see the relevant section).

1.3 Menu functions

Use the **OK** key to access the main menu:



Use the $\wedge$ $\vee$ keys to select the functions from those available:


- 1 - Submenu and commands
- 2 - Use the settings icon to access a series of adjustments/services described below

Three possible solutions for drawing up the main menu are given below:

- menu with **COMMUNICATION** functions;
- menu with **HOME AUTOMATION** functions;
- **CUSTOMISED** menu.

COMMUNICATION

Main menu example with programming of just the COMMUNICATION commands.



- 1 - Activation
- 2 - Intercommunication
- 3 - Camera
- 4 - Cycle cameras
- 5 - Settings

HOUSE AUTOMATION

Main menu example with communication and house-automation sub-menu.




- 1 - Communication
- 2 - Scenarios
- 3 - Alarms
- 4 - Sound system
- 5 - Temperature control
- 6 - Settings

CUSTOMISED MENU

The customised menu allows more intuitive use of the Video Display functions. In fact the menu only displays the functions in your My Home system and the text of each command can be customised in the installation phase.

Using the customised menu also lets you:

- Have the PROFESSIONAL STUDIO, HANDS FREE, PAGING and MULTIMEDIA functions, which otherwise can only be called from the SETTINGS menu, in the main page or in another page.



- 1 - Communication
- 2 - Professional studio
- 3 - Hands free
- 4 - Paging
- 5 - Multimedia
- 6 - Settings


The installer has given the exact configuration of your Video Display the tables below; **if he has not filled it in ask for it.**

COMMUNICATION	
FUNCTIONS	DESCRIPTION

HOUSE AUTOMATION	
SUB-MENU	SYSTEM FOUND
SCENARIOS	☐
ALARMS	☐
SOUND SYSTEM	☐
TEMPERATURE CONTROL	☐
MULTIMEDIA INTERFACE	☐

1.3.1 Volume adjustment


NOTE: During a video door entry call you can access the Adjustments menu directly by pressing the **-** or **+** key.



Select
Adjustments




Press **OK** to access
the menu



Inside the menu
select one of the
items
(e.g. Bells)



Adjust the volume
to the level
required.



Press **OK**
to confirm



EP SOUND = sound volume when talking to the entrance panel.



INTERCOM = sound volume when holding an intercom conversation.




BELLS = volume level for all the bells.

1.3.2 Monitor adjustment (day/night)

It is possible to select two different adjustments, one for day viewing and one for night viewing; to switch from one mode to the other press **C** during the video door entry call.


NOTE: During a video door entry call you can access the Adjustments menu directly by pressing the **-** or **+** key.




Select
Adjustments



Press **OK** to access
the menu




Inside the menu
select one of the
items
(e.g. Contrast)



Select
Day monitor




Press **OK**
to confirm



Make
the adjustment

1.3.3 Camera swing


NOTE: This menu can only be accessed during the connection with the entrance panel, if this is set up for the camera swing.




Select
Adjustments



Press **OK** to access
the menu



Adjust the correct
camera angle




Select
Swing bracket



Press **OK**
to confirm

1.3.4 Bells adjustment


You can associate one of sixteen tunes to each call event.



Select
Bells




Press **OK** to access
the menu



Select
the event



Press **OK**
to confirm



Choose the tune



Adjust the volume

Select Confirm and then **OK** to
save the selection and return to
the previous page



CALL FROM EP = call from the entrance panel (S=0 or S=1)



INTERNAL INTERCOM = call from the intercom in your apartment



EXTERNAL INTERCOM = call from an intercom in another apartment



CALL TO THE FLOOR = call from the pushbutton near your entrance door

1.3.5 Paging

If your system is set up, using the icon in the main menu a “paging” call can be sent to the system:

- **Basic:** only sound system
- **Enhanced:** on the speaker* audio handsets as well



Select
Paging



Press **OK**
to confirm



Once the communication is activated the voice will be played on the whole system.



The page function can be activated directly by pressing the key  (if the installer has configured it).

* Configure with Software

Trouble shooting

2.1 Push to Talk mode

16




2.1 Push to Talk mode

Receiving a call from the entrance panel.



Press the Connection key to answer the call.


The connection LED lights up.

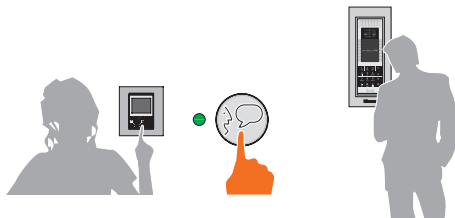


During the conversation you can activate the PUSH TO TALK function.

Press the Connection key for at least 2 seconds to talk to the entrance panel.


The LED remains ON.

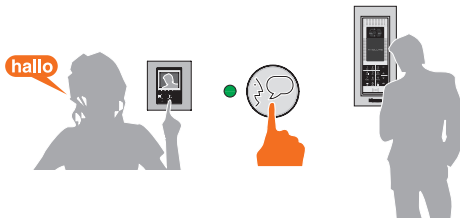

Release the key to hear from the entrance panel.
The LED becomes red.

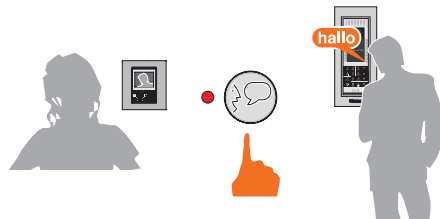


To end the connection press the connection key briefly.
The LED goes out.

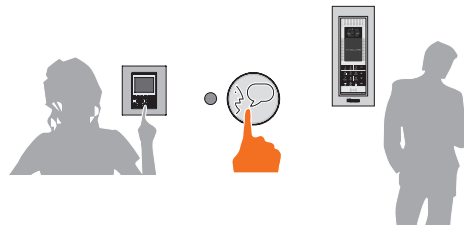

PROBLEM	SOLUTION
On pressing the Entrance panel Activation/Cycling key (○) no picture appears.	- the audio/video channel may be busy, wait for it to become free (from 1 to 3 minutes) and try again.
On pressing the OK key the menu does not switch on and the handset gives a busy sound	- the audio/video channel is busy, wait for it to become free (from 1 to 3 minutes) and try again.
When called the handset does not ring	- check that the call has not been excluded (the call exclusion LED is ON); - check the configuration of the devices.
At the entrance panel it is difficult to hear the caller	- talk at a maximum distance of 40 centimetres from the Video Display microphone; - check the entrance panel settings with the installer and if necessary reduce the microphone volume; - you can communicate in PUSH TO TALK mode (see the relevant section).
At the handset it is difficult to hear the caller	- check the volume setting on the Video Display; - make sure that there are no strong noise sources near the Video Display; - you can communicate in PUSH TO TALK mode (see the relevant section).

CCTV functions

3.1	Activation	20
3.2	Intercommunication	20
3.3	Camera	21
3.4	Cycle cameras	21
3.5	Staircase lights	22
3.6	Call exclusion	22

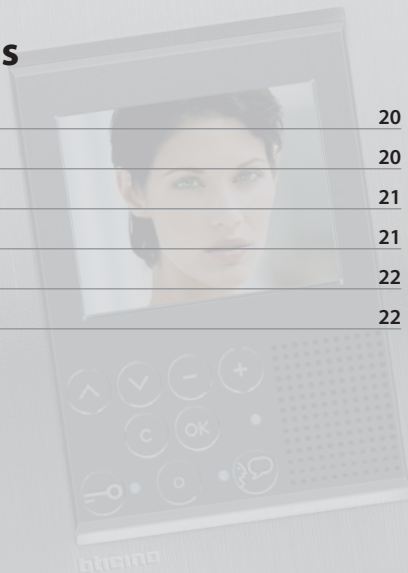

3.1 Activation

This function activates an actuator or an entrance panel. As an example you can activate the opening of a secondary gate.




Press **OK** to access the Main menu



Select the function



Press **OK** to confirm



Command Performed appears on the screen briefly
To quit the menu press the **C** key

3.2 Intercommunication

This function allows conversation with other video handsets/ handsets installed in your home or in other apartments.




Press **OK** to access the Main menu



Select the extension to call



Press **OK** to confirm



Command Performed appears briefly and then the screen switches off
If the audio/video channel is occupied by another user you hear a sound and the command is not performed.
Wait until the channel is free and try again. If there is a call from the entrance panel, the conversation is interrupted.

3.3 Camera

This function lets you monitor your home, activating one of the cameras in the apartment and in the common areas (e.g. garage or garden).



Press **OK** to access the Main menu



Select the camera to activate



Press **OK** to confirm



The picture taken by the camera selected appears on the screen (if the audio/video channel is occupied by another user the command is not performed. Wait until the channel is free and try again).

If there is a call from the entrance panel, the connection will be interrupted.

3.4 Cycle cameras

This lets you display the pictures taken by all the cameras installed one after the other. Once activated the Video Display displays the first camera for 10 seconds, then goes to the next. When the cycle is complete, the screen switches off.

You can stop on the display of one camera by pressing the Connection key. The working camera remains active and if it belongs to an entrance panel the sound communication is activated as well.



Select
Cycle cameras



Press **OK** to Confirm (if the audio/video channel is occupied by another user the command is not performed. Wait until the channel is free and try again). If there is a call from the entrance panel, the connection will be interrupted.



3.5 Staircase lights

Lets you switch on the lights at the entrance or on the stairs.




Press **OK** to access the Main menu



Select the **Staircase light** function



Press **OK** to confirm




Command Performed appears on the screen briefly then the Main menu returns.

3.6 Call exclusion

This lets you enable/disable the call bell.

If the bell is disabled the call exclusion LED lights up.

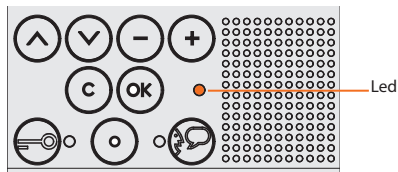

To activate the call exclusion set the "Bell" volume to zero (see the relevant section).

House automation functions

4.1	Scenarios	24
4.2	Alarms	25
4.3	Sound system	26
4.4	Temperature control	27
4.5	Multimedia menu	29

4.1 Scenarios

Your Video Display communicates with the BTicino automation system, activating the scenarios.



Inside the Main menu select **Scenarios**



Press **OK** to confirm



Select the scenario you want to activate



Press **OK** to confirm




Command Performed appears on the screen briefly
To quit the menu press the **C** key.

The installer has given a brief description of the scenarios set in the tables below, **if he has not filled it in ask for it.**

SCENARIO	DESCRIPTION
SCENARIO I	
SCENARIO II	
SCENARIO III	
SCENARIO IV	
SCENARIO V	

4.2 Alarms


Your Video Display communicates with the BTicino burglar-alarm system, in particular giving information on the system state, the active zones and the last 3 alarms given.



Inside the Main menu select **Alarms**



Press **OK** to confirm



The information screen appears

Alarms icons key:



ARMED



DISARMED



INTRUSION



FREEZER



EMERGENCY CALL



TELERESCUE



ANTIPANIC



TECHNICAL



TAMPERING



FIRE




GAS LEAK



FLOOD

4.3 Sound system

The information in the screen is read as indicated below:




- 1 - State of the 8 zones managed by the burglar-alarm system: the corresponding number (from 1 to 8) is indicated for each active zone
- 2 - System state = ON/OFF
- 3 - Information on the last 3 alarms:
Type of alarm, Zone or Channel of origin

Technical Alarms:

GAS LEAK	C=1	TECHNICAL GENERIC	C=5,6,7
FREEZER	C=2	FIRE	C=8
FLOOD	C=3	TELERESCUE	C=9
EMERGENCY CALL	C=4		


NOTE: when the burglar alarm is switched on, the memory of the last 3 alarms is cancelled; if the siren is active, a further alarm can't be visualized.



Inside the Main menu select
Sound system



Press **OK** to access the menu




Using the **- +** keys you can activate/de-activate the sound system*, adjust the volume, select the CD track or change the radio station and select the musical source.

- * - **One-channel system:** general activation, of the single room and of the single amplifier if the Video Display is programmed by PC.
- **Multi-channel system:** activation of the single room and of the single amplifier if the Video Display is programmed by PC.

4.4 Temperature control

Your Video Display lets you control and adjust the temperature inside the home, interacting with the BTicino temperature control system.

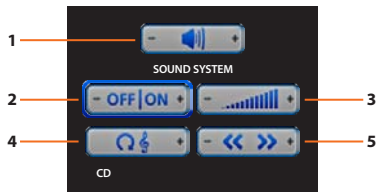


- 1 - Press the **-** and **+** keys to select amplifier
- 2 - Press the **-** and **+** ON/OFF the system
- 3 - Press the **-** and **+** adjust the volume
- 4 - Press the **+** key to select the music source (radio, CD, etc.)
- 5 - Press the **-** and **+** keys to change the radio station or choose the CD track



Inside the Main menu select **Temperat. control**




Press **OK** to confirm



You can set the manual mode and adjust the temperature with the **-** **+** keys.


Set the heat protection

You can set the temperature on different levels in the various system zones.

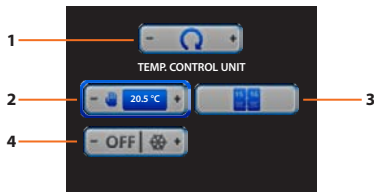

- 1 - Press the **-** and **+** keys to select Temperature control unit/Zones
- 2 - To set the manual mode and adjust the temperature use the **-** and **+** keys and then press **OK** to confirm
- 3 - To set the Weekly mode; press **OK** to confirm (the last weekly program selected on the Temperature control unit is set)
- 4 - Press the **+** key to set the protection (antifreeze for winter or heat protection for summer);


Pressing the **-** key switches the system OFF

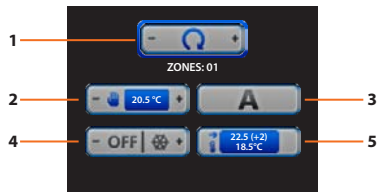

- 1 - Press the **-** and **+** keys to select Temperature control unit/Zones
- 2 - To set the manual mode and adjust the temperature use the **-** and **+** keys and then press **OK** to confirm
- 3 - To set the Automatic mode; press **OK** to confirm (in this case resets the mode set on the Temperature control unit for this zone)
- 4 - Press the **+** key to set the protection (antifreeze for winter or heat protection for summer);
Pressing the **-** key switches the zone OFF
- 5 - Display the zone's current state.

4.5 Multimedia menu


If your system has the Multimedia Interface (3465), you can access your menu via the dedicated icon.




Inside the Main menu select **Multimedia interface**



Press **OK** to access the menu



The of your Video Display displays the main window of the Multimedia Interface.

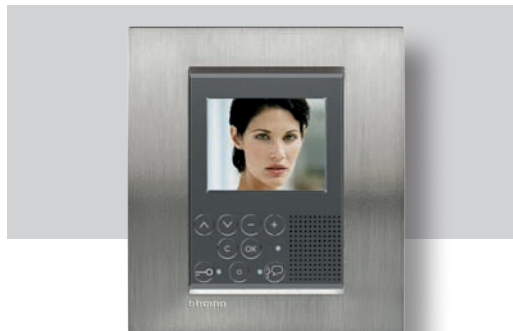

To navigate the menu of the multimedia interface use the same keys as its remote control:




The "MENU" key of the multimedia interface can be activated by pressing and holding down **C** on the Video Display.



Inside the menu of the multimedia interface the videostation will not switch off automatically. To exit and switch the monitor off press the pushbutton of 


Services

5.1	The “Settings” menu	32
5.2	Services	33
5.3	Messages	35

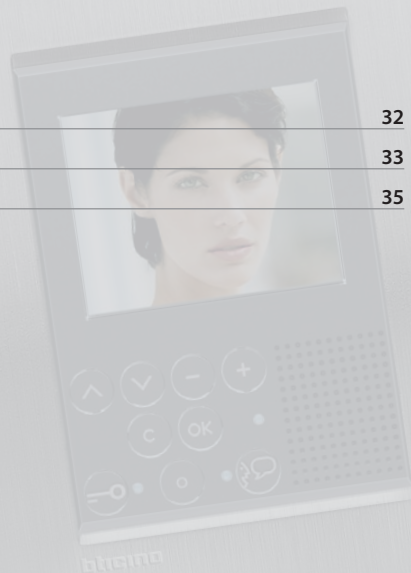

5.1 The "Settings" menu


The main menu always has the SETTINGS icon. Selecting it gives access to a wide range of customisations which let you get the most from your Video Display.



Inside the Main menu select **Settings**



Press **OK** to access the menu



The following page is displayed with the icons:

- 1 - Adjustments
(see the relevant section)
- 2 - Services
- 3 - Messages
- 4 - Bells
- 5 - Information
- 6 - Configuration



SETTINGS



ADJUSTMENT

**VOLUME
MONITOR
SWING**



SERVICES

**PROF. STUDIO
HANDS FREE
DOOR STATE
ALARM MSG**



MESSAGES



BELLS



INFORMATION



CONFIGURATION


CAUTION

Only the installer has access to the CONFIGURATION menu; incorrect operations could affect the operation of the Video Display.

5.2 Services

5.2.1 Professional studio


The Professional Studio function lets you set the automatic opening of the door lock when there is a call from the Entrance Panel. It cannot be activated at the same time as the Door State function.



Select
Services



Press **OK**
to confirm




Enable or disable
the function

If you enable this function your
Video Display **door lock LED**
flashes to remind you.

5.2.2 Hands free

The Hands Free function automatically activates the microphone and loudspeaker when there is a call, avoiding having to press the Connection key to answer (the connection is established immediately the call is made).



Select
Settings



Press **OK**
to confirm




Enable or disable
the function

If you enable this function your
Video Display **door lock LED**
flashes to remind you.

5.2.3 Door state

This function tells you about the door lock state. If it is open the “door lock LED” flashes, if it is closed it remains OFF.

NOTE: it can only be activated if your system allows it (ask your installer for more information); it can not be activated at the same time as the Professional Studio function.



Select
Services



Press **OK**
to confirm



Select
Door state




Enable or disable
the function

5.2.4 Alarm messages

If it is activated the Video Display tells you if the antiintrusion system has detected an alarm. The three LED flash alternately until a key is pressed to display the message (if locally supplied the message will be displayed automatically).


To cancel the message press the **C** key when the message is displayed. If not the signal will appear the next time a key is pressed.



Select
Services



Press **OK**
to confirm




Select
Alarm MSG



Enable or disable
the function


5.3 Messages



Select
Messages



Press **OK**
to confirm



Select the message
you want to display



Press **C** to return to
the previous page



There are messages, the menu can be selected.



No messages, the menu cannot be selected.



BTicino SpA

Via Messina, 38

20154 Milano - Italy

www.bticino.com

BTicino SpA reserves at any time the right to modify the contents of this booklet and to communicate in any form and modality, the charges brought to the same.