

Basic actuator

3475

Description

The device forms part of the Basic automation and is therefore small in size. This actuator can be used in flush mounted boxes, junction boxes, rolling shutter boxes and trunking. Particularly suitable is the installation inside junction boxes, positioning the item at the back of the flush mounted box, behind lowered automation devices, or behind traditional type devices (pushbuttons, switches, etc.).

The actuator has cords for connection to the load to be controlled and a LED.

Technical data

Power supply from BUS: 27 Vdc
Operating power supply with SCS BUS: 18 – 27 Vdc
Absorption: 13 mA
Power/Absorption of driven loads:

	Incandescent lamps Halogen lamp		LED lamps Compact fluorescent lamp		Ferromagnetic transformers	
						
230 Vac	460 W	2 A	40 W	Max. 1 lamp	2 A cosφ 0.5	460 VA

Size: basic module

Configuration


The actuator performs all the basic operating modes that can be configured directly on the control, apart from those which require the use of two interlocked relays.

Moreover further operating modes with the configurator in position M of the same actuator are listed in the table below.


Possible function	Configurator in M
Pushbutton (monostable ON) ignores the Room and General controls	PUL
Actuator as Slave. Receives a control sent by a Master actuator which has the same address	SLA
Master Actuator with OFF control delayed on the corresponding Slave actuator. Only for point-point control. With the OFF control the Master actuator deactivates; the Slave actuator deactivates after the time set in the Master actuator ¹⁾	1 – 4

1) Typical function for use in bathrooms without windows where the ON control activates the light (Master actuator) and the ventilation fan (Slave actuator) at the same time. The OFF control switches the light OFF immediately and leaves the fan working for the time set with configurator 1 to 4 in M of the Master actuator as indicated in the table.

Front view

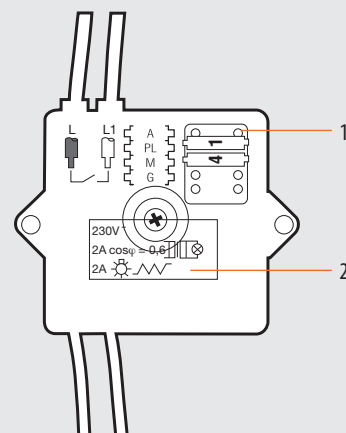

Side view

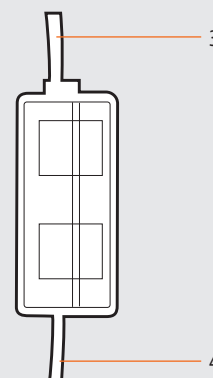

Legend

1. Configurator socket
2. LED
3. 0.75 mm² cords for connection to the load
4. BUS

Configurator	Time (minutes)
1	1
2	2
3	3
4	4