


The device needs 3 voltages: 3.3V, 1.8V and 8V with 700mA burst capacity.

Since V_IN must be over 10V, a buck regulator is used to derive the 3.3V. Bucks present a lot of noise at their input, so there is an LC filter there to avoid turning the cable into a broadband EMI antenna.

The 10,000uF supercapacitor delivers all burst current to the PA for packet transmission, so the quality of the cabling is no longer important. D1 prevents the supercap from powering the system while discharging, and the D3 Zener keeps the voltage at 12V even with fully charged marine batteries or alternators often going above 14.5V.

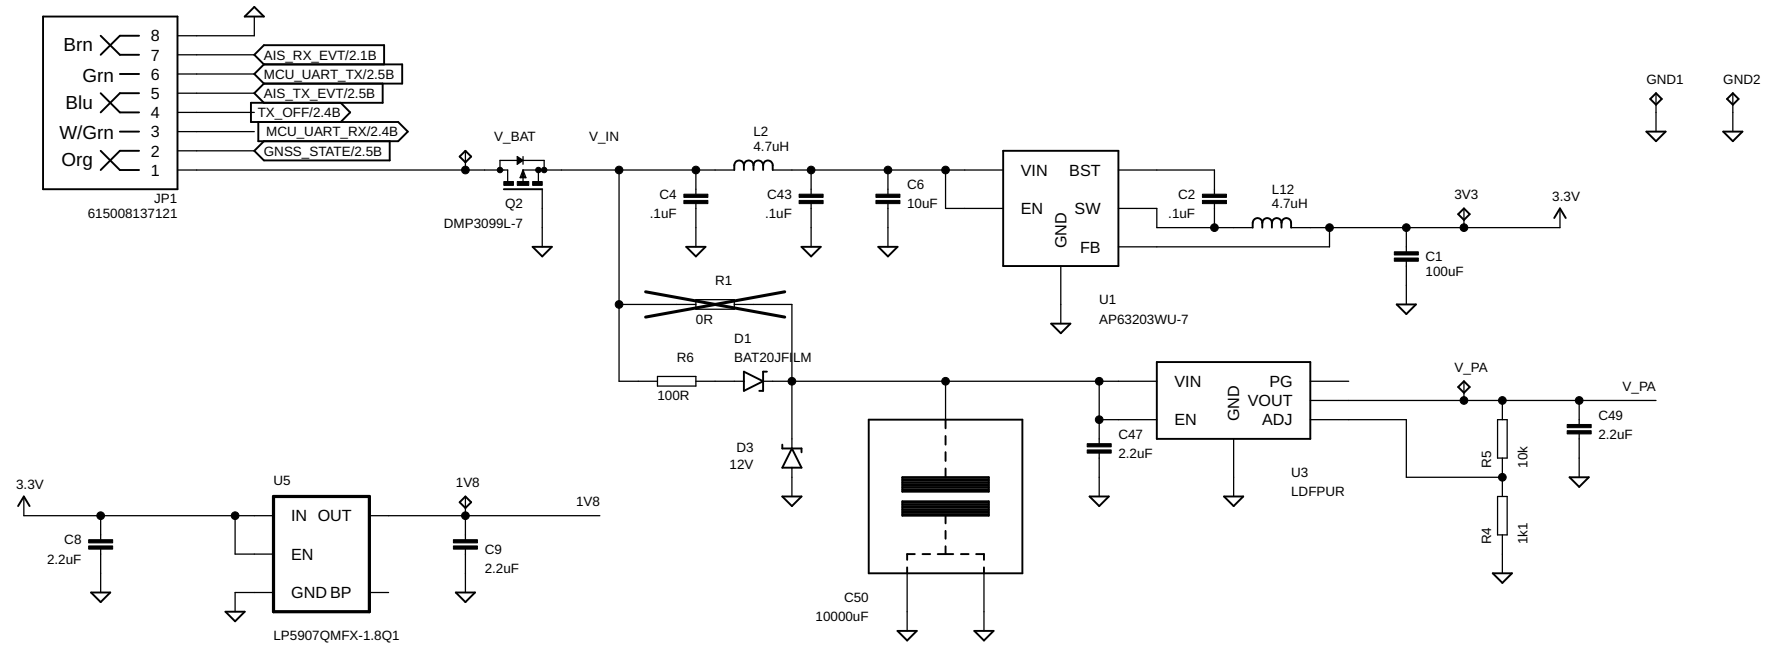

MAIANA™ AIS Transponder
Copyright © 2015-2020 Peter Antypas
Licensed under GPLv3

Connections & Power


transponder-7.0.0

10/18/20 7:52 AM

Sheet: 1/7

The STM32L412K8U6 is a reasonably priced M4 MCU with 64K of flash.

Firmware built with -O2 barely fits, so a low-cost EEPROM is used to store configuration.

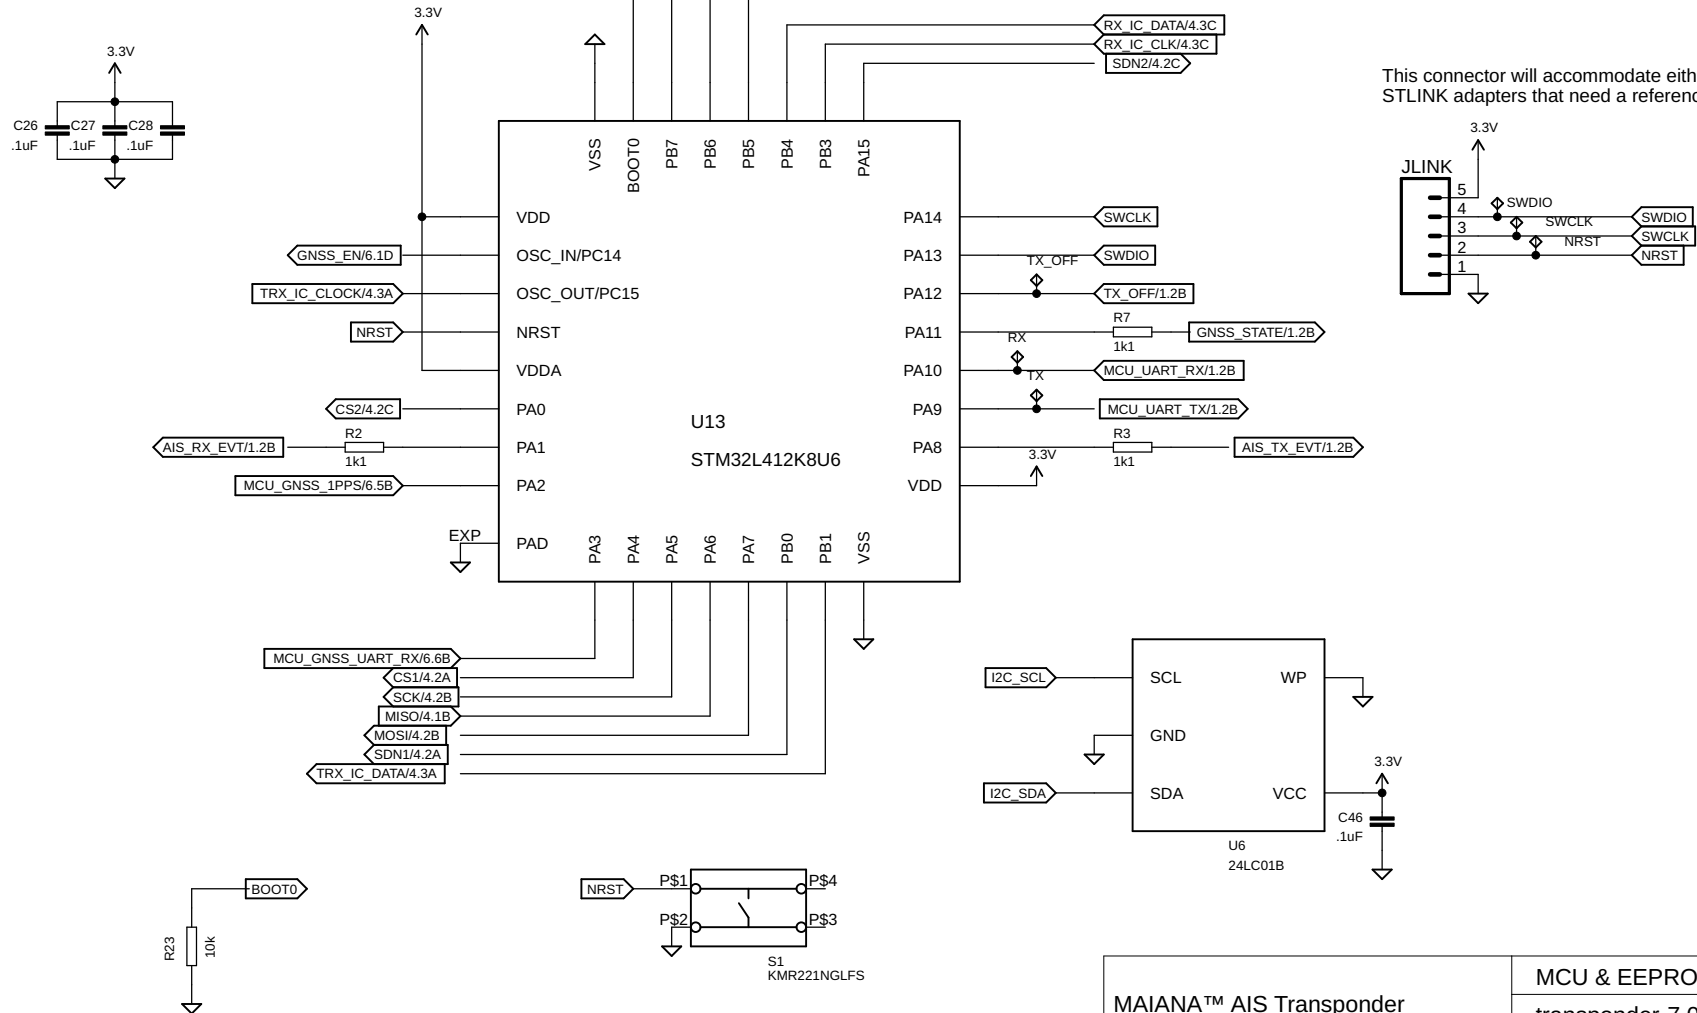

This connector will accommodate either SEGGER or STLINK adapters that need a reference voltage.

MAIANA™ AIS Transponder
Copyright © 2015-2020 Peter Antypas
Licensed under GPLv3

MCU & EEPROM	
transponder-7.0.0	
10/18/20 7:52 AM	
Sheet: 2/7	

1 2 3 4 5 6

A

A

B


B

C

C

D

D

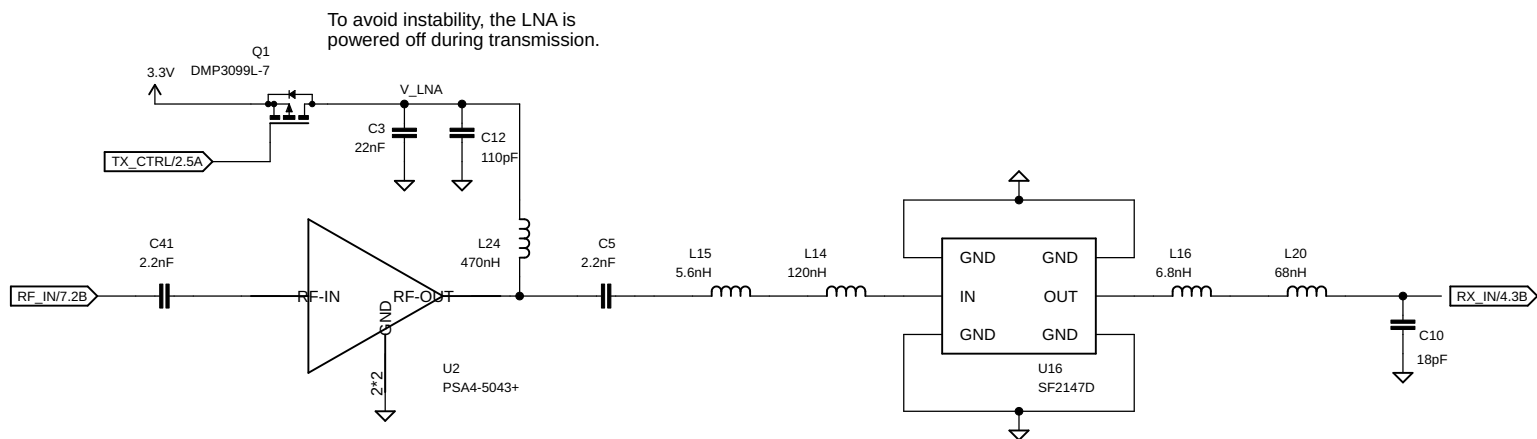

MAIANA™ AIS Transponder
Copyright © 2015-2020 Peter Antypas
Licensed under GPLv3


LNA & SAW Filter

transponder-7.0.0

10/18/20 7:52 AM

Sheet: 3/7

1 2 3 4 5 6

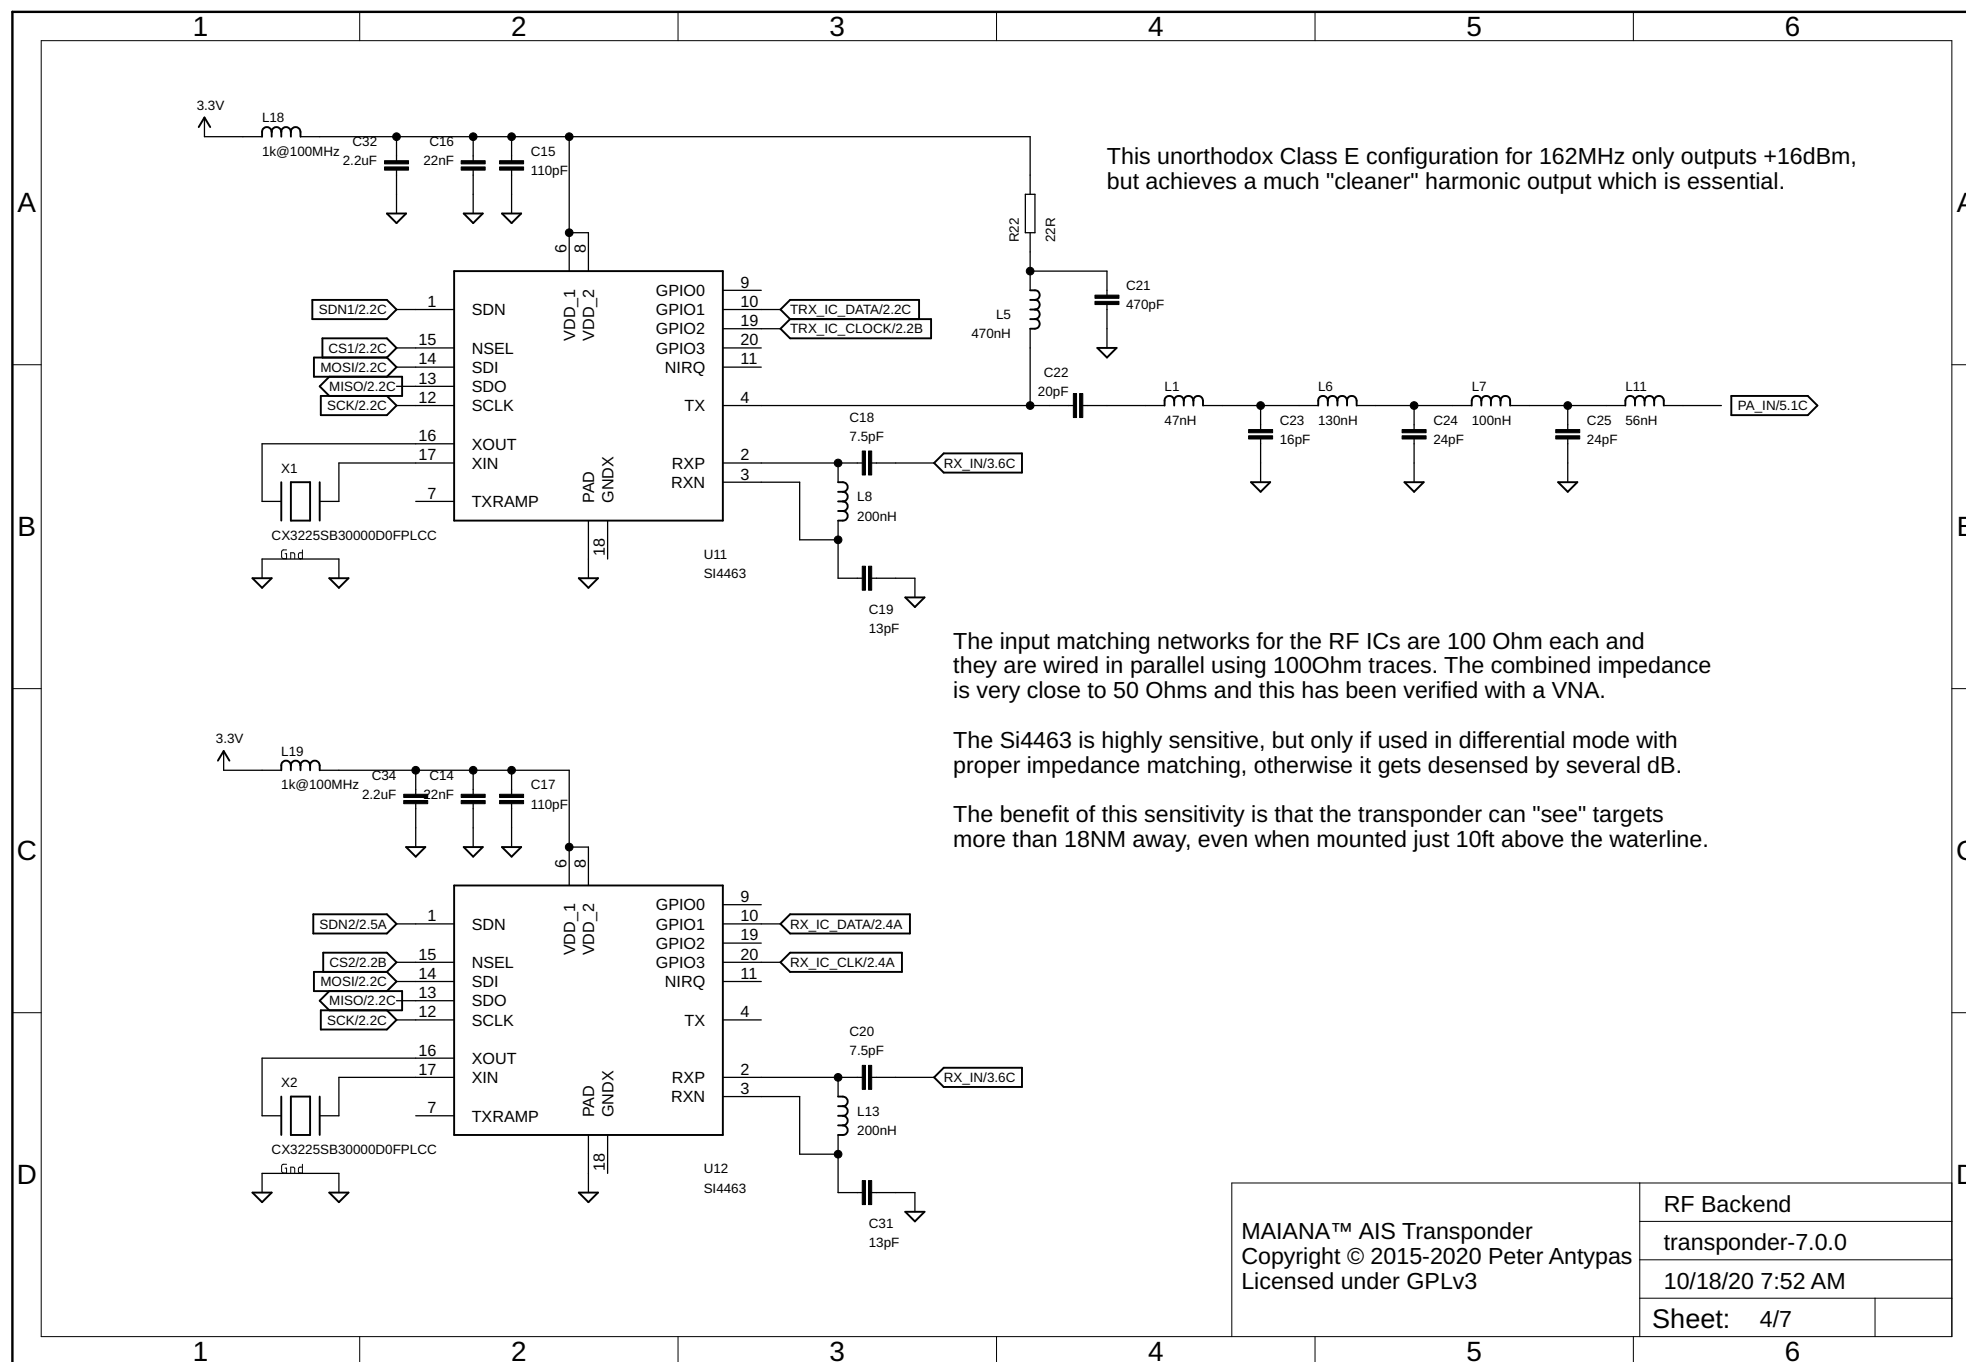


This power amplifier adds more than 17dB of gain for a total conducted output power of +33dBm.

It is based on the reference designs in the datasheet, but includes a narrowband input matching network to reduce BOM and a very steep Chebyshev low pass filter to deal with a pesky 2nd harmonic that falls in the restricted aviation band (324MHz).

The MOSFET drain is always powered, but the gate bias voltage is turned on via R11, R12 and C11. The RC delay is essential for suppressing spurious emissions during ramp up and ramp down.

This MOSFET is at End Of Life. NXP suggests the AFT05MS004N as a replacement, but it's not a drop-in; it will need different matching networks, biasing and input power. On the upside, that part is more efficient and capable of 5W output, so it might be possible to support class B+.

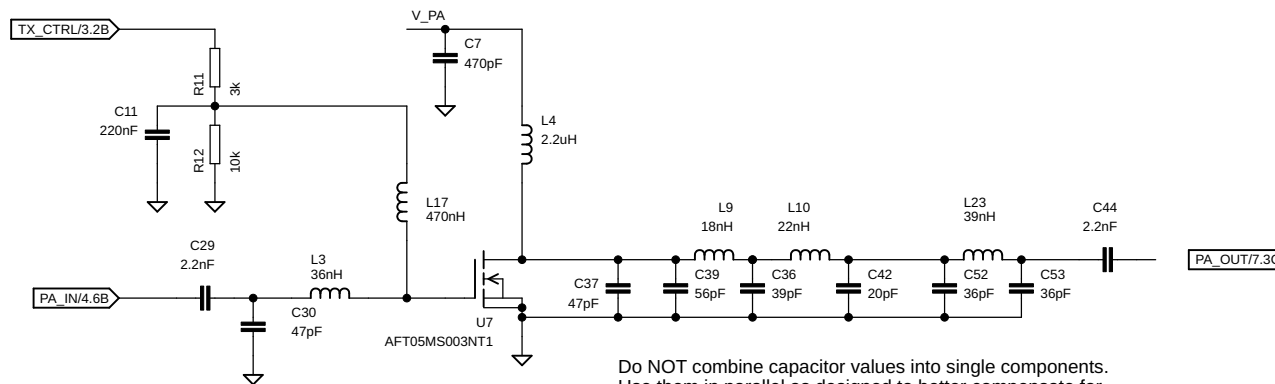

Do NOT combine capacitor values into single components. Use them in parallel as designed to better compensate for tolerances.

MAIANA™ AIS Transponder
Copyright © 2015-2020 Peter Antypas
Licensed under GPLv3


RF Power Amplifier

transponder-7.0.0

10/18/20 7:52 AM


Sheet: 5/7

The 1PPS signal is inverted, so the MCU IO is configured with an internal pullup and reacts to a falling edge instead.

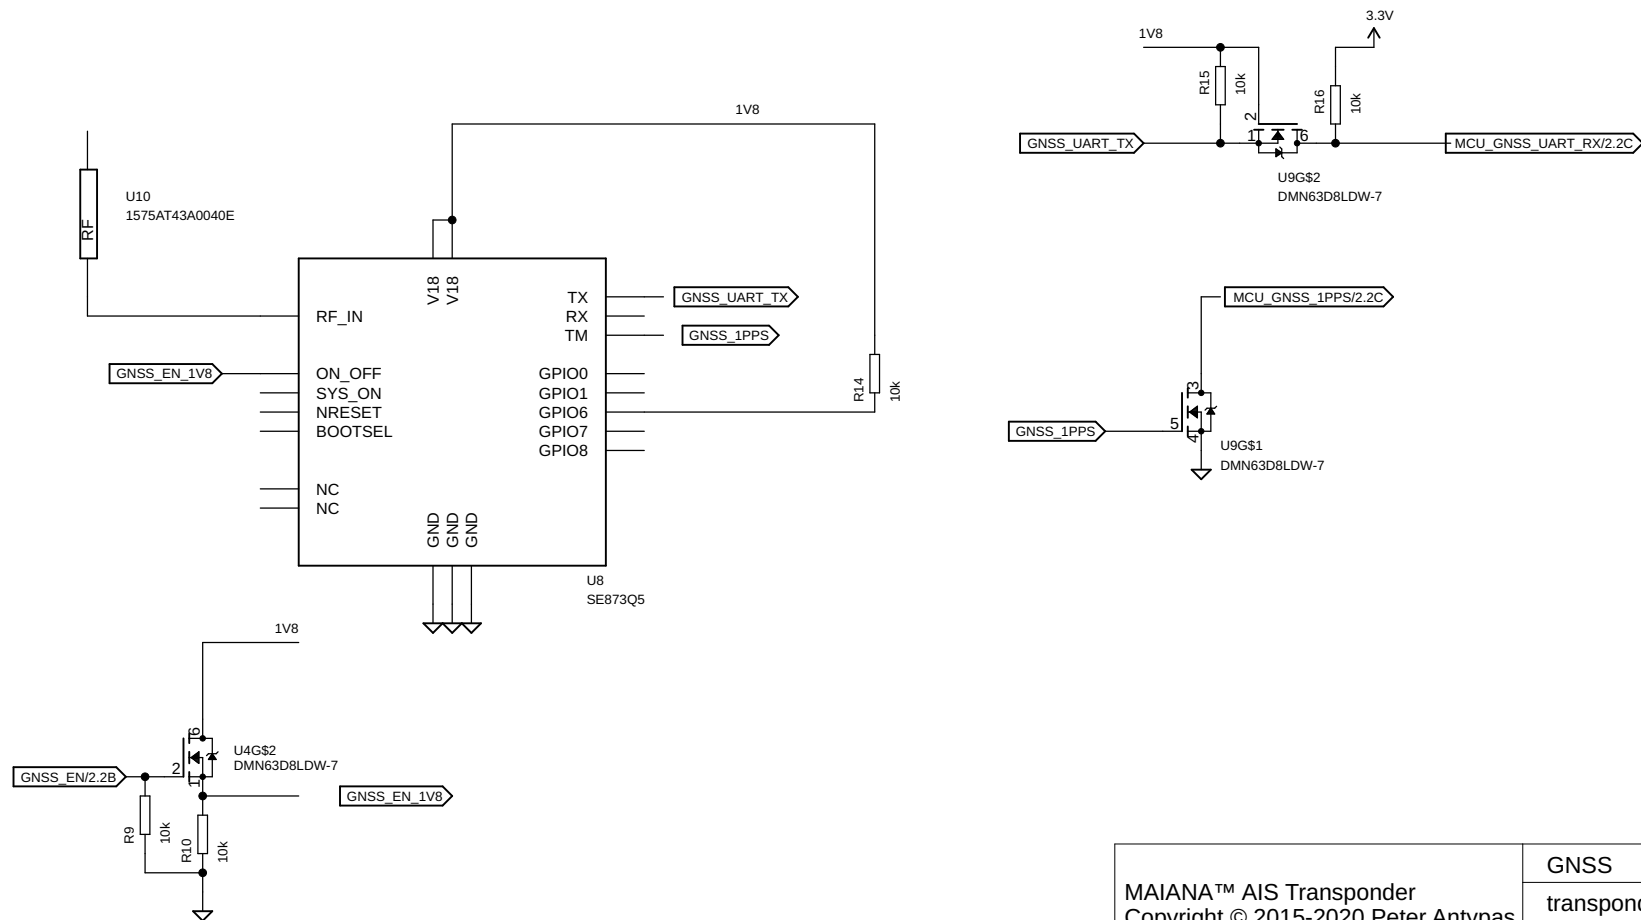

GNSS	
transponder-7.0.0	
10/18/20 7:52 AM	
Sheet: 6/7	

This type of RX/TX switch needs no DC blocking caps.
Although it runs on 3.3V, all logic inputs must be well below
3V, so 1.8V is used for them.

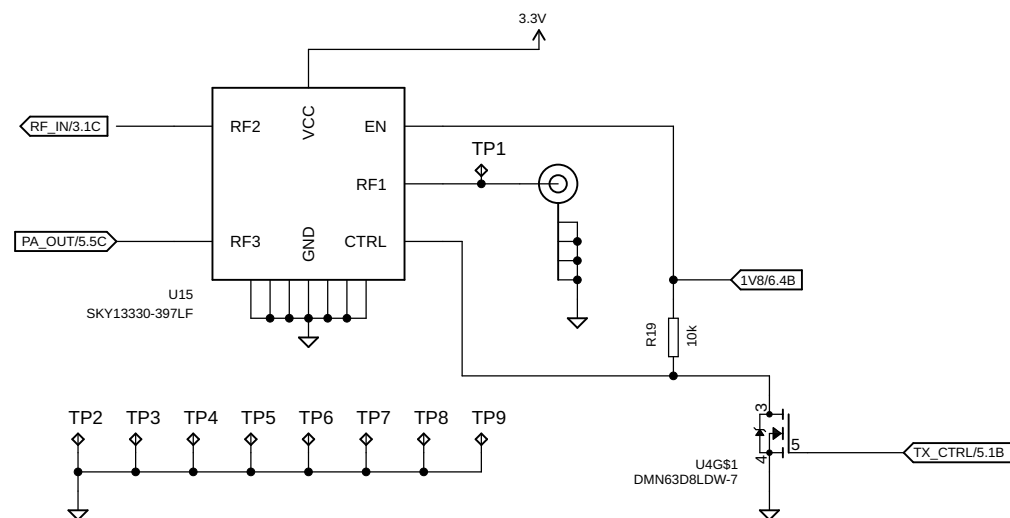

MAIANA™ AIS Transponder
Copyright © 2015-2020 Peter Antypas
Licensed under GPLv3

Antenna Switch	
transponder-7.0.0	
10/18/20 7:52 AM	
Sheet: 7/7	