SIGNAL PROCESSING

Through GATE

EE1205-TA Group

Author: Sayyam Palrecha

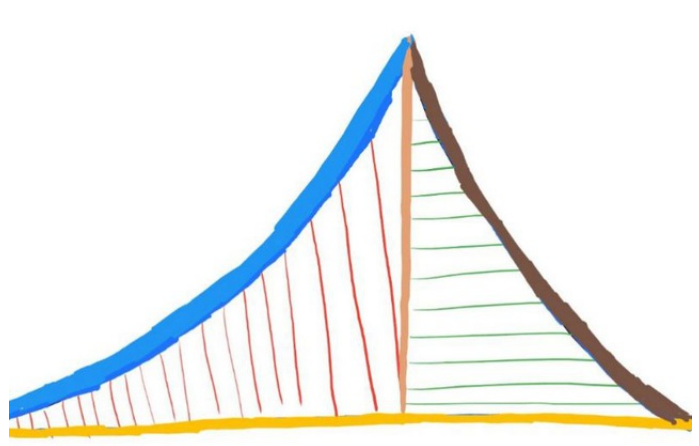

Contents

Introduction

This book provides solutions to signal processing problems in GATE.

Chapter 1

Harmonics

1.1

Chapter 2

2.1

Chapter 3

Z-transform

Chapter 4

Systems

4.1 The damping ratio and undamped natural frequency of a closed loop system as shown in the figure, are denoted as ζ and ω_n, respectively. The values of ζ and ω_n are

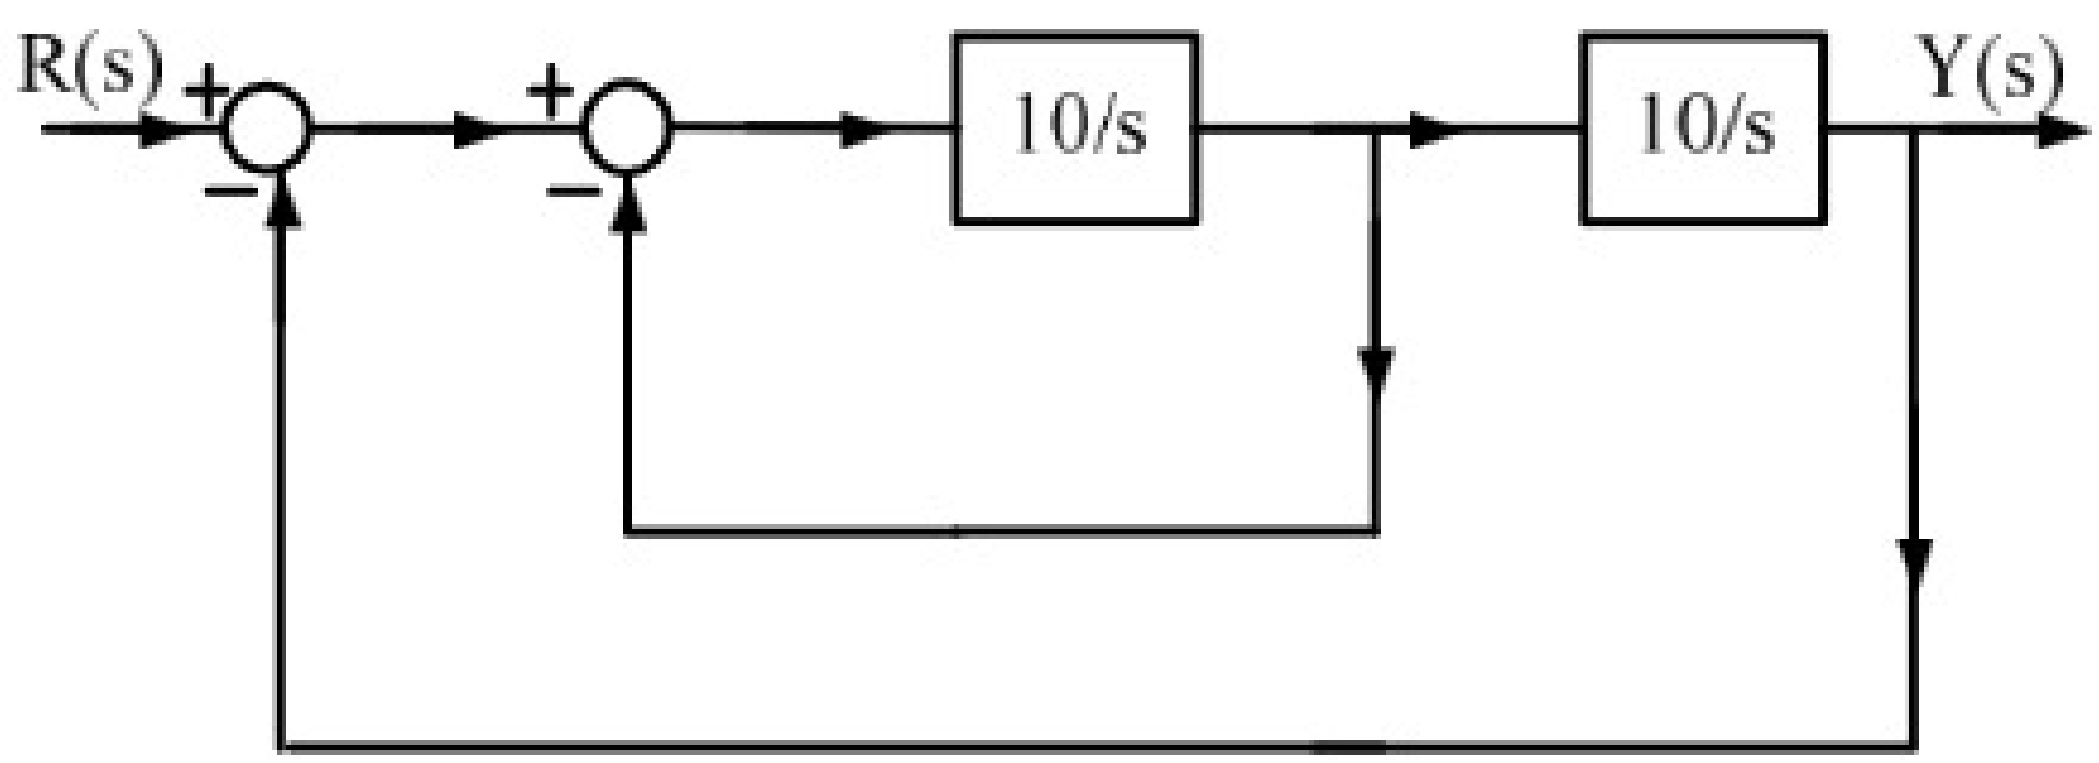

(a) $\zeta = 0.5$ and $\omega_n = 10$ rad/s

(b) $\zeta = 0.1$ and $\omega_n = 10$ rad/s

(c) $\zeta = 0.707$ and $\omega_n = 10$ rad/s

(d) $\zeta = 0.707$ and $\omega_n = 100$ rad/s

(GATE EE 2022)

Solution: We will use Mason's Gain Formula to calculate the transfer function of

Parameter	Description	Values
m	load of system	
k	stiffness of system	
ω_n	Natural frequency	$\sqrt{\frac{k}{m}}$
ζ	Damping ratio	$\frac{c}{2m\omega_n}$
y(t)	Output of system	
x(t)	Input to the system	
c	Damping coefficient	
T(s)	Transfer function of system	$\frac{Y(s)}{R(s)}$

Table 4.1: Parameter Table

this system. First converting the given diagram to a signal flow graph :

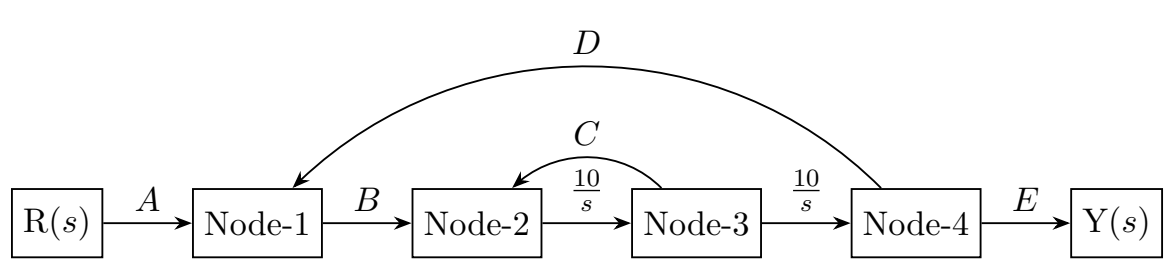

Figure 4.1: Signal Flow Diagram

Mason's Gain Formula is given by :

$$H\left(s\right) = \sum_{i=1}^{N} \left(\frac{P_i \Delta_i}{\Delta}\right) \tag{4.1}$$

This signal flow graph has only one forward path whose gain is given by :

$$P_1 = \frac{10}{s}\frac{10}{s} \tag{4.2}$$

$$= \frac{100}{s^2} \tag{4.3}$$

Parameter	Description
N	Number of forward paths
L	Number of loops
P_k	Forward path gain of k^{th} path
Δ_k	Associated path factor
Δ	Determinant of the graph

Table 4.2: Parameter Table - Mason's Gain Law

Parameter	Formula
Δ	$1 + \sum_{k=1}^{L} \left((-1)^k \text{ Product of gain of groups of k isolated loops} \right)$
Δ_k	Δ part of graph that is not touching k^{th} forward path

Table 4.3: Formula Table - Mason's Gain Law

The loop gain for loop between Node-2 and Node-3 is :

$$L_1 = \frac{10}{s}(-1) \tag{4.4}$$
$$= -\frac{10}{s} \tag{4.5}$$

The loop gain for loop between Node-1 and Node-4 is :

$$L_1 = \frac{10}{s}\frac{10}{s}(-1) \tag{4.6}$$
$$= -\frac{100}{s^2} \tag{4.7}$$

Using Table 4.3, Δ is :

$$\Delta = 1 - \left(-\frac{10}{s} - \frac{100}{s^2}\right) \tag{4.8}$$

$$= 1 + \frac{10}{s} + \frac{100}{s^2} \tag{4.9}$$

There are no two isolated loops available. Hence all further terms will b zero.

As both the loops are in contact with the only forward path,

$$\Delta_1 = 1 \tag{4.10}$$

Using equation (4.1) :

$$H(s) = \frac{\frac{100}{s^2}}{1 + \frac{10}{s} + \frac{100}{s^2}} \tag{4.11}$$

$$= \frac{100}{s^2 + 10s + 100} \tag{4.12}$$

Referring to Table 4.1, the general equation of the damping system is second order and can be written as :

$$m\ddot{y}(t) + c\dot{y}(t) + ky(t) = x(t) \tag{4.13}$$

Take the Laplace transform and solve for $\frac{Y(s)}{X(s)}$:

$$\frac{Y(s)}{X(s)} = \frac{\omega_n^2}{s^2 + 2\zeta\omega_n s + \omega_n^2} \tag{4.14}$$

$$\implies H(s) = \frac{\omega_n^2}{s^2 + 2\zeta\omega_n s + \omega_n^2} \tag{4.15}$$

Comparing equations (4.12) and (4.15) ,

$$\omega_n^2 = 100 \tag{4.16}$$

$$\implies \omega_n = 10 \text{ rad/s} \tag{4.17}$$

$$2\zeta\omega_n = 10 \tag{4.18}$$

$$\implies \zeta = 0.5 \tag{4.19}$$

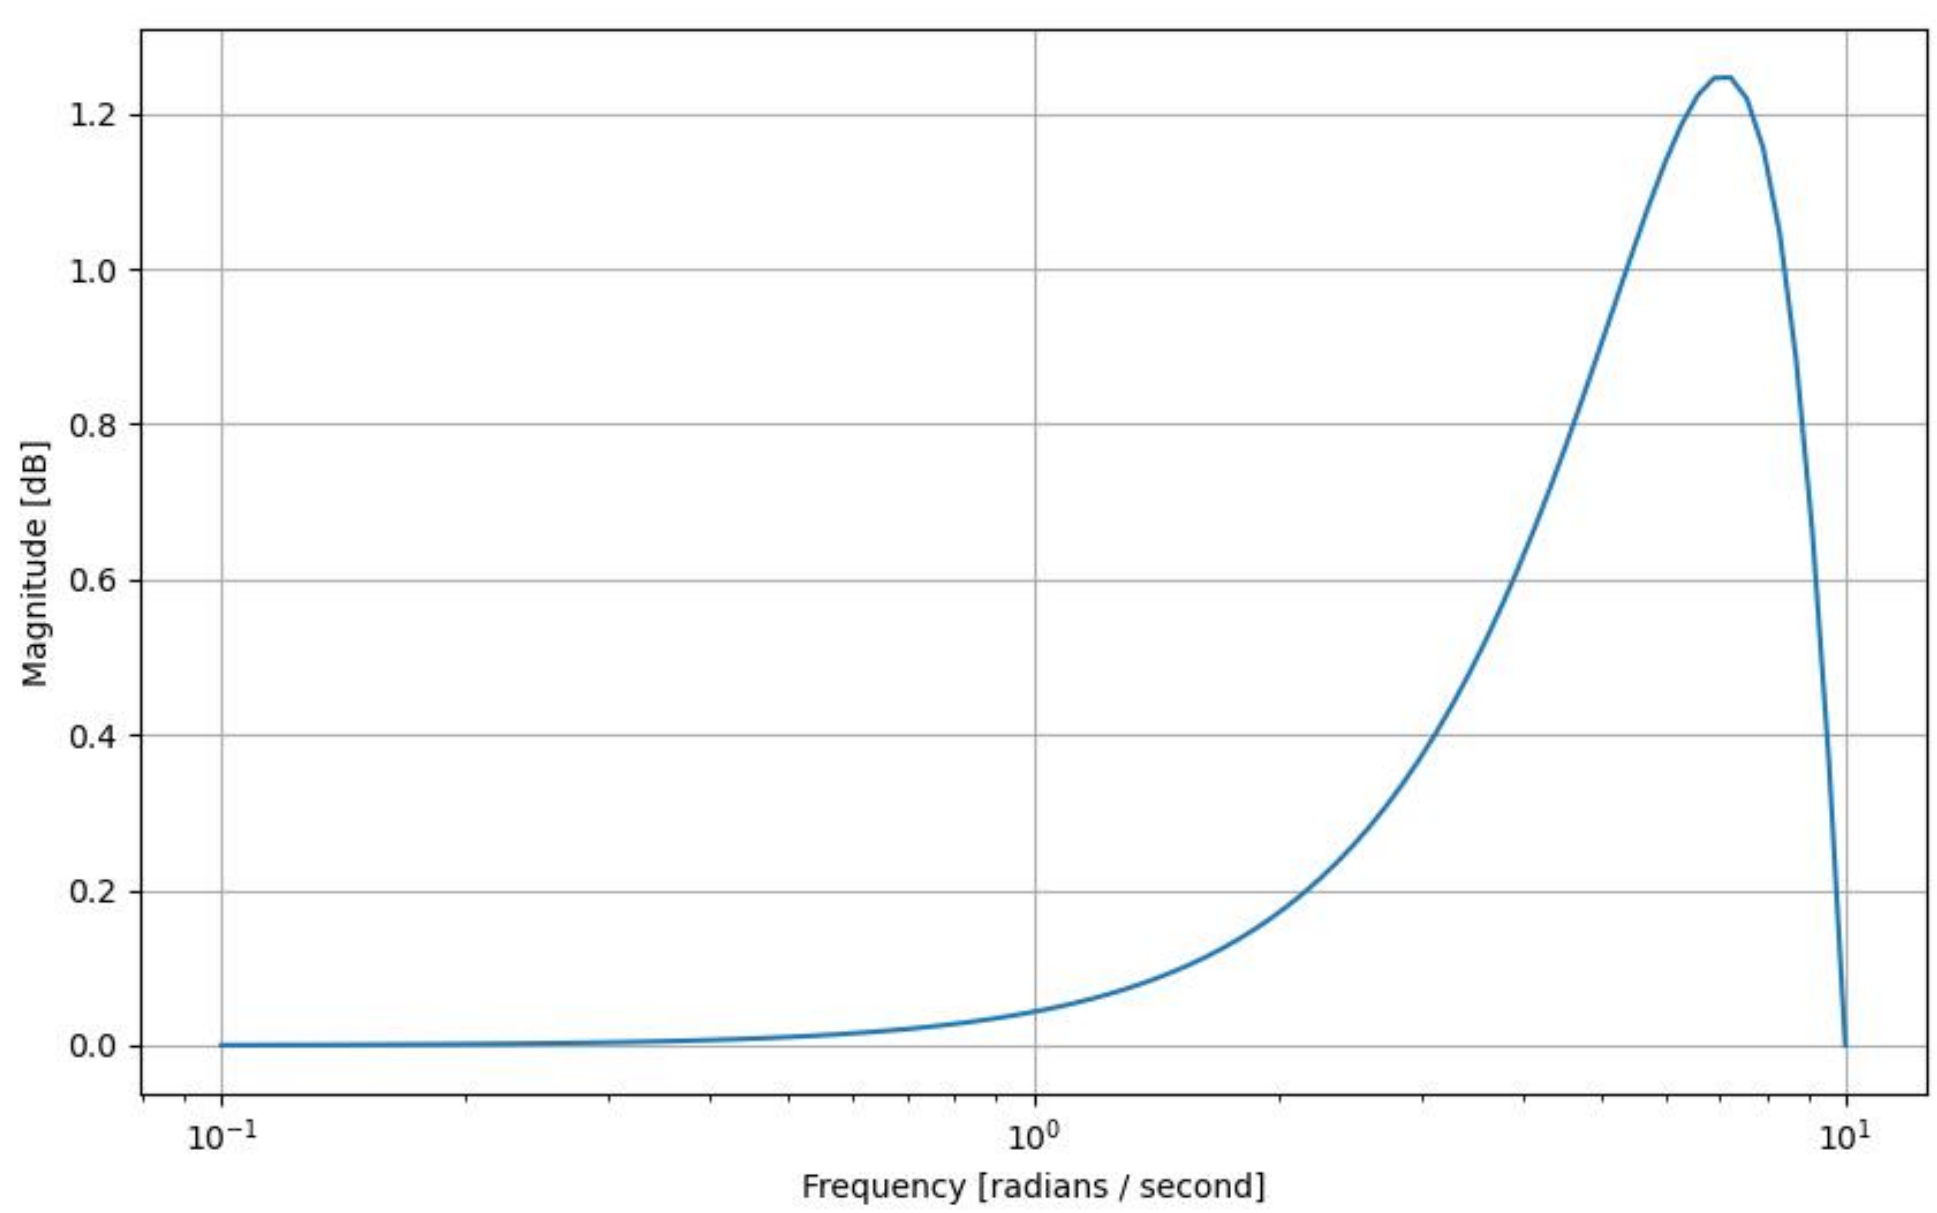

Figure 4.2: Magnitude plot

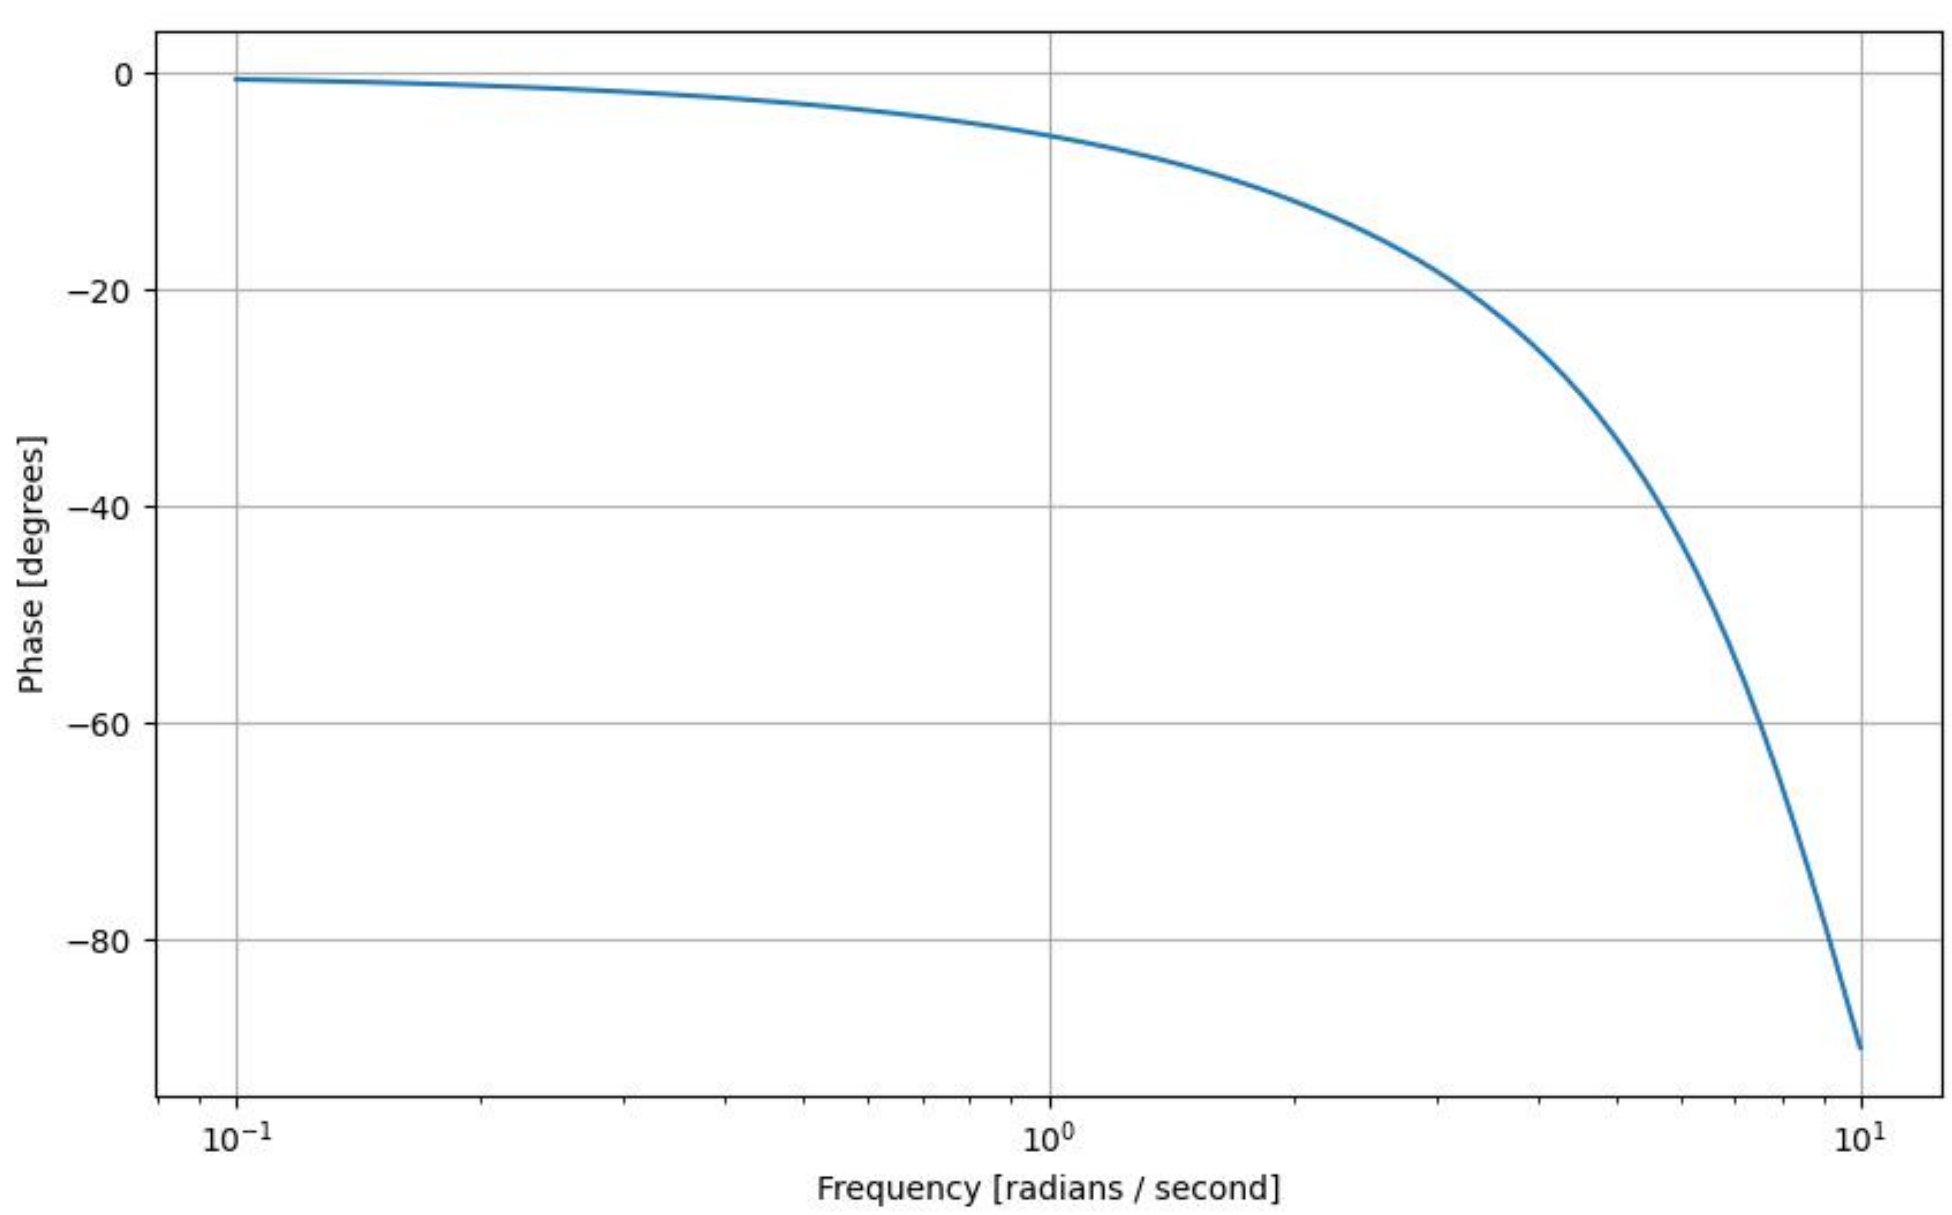

Figure 4.3: Phase plot

Chapter 5

5.1

Chapter 6

Sampling

6.1

Chapter 7

Contour Integration

7.1

Chapter 8

Laplace Transform

8.1 Consider the differential equation $\frac{d^2y}{dx^2} - 2\frac{dy}{dx} + y = 0$. The boundary conditions are $y = 0$ and $\frac{dy}{dx} = 1$ at $x = 0$. Then the value of y at $x = \frac{1}{2}$ (GATE AE 2022)

Solution:

Parameters	**Values**	**Description**
$y(0)$	0	y at $x = 0$
$y'(0)$	1	$\frac{dy}{dx}$ at $x = 0$

Table 8.1: Parameters

$$\frac{d^2y}{dx^2} \xleftrightarrow{\mathcal{L}} s^2Y(s) - sy(0) - y'(0) \tag{8.1}$$

$$\frac{dy}{dx} \xleftrightarrow{\mathcal{L}} sY(s) - y(0) \tag{8.2}$$

Applying Laplace Transform, using (8.1) and (8.2),

$$s^2Y(s) - sy(0) - y'(0) - 2(sY(s) - y(0)) + Y(s) = 0 \tag{8.3}$$

From Table 8.1,

$$(s^2 - 2s + 1)Y(s) - 1 = 0 \tag{8.4}$$

$$Y(s) = \frac{1}{(s-1)^2} \tag{8.5}$$

$$t^n \overset{\mathcal{L}}{\longleftrightarrow} \frac{n!}{s^{n+1}} \tag{8.6}$$

$$e^{at}x(t) \overset{\mathcal{L}}{\longleftrightarrow} X(s-a) \tag{8.7}$$

Taking Inverse Laplace Transform for $Y(s)$, using (8.6) and (8.7),

$$y(x) = xe^x \tag{8.8}$$

$$\implies y\left(\frac{1}{2}\right) = \frac{\sqrt{e}}{2} \tag{8.9}$$

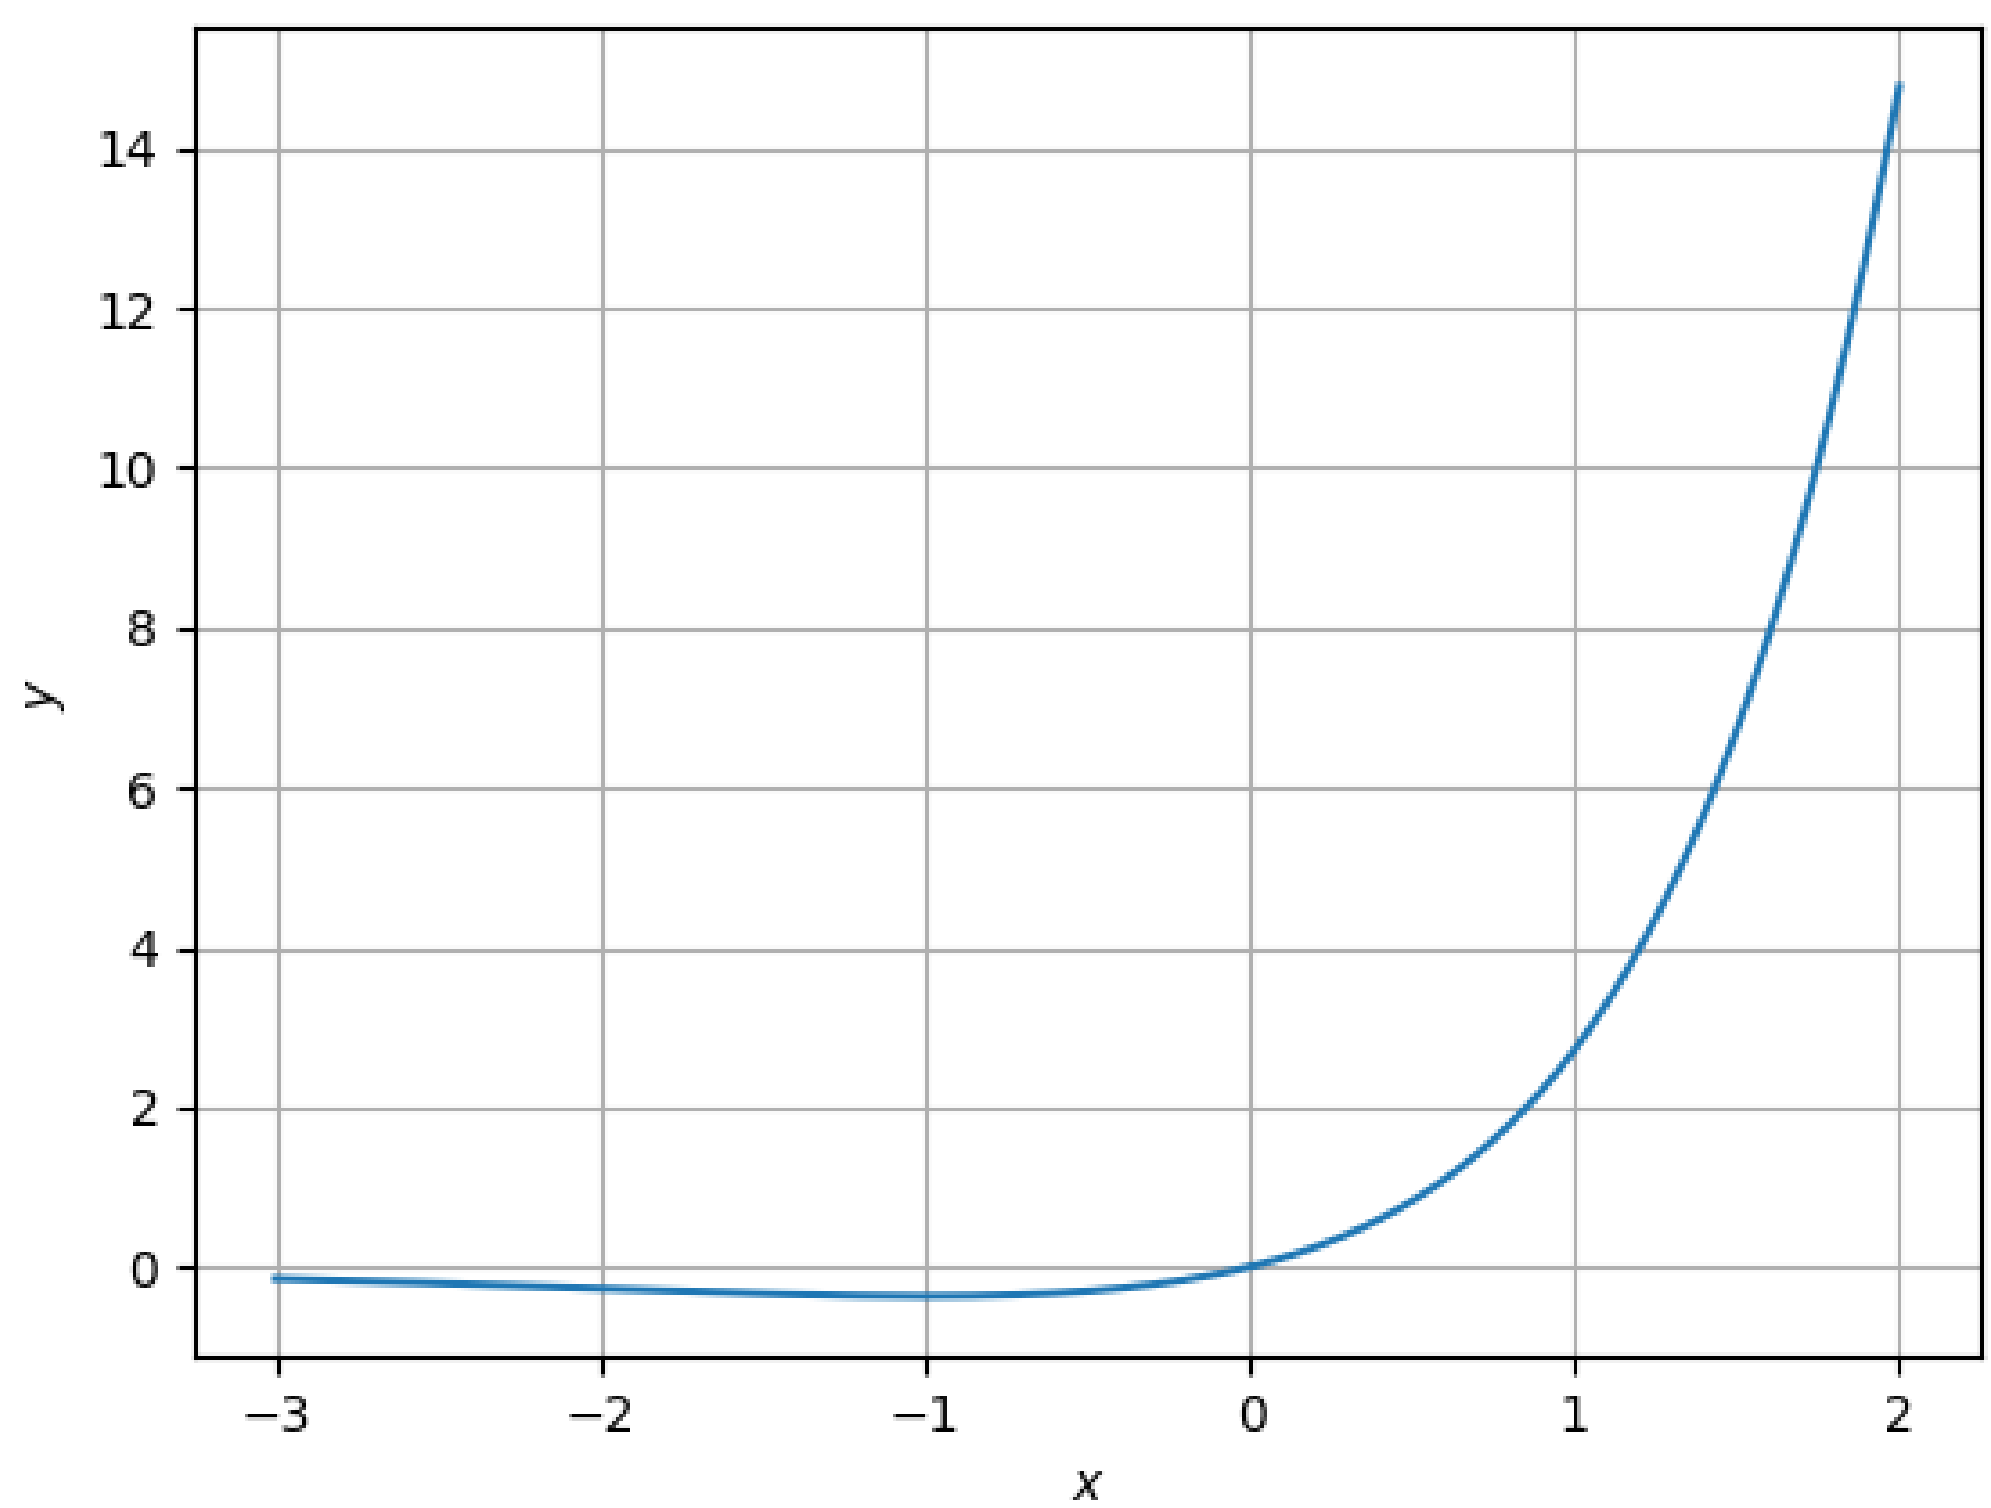

Figure 8.1: Plot of $y(x)$

8.2 A process described by the transfer function

$$G_p(s) = \frac{(10s+1)}{(5s+1)}$$

is forced by a unit step input at time $t = 0$. The output value immediately after the unit step input (at $t = 0^+$) is ? (Gate 2022 CH 34)

Solution:

Parameters	**Description**
$X(s)$	Laplace transform of $x(t)$
$Y(s)$	Laplace transform of $y(t)$
$G_p(s) = \frac{Y(s)}{X(s)}$	Transfer function
$x(t) = u(t)$	unit step function

Table 8.2: Given parameters

$$G_p(s) = \frac{Y(s)}{X(s)} = \frac{(10s+1)}{(5s+1)} \tag{8.10}$$

$$u(t) \xleftrightarrow{\mathcal{L}} \frac{1}{s} \tag{8.11}$$

From equation (8.11):

$$Y(s) = \frac{(10s+1)}{s\,(5s+1)} \tag{8.12}$$

$$= \frac{1}{s} + \frac{5}{5s+1} \tag{8.13}$$

Taking inverse laplace transformation,

$$\frac{1}{s} \xleftrightarrow{\mathcal{L}^{-1}} u(t) \tag{8.14}$$

$$\frac{1}{s-c} \xleftrightarrow{\mathcal{L}^{-1}} e^{ct}u(t) \tag{8.15}$$

$$y(t) = \left(1 + e^{\frac{-t}{5}}\right) u(t) \tag{8.16}$$

$$y(0^+) = 2 \tag{8.17}$$

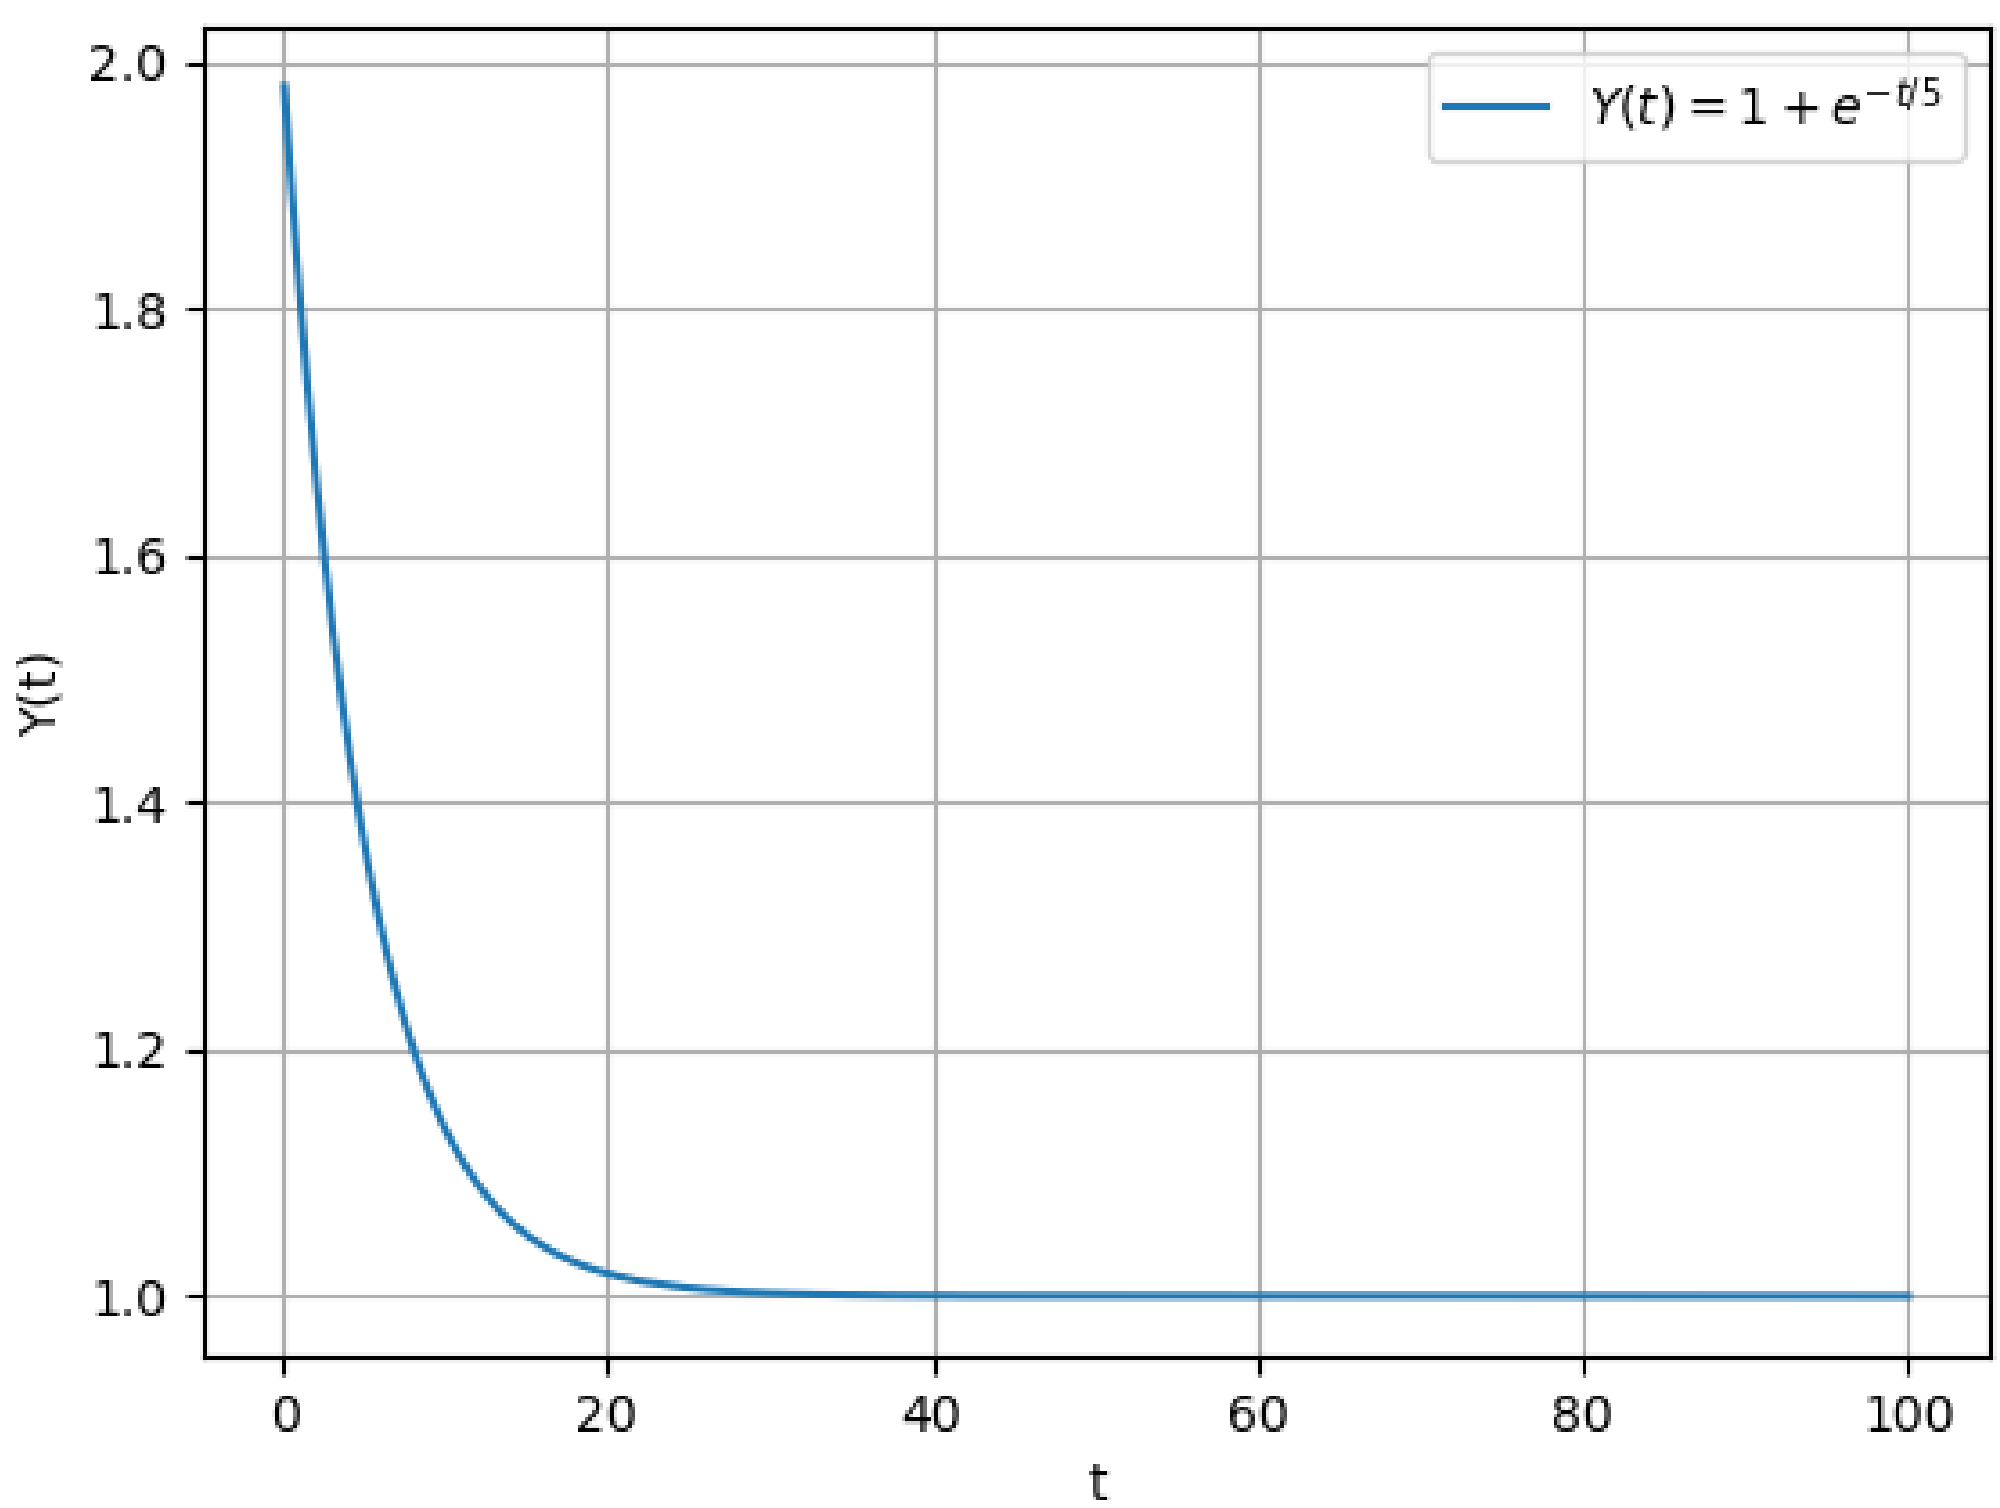

Figure 8.2: Graph of y(t)

Chapter 9

Fourier transform

9.1