

A FAST TEMPLATE PERIODOGRAM FOR DETECTING NON-SINUSOIDAL FIXED-SHAPE SIGNALS IN IRREGULARLY SAMPLED TIME SERIES

J. HOFFMAN¹, J. VANDERPLAS², J. D. HARTMAN³, G. Á BAKOS^{3,4}

Draft version May 25, 2026

ABSTRACT

Astrophysical time series often contain periodic signals. The large and growing volume of time series data from photometric surveys demands computationally efficient methods for detecting and characterizing such signals. The most efficient algorithms available for this purpose are those that exploit the $\mathcal{O}(N \log N)$ scaling of the Fast Fourier Transform (FFT). However, these methods are not optimal for non-sinusoidal signal shapes. Template fits (or periodic matched filters) optimize sensitivity for *a priori* known signal shapes—for example, the characteristic lightcurves of RR Lyrae, Cepheids, δ Scuti variables, eclipsing binaries, and exoplanetary transits—but at a significant computational cost. Current implementations of template periodograms scale as $\mathcal{O}(N_f N_{\text{obs}})$, where N_f is the number of trial frequencies and N_{obs} is the number of lightcurve observations, and due to non-convexity, they do not guarantee the best fit at each trial frequency, which can lead to spurious results. In this work, we present a non-linear extension of the Lomb-Scargle periodogram to obtain a template-fitting algorithm that is both accurate (globally optimal solutions are obtained except in pathological cases) and computationally efficient (scaling as $\mathcal{O}(N_f \log N_f)$ for a given template). The non-linear optimization of the template fit at each frequency is recast as a polynomial zero-finding problem, where the coefficients of the polynomial can be computed efficiently with the non-equispaced fast Fourier transform. We show that our method, which uses truncated Fourier series to approximate templates, is an order of magnitude faster than existing algorithms for small problems ($N \lesssim 10$ observations) and 2 orders of magnitude faster for long base-line time series with $N_{\text{obs}} \gtrsim 10^4$ observations. An open-source implementation of the fast template periodogram is freely available online.^a

KEYWORDS

methods: data analysis – methods: statistical – techniques: photometric – stars: variables: general – stars: variables: RR Lyrae

1. INTRODUCTION

Astronomical systems exhibit a wide range of time-dependent variability. By measuring and characterizing this variability, astronomers are able to infer a variety of important astrophysical properties about the underlying system.

Periodic signals in noisy astronomical timeseries can be detected with a number of techniques, including Gaussian process regression (Foreman-Mackey et al. 2017; Rasmussen & Williams 2005), least-squares spectral analysis (Lomb 1976; Scargle 1982; Barning 1963; Vaníček 1971), and information-theoretic methods (Graham et al. 2013a; Huijse et al. 2012; Cincotta et al. 1995).

For an empirical comparison of some of these techniques applied to several astronomical survey datasets, see Graham et al. (2013b).

For stationary periodic signals, least-squares spectral analysis — also known as the Lomb-Scargle (LS) periodogram (Lomb 1976; Scargle 1982; Barning 1963; Vaníček 1971) — is perhaps the most sensitive and computationally efficient method of detection. The LS periodogram can be made to scale as $\mathcal{O}(N_f \log N_f)$, where N_f is the number of trial frequencies, by utilizing the non-equispaced fast Fourier transform (Keiner et al. 2009; Dutt & Rokhlin 1993, NFFT) to evaluate frequency-dependent sums, or by “extrapolating” irregularly spaced observations to a regular grid with Lagrange polynomials (Press & Rybicki 1989).

The LS periodogram fits the following model to a set of observations:

$$\hat{y}_{\text{LS}}(t; \theta, \omega) = \theta_0 \cos \omega t + \theta_1 \sin \omega t. \quad (1)$$

where $\omega = 2\pi/P$ is the (angular) frequency of the underlying signal, and θ_0 and θ_1 are the amplitudes of the signal. When the data y_i is composed of a sinusoidal component and a white noise component (i.e., when the measurement uncertainties are uncorrelated and Gaussian), the LS periodogram provides a maximum likelihood estimate for the model parameters (ω, θ_0 , and θ_1).

The LS “power” $P_{\text{LS}}(\omega)$ has several definitions in the literature (Zechmeister & Kürster 2009), but we adopt

johnh2o2@gmail.com

¹ Xaxis, LLC, 3 World Trade Center, 175 Greenwich Street, 30th Floor, New York, NY 10007

² eScience Institute, University of Washington, Seattle, WA 98195

³ Department of Astrophysical Sciences, Princeton University, Princeton NJ 08540

⁴ Institute for Advanced Study, 1 Einstein Drive, Princeton, NJ

^a <https://github.com/PrincetonUniversity/FastTemplatePeriodogram>

the following definition throughout the paper:

$$P(\omega) = \frac{V_0 - V(\omega)}{V_0} \quad (2)$$

where V_0 is the weighted sum of squared residuals for a constant fit:

$$V_0 = \sum_i w_i (y_i - \bar{y})^2 \quad (3)$$

with $\bar{y} = \sum_i w_i y_i$ the weighted mean of the observations and $w_i \propto \sigma_i^{-2}$ the normalised weights for each observation ($\sum_i w_i = 1$), and $V(\omega)$ is the weighted sum of squared residuals for the best-fit model $\hat{y}$ at a given trial frequency $\omega = 2\pi/P$ where P is the period:

$$V(\omega) = \min_{\theta} \sum_i w_i (y_i - \hat{y}(t_i; \omega, \theta))^2. \quad (4)$$

We use the symbol V rather than χ^2 to follow the convention common in the linear least-squares literature: with $\sum_i w_i = 1$ the quantity $\sum_i w_i (y_i - \hat{y}_i)^2$ is the weighted sum of squared residuals but is not strictly χ^2 -distributed, so the χ^2 symbol can be misleading.

1.1. Maximum-likelihood interpretation

Although the periodogram in Equation 2 is most commonly introduced as a least-squares fit, it has a direct probabilistic reading. Under the standard noise assumptions made throughout this paper – uncorrelated, zero-mean, Gaussian uncertainties $y_i \sim \mathcal{N}(\hat{y}(t_i; \omega, \theta), \sigma_i^2)$ – the likelihood of the data given the model parameters is

$$p(\mathcal{D}|\omega, \theta) = \prod_{i=1}^{N_{\text{obs}}} \mathcal{N}(\hat{y}(t_i; \omega, \theta), \sigma_i^2), \quad (5)$$

where we use $\mathcal{D} = \{(t_i, y_i, \sigma_i) \mid 0 < i \leq N_{\text{obs}}\}$ as shorthand for the lightcurve observations (avoiding the symbol X , which is conventionally reserved for the design matrix). The log-likelihood is

$$\log p(\mathcal{D}|\omega, \theta) = -\frac{1}{2} \sum_{i=1}^{N_{\text{obs}}} \left(\frac{y_i - \hat{y}(t_i; \omega, \theta)}{\sigma_i} \right)^2 + \text{const.} \quad (6)$$

$$= -\frac{W}{2} V(\theta, \omega) + \text{const.}, \quad (7)$$

where $W = \sum_i \sigma_i^{-2}$ and $V(\theta, \omega) \equiv \sum_i w_i (y_i - \hat{y}(t_i; \omega, \theta))^2$ is the weighted sum of squared residuals written with the normalised weights $w_i = \sigma_i^{-2}/W$ ($\sum_i w_i = 1$). Hence

$$V(\omega) = \min_{\theta} \sum_i w_i (y_i - \hat{y}(t_i; \omega, \theta))^2 \quad (8)$$

$$= -\frac{2}{W} \max_{\theta} \log p(\mathcal{D}|\omega, \theta) + \text{const.}, \quad (9)$$

and therefore, since $P(\omega) = 1 - V(\omega)/V_0$,

$$P(\omega) = \frac{2}{WV_0} \max_{\theta} \log p(\mathcal{D}|\omega, \theta) + \text{const.} \quad (10)$$

The Lomb-Scargle power is therefore a linear, monotonically increasing transformation of the profile log-likelihood – that is, of the log-likelihood maximised over the non-frequency parameters θ at each trial ω . Choosing the frequency that maximises the periodogram is equivalent to selecting the maximum-likelihood frequency estimate under the assumed noise model.

It is tempting to recast this as a maximum-a-posteriori (MAP) statement under an implicit uniform prior on θ , but we deliberately avoid that framing for two reasons. First, a uniform prior over an unbounded domain is improper; recovering the periodogram as a strict MAP quantity would require a piecewise prior on (θ_0, θ_1) that vanishes outside some explicitly chosen bounding box, which we do not impose. Second, even when bounded, a uniform prior on (θ_0, θ_1) implicitly imposes a linear prior on the sinusoid amplitude $A \equiv \sqrt{\theta_0^2 + \theta_1^2}$, since the prior volume element in the (θ_0, θ_1) plane is $d\theta_0 d\theta_1 = A dA d\phi$. A uniform prior on the Cartesian coefficients therefore biases the inference towards large amplitudes. The same pitfall is recognised in exoplanet eccentricity inference, where the parameterisation $(e \cos \varpi, e \sin \varpi)$ – introduced for sampling efficiency by Ford (2006) – implicitly imposes a linear prior on the eccentricity e that has since been corrected for or replaced (Eastman et al. 2013). The maximum-likelihood reading invoked here makes none of these implicit prior assumptions, and we adopt it throughout.

A genuinely Bayesian treatment of the LS periodogram, in which the non-frequency parameters are marginalised rather than profiled, was developed by Mortier et al. (2015a,b). Their periodogram power is

$$P_{\text{Bayes}}(\omega) \propto p(\omega|\mathcal{D}) = \int p(\omega, \theta|\mathcal{D}) d\theta,$$

evaluated under the same uncorrelated-Gaussian noise model but with explicit, bounded priors on the non-frequency parameters. Mortier et al. (2015a) focus on the classical periodogram model of Lomb (1976) and Scargle (1982) together with the constant-offset extension of Zechmeister & Kürster (2009); the same marginalisation strategy could in principle be applied to the template-based formulation developed in this paper.

As remarked in (VanderPlas 2018), the probabilistic interpretation of a periodogram is only as good as the noise model underlying it; in practice the working assumptions (uncorrelated, Gaussian uncertainties, no systematics) are often broken in real astronomical timeseries, and the maximum-likelihood reading above should be understood with the same caveats.

1.2. Extending Lomb-Scargle

The LS periodogram has numerous extensions to account for, e.g., biased estimates of the mean brightness (Zechmeister & Kürster 2009), non-sinusoidal signals (Schwarzenberg-Czerny 1996; Bretthorst 2003; Palmer 2009; Baluev 2009, 2013c; Wheeler & Kipping 2019), multiple periodicities (Baluev 2013a,b), multi-band observations (VanderPlas & Ivezić 2015), and to mitigate overfitting of more flexible models via regularization (VanderPlas & Ivezić 2015). Baluev (2008) provided the framework for improving false alarm statistics with extreme value theory, and this was generalized further in ?.

For a more detailed review of the LS periodogram and its extensions, see [VanderPlas \(2018\)](#).

The multi-harmonic LS periodogram ([Bretthorst et al. 1988](#); [Schwarzenberg-Czerny 1996](#); [Palmer 2009](#), MHGLS), provides a more flexible model by adding harmonic components to the fit:

$$\hat{y}_{\text{MHLS}}(t; \theta, \omega) = \theta_0 + \sum_{n=1}^H \theta_{2n} \cos n\omega t + \theta_{2n-1} \sin n\omega t. \quad (11)$$

Additional harmonics are important for modeling signals that, while stationary and periodic, are non-sinusoidal (e.g. RR Lyrae, eclipsing binaries, etc.).

However, the MHLS periodogram contains $2H + 1$ free parameters while the original LS periodogram contains only 2 (3 if the mean brightness is considered a free parameter). Including higher order harmonics adds model complexity, which can degrade the sensitivity of the MHLS periodogram to sinusoidal or approximately sinusoidal signals.

Tikhonov regularisation (also known as L_2 regularisation) is one tool for mitigating overfitting of the higher-order harmonics. Adding an L_2 penalty on the Fourier amplitudes is equivalent to imposing a zero-mean Gaussian prior on those amplitudes; in the limit of infinite prior width, this prior reduces to the implicit (improper) uniform prior used in the unregularised fit. The choice of prior width is therefore a subjective modelling decision rather than a bias in the statistical sense, and its merits should be weighed against the corresponding decrease in model variance ([VanderPlas & Ivezić 2015](#)).

1.3. Computational scaling

The LS periodogram naively scales as $\mathcal{O}(N_f N_{\text{obs}})$ where N_f is the number of trial frequencies and N_{obs} is the number of observations. However, the limiting computations of the LS periodogram involve sums of trigonometric functions over the observations. When the observations are regularly sampled, the fast Fourier transform (FFT) ([Cooley & Tukey 1965](#)) can evaluate such sums efficiently and the LS periodogram scales as $\mathcal{O}(N_f \log N_f)$.

When the data is not regularly sampled, as is the case for most astronomical time series, the LS periodogram can be evaluated quickly in one of two popular ways. The first, by [Press & Rybicki \(1989\)](#) involves “extrapolating” irregularly sampled data onto a regularly sampled mesh, and then performing FFTs to evaluate the necessary sums. The second, as pointed out in [Leroy \(2012\)](#), is to use the non-equispaced FFT ([Keiner et al. 2009](#); [Dutt & Rokhlin 1993](#), NFFT) to evaluate the sums; this provides roughly an order of magnitude speedup over the [Press & Rybicki \(1989\)](#) algorithm, and both algorithms scale as $\mathcal{O}(N_f \log N_f)$ ([Leroy 2012](#)).

There is a growing population of alternative methods for detecting periodic signals in astrophysical data. Some of these methods can reliably outperform the LS periodogram, especially for non-sinusoidal signal shapes (see [Graham et al. \(2013b\)](#) for a recent empirical review of period finding algorithms). However, a key advantage the LS periodogram and its extensions is speed. Virtually all other “phase-folding” methods scale as $\mathcal{O}(N_{\text{obs}} \times N_f)$, where N_{obs} is the number of observations and N_f is the

number of trial frequencies, while the Lomb-Scargle periodogram scales as $\mathcal{O}(N_f \log N_f)$. The virtual independence of Lomb-Scargle’s computation time with respect to the number of observations (assuming $N_f \gtrsim N_{\text{obs}}$) is especially valuable for lightcurves with $N_{\text{obs}} \gg \log N_f \sim 50$.

Algorithmic efficiency will become increasingly important as the volume of data produced by astronomical observatories continues to grow larger. The HATNet survey ([Bakos et al. 2004](#)), for example, has already made $\mathcal{O}(10^4)$ observations of $\mathcal{O}(10^6 - 10^7)$ stars. The Gaia telescope ([Gaia Collaboration et al. 2016](#)) is set to produce $\mathcal{O}(10 - 100)$ observations of $\mathcal{O}(10^9)$ stars. The Vera C. Rubin Observatory’s Legacy Survey of Space and Time (LSST; [LSST Science Collaboration et al. 2009](#)), which began science operations in 2025, is expected to make $\mathcal{O}(10^2 - 10^3)$ observations of $\mathcal{O}(10^{10})$ stars over its ten-year survey.

1.4. Template periodograms

When the shape of a stationary periodic signal is known *a priori*, then the number of degrees of freedom is the same as the original LS periodogram (with a floating mean component):

$$\hat{y}(t; \theta, \omega) = \theta_0 + \theta_1 \mathbf{M}(\omega t - \theta_2), \quad (12)$$

where $\mathbf{M} : [0, 2\pi) \rightarrow \mathbb{R}$ is a predefined periodic template (i.e., a function from the unit circle to the real line). We refer to the periodogram corresponding to this model as the “template periodogram.”

As is the case for the LS periodogram, the template periodogram is equivalent to a maximum-likelihood estimate of the model parameters under the assumption that measurement uncertainties are Gaussian and uncorrelated (i.e. white noise).

This paper develops new extensions of least-squares spectral analysis for arbitrary signal shapes. For non-periodic signals this method is known as matched filter analysis, and can be extended to search for periodic signals by, e.g., phase folding the data at different trial periods.

An analysis by [Sesar et al. \(2016\)](#) found that template fitting significantly improved period and amplitude estimation for RR Lyrae in Pan-STARRS DR1 photometry ([Chambers et al. 2016](#)). Since the signal shapes for RR Lyrae in various bandpasses are known *a priori* (see [Sesar et al. \(2010\)](#)), template fitting provides an optimal estimate of amplitude and period, given that the object is indeed an RR Lyrae star well modeled by at least one of the templates. Templates were especially crucial for Pan-STARRS data, since there are typically only 35 observations per source over 5 bands ([Hernitschek et al. 2016](#)), not enough to obtain accurate amplitudes empirically by phase-folding. By including domain knowledge (i.e. knowledge of what RR Lyrae lightcurves look like), template fitting allows for accurate inferences of amplitude even for undersampled lightcurves.

However, the improved accuracy comes at substantial computational cost: the template fitting procedure took 30 minutes per CPU per object, and [Sesar et al. \(2016\)](#) were forced to limit the number of fitted lightcurves ($\lesssim 1000$) in order to keep the computational costs to a reasonable level. Several cuts were made before the

template fitting step to reduce the more than 1 million Pan-STARRS DR1 objects to a small enough number, and each of these steps removes a small portion of RR Lyrae from the sample. Though this number was reported by [Sesar et al. \(2016\)](#) to be small ($\lesssim 2\%$), it may be possible to further improve the completeness of the final sample by applying template fits to a larger number of objects, which would require either more computational resources, more time, or, ideally, a more efficient template fitting procedure.

The paper is organized as follows. Section 2 poses the problem of template fitting in the language of least squares spectral analysis and derives the fast template periodogram. Section 3 describes a freely available implementation of the new template periodogram. Section 4 summarizes our results, addresses caveats, and discusses possible avenues for improving the efficiency of the current algorithm.

2. DERIVATIONS

We define a template $\mathbf{M}$

$$\mathbf{M} : [0, 2\pi) \rightarrow \mathbb{R}, \quad (13)$$

as a mapping between the unit interval and the set of real numbers. We restrict our discussion to sufficiently smooth templates such that $\mathbf{M}$ can be adequately described by a truncated Fourier series

$$\hat{\mathbf{M}}(\omega t | H) = \sum_{n=1}^H (c_n \cos n\omega t + s_n \sin n\omega t) \quad (14)$$

for some finite $H > 0$.

That the c_n and s_n values are *fixed* (i.e., they define the template) is the crucial difference between the template periodogram and the multi-harmonic Lomb-Scargle ([Palmer 2009](#); [Bretthorst et al. 1988](#)), where c_n and s_n are *free parameters*.

We now construct a periodogram for this template. The periodogram assumes that an observed time series $S = \{(t_i, y_i, \sigma_i)\}_{i=1}^N$ can be modeled by a scaled, transposed template that repeats with period $2\pi/\omega$, i.e.

$$y_i \approx \hat{y}(\omega t_i; \theta, \mathbf{M}) = \theta_1 \mathbf{M}(\omega t_i - \theta_2) + \theta_3, \quad (15)$$

where $\theta = (\theta_1, \theta_2, \theta_3) \in \mathbb{R}^3$ is a set of model parameters.

The optimal parameters are the location of a local minimum of the (weighted) sum of squared residuals,

$$V(\theta, S) \equiv \sum_i w_i (y_i - \hat{y}(\omega t_i; \theta))^2, \quad (16)$$

and thus the following condition must hold for all three model parameters at the optimal solution $\theta = \theta_{\text{opt}}$:

$$\left. \frac{\partial V}{\partial \theta_j} \right|_{\theta=\theta_{\text{opt}}} = 0 \quad \forall \theta_j \in \theta. \quad (17)$$

Note that we have implicitly assumed $V(\theta, S)$ is a C^1 differentiable function of θ , which requires that $\mathbf{M}$ is a C^1 differentiable function. Though this assumption could be violated if we considered a more complete set of templates, (e.g. a box function), our restriction to truncated Fourier series ensures C^1 differentiability.

Note that we also implicitly assume $\sigma_i > 0$ for all i and we will later assume that the variance of the observations y_i is non-zero. If there are no measurement errors, i.e. $\sigma_i = 0$ for all i , then uniform weights (setting $\sigma_i = 1$) should be used. If the variance of the observations y is zero, the periodogram (as defined in Equation 2) is undefined for all frequencies. We do not consider the case where $\sigma_i = 0$ for some observations i and $\sigma_j > 0$ for some observations j .

We can derive a system of equations for θ_{opt} from the condition given in Equation 17. The explicit condition that must be met for each parameter θ_j is simplified below, using

$$\hat{y}_i = \hat{y}(\omega t_i; \theta) \quad (18)$$

and

$$\partial_j \hat{y}_i = \left. \frac{\partial \hat{y}(\omega t; \theta)}{\partial \theta_j} \right|_{t=t_i} \quad (19)$$

for brevity:

$$\begin{aligned} 0 &= \left. \frac{\partial V}{\partial \theta_j} \right|_{\theta=\theta_{\text{opt}}} \\ &= -2 \sum_i w_i (y_i - \hat{y}_i) (\partial_j \hat{y})_i \end{aligned} \quad (20)$$

$$\sum_i w_i y_i (\partial_j \hat{y})_i = \sum_i w_i \hat{y}_i (\partial_j \hat{y})_i.$$

The above is a general result that extends to all least squares periodograms. To simplify derivations, we adopt the following notation:

$$\langle X \rangle \equiv \sum_i w_i X_i \quad (21)$$

$$\langle XY \rangle \equiv \sum_i w_i X_i Y_i \quad (22)$$

$$\text{Cov}(X, Y) \equiv \langle XY \rangle - \langle X \rangle \langle Y \rangle \quad (23)$$

$$\text{Var}(X) \equiv \text{Cov}(X, X) \quad (24)$$

In addition, the transposed template $\mathbf{M}_{\theta_2} = \mathbf{M}(\omega t_i - \theta_2)$ can be expressed as

$$\mathbf{M}_{\theta_2}(\omega t) = \sum_n c_n \cos n(\omega t - \theta_2) \quad (25)$$

$$+ s_n \sin n(\omega t - \theta_2) \quad (26)$$

$$= \sum_n (c_n \cos n\theta_2 - s_n \sin n\theta_2) \cos n\omega t + \quad (27)$$

$$(s_n \cos n\theta_2 + c_n \sin n\theta_2) \sin n\omega t \quad (28)$$

$$= \sum_n (\alpha_n e^{in\theta_2} + \alpha_n^* e^{-in\theta_2}) \cos n\omega t + \quad (29)$$

$$(-i [\alpha_n e^{in\theta_2} - \alpha_n^* e^{-in\theta_2}]) \sin n\omega t \quad (30)$$

$$= \sum_n (\alpha_n \psi^n + \alpha_n^* \psi^{-n}) \cos n\omega t + \quad (31)$$

$$(-i [\alpha_n \psi^n - \alpha_n^* \psi^{-n}]) \sin n\omega t \quad (32)$$

$$= \sum_n A_n(\psi) \cos n\omega t + B_n(\psi) \sin n\omega t \quad (33)$$

where $\alpha_n = (c_n + is_n)/2$, and $\psi \equiv e^{i\theta_2}$ is a convenient change of variable.

We also define the following terms:

$$\widehat{YM} = \langle y \mathbf{M}_{\theta_2} \rangle \quad (34)$$

$$\widehat{MM} = \langle \mathbf{M}_{\theta_2}^2 \rangle \quad (35)$$

$$\overline{M} = \langle \mathbf{M}_{\theta_2} \rangle \quad (36)$$

$$MM = \text{Var}(\mathbf{M}_{\theta_2}) = \widehat{MM} - \overline{M}^2 \quad (37)$$

$$YM = \text{Cov}(\mathbf{M}_{\theta_2}, y) = \widehat{YM} - \bar{y} \overline{M} \quad (38)$$

For a given phase shift θ_2 , the optimal amplitude and offset are obtained from requiring the partial derivatives of the sum of squared residuals, V , to be zero.

Namely, we obtain that

$$0 = \frac{\partial V}{\partial \theta_1} = 2 \sum_i w_i (y_i - \hat{y}_i) \left(-\frac{\partial \hat{y}}{\partial \theta_1} \right)_i \quad (39)$$

$$= \sum_i w_i (y_i - \theta_1 \mathbf{M}_{\theta_2} - \theta_3) \mathbf{M}_{\theta_2} \quad (40)$$

$$= \widehat{YM} - \theta_1 \widehat{MM} - \theta_3 \overline{M} \quad (41)$$

and

$$0 = \frac{\partial V}{\partial \theta_3} = 2 \sum_i w_i (y_i - \hat{y}_i) \left(-\frac{\partial \hat{y}}{\partial \theta_3} \right)_i \quad (42)$$

$$= \sum_i w_i (y_i - \theta_1 \mathbf{M}_{\theta_2} - \theta_3) \quad (43)$$

$$= \bar{y} - \theta_1 \overline{M} - \theta_3 \quad (44)$$

This system of equations can then be rewritten as

$$\begin{pmatrix} \widehat{MM} & \overline{M} \\ \overline{M} & 1 \end{pmatrix} \begin{pmatrix} \theta_1 \\ \theta_3 \end{pmatrix} = \begin{pmatrix} \widehat{YM} \\ \bar{y} \end{pmatrix} \quad (45)$$

which reduces to

$$\begin{pmatrix} \theta_1 \\ \theta_3 \end{pmatrix} = \frac{1}{\widehat{MM} - \overline{M}^2} \begin{pmatrix} 1 & -\overline{M} \\ -\overline{M} & \widehat{MM} \end{pmatrix} \begin{pmatrix} \widehat{YM} \\ \bar{y} \end{pmatrix} \quad (46)$$

$$= \frac{1}{\widehat{MM} - \overline{M}^2} \begin{pmatrix} \widehat{YM} - \bar{y} \overline{M} \\ \widehat{MM} \bar{y} - \widehat{YM} \overline{M} \end{pmatrix} \quad (47)$$

Letting $MM = \widehat{MM} - \overline{M}^2$ and $YM = \widehat{YM} - \bar{y} \overline{M}$, we have

$$\begin{pmatrix} \theta_1 \\ \theta_3 \end{pmatrix} = \begin{pmatrix} YM/MM \\ \bar{y} - \overline{M}(YM/MM) \end{pmatrix} \quad (48)$$

This means we can rewrite the model $\hat{y} = \theta_1 \mathbf{M}_{\theta_2} + \theta_3$ as

$$\hat{y}_i = \bar{y} + \left(\frac{YM}{MM} \right) (M_i - \overline{M}) \quad (49)$$

To obtain an expression for the periodogram, $P = 1 - V/V_0$, we first compute V

$$V = \sum_i w_i (y_i - \hat{y}_i)^2 \quad (50)$$

$$= \sum_i w_i (y_i^2 - 2y_i \hat{y}_i + \hat{y}_i^2) \quad (51)$$

$$= YY - 2 \frac{(YM)^2}{MM} + \frac{(YM)^2}{MM} \quad (52)$$

$$= YY - \frac{(YM)^2}{MM} \quad (53)$$

Since, $V_0 = YY$, we have

$$P(\omega) = \frac{(YM)^2}{YY \cdot MM} \quad (54)$$

We wish to maximize $P(\omega)$ with respect to the phase shift parameter θ_2 ,

$$\partial_{\theta_2} P = 0 = \frac{YM}{YY \cdot MM} \left(2\partial_{\theta_2}(YM) - \frac{YM}{MM} \partial_{\theta_2}(MM) \right) \quad (55)$$

$$= 2MM \partial_{\theta_2}(YM) - YM \partial_{\theta_2}(MM). \quad (56)$$

The final expression is the non-linear condition that must be satisfied by the optimal phase shift parameter θ_2 . However, satisfying Equation 55 is not *sufficient* to guarantee that θ_2 is optimal. The value of the periodogram at each θ_2 satisfying Equation 55 must be computed, and the globally optimal solution chosen from this set.

We seek a more explicit form for Equation 55. We derive expressions for MM and YM , defining

$$CC_{nm} \equiv \text{Cov}(\cos n\omega t, \cos m\omega t) \quad (57)$$

$$CS_{nm} \equiv \text{Cov}(\cos n\omega t, \sin m\omega t) \quad (58)$$

$$SS_{nm} \equiv \text{Cov}(\sin n\omega t, \sin m\omega t) \quad (59)$$

$$YC_n \equiv \langle (y - \bar{y}) \cos n\omega t \rangle \quad (60)$$

$$YS_n \equiv \langle (y - \bar{y}) \sin n\omega t \rangle, \quad (61)$$

all of which can be evaluated efficiently using the NFFT.

The autocovariance of the template values MM , is given by

$$MM \equiv \sum_i w_i M_i^2 - \left(\sum_i w_i M_i \right)^2 \quad (62)$$

$$= \sum_i w_i \left(\sum_n A_n \cos \omega n t_i + B_n \sin \omega n t_i \right)^2 \quad (63)$$

$$- \left(\sum_n A_n C_n + B_n S_n \right)^2 \quad (64)$$

$$= \sum_{n,m} A_n A_m C C_{nm} + (A_n B_m C S_{nm} + B_n A_m (C S^T)_{nm}) + B_n B_m S S_{nm} \quad (65)$$

$$= \sum_{n,m} A_n A_m C C_{nm} + 2 A_n B_m C S_{nm} + B_n B_m S S_{nm}, \quad (66)$$

using

$$\sum_{n,m} A_n B_m C S_{nm} = \sum_{n,m} A_m B_n C S_{mn}. \quad (67)$$

We also derive the products $A_n A_m$, $A_n B_m$, $B_n B_m$:

$$\begin{aligned} A_n A_m &= (\alpha_n \psi^n + \alpha_n^* \psi^{-n}) (\alpha_m \psi^m + \alpha_m^* \psi^{-m}) \\ &= \alpha_n \alpha_m \psi^{n+m} + \alpha_n^* \alpha_m \psi^{m-n} \\ &\quad + \alpha_n \alpha_m^* \psi^{n-m} + \alpha_n^* \alpha_m^* \psi^{-n-m} \end{aligned} \quad (68)$$

$$\begin{aligned} A_n B_m &= -i (\alpha_n \psi^n + \alpha_n^* \psi^{-n}) (\alpha_m \psi^m - \alpha_m^* \psi^{-m}) \\ &= -i \{ \alpha_n \alpha_m \psi^{n+m} + \alpha_n^* \alpha_m \psi^{m-n} \\ &\quad - \alpha_n \alpha_m^* \psi^{n-m} - \alpha_n^* \alpha_m^* \psi^{-n-m} \} \end{aligned} \quad (69)$$

$$\begin{aligned} B_n B_m &= -(\alpha_n \psi^n - \alpha_n^* \psi^{-n}) (\alpha_m \psi^m - \alpha_m^* \psi^{-m}) \\ &= -\{ \alpha_n \alpha_m \psi^{n+m} - \alpha_n^* \alpha_m \psi^{m-n} \\ &\quad - \alpha_n \alpha_m^* \psi^{n-m} + \alpha_n^* \alpha_m^* \psi^{-n-m} \} \end{aligned} \quad (70)$$

Now we have that

$$\begin{aligned} MM_{nm} &= A_n A_m C C_{nm} + 2 A_n B_m C S_{nm} + B_n B_m S S_{nm} \\ &= \alpha_n \alpha_m \widetilde{C C}_{nm} \psi^{n+m} + 2 \alpha_n \alpha_m^* \widetilde{C S}_{nm} \psi^{n-m} \\ &\quad + \alpha_n^* \alpha_m^* \widetilde{S S}_{nm} \psi^{-(n+m)} \end{aligned} \quad (71)$$

where

$$\widetilde{C C}_{nm} = (C C_{nm} - S S_{nm}) - i (C S + C S^T)_{nm} \quad (72)$$

$$\widetilde{C S}_{nm} = (C C_{nm} + S S_{nm}) + i (C S - C S^T)_{nm} \quad (73)$$

$$\widetilde{S S}_{nm} = (C C_{nm} - S S_{nm}) + i (C S + C S^T)_{nm} \quad (74)$$

and for YM :

$$\begin{aligned} YM_k &= A_k Y C_k + B_k Y S_k \\ &= \alpha_k Y C_k \psi^k + \alpha_k^* Y C_k \psi^{-k} \\ &\quad - i (\alpha_k Y S_k \psi^k - \alpha_k^* Y S_k \psi^{-k}) \\ &= (Y C_k - i Y S_k) \alpha_k \psi^k + (Y C_k + i Y S_k) \alpha_k^* \psi^{-k} \\ &= \alpha_k \widetilde{Y C}_k \psi^k + \alpha_k^* \widetilde{Y C}_k^* \psi^{-k}. \end{aligned} \quad (75)$$

We also define $YM' = \psi^H YM$ and $MM' = \psi^{2H} MM$, both of which are polynomials in ψ . Their derivatives are

$$\partial YM' = H \psi^{H-1} YM + \psi^H \partial YM \quad (76)$$

$$\partial MM' = 2H \psi^{2H-1} MM + \psi^{2H} \partial MM. \quad (77)$$

A new polynomial condition can then be expressed in terms of MM' , YM' and their derivatives.

$$0 = 2MM\partial(YM) - YM\partial(MM) \quad (78)$$

$$= \psi^{3H+1} (2MM\partial(YM) - YM\partial(MM)) \quad (79)$$

$$\begin{aligned} &= 2\psi^{2H} MM (\psi^{H+1} \partial(YM)) \\ &\quad - \psi^H YM (\psi^{2H+1} \partial(MM)) \end{aligned} \quad (80)$$

$$\begin{aligned} &= 2MM' (\psi \partial(YM') - H(YM')) \\ &\quad - YM' (\psi \partial(MM') - 2H(MM')) \end{aligned} \quad (81)$$

$$\begin{aligned} &= \psi (2MM' \partial(YM') - YM' \partial(MM')) \\ &\quad - 2H (MM' YM' - YM' MM') \end{aligned} \quad (82)$$

$$= 2MM' \partial(YM') - YM' \partial(MM') \quad (83)$$

The last step assumes that $\psi \neq 0$, which is a valid assumption since $\psi = e^{i\theta_2}$ lies on the unit circle for all real θ_2 .

We solve for the zeros of the polynomial condition defined by Equation 78 using the `numpy.polynomial.polyroots` function, which solves for the eigenvalues of the polynomial companion matrix.

Solving for the zeros of a polynomial given a set of coefficients is unstable in certain cases, since the coefficients are represented as floating point numbers with finite precision. Thus, we scale the roots by their modulus to ensure they lie on the unit circle. Alternatively, we could use iterative schemes such as Newton's method to improve the estimate of the roots more robustly, however this requires more computational power and the accuracy of the roots was not a problem for any of the cases the authors have tested.

2.1. Negative amplitude solutions

The model $\hat{y} = \theta_1 \mathbf{M}_{\theta_2} + \theta_0$ allows for $\theta_1 < 0$ solutions. In the original formulation of Lomb-Scargle and in linear extensions involving multiple harmonics, negative amplitudes translate to phase differences, since $-\cos x = \cos(x - \pi)$ and $-\sin x = \sin(x - \pi)$.

However, for non-sinusoidal templates, $\mathbf{M}$, negative amplitudes do not generally correspond to a phase difference. For example, a detached eclipsing binary template $\mathbf{M}_{\text{EB}}(x)$ cannot be expressed in terms of a phase-

shifted negative eclipsing binary template; i.e. $\mathbf{M}_{\text{EB}} \neq -\mathbf{M}_{\text{EB}}(x - \phi)$ for any $\phi \in [0, 2\pi)$.

Negative amplitude solutions found by the fast template periodogram are usually undesirable, as they may produce false positives for lightcurves that resemble flipped versions of the desired template, and allowing for $\theta_1 < 0$ solutions increases the number of effective free parameters of the model, which lowers the signal to noise, especially for weak signals.

One possible remedy for this problem is to set $P_{\text{FTP}}(\omega) = 0$ if the optimal solution for θ_1 is negative, but this complicates the interpretation of P_{FTP} . Another possible remedy is, for frequencies that have a $\theta_1 < 0$ solution, to search for the optimal parameters while enforcing that $\theta_1 > 0$, e.g. via non-linear optimization, but this likely will eliminate the computational advantage of FTP over existing methods.

Thus, we allow for negative amplitude solutions in the model fit and caution the user to check that the best fit θ_1 is positive.

2.2. Extending to multi-band observations

2.2.1. Multi-phase model

As shown in [VanderPlas & Ivezić \(2015\)](#), the multi-phase periodogram (their $(N_{\text{base}}, N_{\text{band}}) = (0, 1)$ periodogram), for any model can be expressed as a linear combination of single-band periodograms:

$$P^{(0,1)}(\omega) = \frac{\sum_{k=1}^K V_{0,k} P_k(\omega)}{\sum_{k=1}^K V_{0,k}} \quad (84)$$

where K denotes the number of bands, $V_{0,k}$ is the weighted sum of squared residuals between the data in the k -th band and its weighted mean $\langle y \rangle$, and $P_k(\omega)$ is the periodogram value of the k -th band at the trial frequency ω .

With Equation 84, the template periodogram is readily applicable to multi-band time series, which is crucial for experiments like LSST, SDSS, Pan-STARRS, and other current and future photometric surveys.

Other multi-band extensions of the template periodogram are provided in Appendix A.

2.3. Computational requirements

For a given number of harmonics H , the task of deriving the polynomial given in Equation 78 requires $\mathcal{O}(H^2)$ computations, and finding the roots of this polynomial requires $\mathcal{O}(H^3)$ computations. The degree of the final polynomial is $6H - 1$.

When considering N_f trial frequencies, the polynomial computation and root-finding step scales as $\mathcal{O}(H^3 N_f)$. The computation of the sums (Equations 57 – 61) scales as $\mathcal{O}(H N_f \log H N_f)$.

Therefore, the entire template periodogram scales as

$$\mathcal{O}(H N_f \log H N_f + H^3 N_f). \quad (85)$$

However, an important consideration is that the peak width scales inversely with the number of harmonics $\delta f_{\text{peak}} \propto 1/H$ and so the number of trial frequencies needed to resolve a peak increases linearly with the number of harmonics in the template.

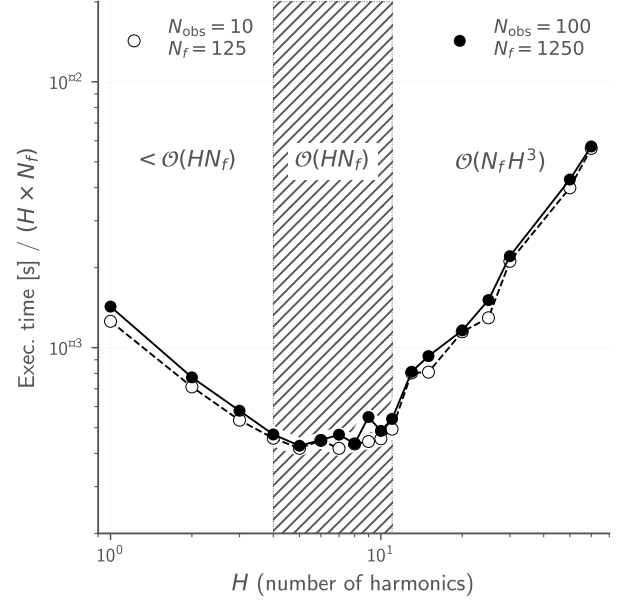


FIG. 1.— Computation time of FTP scaled by NH for different numbers of harmonics. For $H \lesssim 3$, FTP scales sublinearly in H (possibly due to a constant overhead per trial frequency, independent of H). When $3 \lesssim H \lesssim 11$, FTP scales approximately linearly in H , and when $H \gtrsim 11$ FTP approaches the $\mathcal{O}(H^3)$ scaling limit.

The computational scaling factoring in an extra power of H is therefore

$$\mathcal{O}(H^2 N_f \log H N_f + H^4 N_f). \quad (86)$$

For a fixed number of harmonics H , the template periodogram scales as $\mathcal{O}(N_f \log N_f)$. However, for a constant number of trial frequencies N_f , the template algorithm scales as $\mathcal{O}(H^3)$, and computational resources alone limit H to reasonably small numbers $H \lesssim 15$ (see Figure 1).

3. IMPLEMENTATION

An open-source implementation of the template periodogram in Python is available.⁵ Polynomial algebra is performed using the `numpy.polynomial` module ([Jones et al. 2001](#)–). The `nfft` Python module,⁶ which provides a Python implementation of the non-equispaced fast Fourier transform, is used to compute the necessary sums for a particular time series.

No explicit parallelism is used anywhere in the current implementation, however certain linear algebra operations in `Scipy` use OpenMP via calls to BLAS libraries that have OpenMP enabled.

All timing tests were run on a quad-core 2.6 GHz Intel Core i7 MacBook Pro laptop (mid-2012 model) with 8GB of 1600 MHz DDR3 memory. The `Scipy` stack (version 0.18.1) was compiled with multi-threaded MKL libraries.

3.1. Comparison with non-linear optimization

⁵ <https://github.com/PrincetonUniversity/FastTemplatePeriodogram>

⁶ <https://github.com/jakevdp/nfft>

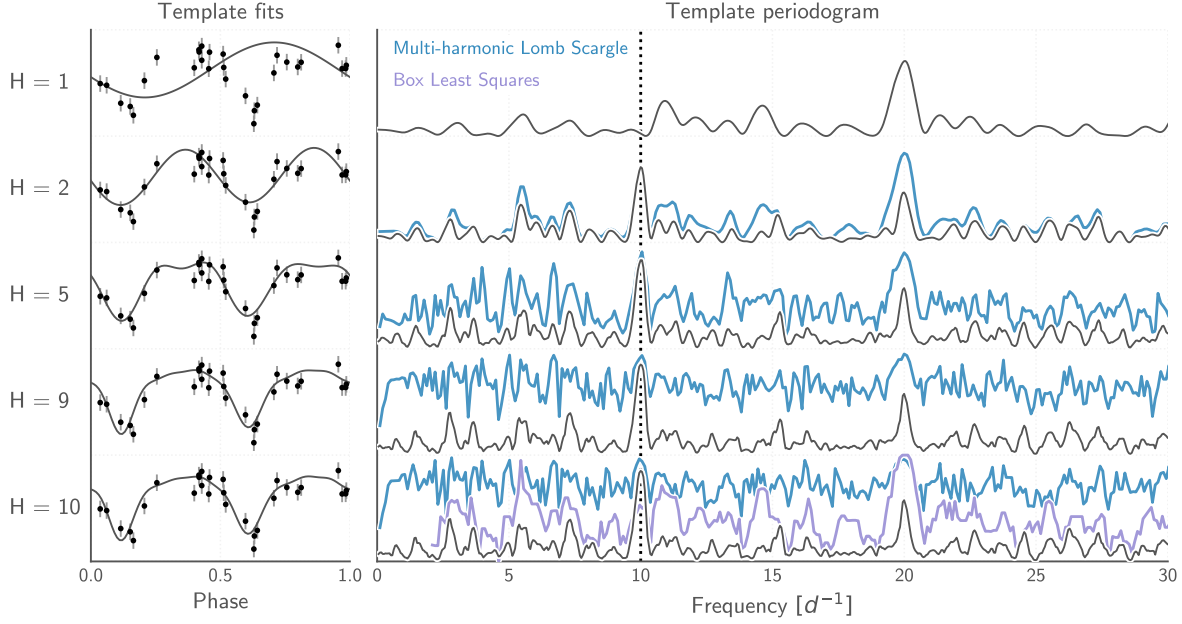


FIG. 2.— Template periodograms performed on a simulated eclipsing binary lightcurve (shown phase-folded in the left-hand plots). The top-most plot uses only one harmonic, equivalent to a Lomb-Scargle periodogram. Subsequent plots use an increasing number of harmonics, which produces a narrower and higher peak height around the correct frequency. For comparison, the multi-harmonic extension to Lomb-Scargle is plotted in blue, using the same number of harmonics as the FTP. The Box Least-Squares (Kovács et al. 2002) periodogram is shown in the final plot.

In order to evaluate the accuracy and speed of the template periodogram, we have included slower alternative solvers within the Python implementation of the FTP that employ non-linear optimization to find the best fit parameters.

Periodograms computed in Figures 2, 3, and 4 used simulated data. The simulated data has uniformly random observation times, with Gaussian-random, homoskedastic, uncorrelated uncertainties. An eclipsing binary template, generated by fitting a well-sampled, high signal-to-noise eclipsing binary in the HATNet dataset (BD+56 603) with a 10-harmonic truncated Fourier series.

3.1.1. Accuracy

For weak signals or signals folded at the incorrect trial period, there may be a large number of local V minima in the parameter space, and thus non-linear optimization algorithms may have trouble finding the global minimum. The FTP, on the other hand, solves for the optimal parameters directly, and thus is able to recover optimal solutions even when the signal is weak or not present.

Figure 3 illustrates the accuracy improvement with FTP. Many solutions found via non-linear optimization are significantly suboptimal compared to the solutions found by the FTP.

Figure 4 compares FTP results obtained using the full template ($H = 10$) with those obtained using smaller numbers of harmonics. The left-most plot compares the $H = 1$ case (weighted Lomb-Scargle), which, as also demonstrated in Figure 2, illustrates the advantage of the template periodogram for known, non-sinusoidal signal shapes.

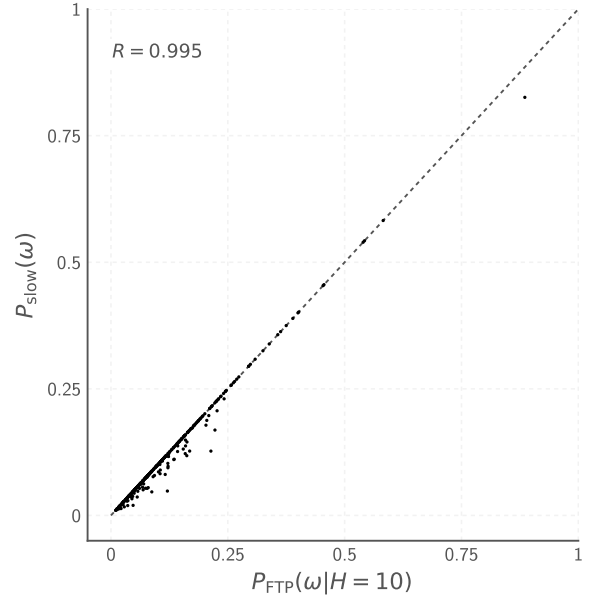


FIG. 3.— Comparing accuracy between previous methods that rely on non-linear optimization at each trial frequency with the fast template periodogram described in this paper. Both methods are applied to simulated data, an example of which is shown in Figure 2. The FTP consistently finds more optimal template fits than those found with non-linear optimization, which do not guarantee convergence to a globally optimal solution. The FTP solves for the optimal fit parameters directly, and therefore is able to achieve greater accuracy than template fits done via non-linear optimization.

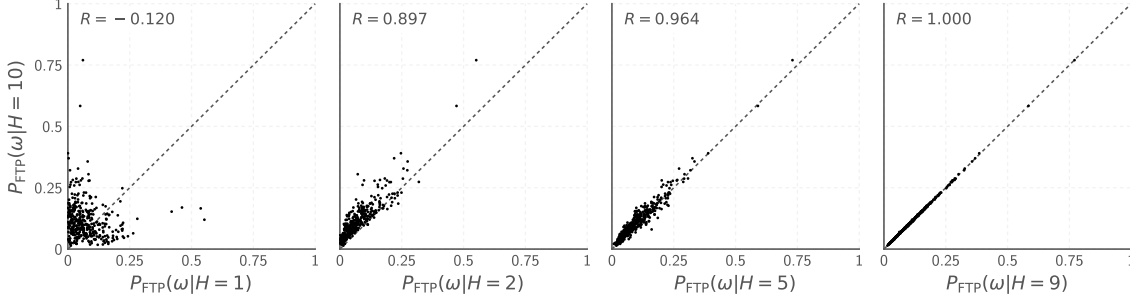


FIG. 4.— Comparing the template periodogram calculated with $H = 10$ harmonics to the template periodogram using a smaller number of harmonics $H < 10$. The template and data used to perform the periodogram calculations are the same as those shown in Figure 2.

3.1.2. Computation time

FTP scales asymptotically as $\mathcal{O}(N_f H \log N_f H)$ with respect to the number of trial frequencies, N_f and as $\mathcal{O}(N_f H^3)$ with respect to the number of harmonics in which the template is expanded, H . For a given resolving power, however, there is an additional factor of H in each of these terms due to the number of trial frequencies necessary to resolve a periodogram peak being proportional to H . However, for reasonable cases ($N_f \lesssim 10^{120}$ when $H = 5$) the computation time is dominated by computing polynomial coefficients and root finding, both of which scale linearly in N_f .

The number of trial frequencies needed for finding astrophysical signals in a typical photometric time series is

$$N_f = 1.75 \times 10^6 \left(\frac{H}{1} \right) \left(\frac{\text{baseline}}{10 \text{ yrs}} \right) \left(\frac{\alpha}{5} \right) \left(\frac{15 \text{ mins}}{P_{\min}} \right) \quad (87)$$

where α represents the “oversampling factor,” $\Delta f_{\text{peak}}/\Delta f$, where $\Delta f_{\text{peak}} \sim 1/\text{baseline}$ is the typical width of a peak in the periodogram and Δf is the frequency spacing of the periodogram.

Extrapolating from the timing of a test case (500 observations, 5 harmonics, 15,000 trial frequencies), the summations account for approximately 5% of the computation time when $N_f \sim 10^6$. If polynomial computations and root-finding can be improved to the point where they no longer dominate the computation time, this would provide an order of magnitude speedup over the current implementation.

Figure 5 compares the timing of the FTP with that of previous methods that employ non-linear optimization. For the case when $N_f \propto N_{\text{obs}}$, FTP achieves a factor of 3 speedup for even the smallest test case (15 datapoints), while for larger cases ($N \sim 10^4$) FTP offers 2-3 orders of magnitude speed improvement. For the constant baseline case, FTP is a factor of ~ 2 faster for the smallest test case and a factor of ~ 20 faster for $N_{\text{obs}} \sim 10^4$. Future improvements to the FTP implementation could further improve speedups by 1-2 orders of magnitude over non-linear optimization.

4. DISCUSSION

Template fitting is a powerful technique for accurately recovering the period and amplitude of objects with *a priori* known lightcurve shapes. It has been used in

the literature by, e.g. [Stringer et al. \(2019\)](#); [Sesar et al. \(2016, 2010\)](#), to detect RR Lyrae in the SDSS, PS1, and DES datasets, where it has been shown to produce purer samples of RR Lyrae at a given completeness. The computational cost of current template fitting algorithms, however, prevents their application to larger datasets.

We have presented a novel template fitting algorithm that extends the Lomb-Scargle periodogram ([Lomb 1976](#); [Scargle 1982](#); [Barning 1963](#); [Vaníček 1971](#)) to handle non-sinusoidal signals that can be expressed in terms of a fixed truncated Fourier series with a reasonably small number of harmonics ($H \lesssim 10$).

The fast template periodogram (FTP) asymptotically scales as $\mathcal{O}(N_f H^2 \log N_f H^2 + N_f H^4)$, while previous template fitting algorithms such as the one used in the `gatspy` library ([VanderPlas 2016](#)), scale as $\mathcal{O}(N_f N_{\text{obs}})$. However, the FTP effectively scales as $\mathcal{O}(N_f H^4)$, since the time needed to compute polynomial coefficients and perform zero-finding dominates the computational time for all practical cases ($N_f \lesssim 10^{120}$). The H^4 scaling effectively restricts templates to those that are sufficiently smooth to be explained by a small number of Fourier terms.

FTP also improves the accuracy of previous template fitting algorithms, which rely on non-linear optimization at each trial frequency to minimize the V of the template fit. The FTP routinely finds superior fits over non-linear optimization methods.

An open-source Python implementation of the FTP is available at GitHub.⁷ The current implementation could likely be improved by:

1. Improving the speed of the polynomial coefficient calculations and the zero-finding steps. This could potentially yield a speedup of $\sim 1 - 2$ orders of magnitude over the current implementation.
2. Exploiting the embarrassingly parallel nature of the FTP using GPU’s.

For a constant baseline, the current implementation improves existing methods by factors of a $\sim$ few for lightcurves with $\mathcal{O}(100)$ observations, and by an order of magnitude or more for objects with more than 1,000 observations. While template fitting remains challenging for the largest time-domain surveys at present, the polynomial computations themselves admit a further factor

⁷

<https://github.com/PrincetonUniversity/FastTemplatePeriodogram>

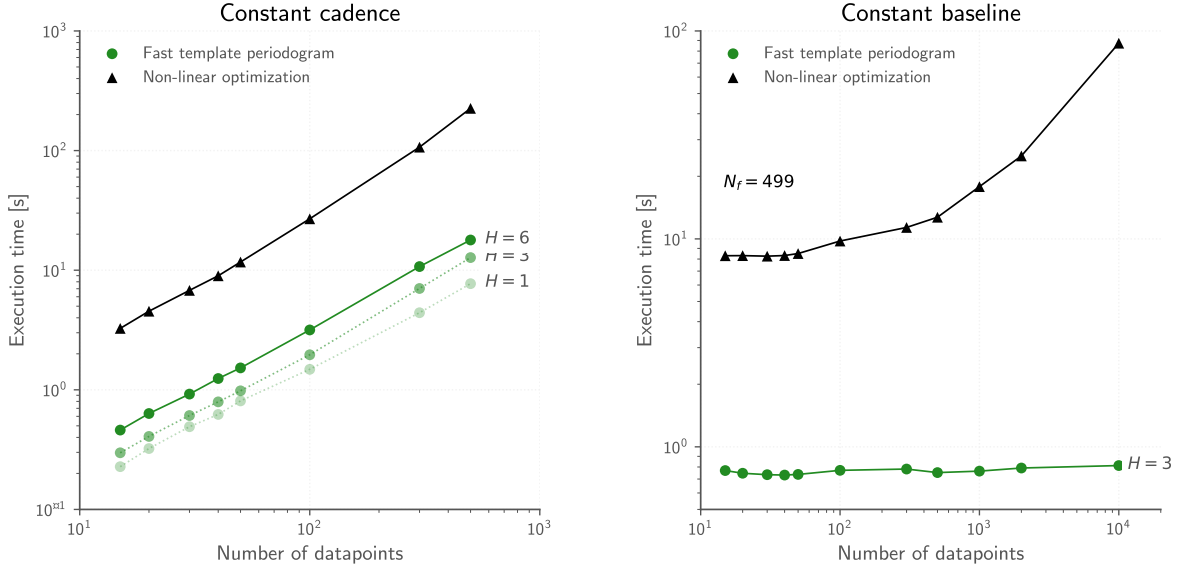


FIG. 5.— Computation time of FTP compared with alternative techniques that use non-linear optimization at each trial frequency. *Left*: timing for the case when $N_f = 12N_{\text{obs}}$, i.e. the cadence of the observations is constant. *Right*: timing for the case when N_f is fixed, i.e. the baseline of the observations are constant. Non-linear optimization techniques scale as $\mathcal{O}(N_f N_{\text{obs}})$ while the FTP scales as $\mathcal{O}(HN_f \log HN_f + N_f H^3)$, where H is the number of harmonics needed to approximate the template.

of ~ 25 – 100 speedup, which would bring the FTP to 1–3 orders of magnitude faster than alternative techniques. This work presents the mathematical shortcut that, combined with a more efficient implementation, will make template fitting a fast and valuable tool for detecting non-sinusoidal periodic signals of specified shape in large time-series datasets.

ACKNOWLEDGEMENTS

Joel Hartman and GB acknowledge support from NASA grant NNX17AB61G. JTV is supported by the University of Washington eScience Institute, with funding from the Alfred P. Sloan Foundation, the Gordon and Betty Moore Foundation, and the Washington Research Foundation.

REFERENCES

- Bakos, G., Noyes, R. W., Kovács, G., et al. 2004, *PASP*, 116, 266 [1.3](#)
- Baluev, R. V. 2008, *MNRAS*, 385, 1279 [1.2](#)
- . 2009, *MNRAS*, 395, 1541 [1.2](#)
- . 2013a, *MNRAS*, 436, 807 [1.2](#)
- . 2013b, *Astronomy and Computing*, 3, 50 [1.2](#)
- . 2013c, *MNRAS*, 431, 1167 [1.2](#)
- Barning, F. J. M. 1963, *Bull. Astron. Inst. Netherlands*, 17, 22 [1, 4](#)
- Bretthorst, G. L. 2003, *Frequency Estimation and Generalized Lomb-Scargle Periodograms* (New York, NY: Springer New York), 309–329 [1.2](#)
- Bretthorst, G. L., Hung, C.-C., D’Avignon, D. A., & Ackerman, J. J. H. 1988, *Journal of Magnetic Resonance*, 79, 369 [1.2, 2](#)
- Chambers, K. C., Magnier, E. A., Metcalfe, N., et al. 2016, *ArXiv e-prints*, arXiv:1612.05560 [1.4](#)
- Cincotta, P. M., Mendez, M., & Nunez, J. A. 1995, *ApJ*, 449, 231 [1](#)
- Cooley, J. W., & Tukey, J. W. 1965, *Math. Comput.*, 19, 297 [1.3](#)
- Dutt, A., & Rokhlin, V. 1993, *SIAM J. Sci. Comput.*, 14, 1368 [1, 1.3](#)
- Eastman, J., Gaudi, B. S., & Agol, E. 2013, *PASP*, 125, 83
- Ford, E. B. 2006, *ApJ*, 642, 505
- Foreman-Mackey, D., Agol, E., Ambikasaran, S., & Angus, R. 2017, *AJ*, 154, 220 [1](#)
- Gaia Collaboration, Prusti, T., de Bruijne, J. H. J., et al. 2016, *A&A*, 595, A1 [1.3](#)
- Graham, M. J., Drake, A. J., Djorgovski, S. G., Mahabal, A. A., & Donalek, C. 2013a, *MNRAS*, 434, 2629 [1](#)
- Graham, M. J., Drake, A. J., Djorgovski, S. G., et al. 2013b, *MNRAS*, 434, 3423 [1, 1.3](#)
- Hernitschek, N., Schlafly, E. F., Sesar, B., et al. 2016, *ApJ*, 817, 73 [1.4](#)
- Huijse, P., Estevez, P. A., Protopapas, P., Zegers, P., & Principe, J. C. 2012, *IEEE Transactions on Signal Processing*, 60, 5135 [1](#)
- Jones, E., Oliphant, T., Peterson, P., et al. 2001–, *SciPy: Open source scientific tools for Python*, [Online; accessed 2017-01-19] [3](#)
- Keiner, J., Kunis, S., & Potts, D. 2009, *ACM Trans. Math. Softw.*, 36, 19:1 [1, 1.3](#)
- Kovács, G., Zucker, S., & Mazeh, T. 2002, *A&A*, 391, 369 [2](#)
- Leroy, B. 2012, *A&A*, 545, A50 [1.3](#)
- Lomb, N. R. 1976, *Ap&SS*, 39, 447 [1, 1.1, 4](#)
- LSST Science Collaboration, Abell, P. A., Allison, J., et al. 2009, *ArXiv e-prints*, arXiv:0912.0201 [1.3](#)
- Mortier, A., Faria, J. P., Correia, C. M., Santerne, A., & Santos, N. C. 2015a, *A&A*, 573, A101 [1.1](#)
- . 2015b, *BGLS: A Bayesian formalism for the generalised Lomb-Scargle periodogram*, ascl:1504.020 [1.1](#)
- Palmer, D. M. 2009, *ApJ*, 695, 496 [1.2, 2](#)
- Press, W. H., & Rybicki, G. B. 1989, *ApJ*, 338, 277 [1, 1.3](#)
- Rasmussen, C. E., & Williams, C. K. I. 2005, *Gaussian Processes for Machine Learning* (Adaptive Computation and Machine Learning) (The MIT Press) [1](#)
- Scargle, J. D. 1982, *ApJ*, 263, 835 [1, 1.1, 4](#)
- Schwarzenberg-Czerny, A. 1996, *ApJ*, 460, L107 [1.2](#)
- Sesar, B., Ivezić, Ž., Grammer, S. H., et al. 2010, *ApJ*, 708, 717 [1.4, 4](#)
- Sesar, B., Hernitschek, N., Mitrović, S., et al. 2016, *ArXiv e-prints*, arXiv:1611.08596 [1.4, 4, A, A](#)
- Stringer, K. M., Long, J. P., Macri, L. M., et al. 2019, *AJ*, 158, 16 [4](#)
- VanderPlas, J. 2016, *gatspy: General tools for Astronomical Time Series in Python*, Astrophysics Source Code Library, ascl:1610.007 [4](#)
- VanderPlas, J. T. 2018, *ApJS*, 236, 16 [1.1, 1.2](#)
- VanderPlas, J. T., & Ivezić, Ž. 2015, *ApJ*, 812, 18 [1.2, 1.2, 2.2.1](#)

Vaníček, P. 1971, Ap&SS, 12, 10 [1](#), [4](#)
 Wheeler, A., & Kipping, D. 2019, MNRAS, 485, 5498 [1.2](#)
 Zechmeister, M., & Kürster, M. 2009, A&A, 496, 577 [1](#), [1.1](#), [1.2](#)

APPENDIX

SHARED-PHASE MULTI-BAND TEMPLATE PERIODOGRAM

We derive a multi-band extension for the template periodogram for data taken in K filters, with N_k observations in the k -th filter. We use the same model as the one described in [Sesar et al. \(2016\)](#) in order to illustrate the applicability of the template periodogram to more sophisticated scenarios.

The i -th observation in the k -th filter is denoted $y_i^{(k)}$. We wish to fit a periodic, multi-band template $\mathbf{M} = (\mathbf{M}^{(1)}, \mathbf{M}^{(2)}, \dots, \mathbf{M}^{(K)}) : [0, 2\pi) \rightarrow \mathbb{R}^K$ to all observations. We assume the same model used by [Sesar et al. \(2016\)](#), which assumes the relative amplitudes, phase shifts, and offsets are shared across bands:

$$\hat{y}^{(k)}(t; \theta) = \theta_1 \mathbf{M}^{(k)}(\omega t - \theta_2) + \theta_3 + \lambda^{(k)} \quad (\text{A1})$$

where $\lambda^{(k)}$ is a fixed relative offset for band k . The V for this model is

$$V = \sum_{k=1}^K \sum_{i=1}^{N_k} w_i^{(k)} \left(y_i^{(k)} - \hat{y}_i^{(k)} \right)^2 \quad (\text{A2})$$

To make things simpler, we can set the $\lambda^{(k)}$ values to 0 simply by subtracting them off from our observations; this means we take all $y_i^{(k)} \rightarrow y_i^{(k)} - \lambda^{(k)}$. We have that

$$V = \sum_{k=1}^K W^{(k)} V_k \quad (\text{A3})$$

Where $W^{(k)} \equiv \sum_{i=1}^{N_k} w_i^{(k)}$ and $\sum_{k=1}^K W^{(k)} = 1$. This means that the system of equations reduces to:

$$0 = \frac{\partial V}{\partial \theta_1} = \sum_{k=1}^K W^{(k)} \left(\widehat{YM}^{(k)} - \theta_1 \widehat{MM}^{(k)} - \theta_3 \overline{M}^{(k)} \right) \quad (\text{A4})$$

for the θ_1 parameter, where $\widehat{YM}^{(k)}$, $\widehat{MM}^{(k)}$, $\overline{M}^{(k)}$ are values from the single band case computed for each band individually, holding $W^{(k)} = 1$ for each band. That is:

$$\widehat{YM}^{(k)} \equiv \frac{1}{W^{(k)}} \sum_{i=1}^{N_k} w_i^{(k)} y_i^{(k)} \mathbf{M}_{\theta_2}^{(k)}(\omega t_i) \quad (\text{A5})$$

$$\widehat{MM}^{(k)} \equiv \frac{1}{W^{(k)}} \sum_{i=1}^{N_k} w_i^{(k)} \left(\mathbf{M}_{\theta_2}^{(k)}(\omega t_i) \right)^2 \quad (\text{A6})$$

$$\overline{M}^{(k)} \equiv \frac{1}{W^{(k)}} \sum_{i=1}^{N_k} w_i^{(k)} \mathbf{M}_{\theta_2}^{(k)}(\omega t_i) \quad (\text{A7})$$

For the offset θ_3 , we have

$$0 = \frac{\partial V}{\partial \theta_3} = \sum_{k=1}^K W^{(k)} \left(\bar{y}^{(k)} - \theta_1 \overline{M}^{(k)} - \theta_3 \right) \quad (\text{A8})$$

Where $\bar{y}^{(k)}$ is the weighted-mean for the k -th band ($\bar{y}^{(k)} \equiv (1/W^{(k)}) \sum_{i=1}^{N_k} w_i^{(k)} y_i^{(k)}$), again with $y_i^{(k)} \rightarrow y_i^{(k)} - \lambda^{(k)}$.

So if we redefine the quantities $\widehat{YM}$, $\widehat{MM}$, $\overline{M}$, and $\bar{y}$ as weighted averages across the bands, i.e. $\widehat{YM} = \sum_{k=1}^K W^{(k)} \widehat{YM}^{(k)}$, etc., the solution for the optimal parameters has the same form:

$$\theta_1 = \left(\frac{YM}{MM} \right) \quad (\text{A9})$$

$$\theta_3 = \bar{y} - \overline{M} \left(\frac{YM}{MM} \right) \quad (\text{A10})$$

which means that the model for the k -th band is

$$\hat{y}^{(k)} = \bar{y} + \left(\frac{YM}{MM} \right) (M_i^{(k)} - \overline{M}) \quad (\text{A11})$$

The form of the periodogram has the same form as the single-band case:

$$V = \sum_{k=1}^K \sum_{i=1}^{N_k} w_i^{(k)} \left(y_i^{(k)} - \hat{y}_i^{(k)} \right)^2 \quad (\text{A12})$$

$$= \sum_{k=1}^K \sum_{i=1}^{N_k} w_i^{(k)} \left((y_i^{(k)} - \bar{y}) - \left(\frac{YM}{MM} \right) (M_i^{(k)} - \overline{M}) \right)^2 \quad (\text{A13})$$

$$= \sum_{k=1}^K \sum_{i=1}^{N_k} w_i^{(k)} \left((y_i^{(k)} - \bar{y})^2 - 2 \left(\frac{YM}{MM} \right) (M_i^{(k)} - \overline{M})(y_i^{(k)} - \bar{y}) + \left(\frac{YM}{MM} \right)^2 (M_i^{(k)} - \overline{M})^2 \right) \quad (\text{A14})$$

$$= YY - 2 \frac{(YM)^2}{MM} + \frac{(YM)^2}{MM} \quad (\text{A15})$$

$$= YY - \frac{(YM)^2}{MM}. \quad (\text{A16})$$

Since there is a single shared offset between the bands (i.e. we assume the mean magnitude is the same in all bands after subtracting $\lambda^{(k)}$), the variance for the signal, YY , is not $\sum_{k=1}^K \sum_{i=1}^{N_k} w_i^{(k)} (y_i^{(k)} - \bar{y}^{(k)})^2$ but $\sum_{k=1}^K \sum_{i=1}^{N_k} w_i^{(k)} (y_i^{(k)} - \bar{y})^2$.

Construction of the polynomial for the multi-band case can be performed by first computing the polynomial expression for $\psi^{2H} \widehat{MM} = \sum_{k=1}^K \sum_{i=1}^{N_k} w_i^{(k)} \left(\psi^H M_i^{(k)} \right)^2$ and a separate polynomial expression for $\psi^H \overline{M}$, which can then be squared and subtracted from $\psi^{2H} \widehat{MM}$ to find $MM' = \psi^{2H} MM$.

For $YM' = \psi^H YM$, we merely compute $\psi^H \widehat{YM}^{(k)}$ for each band, take the weighted average of the polynomial coefficients for all bands ($\psi^H \widehat{YM} = \sum_k^K W^{(k)} \psi^H \widehat{YM}^{(k)}$) and subtract the $\psi^H \bar{y} \overline{M}$ polynomial to get YM' .

After computing the polynomials MM' and YM' , the polynomial in Equation 78 can be computed quickly and the following steps for finding the optimal model parameters is the same as in the single band case.

The computational complexity of this model scales as $\mathcal{O}(KN_f H \log N_f H + N_f H^3)$ where K is the number of filters. Since the polynomial zero-finding step is the limiting computation in most real-world applications, the multi-band template periodogram corresponding to the Sesar et al. (2016) model should not be significantly more computationally intensive than the single-band case.

DATA AVAILABILITY

The data underlying this article are available in the GitHub repository located at <https://github.com/PrincetonUniversity/FastTemplatePeriodogramPaper>.