


CN11 INDEPENDENT STM32N6570–DK BREAKOUT SCHEMATIC

DRAFT DEVELOPMENT HARDWARE – NOT FOR FABRICATION

NOT PHYSICALLY QUALIFIED / NOT WEARABLE QUALIFIED

MATING PINS FACE DK; OPPOSING MATING VIEW MUST BE PRESERVED

SYSTEM DK SOURCE–GROUND CONTACTS ARE CN8–P6, CN8–P7 AND CN12–P7 ONLY

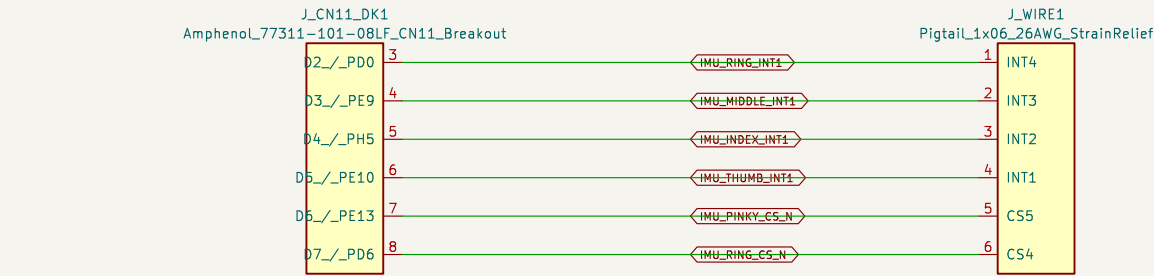

EXACT APPROVED PHYSICAL–CONTACT AND LOCAL–PIGTAIL MAPPING:

- P1 RX / D0 / PF6 DNC NPTH
- P2 TX / D1 / PD5 DNC NPTH
- P3 D2 / PD0 -> J_WIRE1 P1 IMU_RING_INT1
- P4 D3 / PE9 -> J_WIRE1 P2 IMU_MIDDLE_INT1
- P5 D4 / PH5 -> J_WIRE1 P3 IMU_INDEX_INT1
- P6 D5 / PE10 -> J_WIRE1 P4 IMU_THUMB_INT1
- P7 D6 / PE13 -> J_WIRE1 P5 IMU_PINKY_CS_N
- P8 D7 / PD6 -> J_WIRE1 P6 IMU_RING_CS_N

DNC: P1, P2 – NPTH / NO COPPER / NO WIRE

MH_CARRIER1 AND ALL UNNUMBERED STRAIN–RELIEF HOLES ARE PCB–ONLY MECHANICAL FEATURES; EXCLUDED FROM THIS NETLIST

NO INVENTED POWER, SIGNAL, PULL–UP, TEST–POINT OR HARNESS CONNECTION IS PRESENT

RUN FULL REVIEW BEFORE PCB LAYOUT OR FABRICATION