


CN12 INDEPENDENT STM32N6570–DK BREAKOUT SCHEMATIC

DRAFT DEVELOPMENT HARDWARE – NOT FOR FABRICATION

NOT PHYSICALLY QUALIFIED / NOT WEARABLE QUALIFIED

MATING PINS FACE DK; OPPOSING MATING VIEW MUST BE PRESERVED

SYSTEM DK SOURCE–GROUND CONTACTS ARE CN8–P6, CN8–P7 AND CN12–P7 ONLY

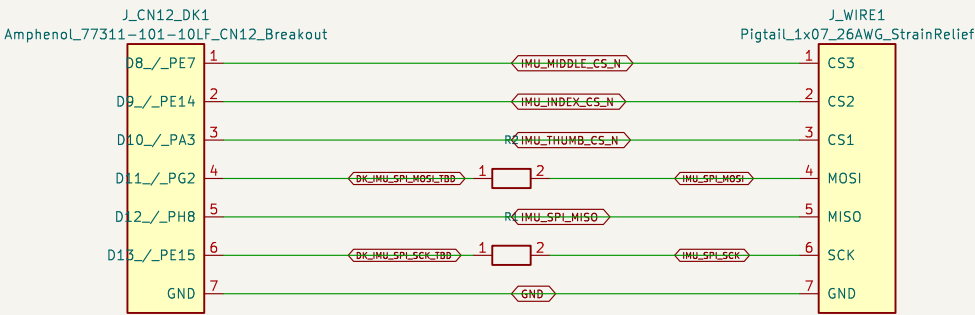

EXACT APPROVED PHYSICAL–CONTACT AND LOCAL–PIGTAIL MAPPING:

- P1 D8 / PE7 -> J_WIRE1 P1 IMU_MIDDLE_CS_N
- P2 D9 / PE14 -> J_WIRE1 P2 IMU_INDEX_CS_N
- P3 D10 / PA3 -> J_WIRE1 P3 IMU_THUMB_CS_N
- P4 D11 / PG2 -> R2 P1 DK_IMU_SPL_MOSI_TBD
- R2 P2 IMU_SPL_MOSI -> J_WIRE1 P4
- P5 D12 / PH8 -> J_WIRE1 P5 IMU_SPL_MISO
- P6 D13 / PE15 -> R1 P1 DK_IMU_SPL_SCK_TBD
- R1 P2 IMU_SPL_SCK -> J_WIRE1 P6
- P7 GND -> J_WIRE1 P7
- P8 AREF DNC NPTH
- P9 SDA DNC NPTH
- P10 SCL DNC NPTH

DNC: P8 AREF, P9 SDA, P10 SCL – NPTH / NO COPPER / NO WIRE

MH_CARRIER1 AND ALL UNNUMBERED STRAIN–RELIEF HOLES ARE PCB–ONLY MECHANICAL FEATURES; EXCLUDED FROM THIS NETLIST

NO INVENTED POWER, SIGNAL, PULL–UP, TEST–POINT OR HARNESS CONNECTION IS PRESENT

RUN FULL REVIEW BEFORE PCB LAYOUT OR FABRICATION