


CN8 INDEPENDENT STM32N6570–DK BREAKOUT SCHEMATIC

DRAFT DEVELOPMENT HARDWARE – NOT FOR FABRICATION

NOT PHYSICALLY QUALIFIED / NOT WEARABLE QUALIFIED

MATING PINS FACE DK; OPPOSING MATING VIEW MUST BE PRESERVED

DK POSITIVE POWER ISOLATION: IOREF / 3V3 / 5V / VIN HAVE NO ELECTRICAL CONNECTION

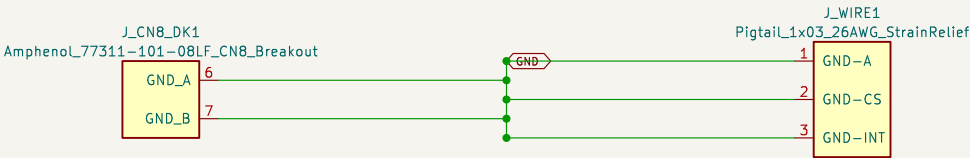

EXACT APPROVED PHYSICAL–CONTACT AND LOCAL–PIGTAIL MAPPING:

- P1 NC DNC NPTH
- P2 IOREF DNC NPTH – NO ELECTRICAL CONNECTION
- P3 RESET DNC NPTH
- P4 3V3 DNC NPTH – NO ELECTRICAL CONNECTION
- P5 5V DNC NPTH – NO ELECTRICAL CONNECTION
- P6 GND -> J_WIRE1 P1 and P2
- P7 GND -> J_WIRE1 P3
- P8 VIN DNC NPTH – NO ELECTRICAL CONNECTION

DNC: P1, P2 IOREF, P3 RESET, P4 3V3, P5 5V, P8 VIN – NPTH / NO COPPER / NO WIRE

MH_CARRIER1 AND ALL UNNUMBERED STRAIN–RELIEF HOLES ARE PCB–ONLY MECHANICAL FEATURES; EXCLUDED FROM THIS NETLIST

NO INVENTED POWER, SIGNAL, PULL–UP, TEST–POINT OR HARNESS CONNECTION IS PRESENT

RUN FULL REVIEW BEFORE PCB LAYOUT OR FABRICATION