




STM32N6570–DK FOUR–CONNECTOR DIGITAL INTERFACE – DRAFT DEVELOPMENT HARDWARE

DK POSITIVE POWER PINS MUST NOT CONNECT TO PCB_GLOVE

PCB_GLOVE POWERED THROUGH J9 EXTERNAL INPUT ONLY

CN8–2 IOREF, CN8–4 3V3, CN8–5 5V, CN8–8 VIN: EXPLICIT NO–CONNECT. CN8–1 NC and CN8–3 RESET also DNC.

CN7 DNC: pins 1,2,3,5,6. CN11 DNC: pins 1,2. CN12 DNC: pins 8 AREF, 9 SDA, 10 SCL.

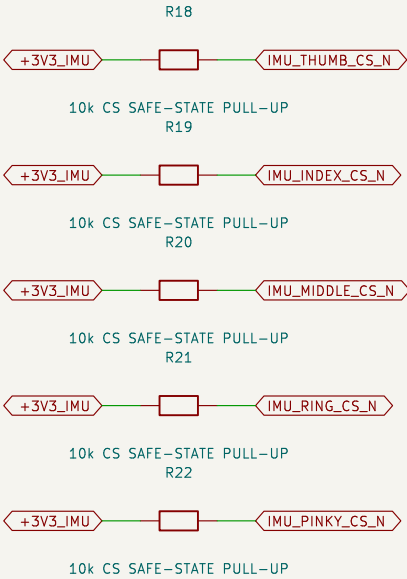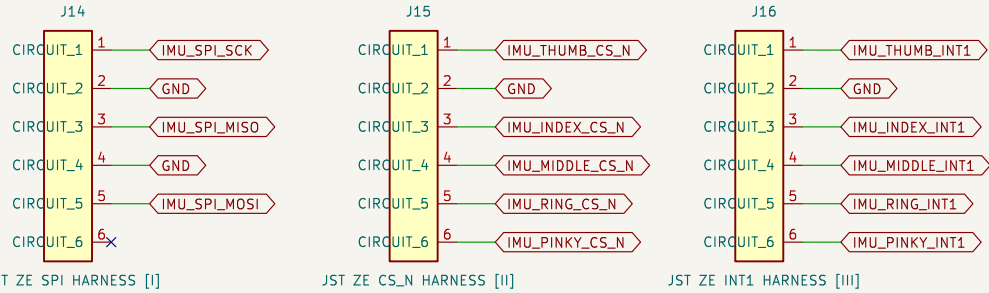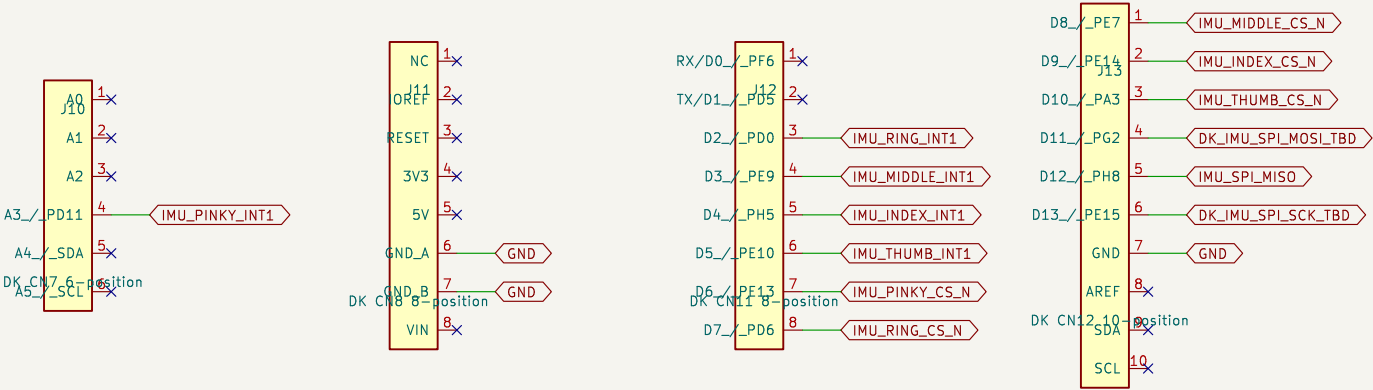

J14 JST ZE SPI [I] circuits/cavities: 1 SCK, 2 GND, 3 MISO, 4 GND, 5 MOSI, 6 DNC / NO TERMINAL.

J15 JST ZE CS_N [II] circuits/cavities: 1 THUMB, 2 GND, 3 INDEX, 4 MIDDLE, 5 RING, 6 PINKY.

J16 JST ZE INT1 [III] circuits/cavities: 1 THUMB, 2 GND, 3 INDEX, 4 MIDDLE, 5 RING, 6 PINKY.

IDENTICAL JST ZE 6P PORTS: J14 SPI [I] / J15 CS_N [II] / J16 INT1 [III]. VERIFY GROUP. NO HOT–PLUG. PHYSICAL KEYING OPEN.
CS PULL–UPS KEEP ALL IMUS DESELECTED WHILE DK IS OFF, RESETTING, BOOTING, HALTED, OR DISCONNECTED

R18–R22 = 10k to +3V3_IMU on glove side. PROVISIONAL – PHYSICAL RESET/BACKFEED VALIDATION REQUIRED.

SPI5 initial firmware: MODE 3, IDLE HIGH, SOFTWARE NSS, 100 kHz–1 MHz. Final speed requires signal–integrity validation.

ISM330DHCX INT1: active–high push–pull. MCU inputs: no internal pull. EXTI: thumb 10, index 5, middle 9, ring 0, pinky 11.

DEFERRED PHYSICAL VALIDATION – NOT MEASURED

NOT PHYSICALLY QUALIFIED / NOT WEARABLE QUALIFIED / NOT FOR FABRICATION

Sheet: /DK ADAPTER HEADERS/
File: dk_adapter_headers.kicad_sch

Title:		
Size: A3	Date:	Rev:
KiCad E.D.A. 9.0.4		Id: 2/7