




Article	Référence	Description	Qté	Désignation	Boitier	Valeur	Réf Fabricant
146595	CARTED3161A1	Circuit imprimé TM DF 35µm 52x37 2VE 1SE	1	Circuit imprimé	h=1.6,L=52,l=37 (mm)		D3161A1
123340	CMS CER0603-X7R-10%-100N-50V	Condensateur céramique CMS 0603 100nF	3	> C1, C2, C3	603	100n	MC0603B104K500CT
129592	CMS CER0603-X7R-10%-2M2-50V	Condensateur céramique CMS 0603 2.2µF	2	> C4, C5	1206	2.2u	C1206C225K5RACTU
137055	CMS CER0603-X7R-10%-27M-50V	Condensateur céramique CMS 0603 27µF	1	C6	1206	22u	
129281	CONDRAD100M63V5	Condensateur radial transversant 10mm 100µF	1	C7	e=5,D=10,h=12.5 (mm)	100u	711-1602
113100	CMS LL4148	Diode CMS	1	D1	SOD-80	LL4148	LL4148
144664	CMS ES3J	Diode CMS SMC	1	D2	DO-214AB(smc)	ES3J	ES3J
111534	CMS SMBJ58CA	Diode CMS SMB	1	D3	DO-214AA(smb)	SMBJ58CA	SMBJ58CA
146558	CMS STPS1L60AFN	Diode CMS SMA	1	D4	DO-214AC(sma)	STPS1L60	STPS1L60AFN
146559	CMS NRVA4003T3G	Diode CMS SMA	2	> D5, D6	DO-214AC(sma)	NRVA4003T3G	NRVA4003T3G
145579	CMS FCC16501ABTP	Fusible 0603 0A5	1	FB1	603	0.5A	FCC16501ABTP
146557	MKDSN1.5/7-5.08	Bornier 1x07 5.08mm	1	J1	e=5.08,L=35.56,l=8.0,h=10 (mm)	MKDSN1.5/7-5.08	1729173
146554	CMS 1775469-5	Connecteur 5pos 2mm coudé	1	J2	e=2,L=14,l=7.5,h=5.50 (mm)	1775469-5	1775469-5
136399	CMS 7447779122	Inductance 22µH	1	L1	L=7.3,l=7.3,h=4 (mm)	22u	7447779122
114160	CMS RES0603-1/10W-1%-220E	Resistance 1/10W 1% CMS 0603 220E	2	> R1, R2	603	220	804-8791
123336	CMS RES0603-1/10W-1%-1K	Resistance 1/10W 1% CMS 0603 1K	1	R4	603	1k	2122366
133693	CMS RES0603-1/10W-1%-4K7	Resistance 1/10W 1% CMS 0603 4K7	2	> R3, R5	603	4.7k	804-8909
138497	CMS RES0603-1/10W-1%-18K	Resistance 1/10W 1% CMS 0603 18K	1	R6	603	18k	
127913	CMS RES0603-1/10W-1%-33K	Resistance 1/10W 1% CMS 0603 33K	1	R7	603	33k	717-1124
141400	CMS RES0603-1/10W-1%-51K	Resistance 1/10W 1% CMS 0603 51K	1	R8	603	51k	71-CRCW0603-51k-E3
132850	CMS RES0603-1/10W-1%-100K	Resistance 1/10W 1% CMS 0603 100K	1	R9	603	100k	1738931RL
146560	CMS MMUN2233T1G	Transistors numériques 100mA 50V BRT NPN	1	T1	SOT-23	MMUN2233T1G	MMUN2233T1G
128380	CMS BC846B215-NXP	Transistors bipolaire NPN	1	T2	SOT-23	BC846B1B	BC846,215
120222	CMS BC857	Transistors bipolaire PNP	1	T3	SOT-23	BC857B3F	BC857,215
127302	CMS IRLR3110ZPBF	MOSFET 100V HEXFET 14mOhms 15nC	1	T4	D-pak	IRLR3110ZTRPBF	IRLR3110ZPBF
146579	CMS PIC12F1571	Microcontrôleurs 8 bits - MCU 16-bit PWM 128 RAM 1.75KB Comparator	1	U1	SO-8	PIC12F1571-I_SN	PIC12F1571
146575	CMS LMR16020PDDAR	Régulateurs de tension de commutation SIMPLE SWITCHER 60V	1	U2	SO-8	LMR16020PDDAR	LMR16020PDDAR

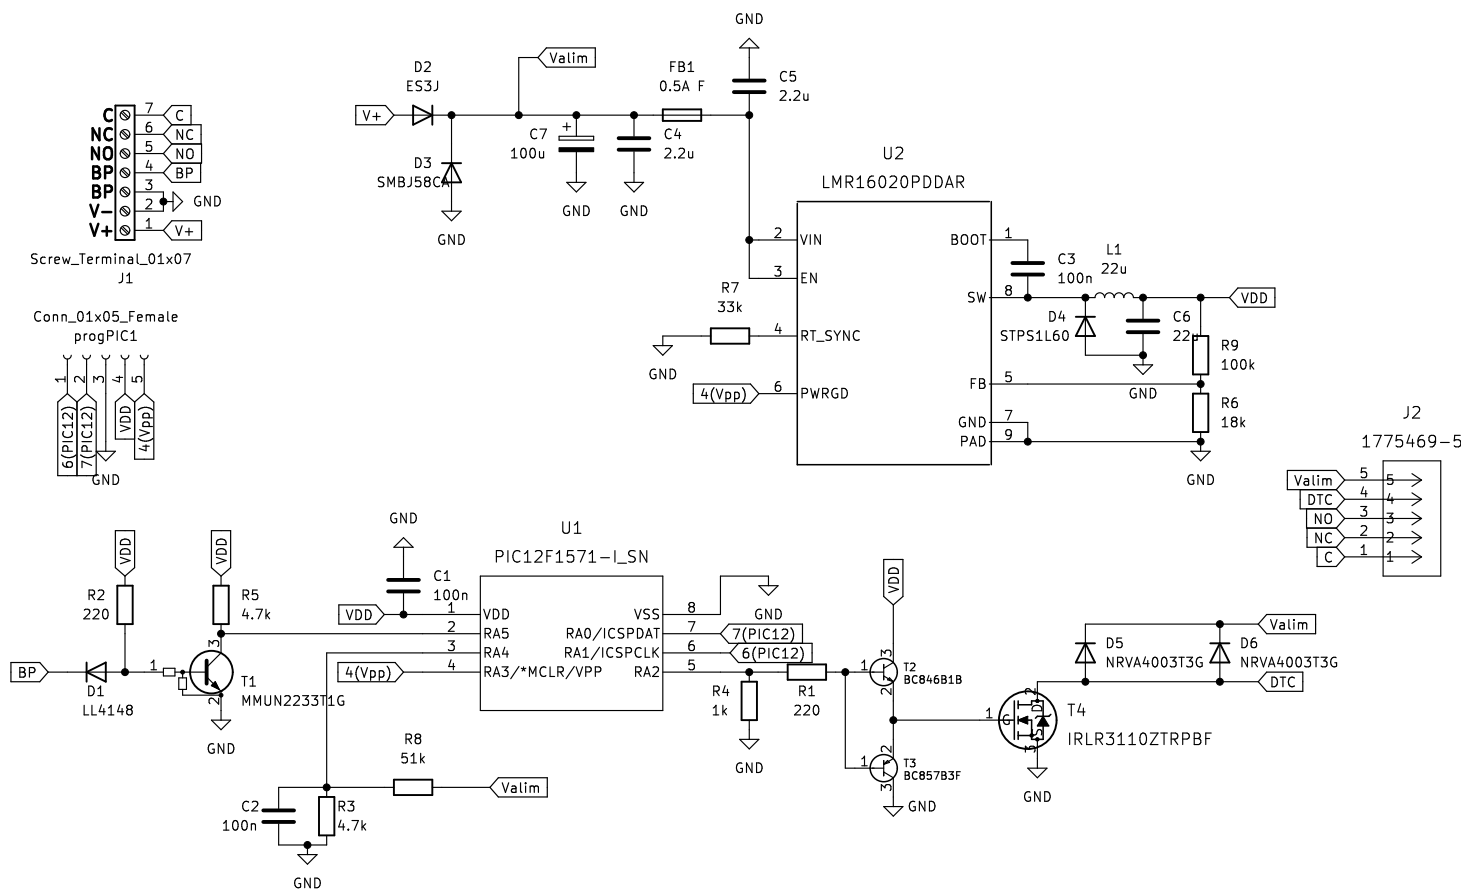


Ilévia		
D3161A1		
FranceLog		
Sheet: /		
File: retroing.kicad_sch		
Title: Carte de commande		
Size: A4	Date: 2024-04-29	Rev: 1
KiCad E.D.A. kicad (6.0.9)	Id: 1/1	


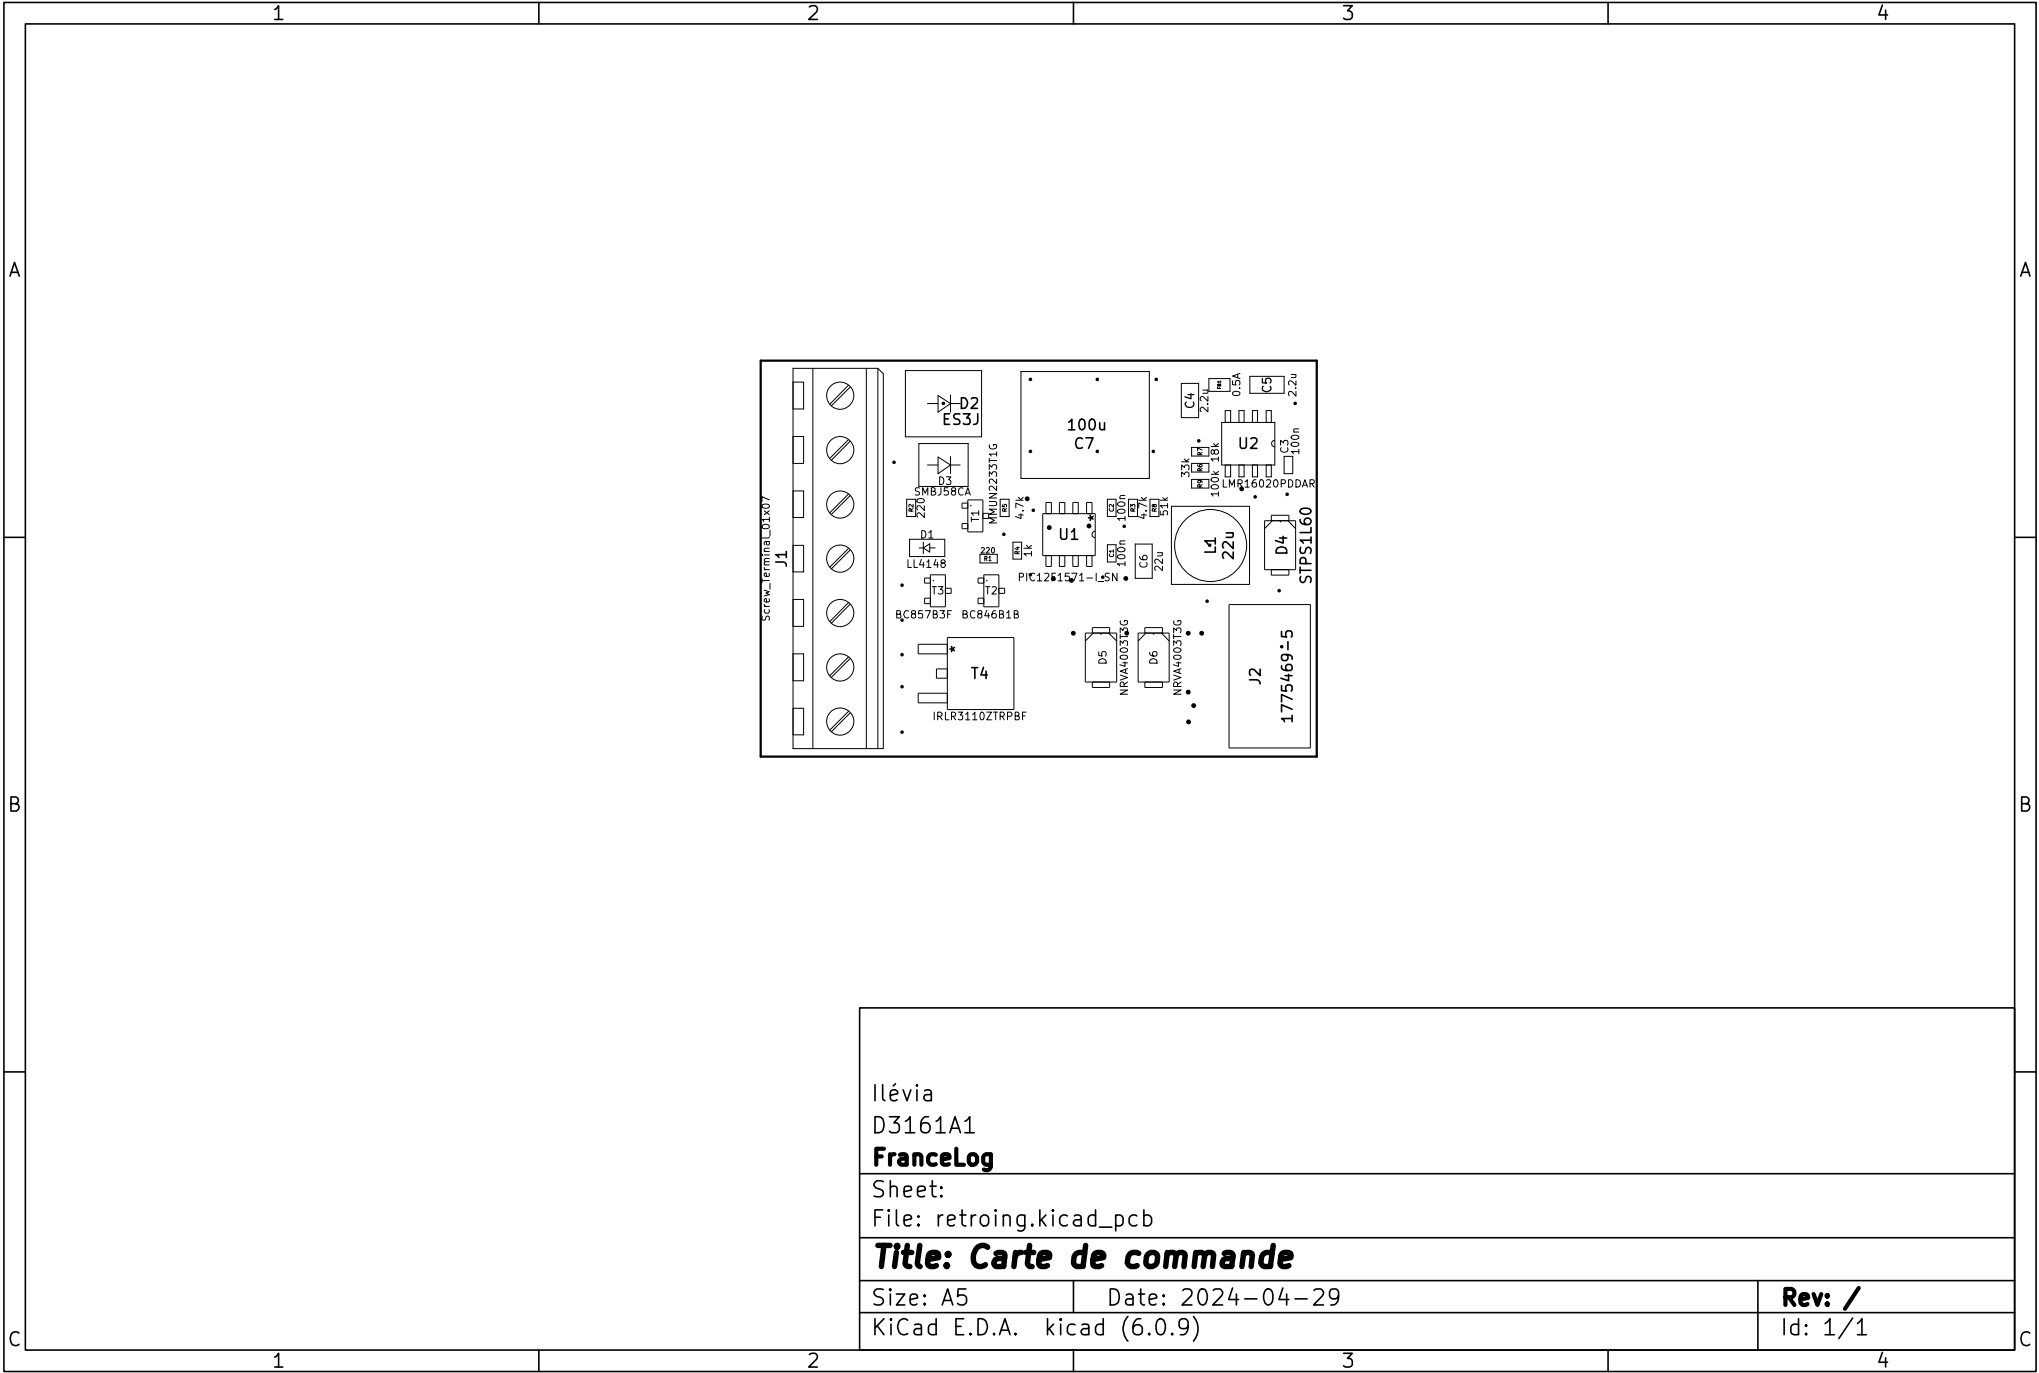


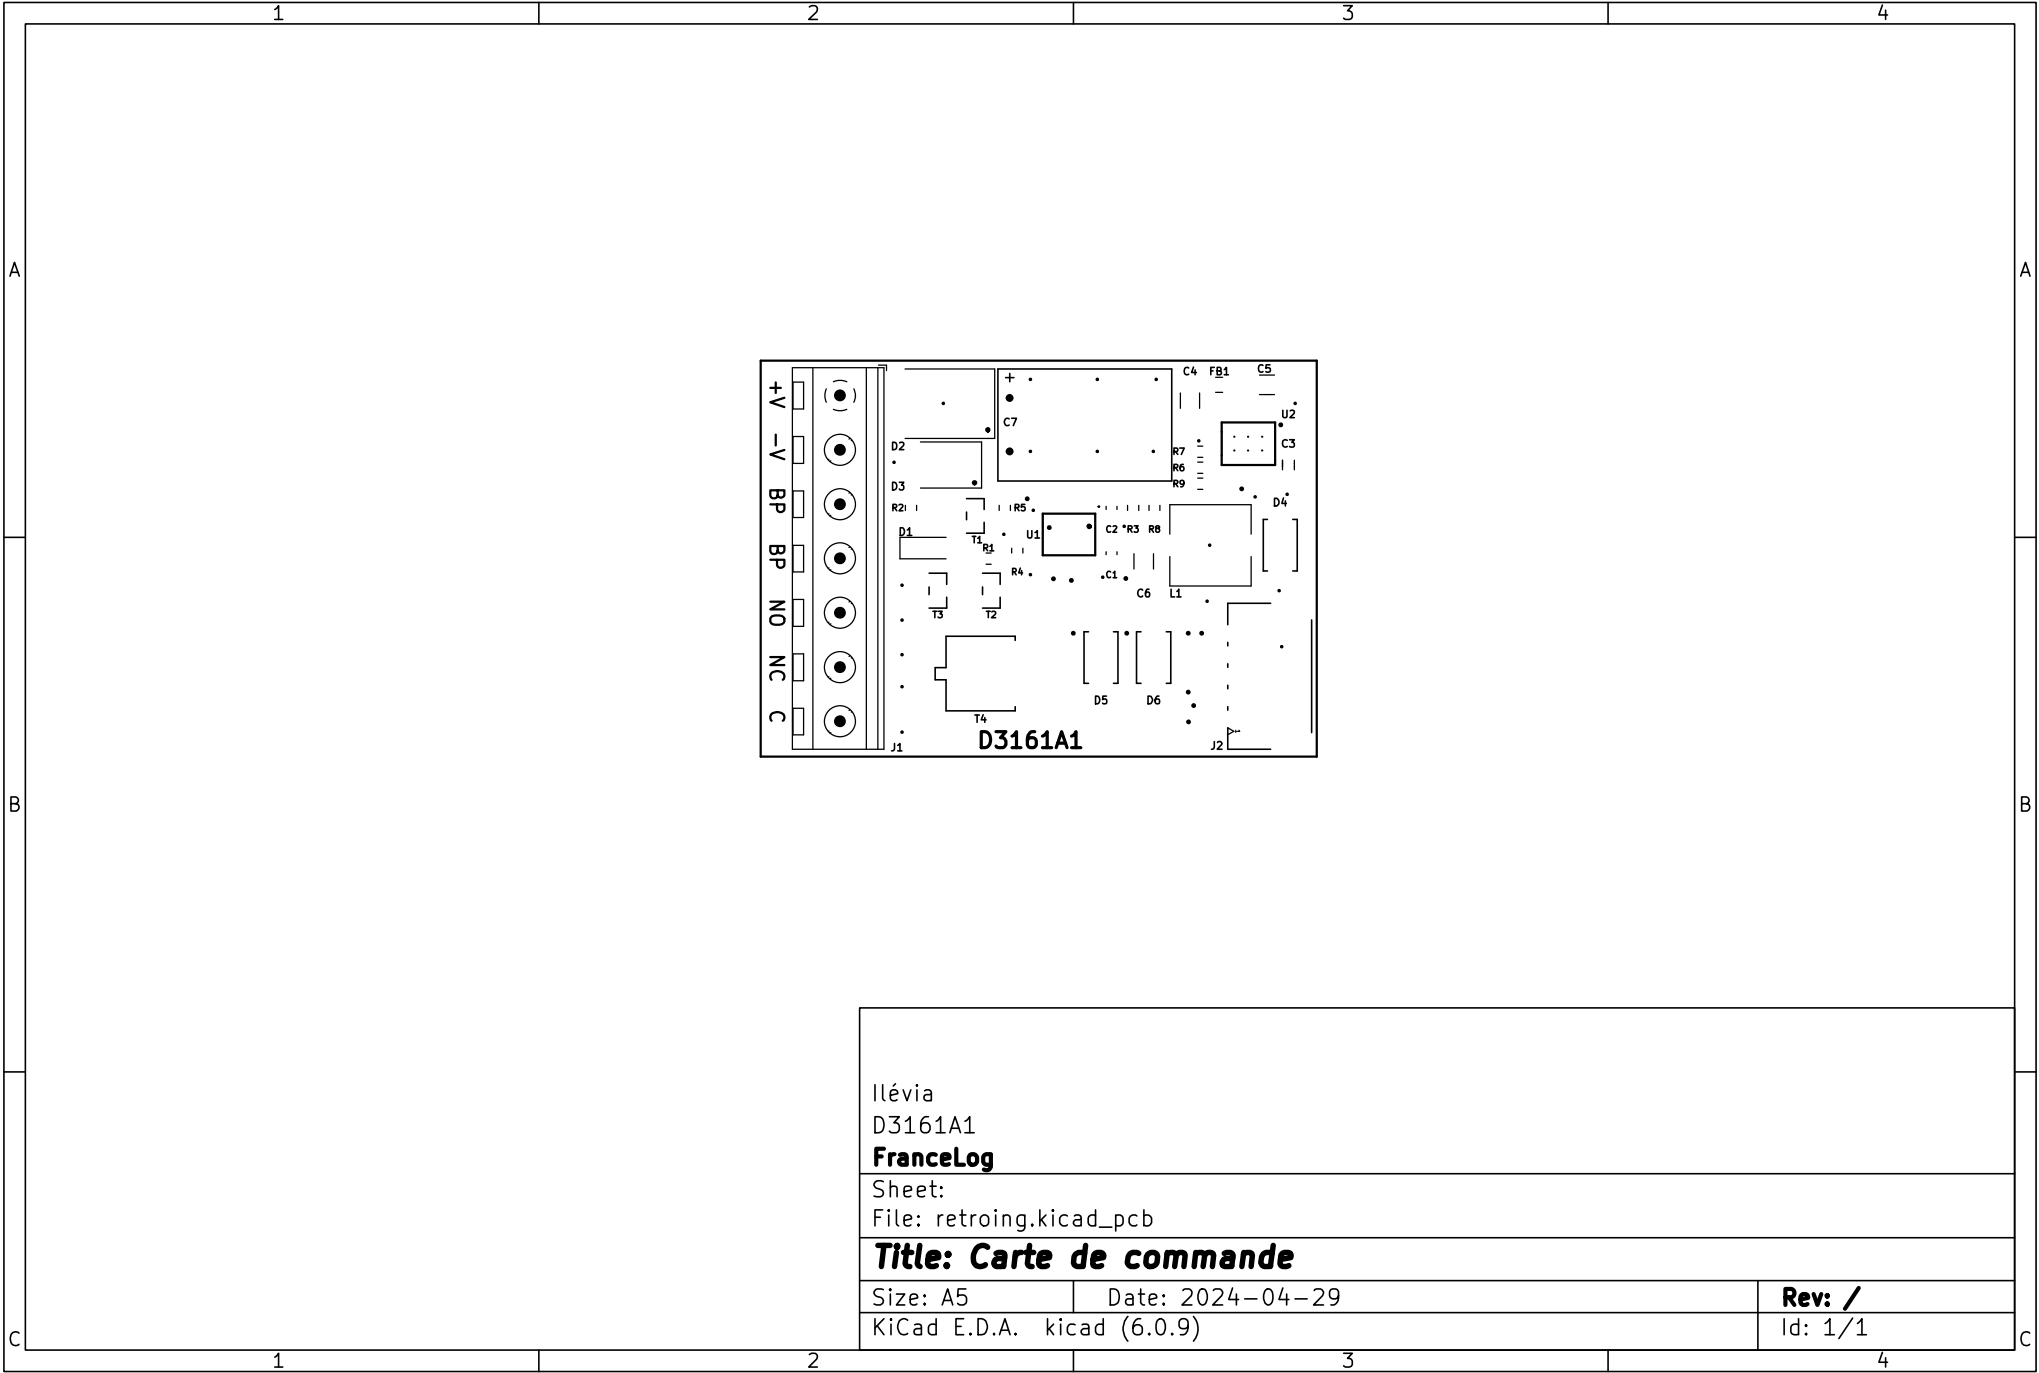

Top

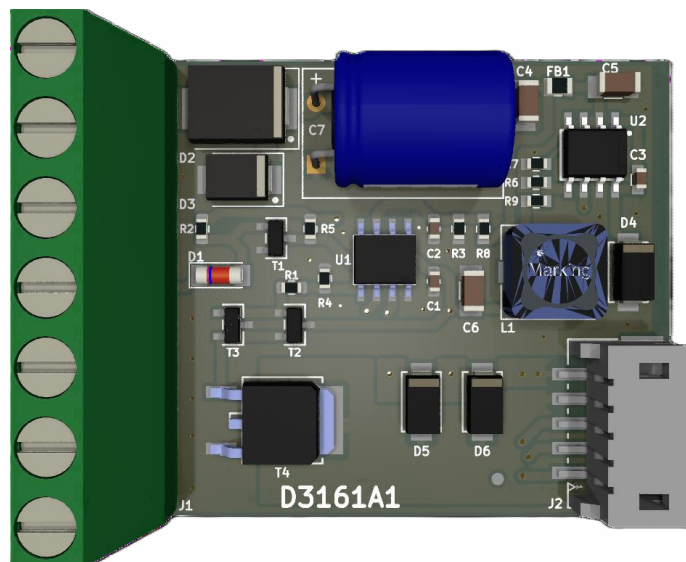

Bottom

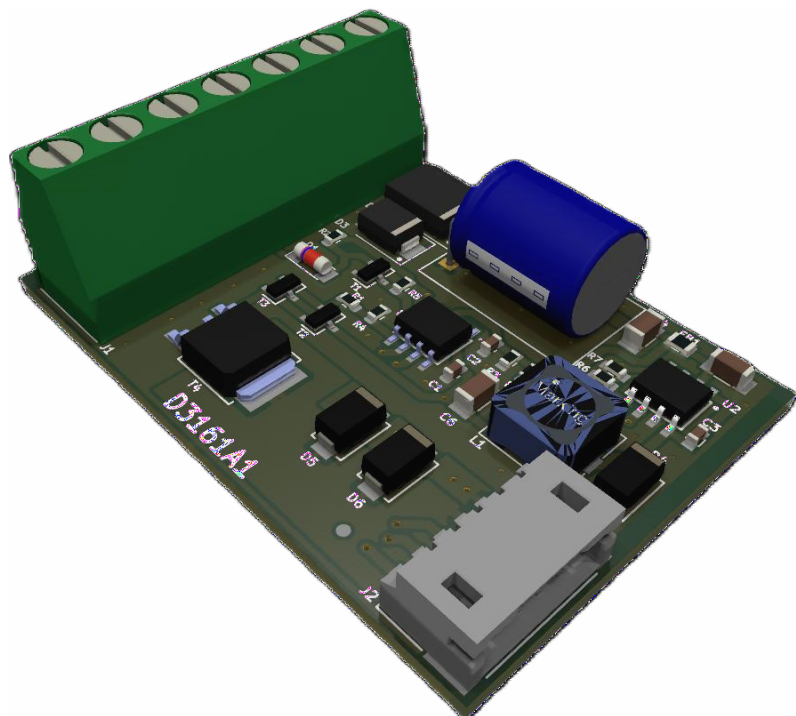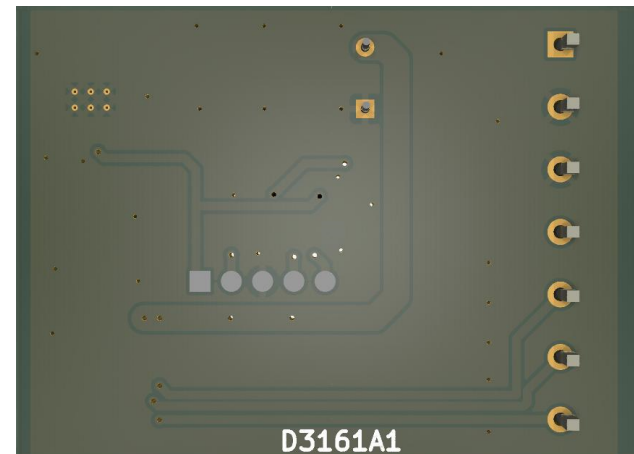

Ilévia
D3161A1

FranceLog

Sheet: /
File: D31.kicad_sch


Title: Carte de commande

Size: A4 Date: 2024-04-30

KiCad E.D.A. kicad (6.0.9)

Rev: /

Id: 1/1

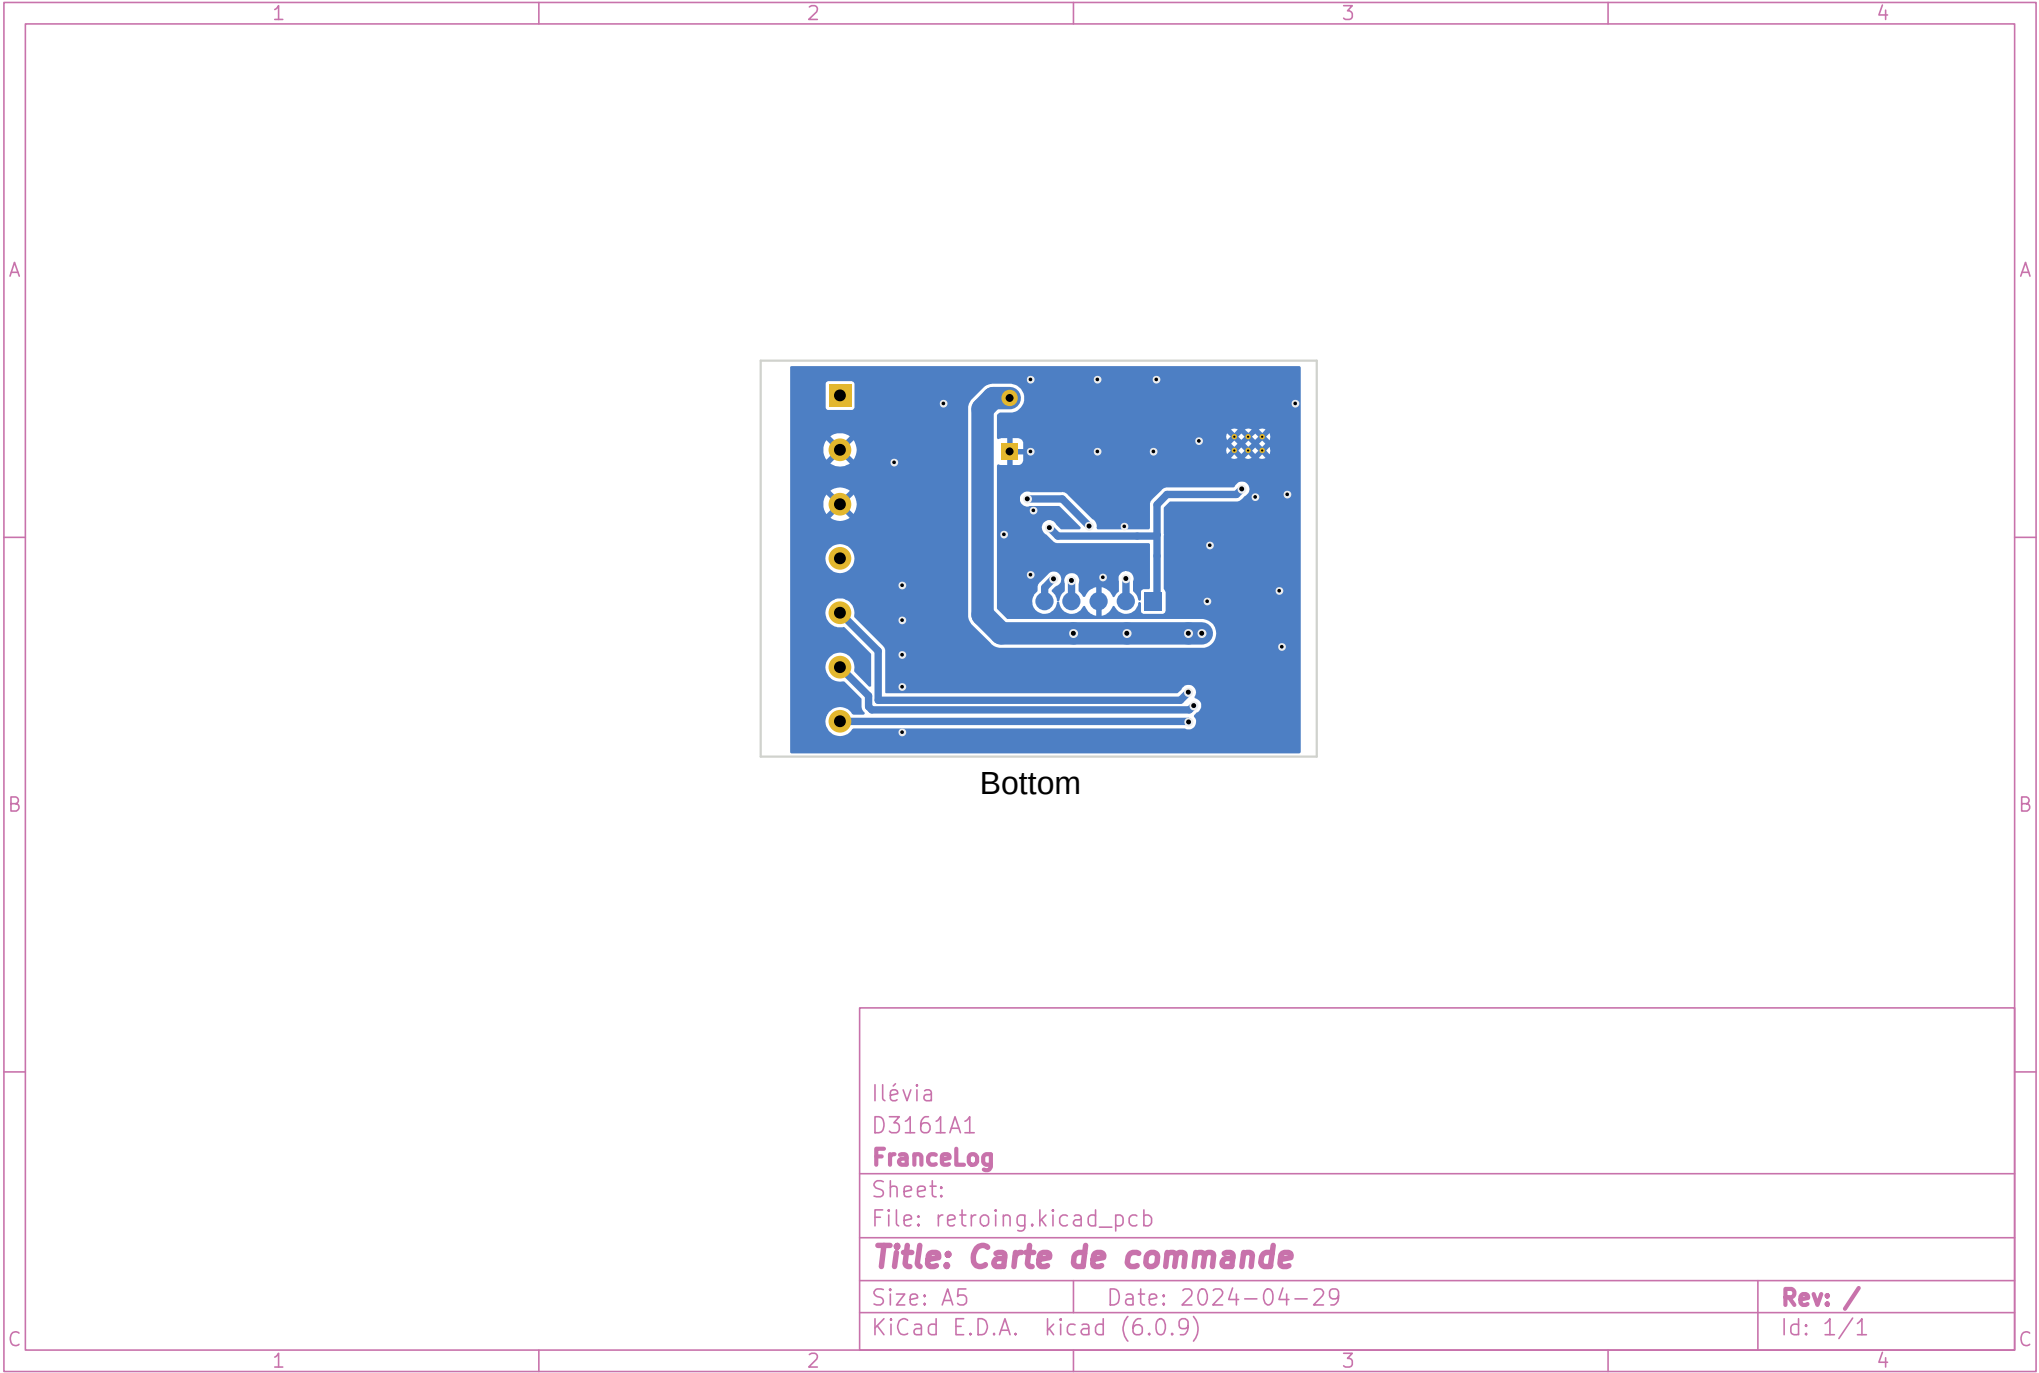


Ilévia
D3161A1
FranceLog

Sheet:
File: retroing.kicad_pcb

Title: Carte de commande

Size: A5 Date: 2024-04-29
KiCad E.D.A. kicad (6.0.9)

Rev: /
Id: 1/1

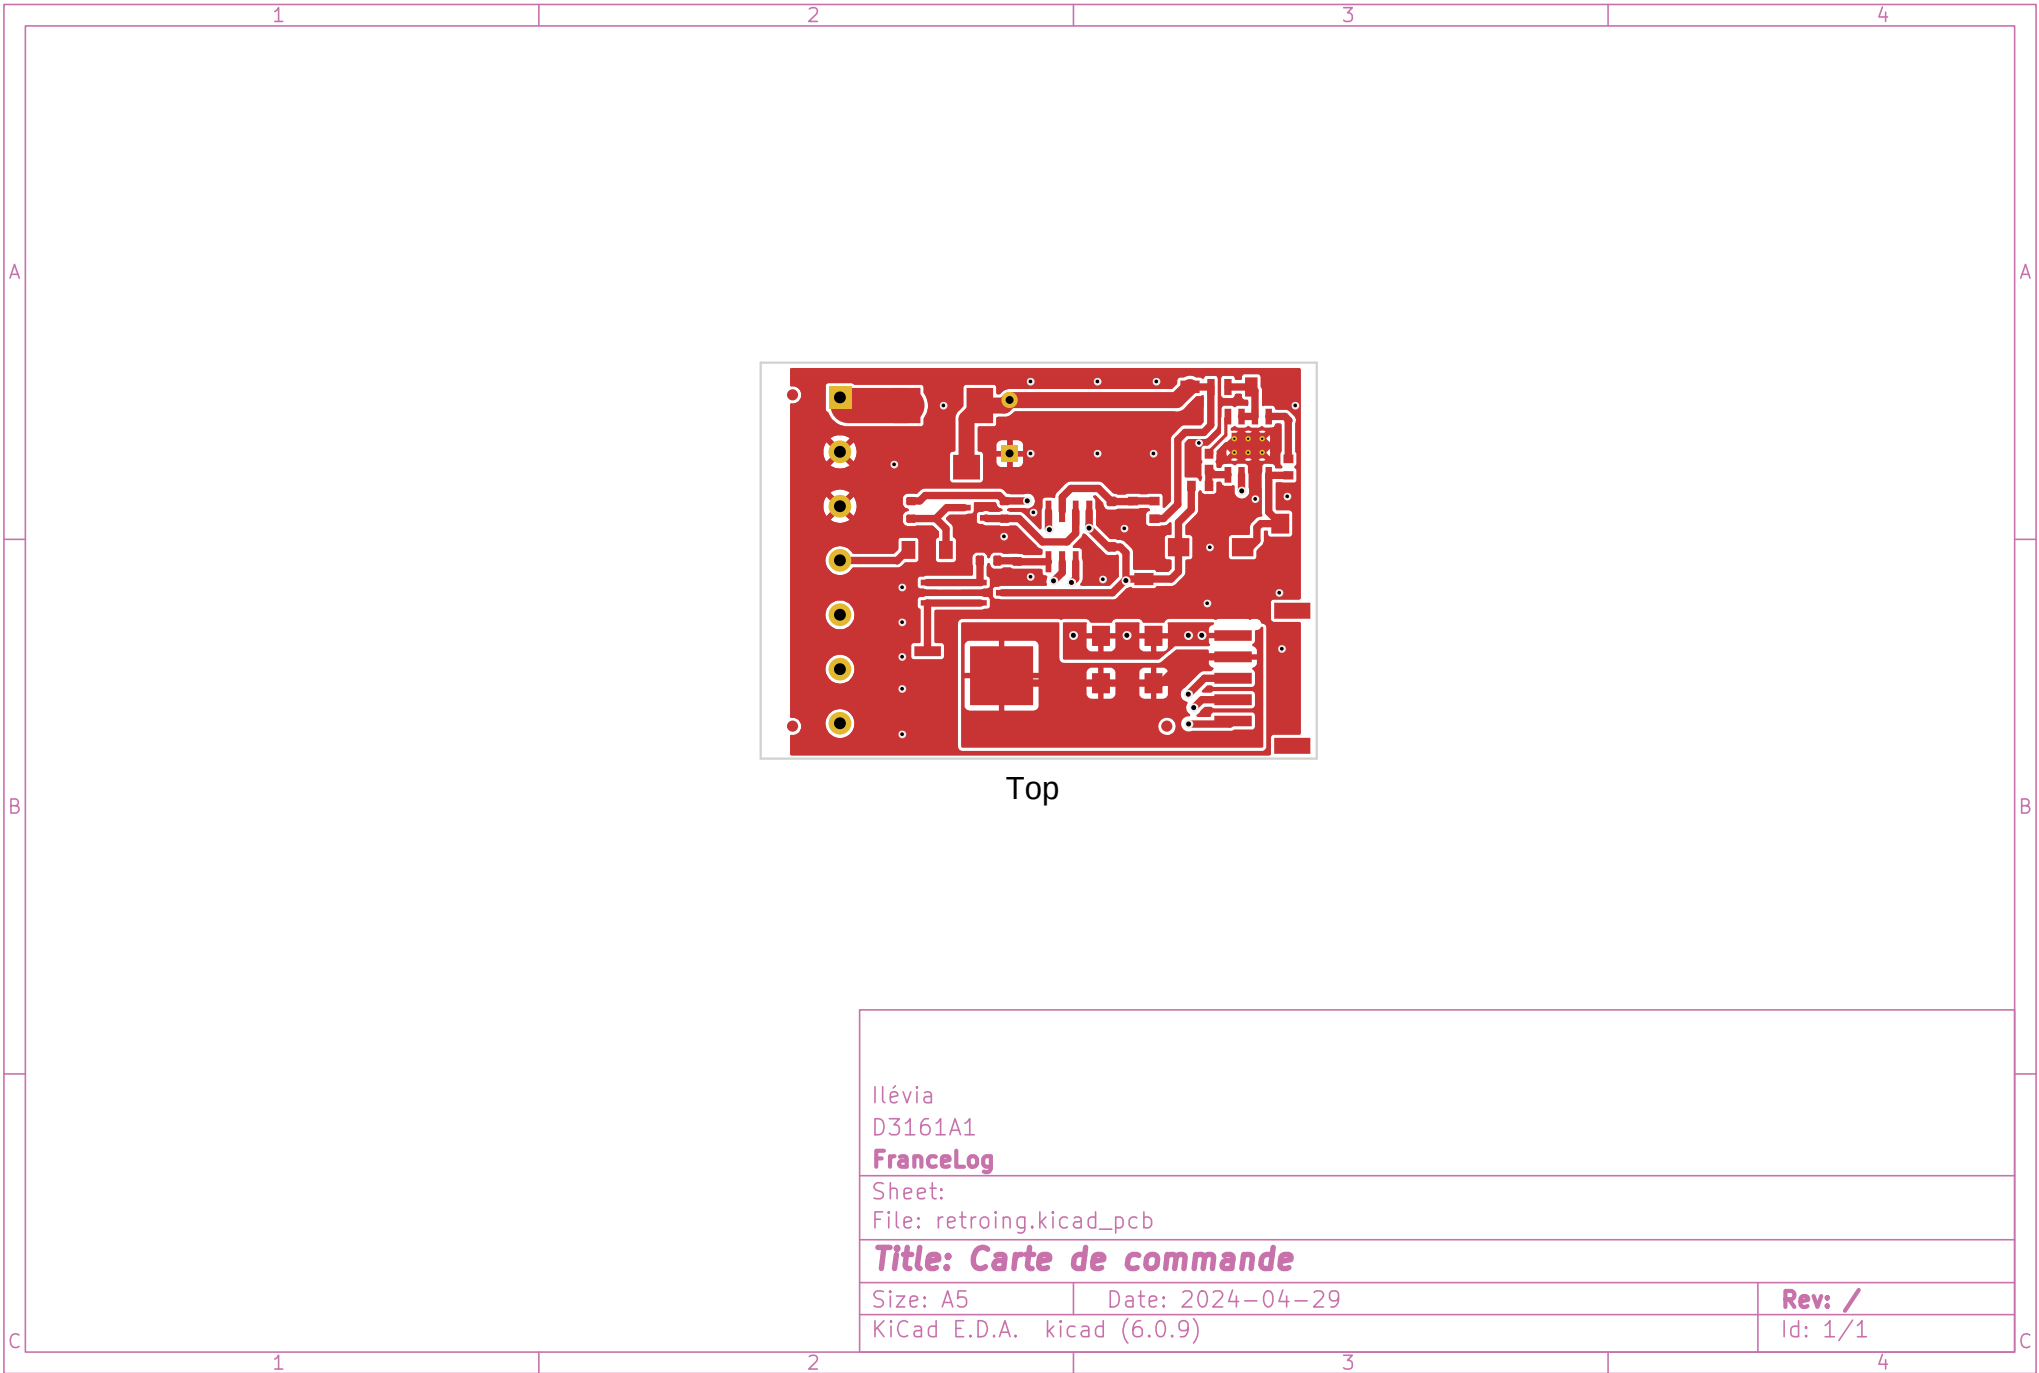


Ilévia
D3161A1
FranceLog

Sheet:
File: retroing.kicad_pcb

Title: Carte de commande

Size: A5 Date: 2024-04-29
KiCad E.D.A. kicad (6.0.9)

Rev: /
Id: 1/1

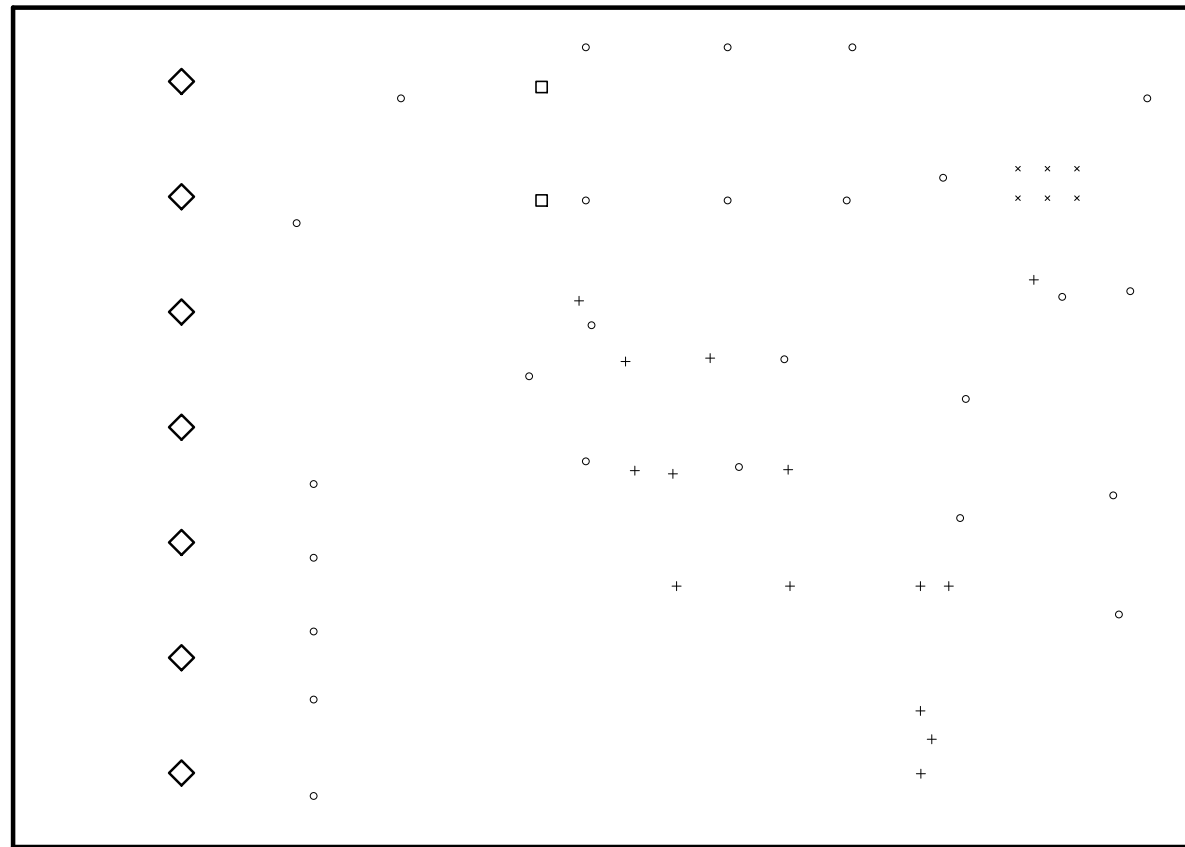

Drill Map:

- x 0.203mm / 0.0080" (6 holes)
- o 0.300mm / 0.0118" (26 holes)
- + 0.400mm / 0.0157" (14 holes)
- 0.700mm / 0.0276" (2 holes)
- ◇ 1.100mm / 0.0433" (7 holes)