



CONFIGURAÇÕES STM32 CUBE IDE

Configurações Default

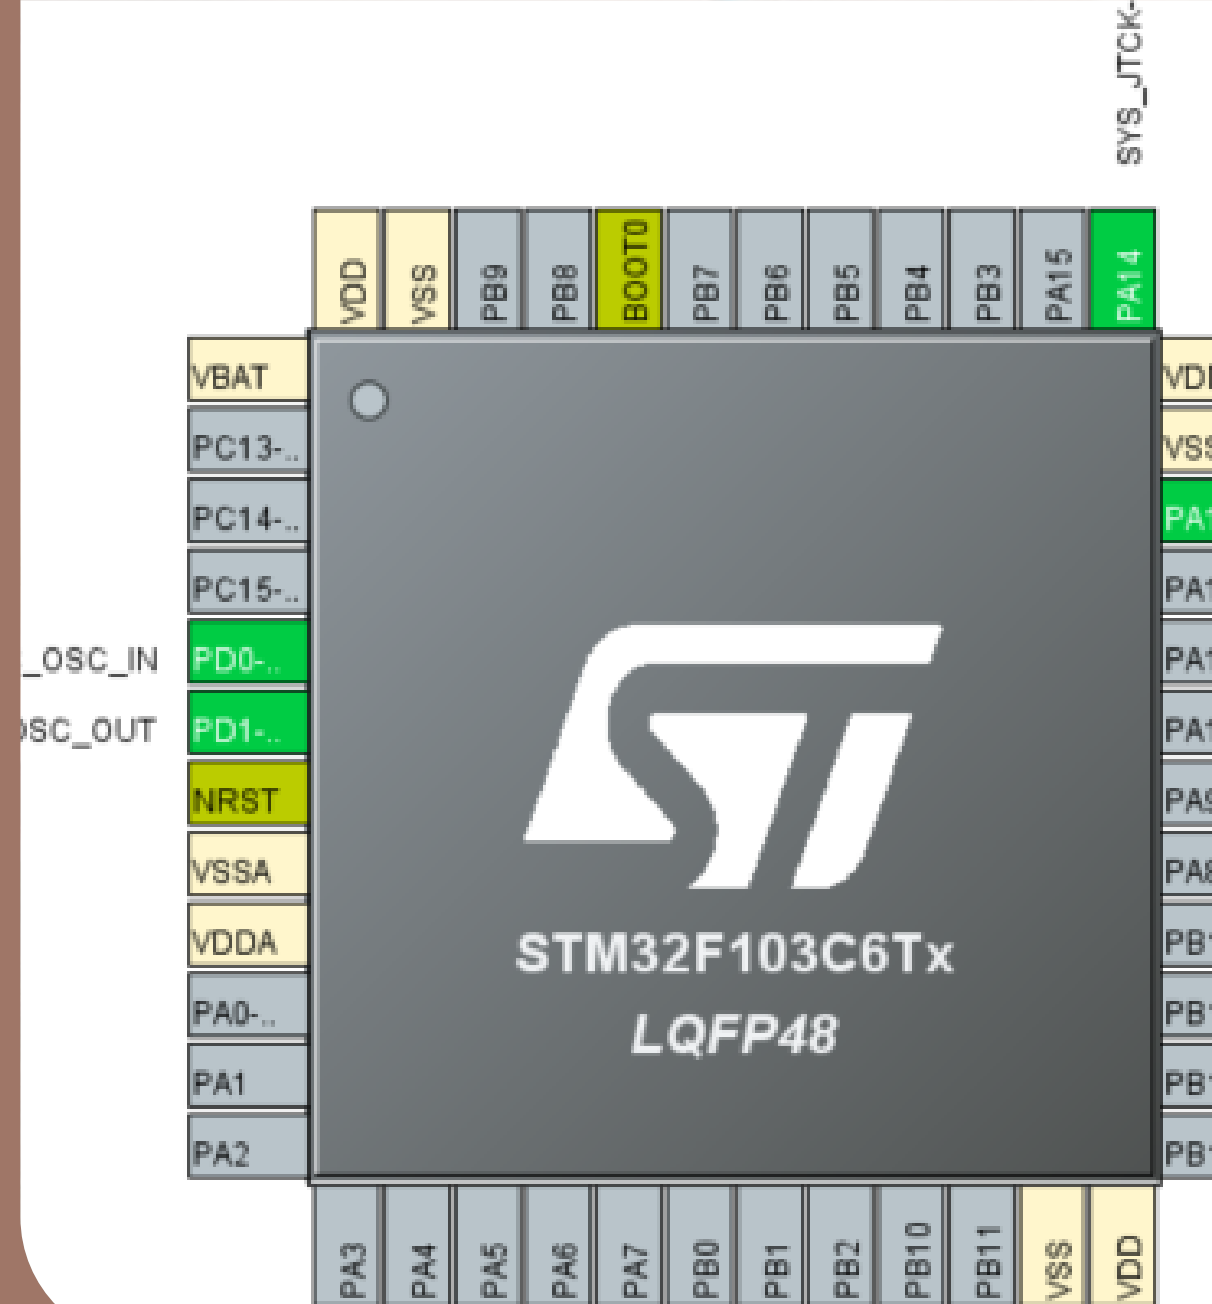

DEBUG CONFIG

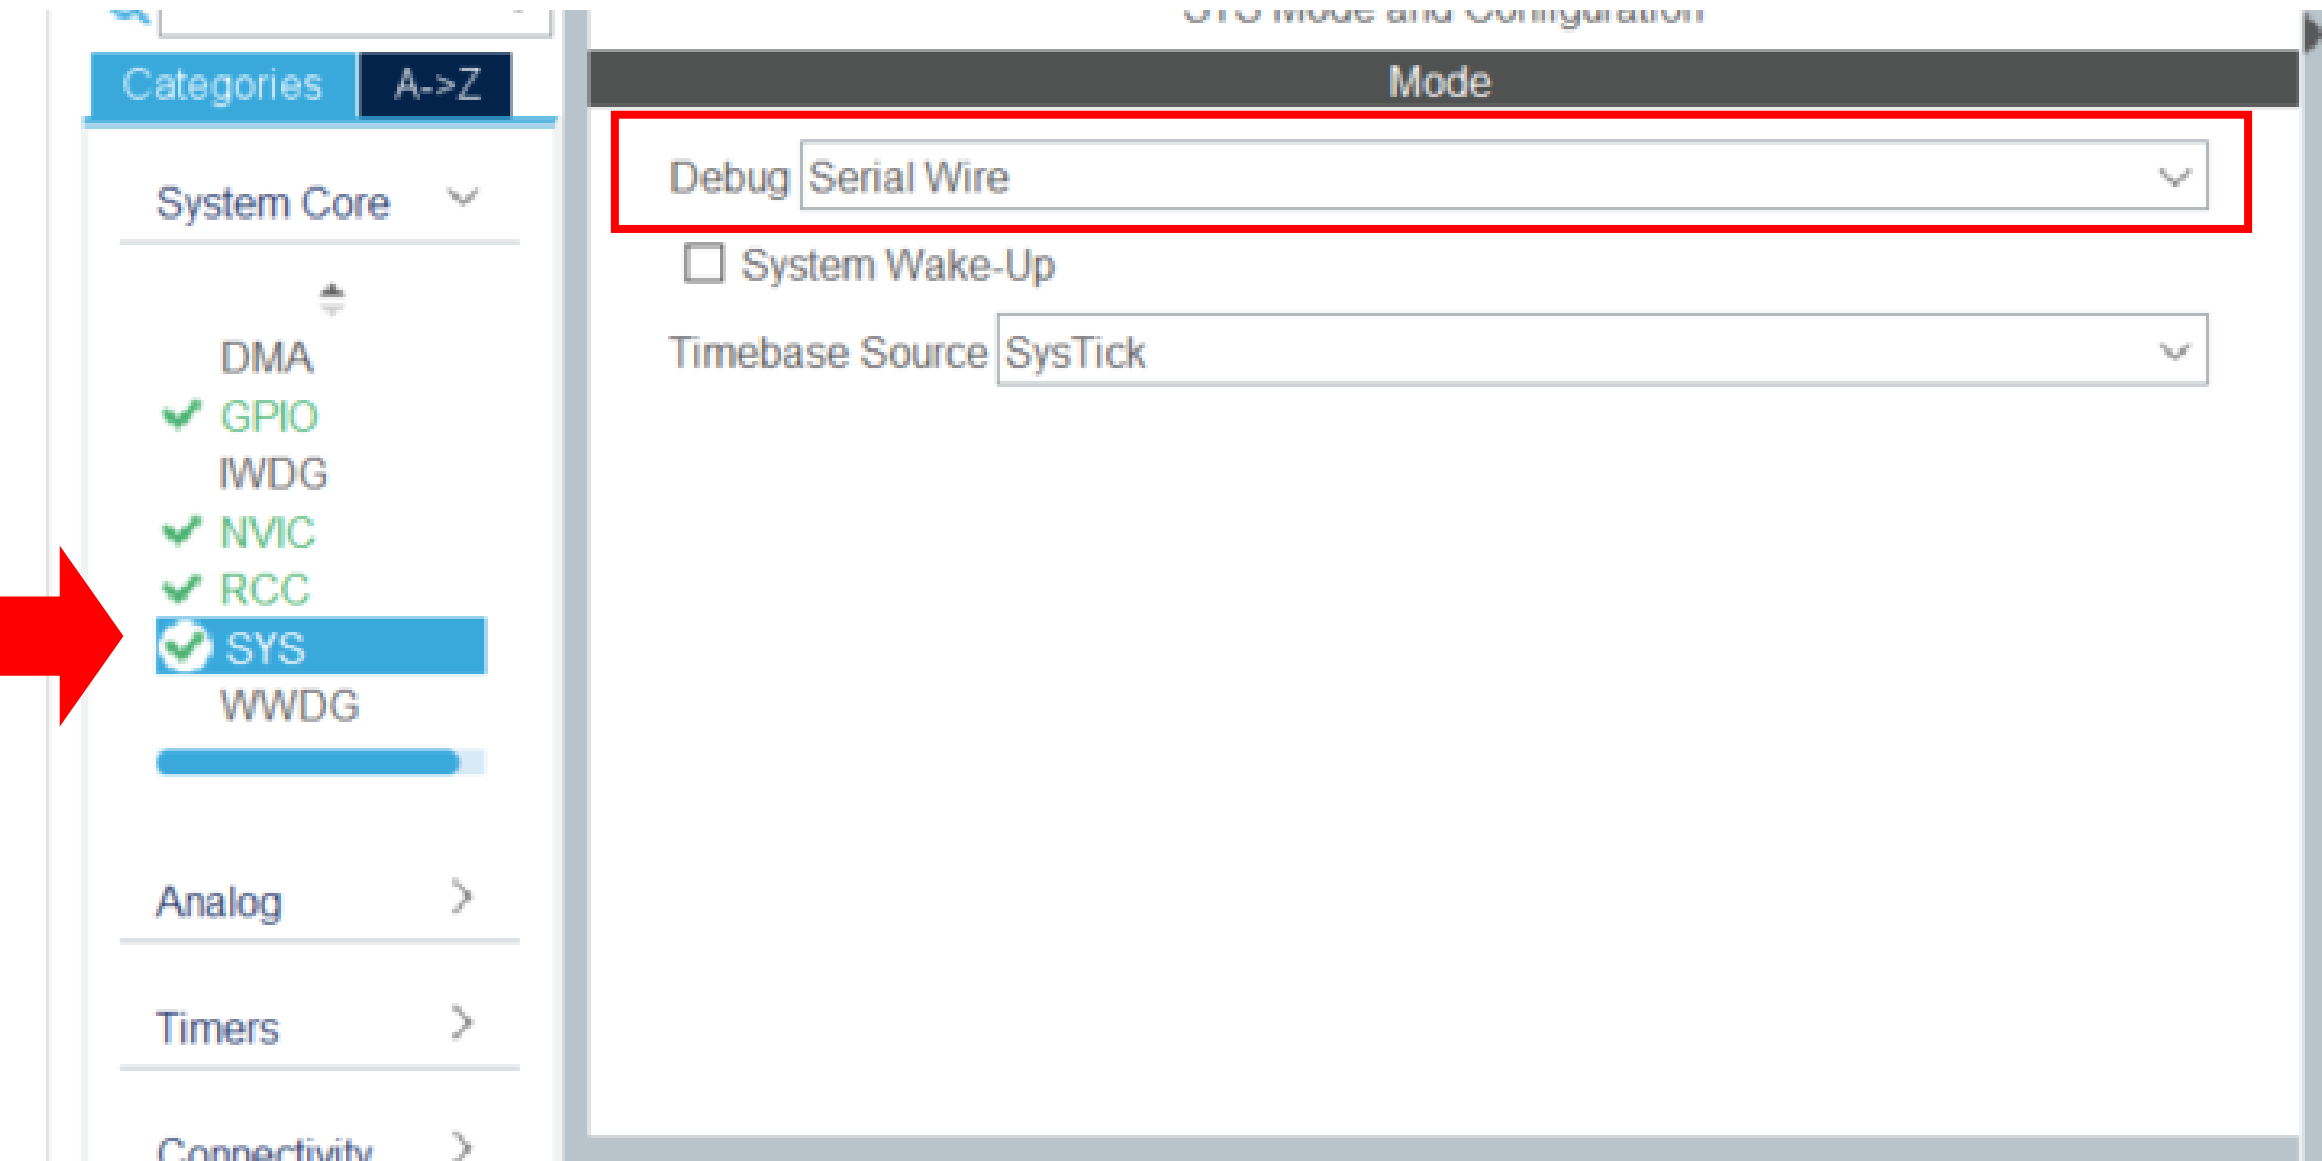

The screenshot displays the 'Mode and Configuration' window in STM32CubeIDE. The left sidebar shows a tree view of system components under 'System Core'. The 'SYS' component is highlighted with a blue background and a green checkmark, and a red arrow points to it from the left. The main area shows the 'Debug' tab selected, with a red rectangle highlighting the 'Serial Wire' dropdown menu. Below this, the 'System Wake-Up' checkbox is unchecked, and the 'Timebase Source' is set to 'SysTick'.

Categories A->Z

System Core

- DMA
- ✓ GPIO
- IWDG
- ✓ NVIC
- ✓ RCC
- ✓ **SYS**
- WWDG

Analog >

Timers >

Connectivity >


Mode

Debug Serial Wire

☐ System Wake-Up

Timebase Source SysTick

ESCOLHA DA FONTE DE CLOCK

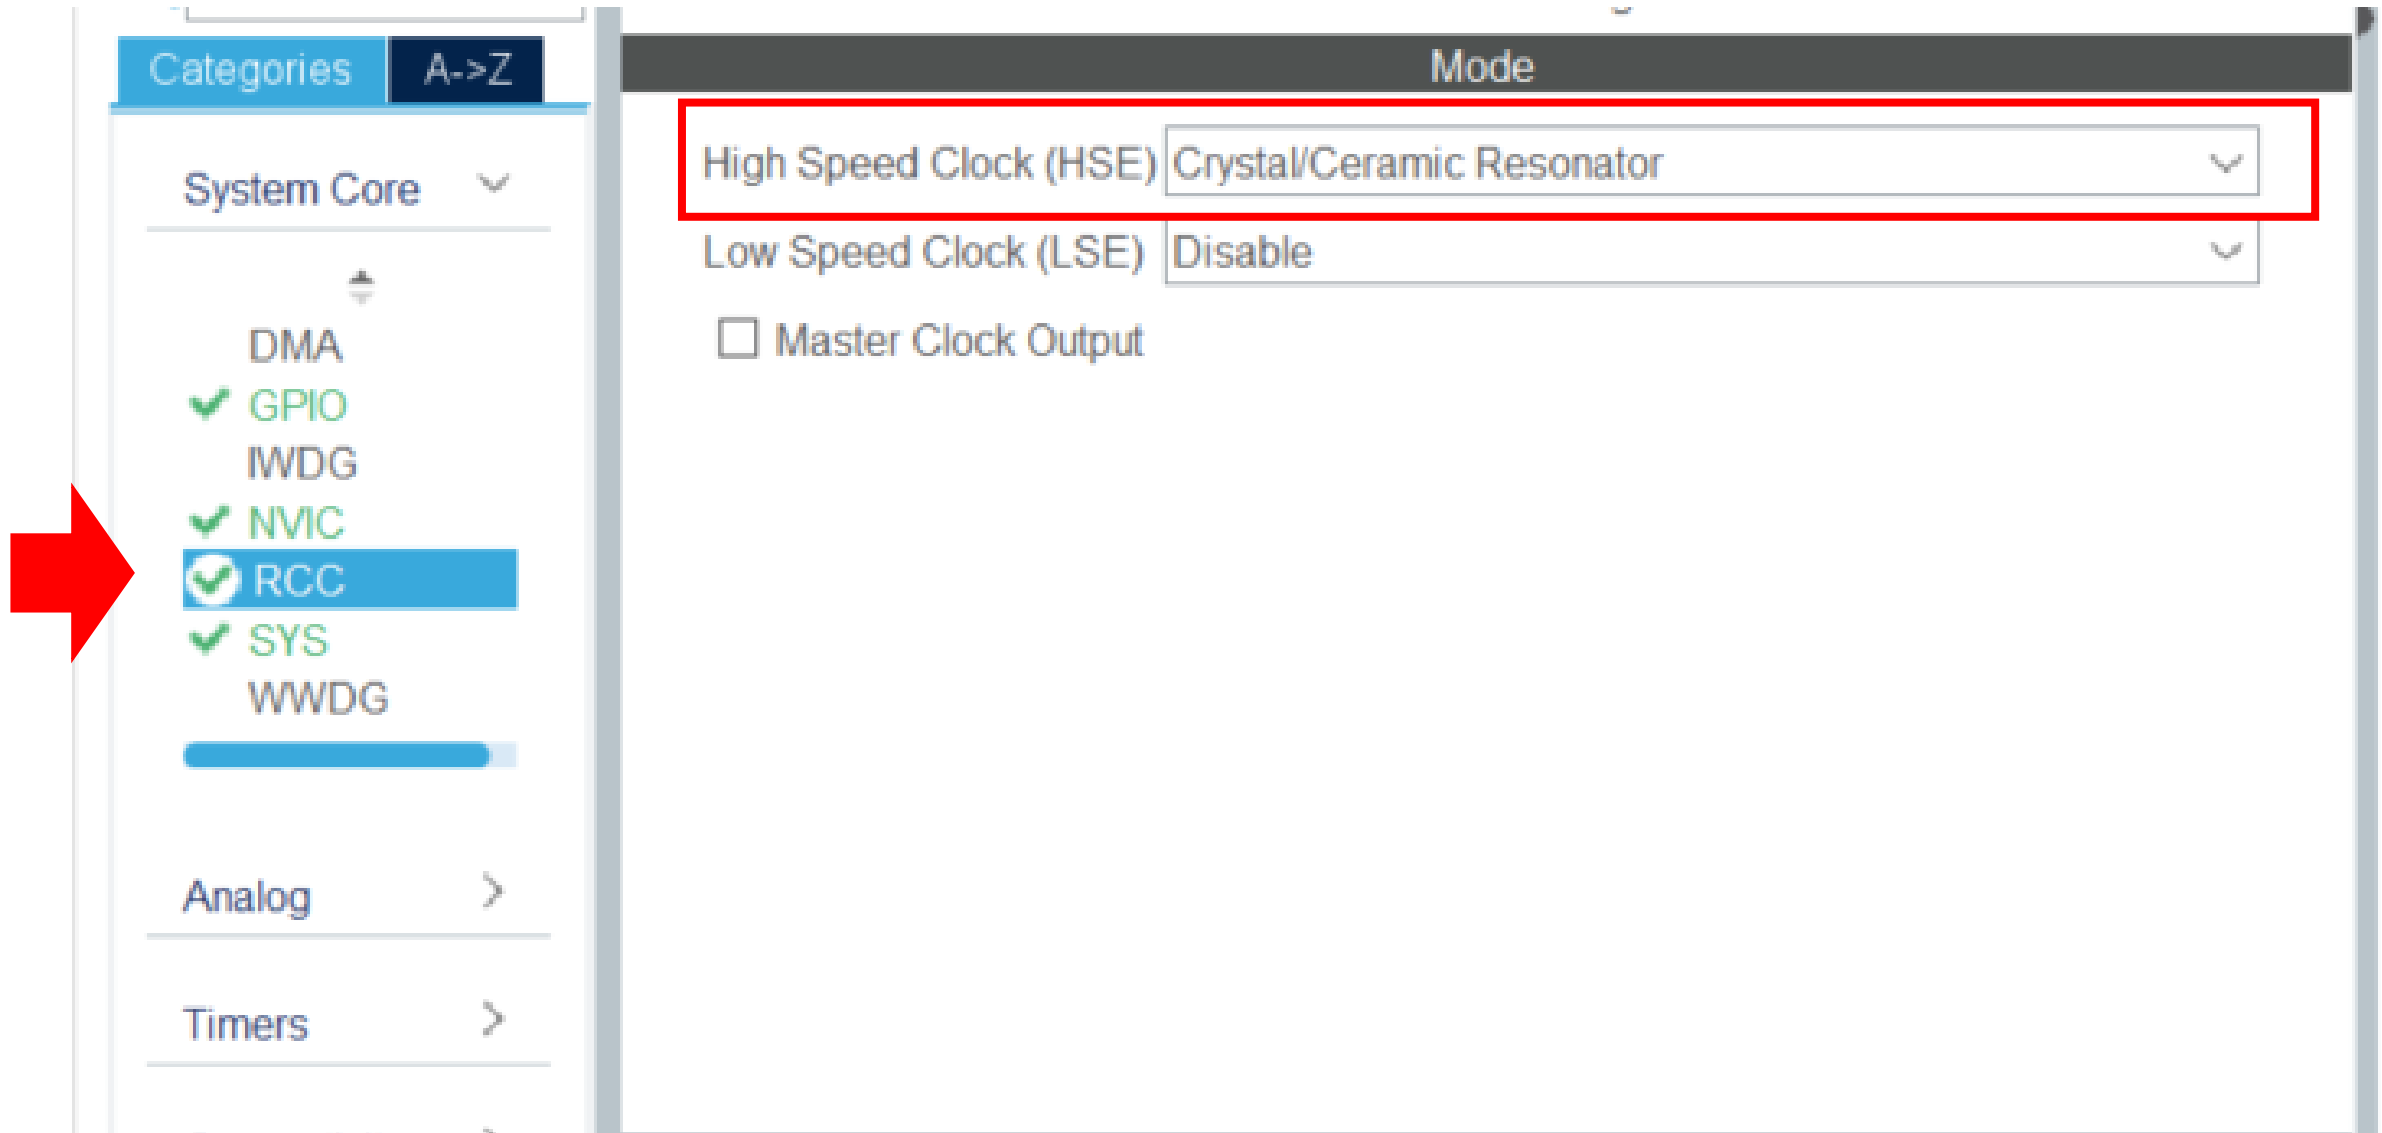


The image shows the STM32CubeMX configuration interface. On the left sidebar, the 'RCC' module is selected and highlighted in blue, with a red arrow pointing to it. The main configuration area on the right shows the 'Mode' tab. Under the 'High Speed Clock (HSE)' section, the source is set to 'Crystal/Ceramic Resonator'. The 'Low Speed Clock (LSE)' is set to 'Disable'. There is also an unchecked checkbox for 'Master Clock Output'.


Category	Mode
High Speed Clock (HSE)	Crystal/Ceramic Resonator
Low Speed Clock (LSE)	Disable
☐ Master Clock Output	

Pinout view

System view

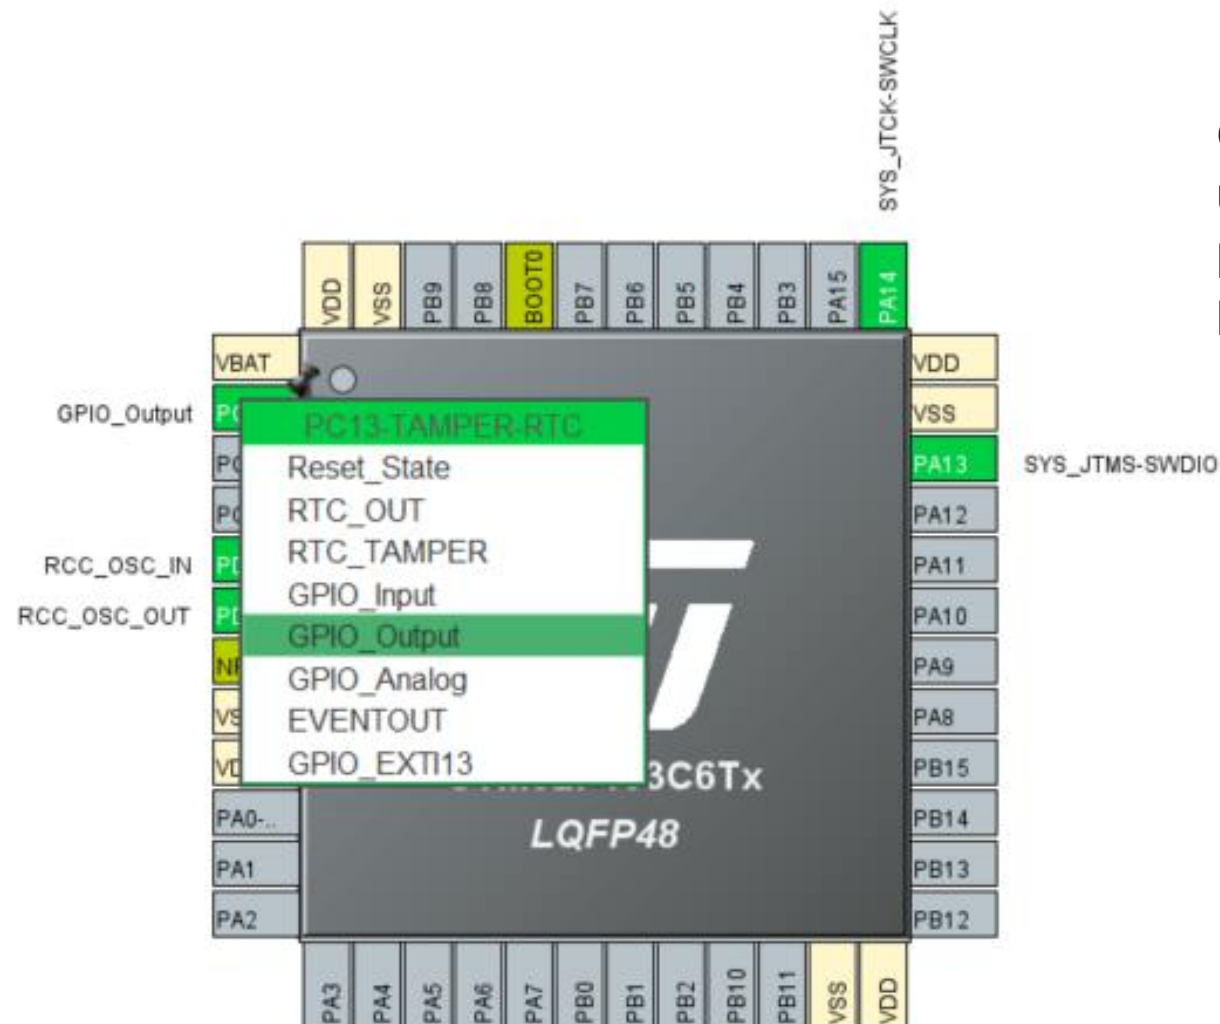

Configure os pinos que serão usados, como no exemplo o pino PC13 usado como default para o LED da placa BluePill

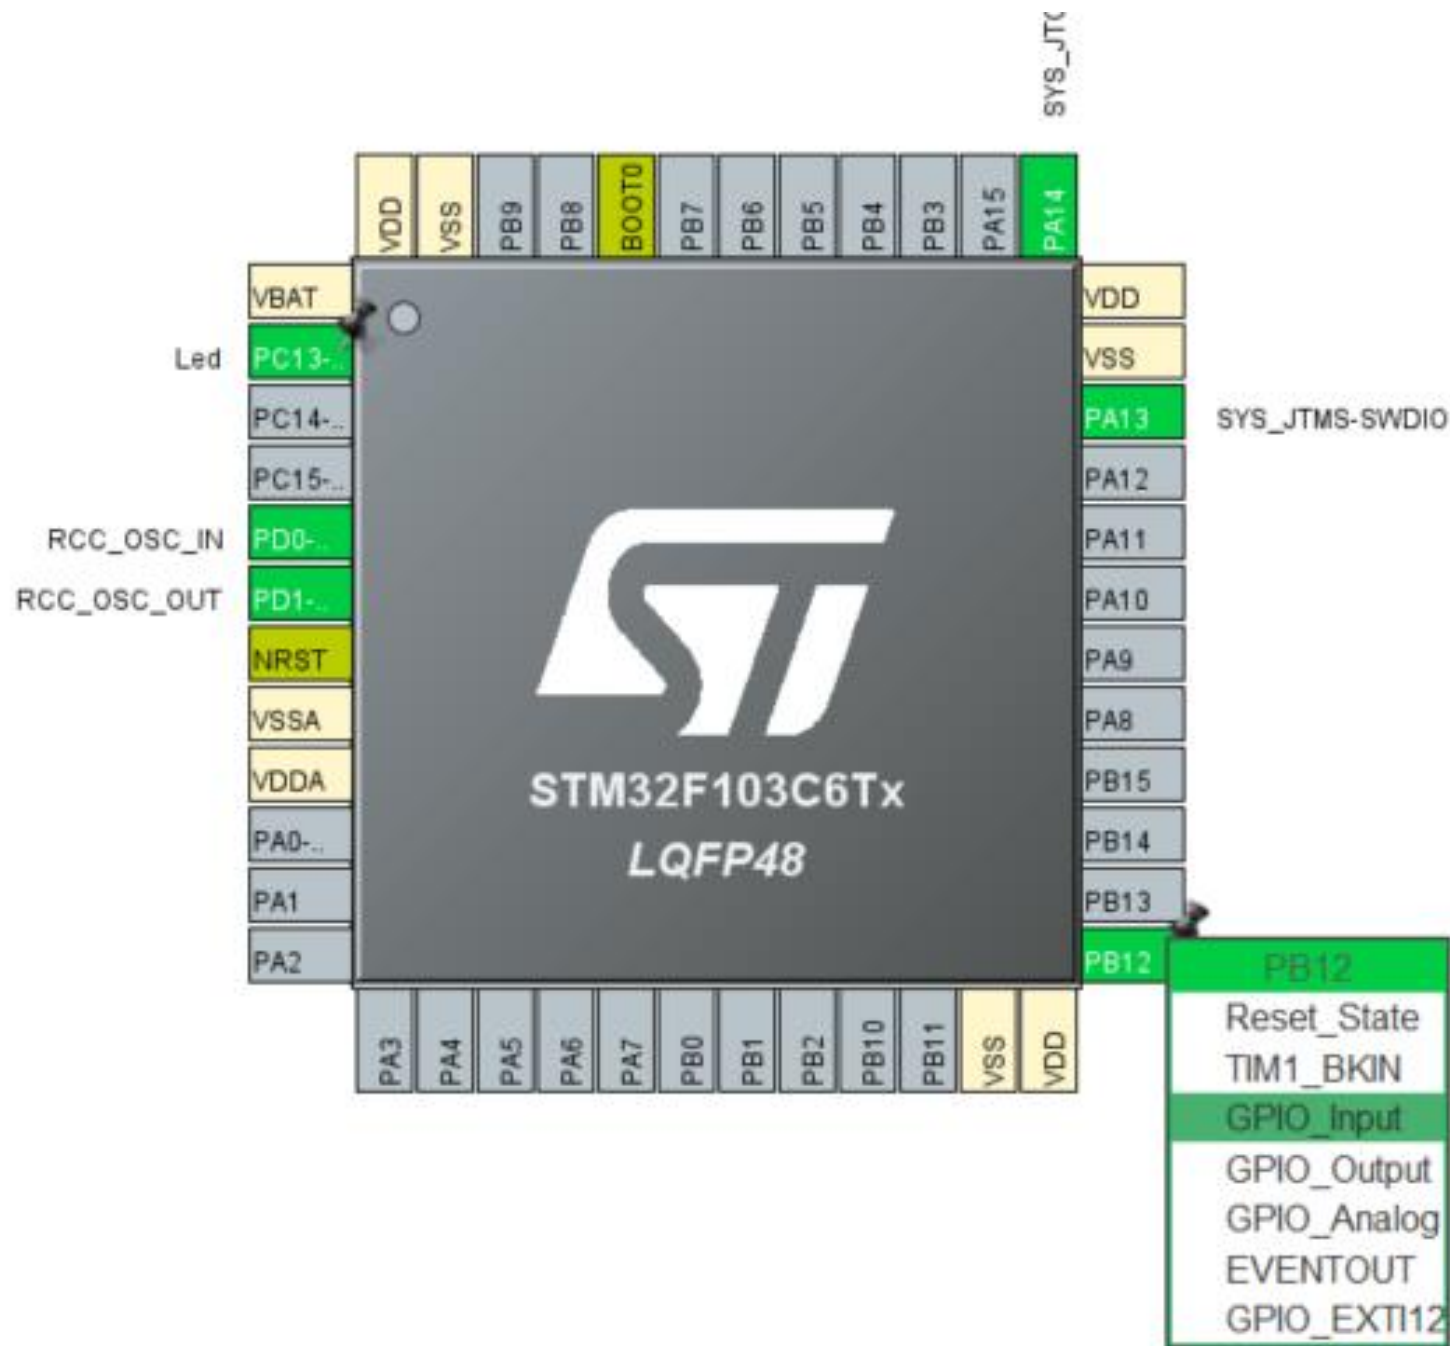

Nesse exemplo o pino PB12 está sendo configurado como entrada digital, para ler um botão à placa.



Pinout & Configuration

Clock Configuration

Software Packs

Pinout

Search

Categories A->Z

System Core

DMA

✓ GPIO

IWDG

✓ NVIC

✓ RCC

✓ SYS

WWDG

Analog

Timers

Connectivity

Computing

Middleware a...

GPIO Mode and Configuration

Mode

Configuration

Group By Peripherals

✓ GPIO

✓ RCC

✓ SYS

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin Name	Signal on Pin	GPIO output le...	GPIO mode	GPIO Pull-up/...	Maximum outp...	User Label	Modified
PB12	n/a	n/a	Input mode	Pull-up	n/a	Botao_1	✓
PC13-TAMP...	n/a	Low	Output Push P...	No pull-up and ..	Low	Led	✓

PB12 Configuration :

GPIO mode

Input mode


GPIO Pull-up/Pull-down

Pull-up

User Label

Botao_1

Para o uso do botão foi escolhido configurar um pull up no pino.



- Pull-up
- No pull-up and no pull-down
- Pull-up
- Pull-down

Pinout & Configuration

Clock Co

v Sof

Q

USART1 Mode and Configuration

Categories A->Z

System Core >

Analog >

Timers >

Connectivity v

CAN

I2C1

SPI1

✔ USART1

USART2

USB

Computing >

Middleware a... >

Mode Asynchronous v

Hardware Flow Control (RS232) Disable v

Configuration

Reset Configuration

✔ NVIC Settings

✔ DMA Settings

✔ GPIO Settings

✔ Parameter Settings

✔ User Constants

Configure the below parameters :

Q Search (Ctrl+F)

v Basic Parameters

Baud Rate	115200 Bits/s
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Configure a UART1

GERE O PRÉ-CODIGO

