
TWO-STOREY GLASS RESTING CUBE


1 GROUND FLOOR PLAN

FFL +0.15

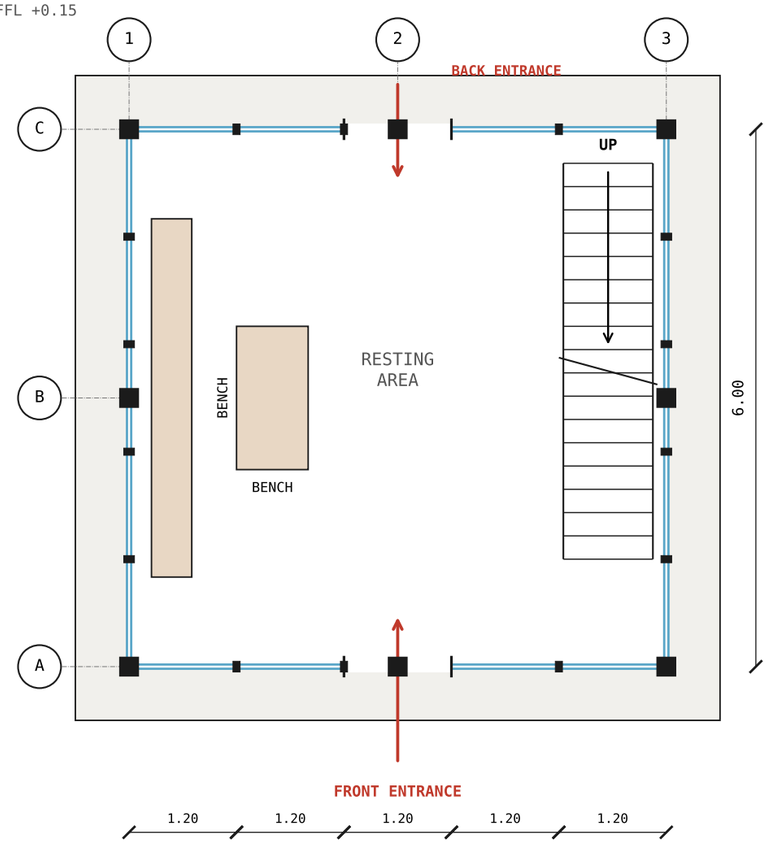


2 SECOND FLOOR PLAN

FFL +3.30

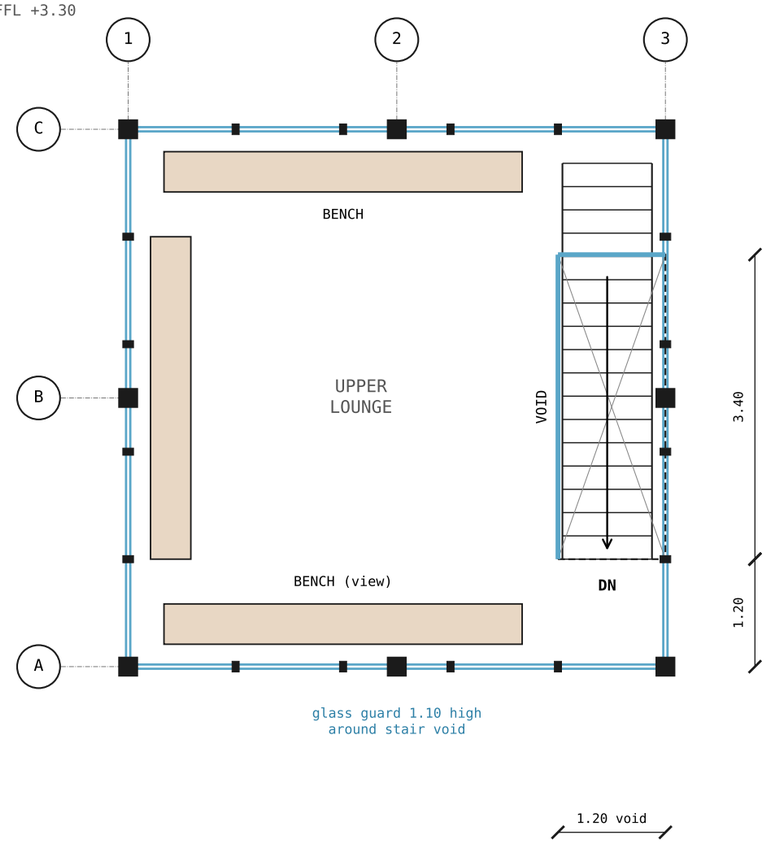


3 FRONT ELEVATION

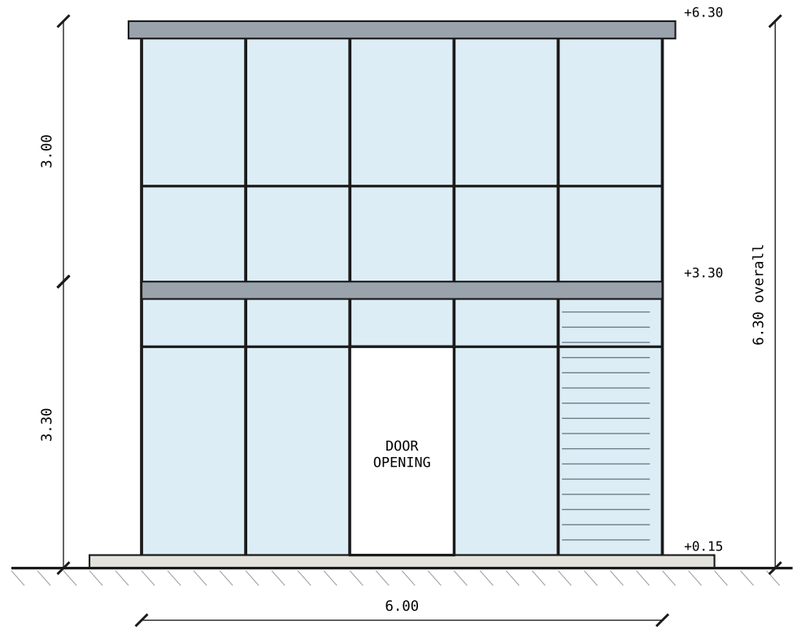


4 SECTION A-A (through stair)

looking from the right side; front on the left

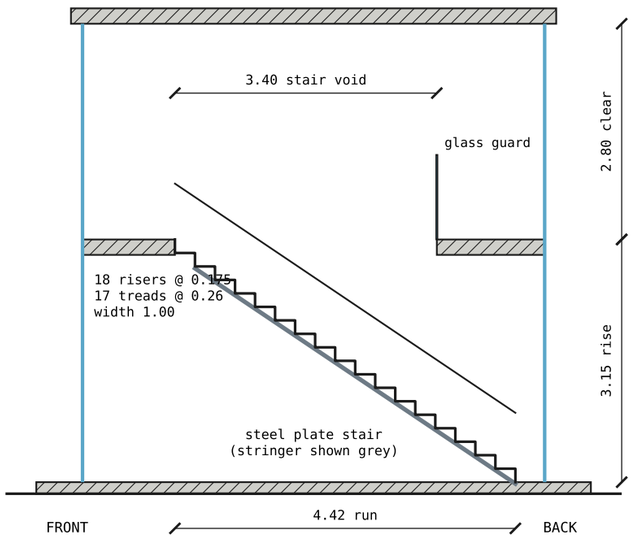

5 FRAMING PLAN

2F floor (roof same, no void)

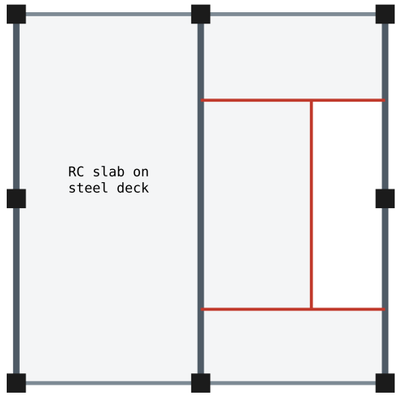

C1 SHS 150x150 column (8 pcs)

B1 W250 beam, grids 1-2-3

B2 W200 edge beam, grids A & C

T W200 trimmer around void (red)

GENERAL NOTES

1. Dimensions in meters. Origin = front-left corner.
2. Walls: 12mm tempered glass, alum. mullions @ 1.20.
3. Transoms at +2.55 (door head) and +4.40.
4. Door openings 1.20 wide x 2.40 high, front & back, centered on the middle bay.
5. Stair: steel plate treads, 1.00 wide, climbs from the back toward the front.
6. Benches: seat height 0.45, depth 0.45.


BLENDER QUICK START

- Ground slab top Z=0.15, 2F slab Z 3.10-3.30
- Roof slab 6.30 x 6.30, Z 6.10-6.30
- Columns 0.15 sq at the 8 grid points
- Glass: 0.012 thick planes; Array mullions x5


NAME:	
SHEET: A-01 PLANS	**SCALE: NTS / meters**

TWO-STOREY GLASS RESTING CUBE - 3D VIEWS


EXTERIOR (front)

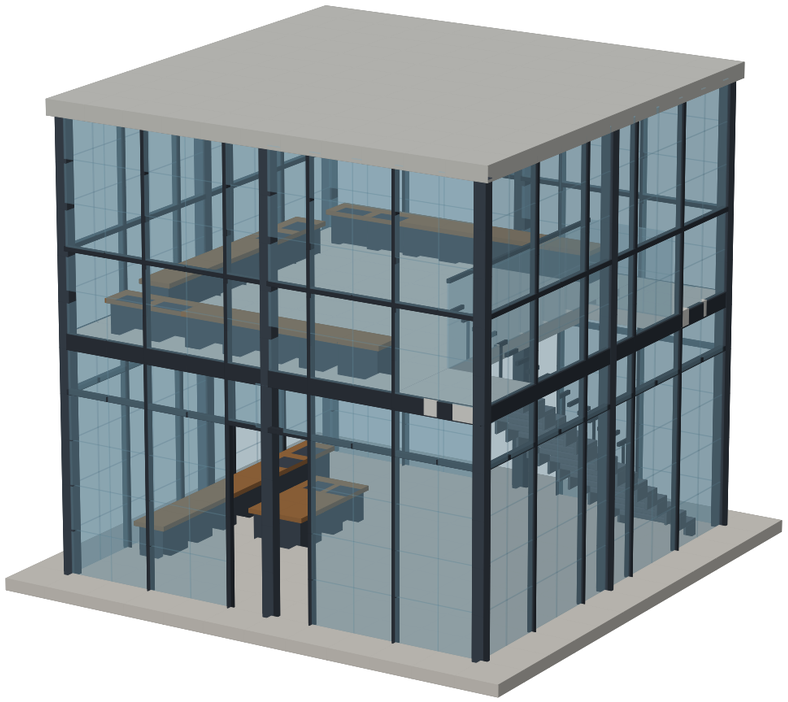

EXTERIOR (back, stair side)

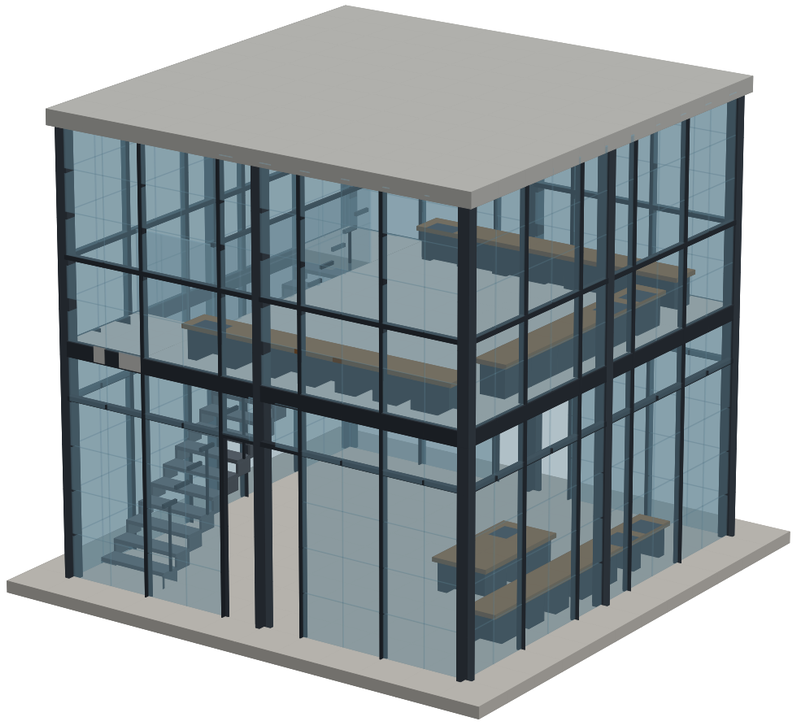

ROOF + GLASS HIDDEN - 2F & stair

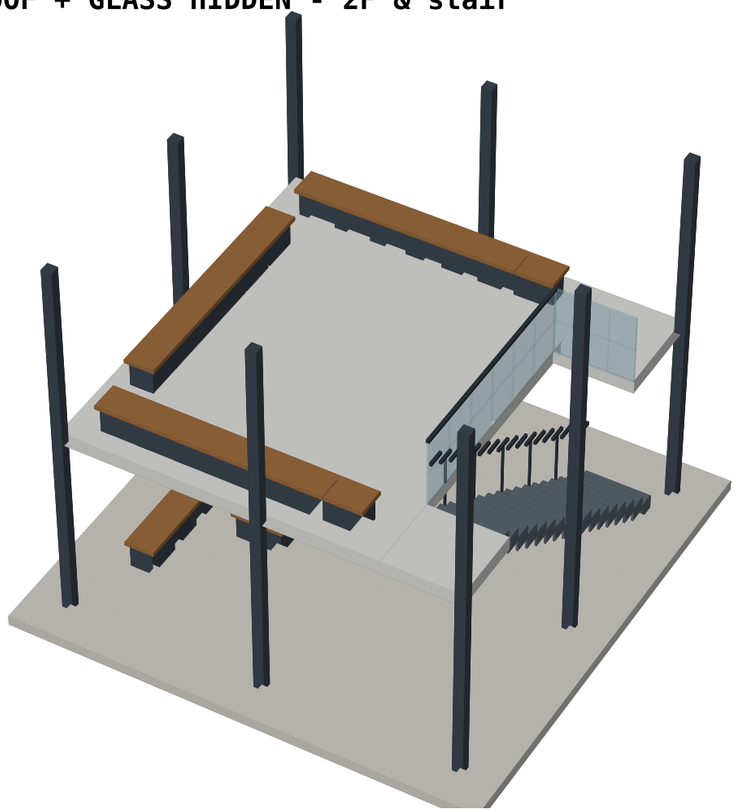

GROUND FLOOR - benches + stair

