1 SIMO Systems

Remarks

- In SIMO Systems only coding and diversity gains can be exploited (no multiplexing gains)
- To realize these gains diversity combining has to be performed
- Diversity combining schemes vary in complexity and performance
- There are many diversity combining schemes. Here we consider:
  - Maximal ratio combining (MRC)
  - Equal gain combining (EGC)
  - Selection combining (SC)
- Diversity combining problem

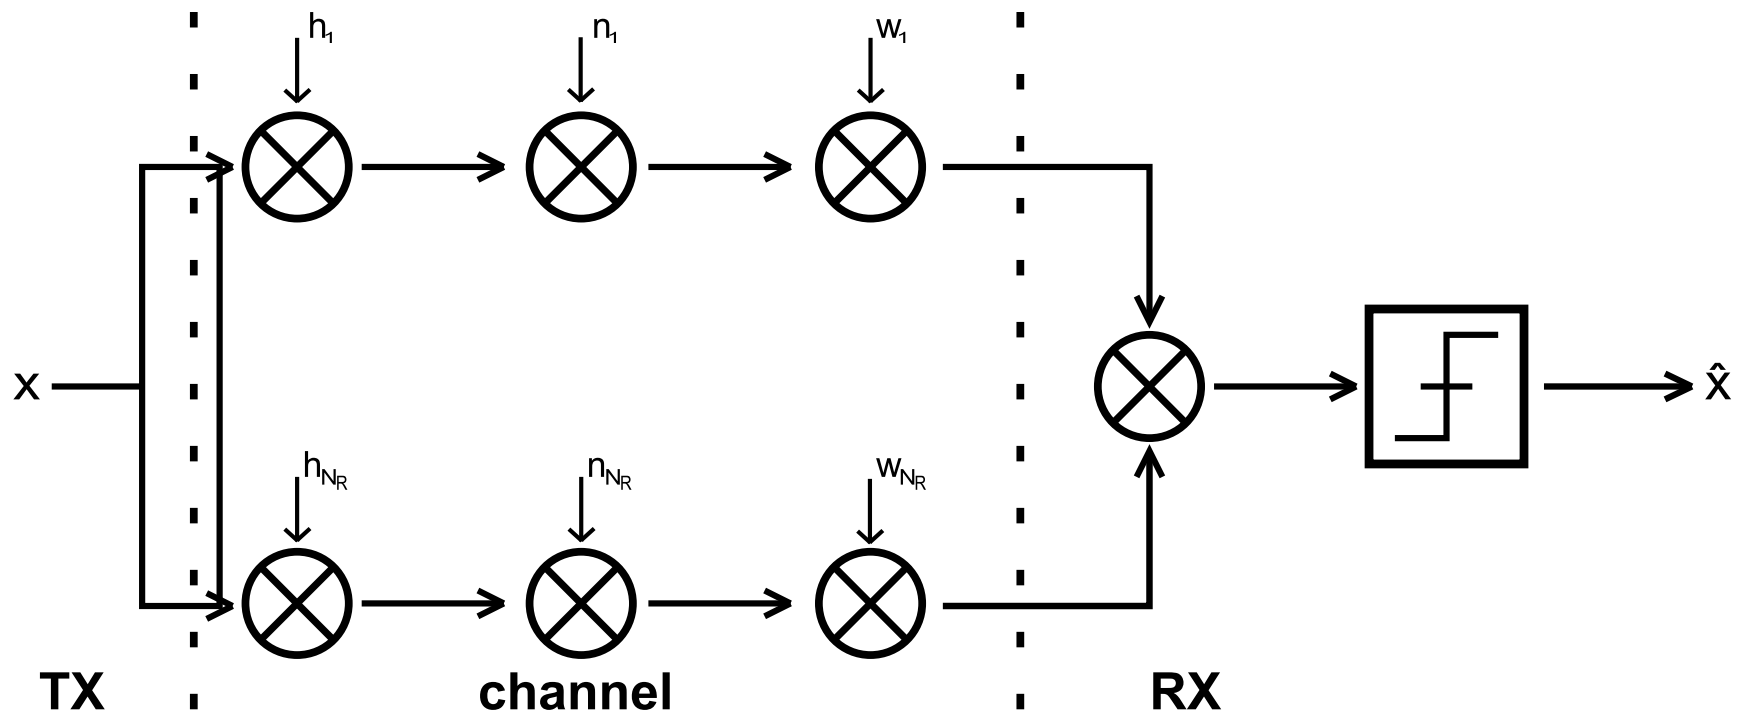

  - how to choose combining weights w_n?
  - what performance (e.g. error rate, outage probability) is achieved?
  - what diversity and coding/combining gain is achieved?

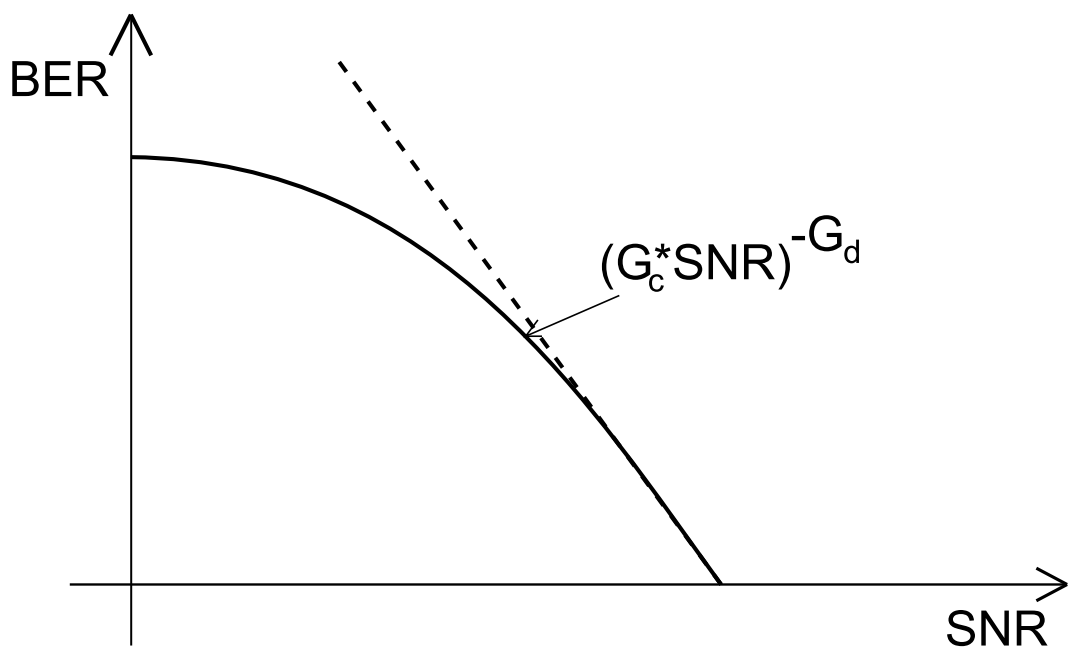

- G_c : Coding gain
- G_d : Diversity gain

1.1 Preliminaries

Consider an equivalent system:

$$y = hx + n;$$
$$\mathcal{E}\{|x^2|\} = E_s; \qquad \mathcal{E}\{|n^2|\} = \sigma_n^2; \qquad \mathcal{E}\{|h|^2\} = 1$$

- Instantaneous SNR: $\gamma_t = \frac{E_s}{\sigma_n^2} \times |h|^2$
- Average SNR: $\bar{\gamma}_t = \mathcal{E}\{\gamma_t\} = \frac{E_s}{\sigma_n^2}$

Bit and Symbol Error Rate

- The Bit and Symbol Error Rate of many modulation schemes can be expressed for given γ_t as:

$$P_e(\gamma_t) = aQ\big\{\sqrt{b\gamma_t}\big\}$$

where:

- $Q(x) = \frac{1}{\sqrt{2\pi}} \times \int_x^\infty e^{-\frac{t^2}{2}}\ dt$
- $P_e(\gamma_t)$ may be exact result or approximation
- BPSK: exact with $a = 1, b = 2$
- M-ary QAM: tight approximation with $a = 4\big(1 - \frac{1}{\sqrt{M}}\big), b = \frac{3}{M-1}$

$\big(Einschub : Gray - Code : BER = \frac{1}{\log_2 M} \times SER\big)$

- Alternative representation of Q - function:

$$Q(x) = \frac{1}{\pi} \int_0^{\frac{\pi}{2}} e^{-\frac{x^2}{2sin^2\theta}}\ d\theta$$

  $\rightarrow$ Integral limits are fixed and do not depend on integration variables!

- Average error probability

$$P_e = \mathcal{E}\big\{P_e(\gamma_t)\big\} = \int_0^\infty aQ\big(\sqrt{bx}\big)p_{\gamma_t}(x)\ \mathrm{d}x$$

  - Integral may be difficult to solve analytically
  - Integral has infinite support $\rightarrow$ numerical evaluation difficult

- Using alternative representation of Q-function we get:

$$P_e = \int_0^\infty \frac{a}{\pi} \int_0^{\frac{\pi}{2}} e^{-\frac{bx}{2sin^2\theta}} p_{\gamma_t}(x)\ d\theta\ dx$$
$$= \frac{a}{\pi} \int_0^{\frac{\pi}{2}} \int_0^\infty p_{\gamma_t}(x) e^{-\frac{b}{2sin^2\theta}}\ dx\ d\theta \qquad = \frac{a}{\pi} \int_0^{\frac{\pi}{2}} M_{\gamma_t}\big(\frac{b}{2sin^2\theta}\big)\ d\theta$$

  where:

- $M_{\gamma_t}(s) = \int_0^\infty p_{\gamma_t}(x) e^{-sx} \ dx$ is the Laplace transform of p_{γ_t}
- $M_{\gamma_t}(-s)$ is the so called Moment Generation Function (MGF) of p_{γ_t}
- Here, we will also refer to $M_{\gamma_t}(s)$ as MGF
- $M_{\gamma_t}(s)$ is sometimes easier to obtain than p_{γ_t}
- The above integral can be easily evaluated numerically because of the finite integral limits

Outage probability

- The outage probability is the probability that the channel cannot support a certain rate, R, i.e. (where γ_T is the threshold SNR):

$$C = \log_2(1+\gamma_t) < R \quad \leftrightarrow \quad \gamma_t < 2^R - 1 \triangleq \gamma_T$$

Thus, the outage probability is given by:

$$P_{out} = P_0 \gamma_t < \gamma - T \ = \int_0^{\gamma_T} p_{\gamma_t}(x) \ dx$$

- Using the inverse Laplace Transform

$$p_{\gamma_t}(x) = \frac{1}{2\pi j} \int_{c-j\omega}^{c+j\omega} M_{\gamma_t}(s) e^{sx} \ dx$$



where $c > 0$ is a small constant that lies in the region of convergence of the integral, we obtain:

- 1.

$$P_{out} = \frac{1}{2\pi j} \int_{c-j\omega}^{c+j\omega} M_{\gamma_t}(s) \int_0^{\gamma_T} e^{sx} \ dx \ ds = \frac{1}{2\pi j} \int_{c-j\omega}^{c+j\omega} M_{\gamma_t}(s) e^{\gamma_T s} \ \frac{ds}{s}$$

$\big($lower integral limit is 0 since $p_{\gamma_t}(0) = 0\big)$

- and 2.:

$$p_{\gamma_t}(x) = \int_0^x p_{\gamma_t}(t) \ dt = 0$$

for $x = 0$ note: $p_{\gamma_t}(x) \xleftrightarrow[transform]{Laplace} \frac{1}{s} M_{\gamma_t}(s)$

General combining scheme

$$y = \Big(\sum_{n=1}^{N_R} h_n w_n \Big) x + \sum_{n=1}^{N_R} w_n n_n$$

$$\gamma_t = \frac{\epsilon_s \left| \sum_{n=1}^{N_R} h_n w_n \right|^2}{\sigma_n^2 \sum_{N=1}^{N_R} |w_n|^2}$$

where w_n depends on the particular combining scheme.

1.2 MRC (Maximum Ratio Combining)

- what weight w_n maximize γ_t?
  - Cauchy-Schwarz inequality

$$\Big|\sum_{n=1}^{N_R} h_n w_n\Big|^2 \leq \sum_{n=1}^{N_R} |h_n|^2 \cdot \sum_{n=1}^{N_R} |w_n|^2$$

    where equality holds if and only if $w_n = c \cdot h_n^*$ for some non-zero constant c.
  - for $w_n = h_n^*$, we obtain

$$\gamma_t = \frac{\epsilon_s}{\sigma_n^2} \cdot \frac{\left(\sum_{n=1}^{N_R} |h_n|^2\right)^2}{\sum_{n=1}^{N_R} |h_n|^2} = \frac{\epsilon_s}{\sigma_n^2} \sum_{n=1}^{N_R} |h_n|^2$$

  - $w_n = h_n^* \forall n$ are the MRC combining weights.
- For performance analysis we assume <u>independent identically distributed (IID)</u> Rayleigh fading

$$\rightarrow \mathcal{E}\{|h_n|^2\} = 1; \quad \bar{\gamma} = \frac{\epsilon_s}{\sigma_n^2}; \quad \gamma_n = \frac{\epsilon_s}{\sigma_n^2} |h_n|^2$$

$$p_\gamma(x) = \frac{1}{\bar{\gamma}} e^{-\frac{x}{\bar{\gamma}}}; \quad x \geq 0$$

$$M_\gamma(s) = \frac{1}{1 + s\bar{\gamma}}$$

- Error rate

$$\gamma_t = \sum_{n=1}^{N_R} \gamma_n$$

  $\rightarrow$ sum of IID random variables (r.v.s.)

$$M_{\gamma_t}(s) = \Big(M_\gamma(s)\Big)^{N_R} = \frac{1}{(1 + s\bar{\gamma})^{N_R}} = \frac{1}{\bar{\gamma}^{N_R}} \cdot \frac{1}{(s + \frac{1}{\bar{\gamma}})^{N_R}}$$

  inverse Laplace-transform (from tables)

$$p_{\gamma_t}(x) = \frac{1}{\bar{\gamma}^{N_R}} \cdot \frac{x^{N_R - 1}}{(N_R - 1)!} e^{-\frac{x}{\bar{\gamma}}}; \quad x \geq 0$$

- Direct approach

$$p_e = \int_0^\infty a \cdot Q\big(\sqrt{ax}\big) p_{\gamma_t}(x)\ dx = a\Big(\frac{1-\mu}{2}\Big)^{N_R} \cdot \sum_{n=0}^{N_R - 1} \binom{N_R - 1 + n}{n} \Big(\frac{1+\mu}{2}\Big)^n$$

  where $\mu = \sqrt{\dfrac{b\bar{\gamma}}{2 + b\bar{\gamma}}}$

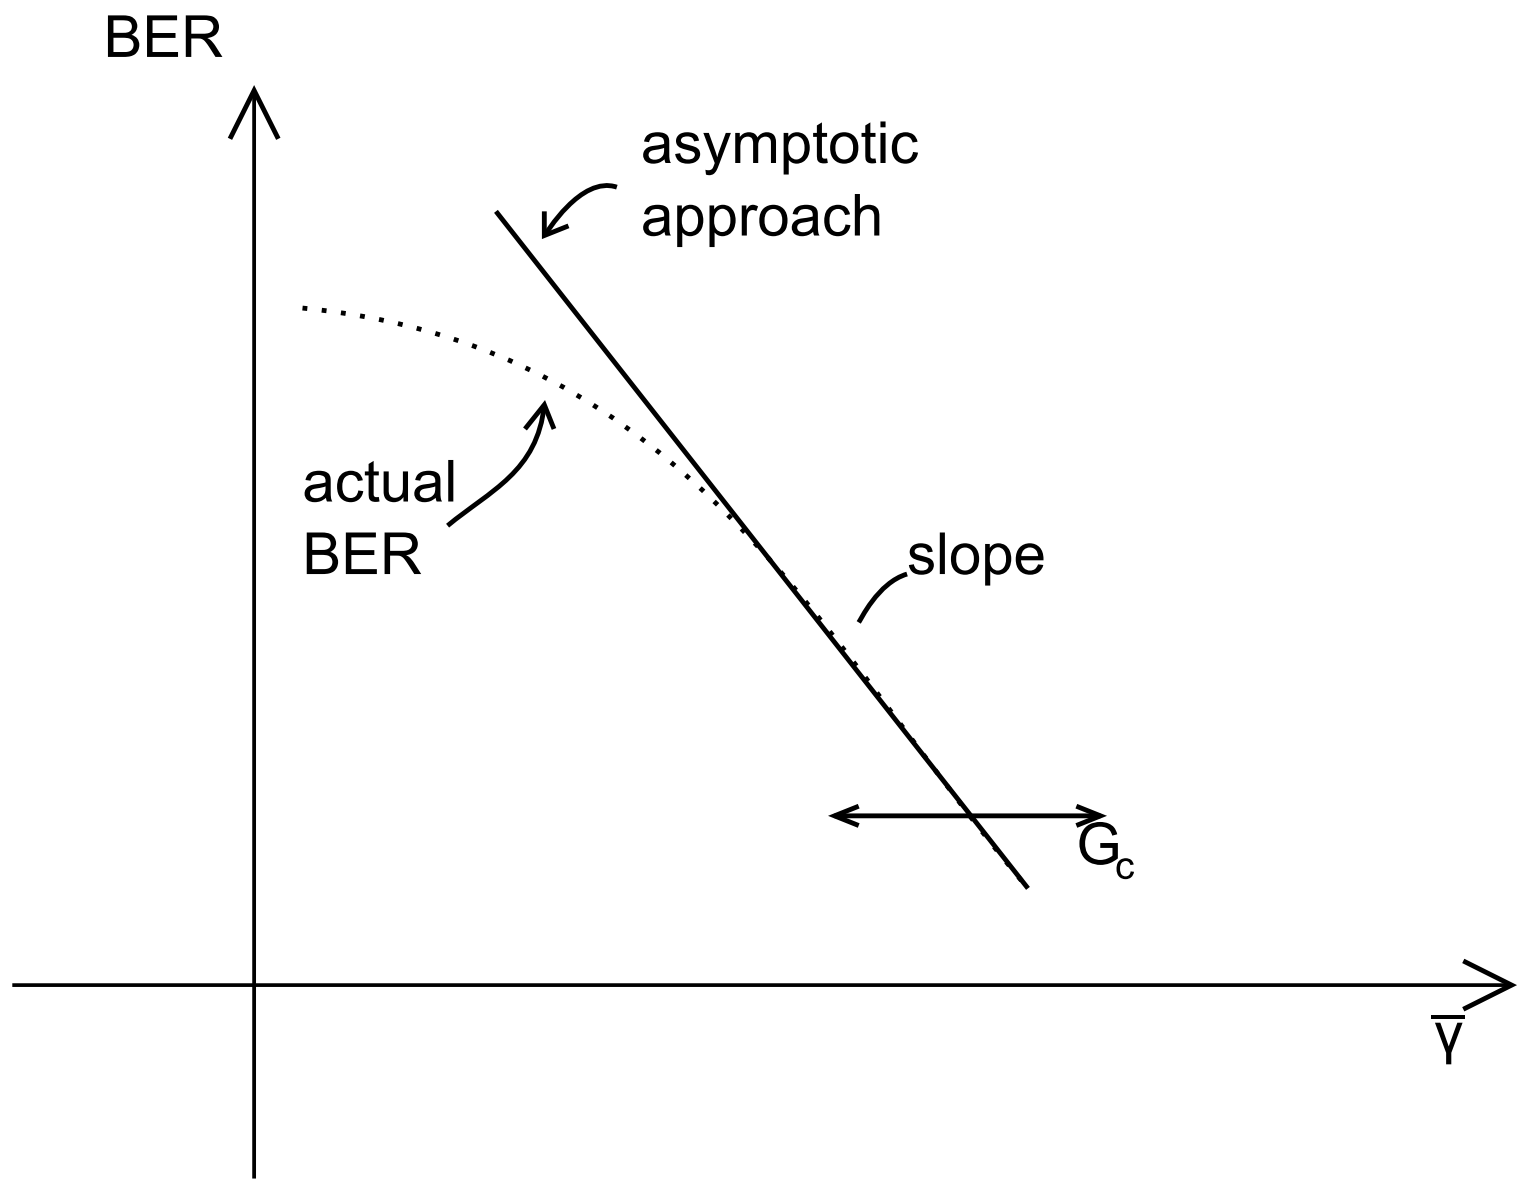

- MGF approach

$$p_e = \frac{a}{\pi}\int_0^{\frac{\pi}{2}} M_{\gamma_t}\Big(\frac{b}{2\sin^2\theta}\Big)\;d\theta$$
$$= \frac{a}{\pi}\int_0^{\frac{\pi}{2}} \frac{1}{\bar{\gamma}^{N_R}\big(\frac{b}{\sin^2\theta}+\frac{1}{\bar{\gamma}}\big)^{N_R}}\;d\theta \quad \text{(numerisch berechnen!)}$$

- high SNR: $\bar{\gamma}\to\infty \iff \frac{1}{\bar{\gamma}}\to 0$

$$p_e = \frac{a}{\pi}\cdot\frac{1}{\bar{\gamma}^{N_R}}\cdot\Big(\frac{2}{b}\Big)^{N_R}\int_0^{\frac{\pi}{2}}\sin^{2N_R}\theta\;d\theta$$

(from MGF approach: $\displaystyle\int_0^{\frac{\pi}{2}}\sin^{2N_R}\theta\;d\theta = \frac{\pi}{2^{N_R+1}}\cdot\binom{2N_R}{N_R}$

$$= \frac{a}{2^{N_R+1}\cdot b^{N_R}}\left(2N_R \quad N_R\right)\frac{1}{\bar{\gamma}^{N_R}} \quad \text{as } \bar{\gamma}\to\infty$$
$$\stackrel{!}{=} \Big(\frac{1}{G_c\bar{\gamma}}\Big)$$

where: Diversity gain: $G_d = N_R$

Combining/Coding gain: $G_c = 2b\Big(\frac{a}{2}\binom{2N_R}{N_R}\Big)^{-\frac{1}{N_R}}$

- MRC exploits the maximal possible diversity
- Diversity gain is not affected by correlation as the branches are not <u>fully</u> correlated
- Diversity gain depends on fading distribution

Outage probability

$$
\begin{aligned}
P_{out} &= \int_0^{\gamma_T} p_{\gamma_t}(x)\ dx = \frac{1}{\bar{\gamma}^{N_R}} \int_0^{\gamma_T} \frac{x^{N_R-1}}{(N_R-1)!} e^{-\frac{x}{\bar{\gamma}}}\ dx \\
&= 1 - e^{-\frac{\gamma_T}{\bar{\gamma}}} \cdot \sum_{n=1}^{N_R} \frac{\left(\frac{\gamma_T}{\bar{\gamma}}\right)^n}{(n-1)!}
\end{aligned}
$$

- Approximation (Taylor series): $\bar{\gamma} \to \infty : -e^{-\frac{x}{\bar{\gamma}}} = 1 - \frac{x}{\bar{\gamma}} + O(\frac{1}{\bar{\gamma}})$ where a function $f(x)$ is $O(x)$ if $\lim\limits_{x\to\infty} \frac{f(x)}{x} = 0$.

$$
\Rightarrow P_{out} = \frac{1}{\gamma^{N_R}} \int\limits_0^{\gamma_T} \frac{x^{N_R-1}}{(N_R-1)!} \left(1 - \frac{x}{\bar{\gamma}} + O\left(\frac{1}{\bar{\gamma}}\right)\right)
$$

- Diversity and coding gain can also be defined for P_{out}

1.3 EGC (Equal Gain Combining)

Combining Weights

- For MRC, both, the amplitudes and phases of the channel gains $h_n = |h_n| e^{j\varphi_n}$ have to be known (or estimated in practice)
- In EGC it is assumed that only the phases are known and weights $w_n = e^{-j\varphi_n}$ are used.

$$
\begin{aligned}
\Rightarrow \gamma_t &= \frac{E_s}{\sigma_n^2} \frac{\left| \sum\limits_{n=1}^{N_R} |h_n| e^{j\varphi_n} e^{-j\varphi_n} \right|^2}{\sum\limits_{n=1}^{N_R} |e^{-j\varphi_n}|^2} = \frac{E_s}{\sigma_n^2} \frac{1}{N_R} \left(\sum_{n=1}^{N_R} |h_n| \right)^2 \\
&= \frac{1}{N_R} \left(\sum_{n=1}^{N_R} \sqrt{\gamma_n} \right)^2 ;\ \text{with } \gamma_n = \frac{E_s}{\sigma_n^2} |h_n|^2
\end{aligned}
$$

Performance Analysis

- IID case
  $\Rightarrow \sqrt{\gamma_n}$ is Rayleigh distributed
  $\Rightarrow$ Exact analysis is much more difficult than for MRC $\Rightarrow$ see book by Simon & Alouini p.341
- Approximate result

$$
P_e = \frac{a}{2} \left[1 - \sqrt{\frac{2b\bar{\gamma}}{5 + 2b\bar{\gamma}}} \sum_{n=0}^{N_R-1} \frac{\binom{2n}{n}}{4^n (1 + \frac{2}{5} b\bar{\gamma})^n} \right]
$$

- high SNR
  $\Rightarrow$ use high SNR analysis of Wang & Giannakis, 2003
  $\Rightarrow$ at high SNR, only pdf of γ_n around 0 is relevant for performance

$$\Rightarrow \overset{\text{Rayleigh}}{p_\gamma(x)} = \frac{1}{\bar{\gamma}} e^{-\frac{x}{\bar{\gamma}}} \overset{\text{Taylor Serie}}{=} \frac{1}{\bar{\gamma}} + O\left(\frac{1}{\bar{\gamma}}\right) \text{ as } x \to 0$$

- need pdf γ_t: (γ_n bekannt, $\rightarrow$ ges.: Wurzel, etc.)
  (cumulative distribution function of $\sqrt{\gamma}$ ($\overset{\text{i.i.d}}{=}$ $\sqrt{\gamma_n}$) (cdf))

$$P_{\sqrt{\gamma}}(x) = \Pr\big\{\sqrt{\gamma} \le x\big\} = \Pr\big\{\gamma \le x^2\big\} = P_\gamma(x^2) = \text{cdf of } \gamma$$
$$\rightarrow p_{\sqrt{\gamma}}(x) = \frac{d}{dx} P_{\sqrt{\gamma}}(x) = 2x \cdot p_\gamma(x^2) = \frac{2x}{\bar{\gamma}} + O\big(\frac{1}{\bar{\gamma}}\big)$$

- Laplace Transformation to MGF

$$\rightarrow M_{\sqrt{\gamma}}(s) = \mathcal{L}\big\{p_{\sqrt{\gamma}}(x)\big\} = \frac{2}{\bar{\gamma}} \cdot \frac{1}{s^2} + O\big(\frac{1}{\bar{\gamma}}\big)$$
$$\sqrt{\gamma_t} = \sum_{n=1}^{N_R} \frac{\sqrt{\gamma_n}}{N_R}$$
$$M_{\sqrt{\gamma_t}}(s) = \mathcal{E}\Big\{\exp(-s\sqrt{\gamma_t})\Big\} = \mathcal{E}\Big\{\exp(-\frac{s}{\sqrt{N_R}} \cdot \sum_{n=1}^{N_R} \sqrt{\gamma_n})\Big\} = \Big(\mathcal{E}\Big\{\exp(-\frac{s}{\sqrt{N_R}} \cdot \sqrt{\gamma_n}\Big\}\Big)^{N_R}$$
$$= \Big(M_{\sqrt{\gamma}}(\frac{s}{\sqrt{N_R}})\Big)^{N_R} = \Big(\frac{2}{\bar{\gamma}} \cdot \frac{N_R}{s^2}\Big)^{N_R} + O\Big(\frac{1}{\bar{\gamma}^{N_R}}\Big)$$

- inverse Laplace Transform

$$p_{\sqrt{\gamma_t}}(x) = \mathcal{L}^{-1}\Big\{M_{\sqrt{\gamma_t}}(s)\Big\} = \Big(\frac{2N_R}{\bar{\gamma}}\Big)^{N_R} \cdot \frac{x^{2N_R-1}}{(2N_R-1)!} + O\Big(\frac{1}{\bar{\gamma}^{N_R}}\Big)$$
$$P_{\gamma_t}(x) = \Pr\big\{\gamma_t \le x\big\} = \Pr\big\{\sqrt{\gamma_t} \le \sqrt{x}\big\} = P_{\sqrt{\gamma_t}}(\sqrt{x}) \rightarrow \text{cdf of } \sqrt{\gamma_t}$$
$$p_{\gamma_t}(x) = \frac{d}{dx} P_{\gamma_t}(x) = \frac{1}{2\sqrt{x}} \cdot p_{\gamma_t}(\sqrt{x}) = \frac{1}{2}\Big(\frac{2N_R}{\bar{\gamma}}\Big)^{N_R} \cdot \frac{x^{N_R-1}}{(2N_R-1)!} + O\big(\bar{\gamma}^{-N_R}\big)$$
$$\rightarrow M_{\gamma_t}(s) = \mathcal{L}\big\{p_{\gamma_t}(x)\big\} = \frac{1}{2}\Big(\frac{2N_R}{\bar{\gamma}}\Big)^{N_R} \cdot \frac{(N_R-1)!}{(2N_R-1)!\ b^{N_R}} + O\big(\bar{\gamma}^{-N_R}\big)$$

- Error Probability:

$$
\begin{aligned}
P_e &= \frac{a}{\pi}\int\limits_0^{\frac{\pi}{2}} M_{\gamma_t}\left(\frac{b}{2\sin^2(\theta)}\right)\mathrm{d}\theta \\
&= \frac{a}{\pi}\frac{1}{2}\left(\frac{2N_R}{\bar{\gamma}}\right)^{N_R}\frac{(N_R-1)!}{(2N_R-1)!}\frac{2^{N_R}}{b^{N_R}}\underbrace{\int\limits_0^{\frac{\pi}{2}}\sin^{2N_R}(\theta)\mathrm{d}\theta}_{\frac{\pi}{2^{2N_R+1}}\binom{2N_R}{N_R}=\frac{\pi(2N_R)!}{2^{2N_R+1}(N_R!)^2}} + O\left(\frac{1}{\bar{\gamma}^{N_R}}\right) \\
&= \frac{aN_R^{N_R}}{2b^{N_R}N_R!}\frac{1}{\bar{\gamma}^{N_R}} + O\left(\frac{1}{\bar{\gamma}^{N_R}}\right) \stackrel{!}{=} \left(\frac{1}{G_c}\right)^{G_d}
\end{aligned}
$$

$\Longrightarrow$ Diversity gain: $G_d = N_R$

$\Longrightarrow$ Combining gain: $G_c = \frac{b}{N_R}\left(\frac{2N_R!}{a}\right)^{\frac{1}{N_R}}$

vergleiche auch Blatt mit Kurven $\overline{\underline{\text{III}}}$ und $\overline{\underline{\text{IV}}}$

A similar asymptotic analysis can be conducted for the outage probability.

1.4 SC (Selection Combining)

Combining weights

- only the strongest branch is chosen
- strongest branch: $\hat{n} = \underset{n}{\operatorname{argmax}}\gamma_n \longrightarrow \gamma_t = \gamma_{\hat{n}}$
- only on RF receiver chain required $\rightarrow$ saves hardware complexity

Performance analysis

- cdf of: γ_t

$$
\begin{aligned}
P_{\gamma_t}(x) &= \Pr\{\gamma_{\hat{n}} \le x\} = \Pr\{\gamma_1 \le x \cap \gamma_2 \le x \cap \dots \gamma_{N_R} \le x\} \\
&\stackrel{(IID)}{=} \Big(\Pr\{\gamma_n \le x\}\Big)^{N_R} = \Big(P_\gamma(x)\Big)^{N_R}
\end{aligned}
$$

- pdf:

$$
\begin{aligned}
p_{\gamma_t}(x) &= \frac{d}{dx}P_{\gamma_t}(x) = N_R\big(P_\gamma(x)\big)^{N_R-1}\cdot p_\gamma(x) \\
\text{where:}\qquad p_{\gamma_t}(x) &= \frac{1}{\bar{\gamma}}e^{-\frac{x}{\bar{\gamma}}};\quad x \ge 0 \\
P_\gamma(x) &= \int_0^x p_\gamma(x)\ dx = 1 - e^{-\frac{x}{\bar{\gamma}}};\quad x \ge 0 \\
\rightarrow p_{\gamma_t}(x) &= \frac{N_R}{\bar{\gamma}}\big(1 - e^{-\frac{x}{\bar{\gamma}}}\big)^{N_R-1}e^{-\frac{x}{\bar{\gamma}}};\quad x \ge 0
\end{aligned}
$$

Error probability

- direct approach $\rightarrow$ closed-form solution possible
- MGF approach
  - Binomial expansion

$$p_{\gamma_t}(x) = \frac{N_R}{\bar{\gamma}} e^{-\frac{x}{\bar{\gamma}}} \sum_{n=0}^{N_R-1} \binom{N_R-1}{n} 1^{N_R-1-n} \Big(-e^{-\frac{x}{\bar{\gamma}}}\Big)^n$$
$$= \frac{N_R}{\bar{\gamma}} \sum_{n=0}^{N_R-1} \binom{N_R-1}{n} \cdot (-1)^n e^{-\frac{x(n+1)}{\bar{\gamma}}}; \quad x \geq 0$$

  - MGF

$$M_{\gamma_t}(s) = \frac{N_R}{\bar{\gamma}} \sum_{n=0}^{N_R-1} \binom{N_R-1}{n} (-1)^n \frac{1}{s + \frac{n+1}{\bar{\gamma}}}$$

  -

$$P_e = \frac{a}{\pi} \int_0^{\frac{\pi}{2}} M_{\gamma_t}\Big(\frac{b}{2\sin^2\theta}\Big)\, d\theta = \frac{aN_R}{\pi\bar{\gamma}} \sum_{n=0}^{N_R-1} \binom{N_R-1}{n} (-1)^n \int_0^{\frac{\pi}{2}} \frac{\mathrm{d}\theta}{\frac{b}{2\sin^2\theta} + \frac{n+1}{\bar{\gamma}}}$$

$\rightarrow$ can be evaluated numerically

  - high SNR approach $\Rightarrow$ $\bar{\gamma} \rightarrow \infty$

$$p_{\gamma_t} = \frac{N_R}{\bar{\gamma}} \left[1 - \exp\left(-\frac{x}{\bar{\gamma}}\right)\right]^{N_R-1} \exp\left(-\frac{x}{\bar{\gamma}}\right)$$
$$\overset{\bar{\gamma}\rightarrow\infty}{=} \frac{N_R}{\bar{\gamma}} \left[1 - \left(1 - \frac{x}{\bar{\gamma}} + O\left(\bar{\gamma}^{-1}\right)\right)\right]^{N_R-1} \left(1 - \frac{x}{\bar{\gamma}} + O\left(\bar{\gamma}^{-1}\right)\right) i$$
$$= \frac{N_R}{\bar{\gamma}^{N_R}} x^{N_R-1} + o\left(\bar{\gamma}^{-N_R}\right)$$

  - MGF:

$$M_{\gamma_t}(s) = \frac{N_R}{\bar{\gamma}^{N_R}} \frac{(N_R-1)!}{s^{N_R}} + O\left(\bar{\gamma}^{-N_R}\right)$$
$$\Big[\rightarrow P_e = \frac{a}{\pi} \int_0^{\frac{\pi}{2}} M_{\gamma_t}\left(\frac{b}{2\sin^2(\theta)}\right) \mathrm{d}\theta\Big]$$
$$= \frac{a(2N_R)!}{b^{N_R} 2^{N_R+1} N_R!} \frac{1}{\bar{\gamma}^{N_R}} + O(\bar{\gamma}^{-N_R})$$

$\Longrightarrow$ Diversity gain: $G_d = N_R$

$\Longrightarrow$ Combining gain: $G_c = 2b\left(\frac{2N_R!}{a(2N_R)!}\right)^{\frac{1}{N_R}}$

– Outage Probability

$$P_{out} = \Pr\{\gamma_{\hat{n}} \leq \gamma_T\} = P_{\gamma_{\hat{n}}}(\gamma_T) = \left[1 - \exp\left(-\frac{\gamma_T}{\bar{\gamma}}\right)\right]^{N_R}$$

$$\text{high SNR: } P_{out} = \left(\frac{\gamma_T}{\bar{\gamma}}\right)^{N_R} + O\left(\bar{\gamma}^{-N_R}\right)$$

1.5 Comparison

- Diversity Gain:
  MRC, EGC and SC all achieve the maximum possible diversity gain of $G_d = N_R$
- Combining Gain:
  The combining gains of MRC, EGC and SC are different
  - MRC/EGC:

$$\frac{G_C^{EGC}}{G_C^{MRC}} = \frac{\frac{1}{2b}\left(\frac{a}{2}\binom{2N_R}{N_R}\right)^{\frac{1}{N_R}}}{\frac{N_R}{b}\left(\frac{a}{2}\frac{1}{N_R!}\right)^{\frac{1}{N_R}}} = \frac{[(2N_R)!]^{\frac{1}{N_R}}}{2N_R(N_R)^{\frac{1}{N_R}}} \leq 1$$

(independent of a or b which are modulation parameters, only depends on number of antennas)

$$N_R \gg 1: \qquad N_R! \approx \sqrt{2\pi}e^{-N_R}N_R^{N_R+\frac{1}{2}} \qquad (Stirling)$$

$$\left.\frac{G_C^{EGC}}{G_C^{MRC}}\right|_{N_R\gg 1} = \frac{\left(\sqrt{2\pi}e^{-2N_R}(2N_R)^{2N_R+\frac{1}{2}}\right)^{\frac{1}{N_R}}}{2N_R\left(\sqrt{2\pi}e^{-N_R}N_R^{N_R+\frac{1}{2}}\right)^{\frac{1}{N_R}}} = \frac{2\cdot 2^{\frac{1}{2N_R}}}{2} \overset{N_R\to\infty}{\to} \frac{2}{e} \equiv -1.3\text{dB}$$

  - MRC/SC:

$$\frac{G_C^{SC}}{G_C^{MRC}} = \frac{2b\left(\frac{a}{2}\binom{2N_R}{N_R}\right)^{\frac{1}{N_R}}}{2b\left(\frac{a}{2}\frac{(2N_R)!}{N_R!}\right)^{\frac{1}{N_R}}} = \frac{1}{(N_R!)^{\frac{1}{N_R}}} \leq 1$$

$$\left.\frac{G_C^{SC}}{G_C^{MRC}}\right|_{N_R\gg 1} = \frac{1}{\sqrt{2\pi}^{\frac{1}{N_R}}e^{-1}N_R^{1+\frac{1}{2N_R}}} N_R \overset{\to}{\to} \infty \frac{e}{N_R}$$

$\to$ loss increases with N_R

2 MISO Systems

Remarks

- Similar to SIMO systems, in MISO systems only coding and diversity gains can be obtained.
- To realize these gains, a careful transmitter design is necessary
- System design depends on whether or not channel state information (**CSI**) is available at transmitter

2.1 Naive Approach

- Assume we simply send the same signal over all N_T transmit antennas

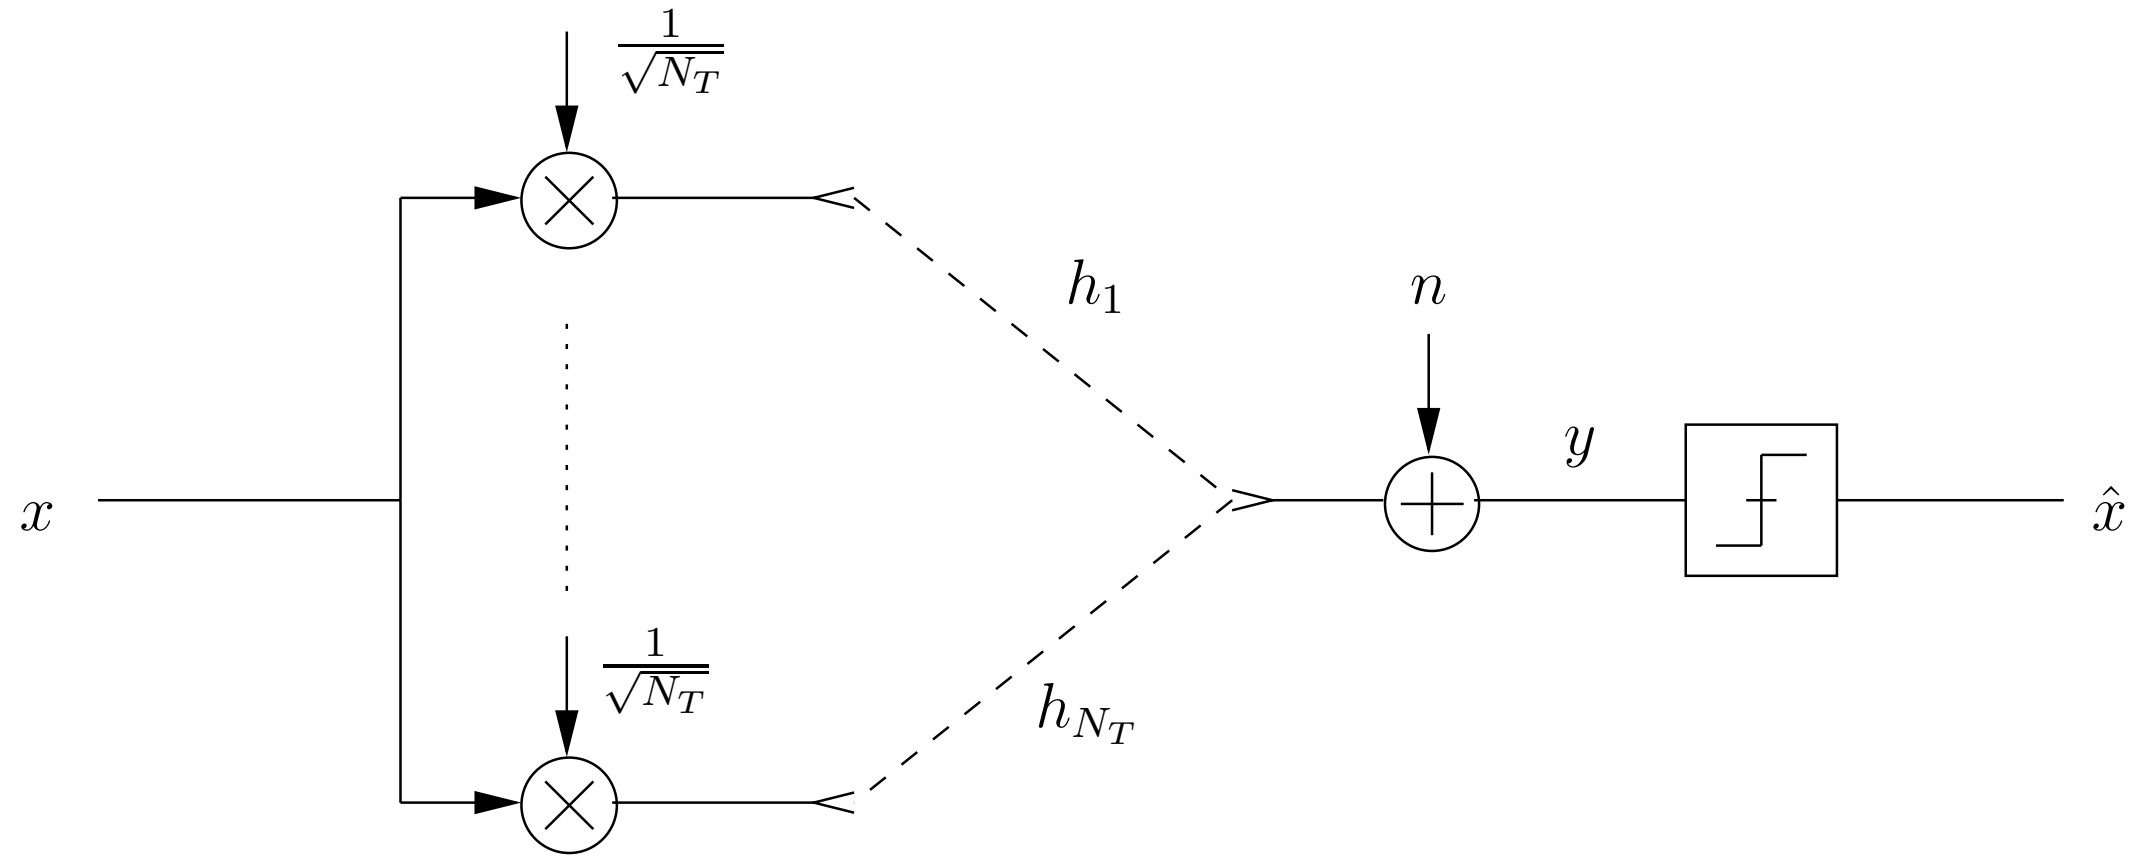

- Transmit power: $\mathcal{E}\left\{\left|\frac{1}{\sqrt{N_T}}x\right|^2+,\ldots,\left|\frac{1}{\sqrt{N_T}}x\right|^2\right\}=\mathcal{E}\left\{N_T\frac{1}{N_T}|x|^2\right\}=E_s$
- Received signal: $y=\frac{1}{\sqrt{N_T}}\sum_{n=1}^{N_T}h_n\cdot x+n$
- Rayleigh fading: h_n are zero mean complex gaussian random variables $\rightarrow h$ is also zero mean complex gaussian
- i.i.d.:
  - $\mathcal{E}\{|h_n|^2\}=1\ \forall n$
  - $\mathcal{E}\{|h|^2\}=\frac{1}{N_T}\mathcal{E}\left\{\left|\sum_{n=1}^{N_T}h_n\right|^2\right\}=\frac{1}{N_T}\mathcal{E}\left\{\sum_{n=1}^{N_T}|h_n|^2\right\}=1$
  - statistical properties of h are independent of N_T
  - the multiple transmit antennas have no benefit at all
  - more sophisticated transmitter designs necessary

2.2 Full CSI Available at the Transmitter

- $h_n, n \in \{1, \ldots, N_T\}$ is known at the transmitter
- Perform "precoding" (beamforming) with coefficients w_n

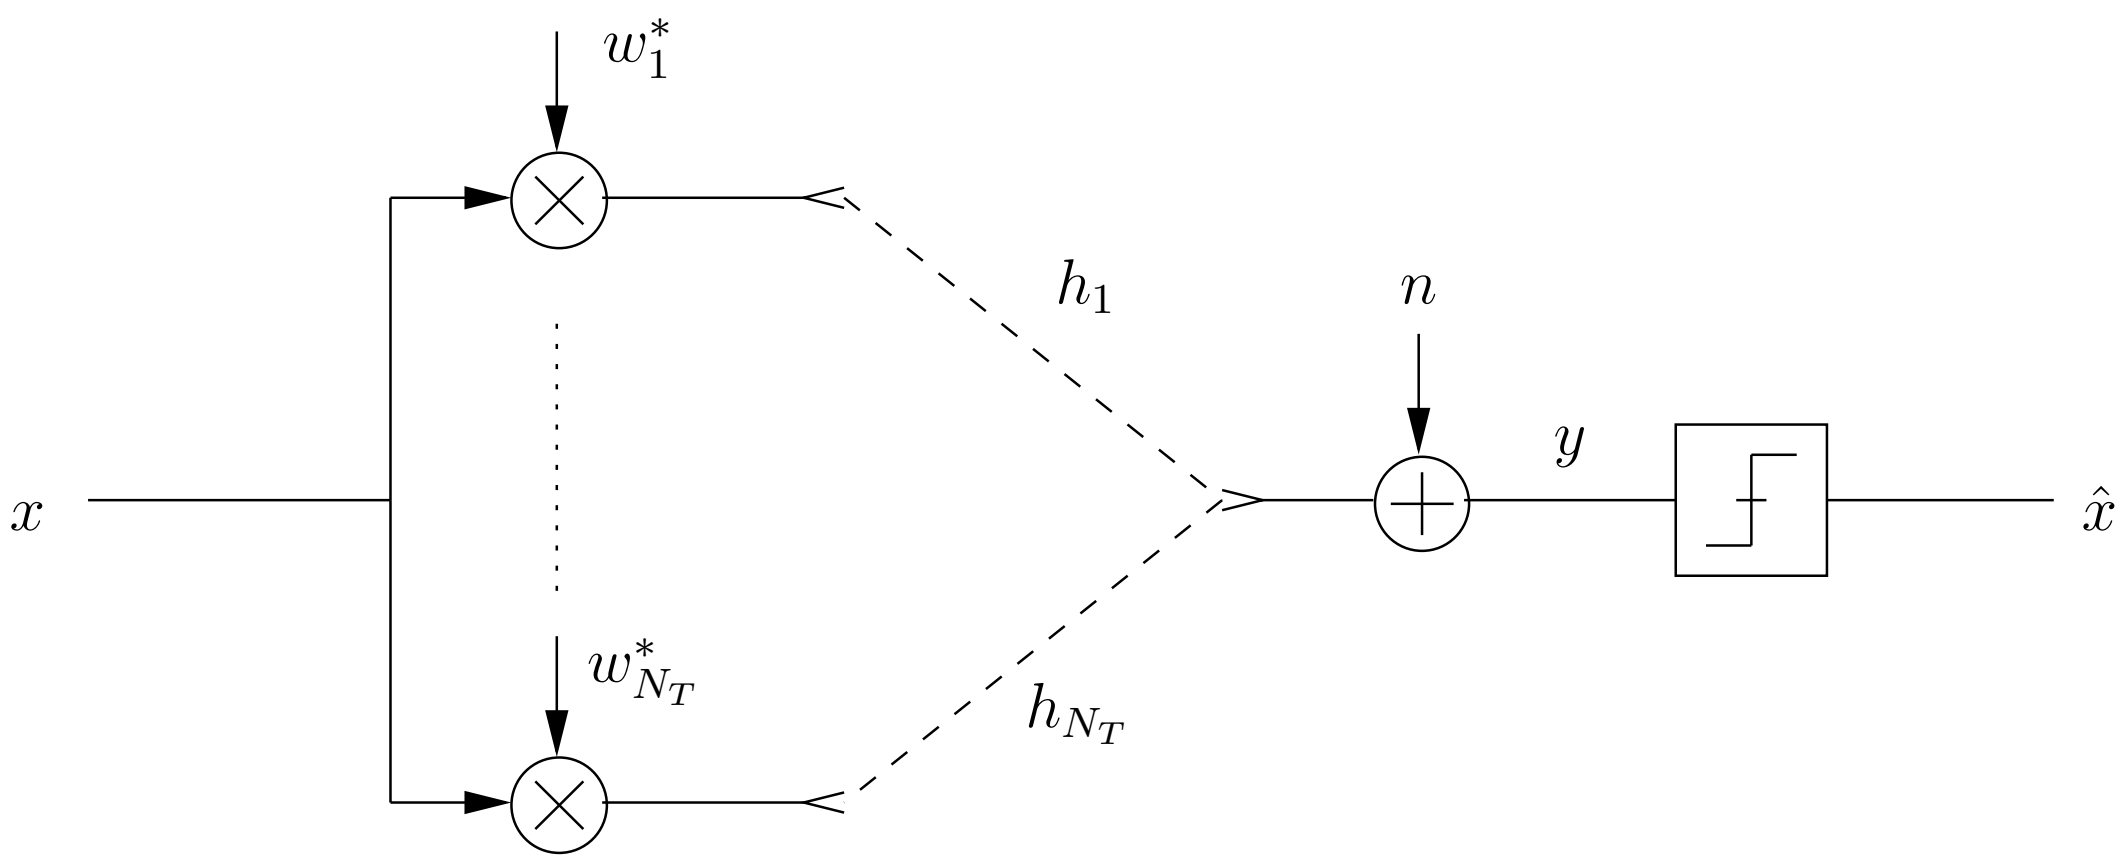

- Transmit Power: Two constraints maybe considered
  - Average transmit power constraint

$$P_{av} = \mathcal{E}\left\{\sum_{n=1}^{N_T} |w_n^* x|^2\right\} = \sum_{n=1}^{N_T} |w_n|^2 \underbrace{\mathcal{E}\{|x|^2\}}_{E_s} = \mathcal{E}_s \Rightarrow \sum_{n=1}^{N_T} |w_n|^2 = 1$$

  - Power constraint for each transmit antenna

$$\rightarrow |w_n| = \frac{1}{\sqrt{N_T}} \qquad \rightarrow P_{av} = E_s$$

- Recveived signal: $y = \underbrace{\sum_{n=1}^{N_T} w_n^* h_n}_{h} \, x + n$ (equivalent SISO channel)

Maximum Ratio Transmission (MRT)

- we have only the average power constraint: $\sum\limits_{n=1}^{N_T} |w_n|^2 = 1$
- SNR: $\gamma_t = \frac{E_s |h|^2}{\sigma_n^2} = \frac{\mathcal{E}_s \left| \sum\limits_{n=1}^{N_T} w_n^* \cdot h_n \right|^2}{\sigma_n^2}$
- Maximize SNR under constraint $\sum\limits_{n=1}^{N_T} |w_n|^2 = 1$

- constraint optimization problem $\rightarrow$ Lagrange method

$$L = \frac{E_s}{\sigma_n^2} \left| \sum_{n=1}^{N_T} w_n^* \cdot h_n \right|^2 + \lambda \left(\sum_{n=1}^{N_T} |w_n|^2 - 1 \right); \quad \text{where: } \lambda = \text{Lagrange Multiplier}$$

$\Rightarrow$ Wirtinger Kalkül: treat z and z^* as independent variables for differentiation:

$$\frac{\partial z^*}{\partial z} = 0; \quad \frac{\partial |z|^2}{\partial z} = \frac{\partial z \cdot z^*}{\partial z} = z^*$$
$$\frac{\partial x^2}{\partial x} = 2x; \quad \frac{\partial (z^*)^2}{\partial z^*} = 2 \cdot z^*; \frac{\partial |z|^2}{\partial z} = z^*$$

$$\frac{\partial L}{\partial w_m^*} = \frac{\epsilon_s}{\sigma_n^2} \left(\sum_{n=1}^{N_T} w_n^* \cdot h_n \right)^* h_m + \lambda w_m$$

$$\rightarrow w_m = \underbrace{\frac{\epsilon_s}{\sigma_n^2 \cdot \lambda} \left(\sum_{n=1}^{N_T} w_n^* h_n \right)^*}_{\text{const., independent of } m := c} h_m$$

$$\rightarrow w_m = c \cdot h_m$$

$$\rightarrow \sum_{n=1}^{N_T} |w_n|^2 = 1 \rightarrow c^2 = \frac{1}{\sum_{n=1}^{N_T} |h_n|^2}$$

$$\rightarrow w_n = \frac{h_n}{\sqrt{\sum_{n=1}^{N_T} |h_n|^2}} \equiv \text{MRT gains}$$

$$\rightarrow \text{SNR} = \frac{E_s}{\sigma_n^2} \left| \sum_{n=1}^{N_T} \frac{|h_n|^2}{\sqrt{\sum_{n=1}^{N_T} |h_m|^2}} \right|^2 = \frac{\epsilon_s}{\sigma_n^2} \sum_{n=1}^{N_T} |h_n|^2$$

$\Rightarrow$ same SNR as for maximum ration combining (MRC)

$\Rightarrow$ MRT with N_T transmit antennas achieves the same performance as MRC with N_T receive antennas

$\Rightarrow$ MRT/MRC can be extended to $N_T \times N_R$ MIMO systems

- $\rightarrow$ has the same performance as MRC with $N_T \cdot N_R$ receive antennas and one transmit antenna

Equal Gain Transmission (EGT)

- we employ gains: $w_n = \frac{1}{\sqrt{N_T}} \cdot \frac{h_n}{|h_m|} \rightarrow |w_n| = \frac{1}{\sqrt{N_T}}$

- SNR:

$$\gamma_t = \frac{E_s}{\sigma_n^2}\left|\sum_{n=1}^{N_T} w_n^* h_n\right|^2$$

$$= \frac{E_s}{\sigma_n^2}\left|\sum_{n=1}^{N_T} \frac{1}{\sqrt{N_T}\cdot\frac{|h_n|^2}{|h_n|}}\right|^2 = \frac{1}{N_T}\cdot\frac{\mathcal{E}_s}{\sigma_n^2}\left|\sum_{n=1}^{N_T}|h_n|\right|^2$$

$$\gamma_n = \frac{E_s}{\sigma_n^2}|h_n|^2$$

$$\text{same SNR as for EGC} \rightarrow \gamma_t = \frac{1}{N_T}\left|\sum_{n=1} N_T\sqrt{\gamma_n}\right|^2$$

$\rightarrow$ EGC with N_T transmit antennas achieves the same performance as EGC with N_T receive antennas

Transmit Antennas Selection

- select antenna with maximum channel gain for transmission:

$$w_n = \begin{cases} \frac{h_n}{|h_n|}, & \text{if } n = \hat{n} \\ 0, & \text{otherwise} \end{cases} \text{ where } \hat{n} = \underset{n}{\operatorname{argmax}}|h_n|$$

- antenna selection with N_T transmit antennas achieves the same performance as *Selection Combining* with N_T receive antennas

2.3 No CSI at Transmitter - Space-Time-Coding

- $h_n, n \in \{1, \ldots, N_T\}$, is only known at the receiver
- "Space-time-coding" has to be employed to realize diversity gain
- $T \times N_T$ matrics $\mathbf{X}$ are transmitted in T symbol intervals over N_T antennas
- $\mathbf{X}$ is drawn from a matrix alphabet $\mathcal{X}$
- Example:

$$\mathbf{X} = \begin{pmatrix} x_{1,1} & x_{1,2} & \cdots & x_{1,N_T} \\ x_{2,1} & x_{2,2} & \cdots & x_{2,N_T} \\ \vdots & \vdots & \ddots & \vdots \\ x_{T,1} & x_{T,2} & \cdots & x_{T,N_T} \end{pmatrix}$$

- We distinguish:
  - Space-time-block-codes (STBCs)
    $\rightarrow$ $\mathbf{X}$ is obtained by mapping K scalar symbols $s_k,\ k = 1, \ldots, K$ from a scalar alphabet $\mathcal{A}$ to matrix $\mathbf{X}$

- Space-time-trellis-codes (STTCs)
  $\rightarrow$ $\mathbf{X}$ is obtained from scalar symbols s_k through a trellis encoding process.
  [see: Tarokh, Seshadri, Calderbank: Space-time-codes for high datarate wireless communication: Performance criterions and coder construction; IEEE Trans. Inf. Theory 1998]
- here: We concentrate on space-time-block-codes (STBCs), but many results can be easily extended to space-time-trellis-codes

- STBCs:
  - K M-ary scalar symbols (e.g. M-PSK symbols) are mapped to STBC matrices $\mathbf{X}$
    $\mathbf{S} = [s_1, \ldots, s_K] \rightarrow \mathbf{X}$
    $s_k \in \mathcal{A} \rightarrow x \in \mathcal{X}$ with $|\mathcal{X}| = M^K$
  - Example: "Alamouti"-Code

$$\mathbf{X} = \frac{1}{\sqrt{2}} \begin{pmatrix} s_1 & s_2 \\ -s_2^* & s_1^* \end{pmatrix}$$

    [Alamouti: A simple transmit diversity technique for wireless communication, IEEE JSAC 1998]

Optimal Detection

- Signal model:

$$\begin{pmatrix} y_1 \\ \vdots \\ y_T \end{pmatrix} = \mathbf{X} \begin{pmatrix} h_1 \\ \vdots \\ h_{N_T} \end{pmatrix} + \begin{pmatrix} n_1 \\ \vdots \\ n_T \end{pmatrix}$$

$$\mathbf{y} = \mathbf{X} \cdot \mathbf{h} + \mathbf{n}$$

- Optimal detection - ML-detection
  - $\mathbf{h}$ is known at receiver
  - $\mathbf{n}$ is AWGN with $\mathcal{E}\{\mathbf{n} \cdot \mathbf{n^H}\} = \sigma_{\mathbf{n}}^2 \cdots \mathbf{I}_{T \times T}$
  - $p(\mathbf{y}|\mathbf{x})$

$$= \frac{1}{\pi^T |\sigma_n^2 \mathbf{I}_{T\times T}|} \exp\left(-(\mathbf{y} - \mathbf{xh})^H (\sigma_n^2 \mathbf{I}_{T\times T})^{-1} (\mathbf{y} - \mathbf{xh})\right)$$

$$= \frac{1}{\pi^T \sigma_n^{2T}} \exp\left(-\frac{1}{\sigma_n^2} (\mathbf{y} - \mathbf{xh})^H (\mathbf{y} - \mathbf{xh})\right) = \frac{1}{\pi^T \sigma_n^{2T}} \exp\left(||\mathbf{y} - \mathbf{xh}||^2\right)$$

    $\rightarrow$ the optimal estimate $\hat{\mathbf{X}}$ or equivalently the optimal estimate $\hat{\mathbf{s}}$ can be obtained as

$$\hat{\mathbf{s}} = \underset{\mathbf{s} \in \mathcal{A}^K}{\operatorname{argmax}}\, p(\mathbf{y}|\mathbf{x}) = \underset{\mathbf{s} \in \mathcal{A}^K}{\operatorname{argmin}} ||\mathbf{y} - \mathbf{hx}||^2$$

  - Disadvantage: In general, metric $||\mathbf{y} - \mathbf{hx}||^2$ has to be calculated M^K times
    $\rightarrow$ complexity increases exponentially with K

Types of STBCs

- Orthogonal STBCs (OSTBCs)
  - OSTBCs are a special class of STBCs which allow independent detection of each $s_k \rightarrow$ only $K \cdot M$ metrics have to be evaluated
  - Rate STBCs: $R_{STBC} = \frac{K}{T}$
  - Examples:
    * Alamouti Code $(K = 2, T = 2) \rightarrow R_{STBC} = 1$

$$\mathbf{X} = \frac{1}{\sqrt{2}} \underbrace{\begin{pmatrix} s_1 & s_2 \\ -s_2^* & s_1^* \end{pmatrix}}_{\longleftrightarrow N_T} \updownarrow T$$

$\rightarrow$ only "full rate OSTBC for complex s_k

    * $N_T = 3, K = 3, T = 4$

$$\mathbf{X} = \frac{1}{\sqrt{3}} \begin{pmatrix} s_1 & s_2 & s_3 \\ -s_2^* & s_1^* & 0 \\ s_3^* & 0 & -s_3^* \\ 0 & -s_3^* & s_2^* \end{pmatrix} \rightarrow R_{STBC} = \frac{K}{T} = \frac{3}{4}$$

  - Orthogonality: $\mathbf{X}^H \mathbf{X} = const \cdot \mathbf{I}_{N_T \times N_T}$
  - Independent detection of s_1 & s_2 for Alamouti Code

$$\begin{pmatrix} y_1 \\ y_2 \end{pmatrix} = \frac{1}{\sqrt{2}} \begin{pmatrix} s_1 & s_2 \\ -s_2^* & s_1^* \end{pmatrix} \begin{pmatrix} h_1 \\ h_2 \end{pmatrix} + \begin{pmatrix} n_1 \\ n_2 \end{pmatrix}$$

$$\rightarrow \underbrace{\begin{pmatrix} y_1 \\ y_2 \end{pmatrix}}_{\tilde{y}} = \frac{1}{\sqrt{2}} \underbrace{\begin{pmatrix} h_1 & h_2 \\ h_2^* & -h_1^* \end{pmatrix}}_{\tilde{F}} \underbrace{\begin{pmatrix} s_1 \\ s_2 \end{pmatrix}}_{s} + \underbrace{\begin{pmatrix} n_1 \\ n_2^* \end{pmatrix}}_{\tilde{n}}$$

$\Bigg($ Anmerkung: nur $\begin{pmatrix} s_1 \\ s_2 \end{pmatrix}$ gewünscht, nicht: $s_1^*, s_2^* \Bigg)$

$$\mathbf{F}^H \mathbf{F} = \frac{1}{2} \begin{pmatrix} h_1^* & h_2 \\ h_2^* & -h_1 \end{pmatrix} \begin{pmatrix} h_1 & h_2 \\ h_2^* & -h_1^* \end{pmatrix} = \frac{1}{2} \begin{pmatrix} |h_1|^2 + |h_2|^2 & 0 \\ 0 & |h_1|^2 + |h_2|^2 \end{pmatrix}$$

$\rightarrow$ $\frac{\sqrt{2}}{\sqrt{|h_1|^2+|h_2|^2}} \cdot \mathbf{F}$ is unitary matrix

$\rightarrow$ $\frac{2}{|h_1|^2+|h_2|^2} \cdot \mathbf{F}^H \cdot \tilde{\mathbf{y}} = \mathbf{s} + \frac{2}{|h_1|^2+|h_2|^2} \cdot \mathbf{F}^H \cdot \tilde{\mathbf{n}}$
$\big(\frac{2}{|h_1|^2+|h_2|^2} \cdot \mathbf{F}^H \cdot \tilde{\mathbf{n}}$ is AWGN vector with covariance matrix $\frac{2\sigma_n^2}{|h_1|^2+|h_2|^2} \cdot \mathbf{I}_{T \times T}\big)$

$\rightarrow$ ML decision: $\hat{\mathbf{s}} = \underset{\mathbf{s}}{\operatorname{argmin}} \big|\big| \frac{2}{|h_1|^2+|h_2|^2} \cdot \mathbf{F}^H \cdot \tilde{\mathbf{y}} - \mathbf{s} \big|\big|^2$

$\rightarrow$ independent ML decoding

$$\hat{s}_1 = \underset{s_1}{\operatorname{argmin}} \left| s_1 - \frac{h_1^* y_1 + h_2 y_2^*}{\frac{1}{\sqrt{2}}(|h_1|^2 + |h_2|^2)} \right|$$

$$\hat{s}_2 = \underset{s_2}{\operatorname{argmin}} \left| s_2 - \frac{h_1^* y_1 - h_2 y_2^*}{\frac{1}{\sqrt{2}}(|h_1|^2 + |h_2|^2)} \right|$$

- independent decoding property can be proved for all OSTBCs
- low complexity is at the expense of a rate-loss compared to other STBCs for $N_T > 2$
  - $\rightarrow$ Frequenzhopping
  - $\rightarrow$ keine Kanalinformation aus vorher empfangenen Symbolen möglich $\Rightarrow$ Kanal ändert sich ständig: nur Entscheidung, ob Rauschen oder Signal + Rauschen

- Performance Analysis of Alamouti Code
  - Decision-variables after combining

$$r_1 = \sqrt{2}\frac{h_1^* y_1 + h_2 y_2^*}{|h_1|^2 + |h_2|^2}$$
$$r_2 = \sqrt{2}\frac{h_1^* y_1 - h_2 y_2^*}{|h_1|^2 + |h_2|^2}$$

because of symmetry it suffices to consider r_1

$$\begin{aligned} r_1 &= \sqrt{2}\frac{h_1^*\left(\frac{1}{\sqrt{2}}s_1 h_1 + \frac{1}{\sqrt{2}}h_2 s_2 + n_1\right) + h_2\left(-\frac{1}{\sqrt{2}}h_2 s_1^* + \frac{1}{\sqrt{2}}h_1 s_2^* + n_2\right)^*}{|h_1|^2 + |h_2|^2} \\ &= \sqrt{2}\frac{\frac{1}{\sqrt{2}}\left(|h_1|^2 + |h_2|^2\right)s_1 + h_1^* n_1 + h_2 n_2^*}{|h_1|^2 + |h_2|^2} \\ &= 1 \cdot s_1 + n_{eq} \end{aligned}$$

where

$$n_{eq} = \sqrt{2}\ \frac{h_1^* n_1 + h_2 n_2^*}{|h_1|^2 + |h_2|^2}$$
$$\text{SNR} \rightarrow \gamma_t = \frac{E_s \cdot 1^2}{\sigma_{eq}^2} \quad \text{with} \quad \mathcal{E}\left\{|s_1|^2\right\} = \mathcal{E}_s$$
$$\sigma_{eq}^2 = 2\frac{|h_1|^2\sigma_n^2 + |h_2|^2\sigma_{eq}}{\left(|h_1|^2 + |h_2|^2\right)^2} = \frac{2\sigma_n^2}{|h_1|^2 + |h_2|^2}$$

- $\rightarrow$ $\gamma_t = \frac{1}{2}\frac{E_s}{\sigma_n}\left(|h_1|^2 + |h_2|^2\right)$
- $\rightarrow$ $\text{SNR}_{\text{Alamouti}} = \frac{1}{2}\text{SNR}_{\text{MRC}} = \frac{1}{2}\text{SNR}_{\text{MRT}}$
- $\rightarrow$ Alamouti code has diversity gain $G_d = 2$
- $\rightarrow$ Transmission with Alamouti STBC requires 3dB higher SNR to achieve same performance as MRT $\rightarrow$ 3dB loss in coding gain G_c
- $\rightarrow$ Lack of CSI knowledge at transmitter "costs" 3dB in power efficiency
- $\rightarrow$ General:
  - · OSTBCs achieve a diversity gain of $G_d = N_T$ if only one receive antenna is available
  - · if N_R receive antennas are available, MRC can be used at the receiver to yield a diversity gain of $\underline{G_d = N_T N_R}$

- Other STBCs:

– Quasi orthogonal STBCs

  * higher rate than OSTBCs
  * only subset of symbols have to be decoded jointly
  * Example: $K = N_T = T = 4$

$$\mathbf{X} = \frac{1}{2} \begin{pmatrix} s_1 & s_2 & s_3 & s_4 \\ -s_2^* & s_1^* & -s_4^* & s_3^* \\ -s_3^* & -s_4^* & s_1^* & s_2^* \\ s_4 & -s_3 & -s_2 & s_1 \end{pmatrix}$$

  * Anmerkung 1: $\mathbf{X}$ ist ähnlich zu Alamouti Code
  * Anmerkung 2: $\mathbf{X}^H\mathbf{X}$: viele Nicht-diagonal Elemente sind Null; die, die ungleich Null sind, zeigen, welche Symbole gemeinsam entschlüsselt werden müssen

– Golden Code for $N_T = N_R = 2$: achieves a rate of $R_{STBC} = 2$ and full diversity of $G_d = N_T, N_R = 4$

– Differential STBCs: $\mathbf{X}_k = \mathbf{X}_{k-1} \cdot \mathbf{D}_k$. $\mathbf{X}_k$ is transmitted, $\mathbf{D}_k$ is transmitted

– Linear dispersion codes: designed to achieve high mutual information

– noncoherent STBCs (On-Off-Keying)

Space Time Code Design

Given:

- Code $\mathscr{X} = \{\mathbf{X}_1, \dots, \mathbf{X}_{|\mathscr{X}|}\}$
- Channel: IID Rayleigh-fading:
  - $h_n \sim \mathcal{CN}(0, 1); \quad n \in \{1, 2, \dots, N_T\}$
  - AWGN $n \sim \mathcal{CN}(0, \sigma_n^2)$

Problem: How should we design codebook $\mathscr{X}$?

- Need to derive error rate for general codebooks $\mathscr{X}$!
  - Codeword error rate

$$P_e = \frac{1}{|\mathscr{X}|} \sum_{i=1}^{|\mathscr{X}|} \Pr\{\mathbf{x}_i \neq \hat{\mathbf{x}}_i\}$$

where $\hat{\mathbf{x}}_i$ is the detected codeword and we assume that all codewords are equally likely

Problem: $\Pr\{\mathbf{x}_i \neq \hat{\mathbf{x}}_i\}$ is not tractable in general

- Use union bound to upper bound $\Pr\{\mathbf{x}_i \neq \hat{\mathbf{x}}_i\}$ as upper sum over pairwise error probabilities(PEP) $\Pr\{\mathbf{x}_i \to \mathbf{x}_j\}$ where it is assumed that $\mathbf{x}_i$ was transmitted and $\mathbf{x}_i$ and $\mathbf{x}_j$ are the only codewords in the codebook

$$\boxed{P_e \leq \frac{1}{|\mathscr{X}|} \sum_{i=1}^{|\mathscr{X}|} \sum_{j=1}^{|\mathscr{X}|} \Pr\{\mathbf{x}_i \to \mathbf{x}_j\} \text{ where } j \neq i}$$

Calculation of PEPs
Recall: $\hat{\mathbf{x}} = \underset{\mathbf{x}\in\mathscr{X}}{\operatorname{argmin}} ||\mathbf{y} - \mathbf{x}\mathbf{h}||^2$
Now, $\mathbf{x}_i$ and $\mathbf{x}_j$ are the only alternatives and an error is made if $||\mathbf{y} - \mathbf{x}_i\mathbf{h}||^2 > ||\mathbf{y} - \mathbf{x}_j\mathbf{h}||^2$ since $\mathbf{x}_i$ was sent but $\mathbf{x}_j$ was detected

$$\to ||\mathbf{x}_i\mathbf{h} + \mathbf{n} - \mathbf{x}_i\mathbf{h}||^2 > ||\mathbf{x}_i\mathbf{h} + \mathbf{n} - \mathbf{x}_j\mathbf{h}||^2$$

$$||\mathbf{n}|| > ||(\mathbf{x}_i - \mathbf{x}_j)\mathbf{h} + \mathbf{n}||^2$$

$$\to ||\mathbf{n}|| > \underbrace{\mathbf{h}^H(\mathbf{x}_i - \mathbf{x}_j)^H(\mathbf{x}_i - \mathbf{x}_j)\mathbf{h}}_{\Delta} + \mathbf{h}^H(\mathbf{x}_i - \mathbf{x}_j)\mathbf{n} + \mathbf{n}^H(\mathbf{x}_i - \mathbf{x}_j)\mathbf{h} + ||\mathbf{n}||^2$$

$$\to \underbrace{-\mathbf{h}^H(\mathbf{x}_i - \mathbf{x}_j)^H\mathbf{n} - \mathbf{n}^H(\mathbf{x}_i - \mathbf{x}_j)\mathbf{h}}_{z} > \Delta$$

for given $\mathbf{h}$, z is a gaussian random variable

$$\sigma_z^2 = \mathcal{E}\{|z|^2\} = \mathcal{E}\{2\mathbf{h}^H(\mathbf{x}_i - \mathbf{x}_j)\overbrace{\mathbf{n}\mathbf{n}^H}^{\sigma_n^2\mathbf{I}}(\mathbf{x}_i - \mathbf{x}_j)\mathbf{h} + 2\mathbf{h}^H(\mathbf{x}_i - \mathbf{x}_j)^H\overbrace{\mathbf{n}\mathbf{n}^T}^{=0}(\mathbf{x}_i - \mathbf{x}_j)^*\mathbf{h}^*\}$$
$$= 2\sigma_n^2\Delta + 0$$

$$\Pr\{\mathbf{x}_i \to \mathbf{x}_j\} = \int_{\Delta}^{\infty} \frac{1}{\sqrt{2\pi}\sigma_z} \exp\left(-\frac{z^2}{2\sigma_z^2}\right) \mathrm{d}z,\ t = \frac{z}{\sigma_z}$$
$$= \frac{1}{\sqrt{2\pi}} \int_{\frac{\Delta}{\sigma_z}}^{\infty} e^{-\frac{t^2}{2}} \mathrm{d}t = Q\left(\frac{\Delta}{\sigma_z}\right) = Q\left(\frac{\Delta}{\sqrt{2\sigma_n^2\Delta}}\right)$$
$$= Q\left(\sqrt{\frac{\Delta}{2\sigma_n^2}}\right)$$

- $\Pr\{\mathbf{x}_i \to \mathbf{x}_j\} = \mathcal{E}\left\{Q\left(\sqrt{\frac{\Delta}{2\sigma_n^2}}\right)\right\}$
  - to avoid cumbersome Q-function we use Chernoff bound:

$$\boxed{Q(x) \leq \frac{1}{2}e^{-\frac{x^2}{2}}}$$

$$\Pr\{\mathbf{x}_i \to \mathbf{x}_j\} \leq \frac{1}{2}\mathcal{E}_h\left\{\exp\left(-\frac{\mathbf{h}^H\mathbf{Q}\mathbf{h}}{4\sigma_n^2}\right)\right\}$$
$$\text{where } \mathbf{Q} = (\mathbf{x}_i - \mathbf{x}_j)^H(\mathbf{x}_i - \mathbf{x}_j)$$

- Eigendecomposition: $\mathbf{Q} = \mathbf{U}^H \mathbf{\Lambda} \mathbf{U}$ with $\mathbf{\Lambda} = \mathrm{diag}\{\lambda_1, \ldots, \lambda_r, 0, \ldots, 0\}$ $\quad r = \mathrm{rank}\{\mathbf{Q}\}$

- Elements $\mathbf{h}$ are i.i.d. Gaussian
  - $\underline{\beta} = \mathbf{Uh}$ has also i.i.d. Gaussian random variables as elements since $\mathbf{U}$ is unitary matrix
  - $\mathbf{h}^H \mathbf{Q} \mathbf{h} = \underbrace{\mathbf{h}^H \mathbf{U}^H}_{\underline{\beta}^*} \mathbf{\Lambda} \underbrace{\mathbf{Uh}}_{\underline{\beta}} = \sum\limits_{i=1}^{r} \lambda_i |\beta_i|^2$ with $\underline{\beta} = [\beta_1, \ldots, \beta_{N_T}]$

$$
\begin{aligned}
\Pr\{\mathbf{x}_i \to \mathbf{x}_j\} &= \frac{1}{2}\mathcal{E}_{\underline{\beta}}\left\{ \exp\left(-\frac{\sum\limits_{i=1}^{r} \lambda_i |\beta_i|^2}{4\sigma_n^2} \right) \right\} \\
&= \frac{1}{2}\mathcal{E}_{\underline{\beta}}\left\{ \prod_{i=1}^{r} e^{-\frac{\lambda_i}{4\sigma_n^2}|\beta_i|^2} \right\} \\
&= \frac{1}{2}\prod_{i=1}^{r} \mathcal{E}_{\beta_i}\left\{ e^{-\frac{\lambda_i}{4\sigma_n^2}|\beta_i|^2} \right\} \\
&= \frac{1}{2}\prod_{i=1}^{r} \mathcal{E}_{|\beta_i|^2}\left\{ e^{-\frac{\lambda_i}{4\sigma_n^2}|\beta_i|^2} \right\} \;\widehat{=}\; \text{MGF of exponentially distributed variable } \alpha_i = |\beta_i|^2
\end{aligned}
$$

$\to P_{\alpha_i}(x) = e^{-x},\ x \geq 0$

$$
\begin{aligned}
\to \Pr\{\mathbf{x}_i \to \mathbf{x}_j\} &\leq \frac{1}{2}\prod_{i=1}^{r} \frac{1}{1 + \frac{\lambda_i}{4\sigma_n^2}} \\
&\leq \prod_{i=1}^{r} \frac{1}{\frac{\lambda_i}{4\sigma_n^2}} = 2^{2r-1} \frac{1}{\prod\limits_{i=1}^{r} \lambda_i} \left(\underbrace{\frac{1}{\sigma_n^2}}_{\widehat{=} SNR} \right)^{-r}
\end{aligned}
$$

- upper bound on P_e:

$$
\begin{aligned}
\lambda_n(i,j) &= n\text{th eigenvalue of } (\mathbf{x}_i - \mathbf{x}_j)^H (\mathbf{x}_i - \mathbf{x}_j) \\
r(i,j) &= \text{ rank of } (\mathbf{x}_i - \mathbf{x}_j)^H (\mathbf{x}_i - \mathbf{x}_j)
\end{aligned}
$$

$$
\to P_e \leq \frac{1}{|\mathscr{X}|} \sum_{i=1}^{|\mathscr{X}|} \sum_{j=1}^{|\mathscr{X}|} 2^{2r(i,j)-1} \frac{1}{\prod\limits_{n=1}^{r(i,j)} \lambda_n(i,j)} \left(\frac{1}{\sigma_n^2} \right)^{-r(i,j)}
$$

- generally loose bound but offers significant insight for code design

Two criteria:

Rank criterion: The diversity gain of a ST code is given by

$G_d = \min_{i,j}(r(i,j)) = \min_{i,j} \operatorname{rank}\left((\mathbf{x}_i - \mathbf{x}_j)^H(\mathbf{x}_i - \mathbf{x}_j)\right)$

$\rightarrow$ Design code such that minimum rank of all possible matrices $(\mathbf{x}_i - \mathbf{x}_j)^H(\mathbf{x}_i - \mathbf{x}_j)$ is maximized

$$T \updownarrow \overset{\overset{N_T}{\longleftrightarrow}}{\mathbf{X}_i} \Rightarrow r(i,j) = N_T \qquad \forall i \neq j$$

Determinant criterion: To maximize the coding gain among all codes with $r(i,j) = N_T$, we need to maximize $\max \min_{i,j} \prod_{n=1}^{N_T} \lambda_n(i,j) = \max \min_{i,j} \left|(\mathbf{x}_i - \mathbf{x}_j)^H(\mathbf{x}_i - \mathbf{x}_j)\right| \qquad \forall i \neq j$

- Rank and determinant criterion can be used for the search for good space-time block codes and space-time trellis codes. These two criteria were first derived by Tarokh, et. al. 1998.
- diversity increases to $N_T N_R$ if N_K receive antennas are available
- Example: see Bäro, Bauch, Hansmann: Improved codes for space-time trellis coded modulation. IEEE Comm. Letters, 2000.

Partial or Imperfect CSI at the Transmitter

- In practice, the CSI cannot be perfect. Channel estimation, quantization and noisy feedback channels introduce errors.
- If the system is optimized for perfect CSI (*e.g.* using MRT or EGT), the performance for imperfect CSI may be worse than for a system designed for no CSI(*e.g.* space-time coding)
- In this case, it is advantageous to use a hybrid approach and combine beamforming and space-time coding.

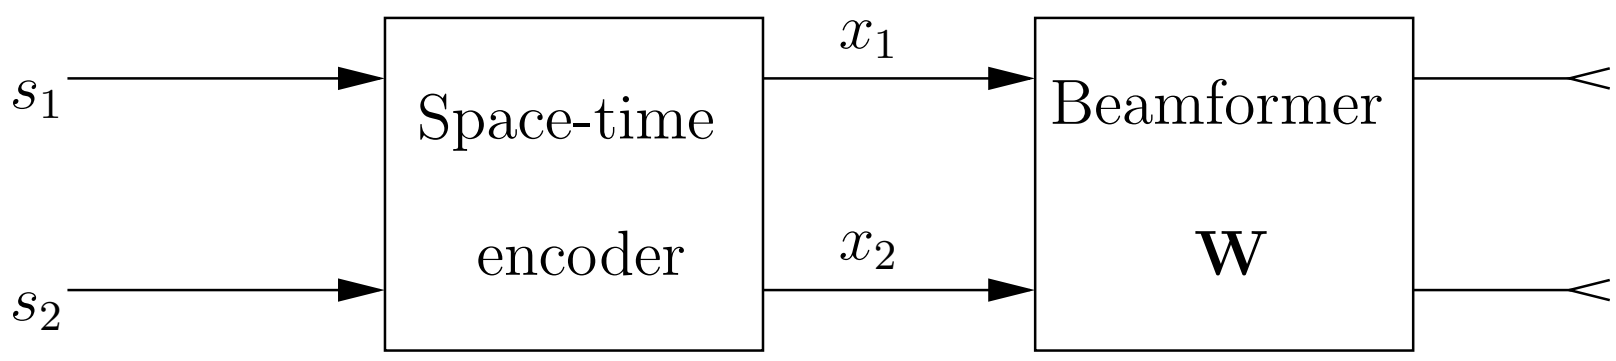

- $\mathbf{W}$ is the beamforming matrix which depends on the reliability of the CSI
- CSI is modeled as

$$\hat{h}_i = \rho h_i + \sqrt{1-\rho^2} e_i$$

where:
  - $\hat{h}_i$ is the CSI estimate
  - ρ is the correlation between $\hat{h}_i$ and h_i

– e_i is the CSI error modeled as AWGN

extreme cases:

– $\rho = 0$: $\hat{h}_i$ independent of $h_i \rightarrow$ no CSI ($\mathbf{W} = \mathbf{I}$)

– $\rho = 1$: $\hat{h}_i = h_i \rightarrow$ perfect CSI ($\mathbf{W}$ performs MRT)

- $\mathbf{W}$ can be optimized under the assumptions for given ρ and $\hat{h}_i$
  $\rightarrow$ see for details: Jöngren, Skorglund and Ottersten: Combining Beamforming and Orthogonal Space-time Block Coding", IEEE on IT, 2002.

3 MIMO Systems without CSI at the transmitter

- We consider $N_T \times N_R$ MIMO system and assume that the channel matrix $\mathbf{H}$ is not known at the transmitter
  $\rightarrow$ no CSI at the transmitter (CSIT)
- signal model:

$$N_R \updownarrow \mathbf{y} = N_R \updownarrow \overset{\overset{N_T}{\longleftrightarrow}}{\mathbf{H}}\, \mathbf{x} \updownarrow N_T + \mathbf{n} \updownarrow N_R$$

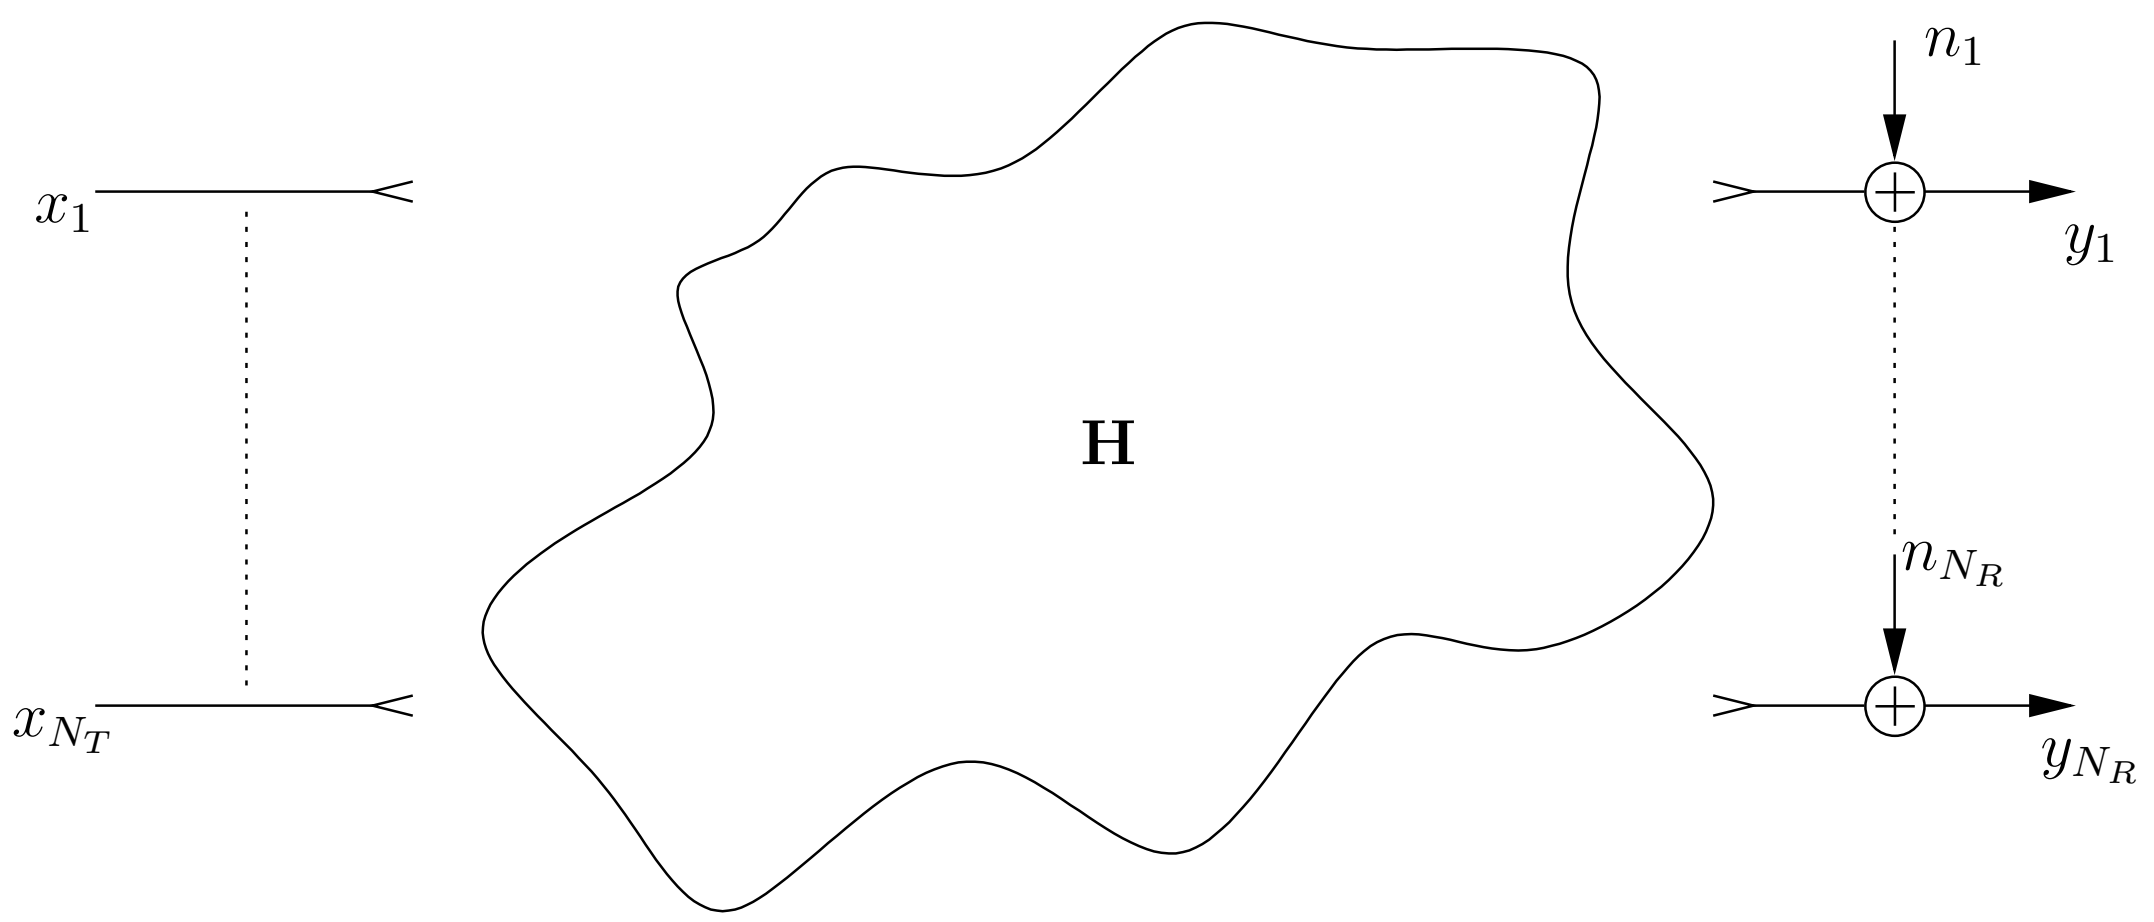

- x_n are M-ary i.i.d. scalar symbols taken *e.g* from an M-PSK or M-QAM symbol alphabet $\mathscr{A}$
- This scheme is often called "spatial multiplexing"
- We transmit N_T symbols per symbol interval
  $\rightarrow$ rate $R = \log_2(M) \cdot N_T$ for uncoded transmission
- Problem: How to detect $\mathbf{x}$ at the receiver considering
  – performance
  – complexity

Optimum Detection

- Elements of $\mathbf{n}$ are gaussian random variables with variance σ_n^2
- $\mathbf{H}$ is known at the receiver

$$\begin{aligned} p(\mathbf{y}|\mathbf{x}) &= \frac{1}{\pi^{N_R}\sigma_n^2\mathbf{I}_{N_R\times N_R}} \exp\left(-(\mathbf{y}-\mathbf{Hx})^H(\sigma_n^2\mathbf{I}_{N_R\times N_R})^{-1}(\mathbf{y}-\mathbf{Hx})\right) \\ &= \frac{1}{\pi^{N_R}\sigma_n^{2N_R}} \exp\left(-\frac{1}{\sigma_n^2}||\mathbf{y}-\mathbf{xH}||^2\right) \end{aligned}$$

- ML-Detection

$$\hat{x} = \underset{\mathbf{x}\in\mathscr{A}^{N_T}}{\operatorname{argmin}}||\mathbf{y}-\mathbf{xH}||^2 = \underset{\mathbf{x}\in\mathscr{A}^{N_T}}{\operatorname{argmax}} \quad p(\mathbf{y}|\mathbf{x})$$

  $\rightarrow$ M^{N_T} metric calculations $\rightarrow$ complexity is exponential in N_T!!

  $\rightarrow$ in general too complex in practice

- Performance
  - consider worst case pairwise error probability (PEP) to evaluate <u>diversity gain</u>
  - PEP $\rightarrow$ x_i is transmitted but $x_j \neq x_i$ is detected
    this happens if $||\mathbf{y}-\mathbf{Hx}_i||^2 > ||\mathbf{y}-\mathbf{Hx}_j||^2$
    $\rightarrow$ $||\mathbf{n}||^2 > ||\mathbf{H}(\mathbf{x}_i-\mathbf{x}_j)+\mathbf{n}||^2$
  - the "worst case" is if $\mathbf{x}_i$ & $\mathbf{x}_j$ differ only in one element *i.e.*,

$$\mathbf{x}_i - \mathbf{x}_j = (x_{ni}-x_{nj}) = \begin{bmatrix} 0 \\ 0 \\ 0 \\ \vdots \\ 1 \\ \vdots \\ 0 \\ 0 \end{bmatrix} \leftarrow \text{"1" in position } n$$

    where $\mathbf{x}_i = [x_{1i}, x_{2i}, \ldots, x_{N_T i}]$
  - $||\mathbf{n}||^2 > ||\underbrace{\mathbf{h}_n}_{n\text{th column of }\mathbf{H}} \underbrace{(x_{ni}-x_{nj})}_{\Delta x_n(i,j)} + \mathbf{n}||^2$
  - $||\mathbf{n}||^2 > \mathbf{h}_n^H\mathbf{n}\Delta x_n^*(i,j) + \mathbf{n}^H\mathbf{h}_n\Delta x_n(i,j) + ||\mathbf{n}||^2 + ||\mathbf{h}_n||^2 - |\Delta x_n(i,j)|^2$

$$||\mathbf{h}_n||^2|\Delta x_n(i,j)|^2 < \underbrace{-\mathbf{h}_n^H\mathbf{n}\Delta x_n(i,j) - \mathbf{n}^H\mathbf{h}_n\Delta x_n(i,j)}_{\text{Gaussian random variable with variance } \sigma_{eq}^2 = 2\sigma_n^2|\Delta x_n(i,j)|^2||\mathbf{h}_n||^2}$$

  - $\Pr\{\mathbf{x}_i \rightarrow \mathbf{x}_j||\mathbf{H}\} = Q\left(\sqrt{\frac{||\mathbf{h}_n||^2|\Delta x_n(i,j)|^2}{2\sigma_n^2}}\right)$

– $\Pr\{\mathbf{x}_i \to \mathbf{x}_j\} = \mathcal{E}\left\{Q\left(\sqrt{\frac{||\mathbf{h}_n||^2|\Delta x_n(i,j)|^2}{2\sigma_n^2}}\right)\right\}$
$\to$ use same approach as for space-time code design to get diversity order
or : SNR is

$$\gamma_t = \frac{||\mathbf{h}_n||^2|\Delta x_n(i,j)|^2}{2\sigma_n^2} = \frac{|\Delta x_n(i,j)|^2}{2\sigma_n^2}(|h_{1n}|^2 + |h_{2n}^2 + \cdots + |h_{N_R n}|^2)$$

– same form as SNR of MRC with N_R receive antennas

– diversity gain of spatial multiplexing wit ML-decoding is

$$G_d = N_R$$

– diversity of N_T transmit antennas is not exploited with spatial multiplexing

– to exploit this additional gain, coding across space is required (at the expense of rate)
(Hier gehören die detection performance kurven für BPSK hin)

Linear Receivers

- How can we avoid the complexity associated wit the joint detection of the elements of $\mathbf{x}$?
- Idea: Employ linear filter (matrix) to seperate the elements of $\mathbf{x}$
- Requires: $N_T \leq N_R$
- We form

$$\mathbf{r} = N_T \updownarrow \overset{\overset{N_R}{\longleftrightarrow}}{\mathbf{F}}\, \mathbf{y} = [r_1, \ldots, r_{N_T}]^T$$

where $\mathbf{F}$ is the filter matrix and $\mathbf{y}$ is the received vector

such that x_n can be obtained from

$$\hat{x}_n = \underset{x_n \in \mathscr{A}}{\operatorname{argmin}} |r_i - x_n|^2 \qquad \text{where } \mathbf{F} \in \mathbb{C}^{N_T \times N_R}$$

- Two popular design criteria for $\mathbf{F}$
  – Zero-forcing (ZF) criterion
  – minimum mean squared error (MMSE) crtiterion