

# STATIAL.b

## ADJUSTABLE MOUSE - BUILD INSTRUCTIONS

v01.00 - 09/07/2024

Modern grip styles have grown out of players adapting to standardized mouse shapes. The Statial.b lets new mouse shapes grow from grip styles.

The Statial.b is an open source DIY mouse design. This concept has adjustable surfaces that can be moved and locked in position to create a wide range of new ergonomics for any grip style. Files for ambidextrous builds are included.

Knowledge of 3D printing, basic electronics & soldering skills as well as the ability to upload code to an Arduino are needed for this build. The design is based around a 16,000 DPI optical sensor in the [PMW3389](#) and driven by an Arduino compatible [PRO MICRO](#) controller.

This is a fairly complex project. I tried to cover all the assembly details in the in this PDF and on YouTube, but some problem solving skills are still going to be required.

The finished design is a functioning prototype that requires a lot of adjusting to get it dialed in and is more fragile than a normal commercially produced product. It's also a heavy mouse weighing up to a hefty 130 grams (depending on components used).

Not trying to put anyone off the build, just important to have realistic expectations about the end product. All that said, it works great and is super fun to use. There's really nothing else like it out there if you're looking to explore mouse ergonomics.

All 3D printed parts need to be made in a "Tough" or "ABS like" resin material. Resin print color is up to you. **This project requires resin printed parts.**

**It will not work if parts are 3D printed with the FDM process.**

Current (2024) project materials costs are around **\$200** (not including tools). This is a rough guess so you have an idea of what you're getting into.

**GitHub Project Repository**

<http://>

**YouTube Design and Assembly Walkthrough:**

<http://>



# BOM - 3D PRINTS



All STL file units in MM. Slicer files for Preform & Lychee also available at GitHub repository. Requires ~170mL of resin for all parts. Complete print sets fit within approx 220mm x 125mm build areas but can be broken up into multiple batches for smaller printers.

Best results in Formlabs Tough 2000. Had good (although more fragile) results with Anycubic ABS-Like Pro 2 line of resins. Did not test but Sunlu ABS-Like and Siraya Tech lines would probably be fine as well.

STL Filename syntax: All matching "SBv##" files work together. The "A##" (letter/number) sections are individual component version IDs. Qty-## are number of print copies needed for a single build. Preform & Lychee files in repo should be have most up to date versions of all files.

ID	NAME	FILE NAME	QTY	MATERIAL	NOTE
3DP.01	BODY - LOWER	body-lower_SBv10A01_qty-01.stl	1	tough / abs like resin	-
3DP.02	BODY - UPPER	body-upper_SBv10A01_qty-01.stl	1	tough / abs like resin	-
3DP.03	ARM - STATIC	arm-static_SBv10A01_qty-03.stl	3	tough / abs like resin	Duplicate parts in slicer
3DP.04	ARM - ADJUSTABLE - A	arm-adj-A_SBv10A01_qty-04.stl	4	tough / abs like resin	Duplicate parts in slicer
3DP.05	ARM -ADJUSTABLE -B	arm-adj-B_SBv10A01_qty-04.stl	4	tough / abs like resin	Duplicate parts in slicer
3DP.06	MOUSE BUTTON - L	mb-L_SBv10A01_qty-01.stl	1	tough / abs like resin	Keep interior supports during post-cure to prevent warpage
3DP.07	MOUSE BUTTON - R	mb-R_SBv10A01_qty-01.stl	1	tough / abs like resin	Keep interior supports during post-cure to prevent warpage
3DP.08	MIDDLE - WHEEL	mid-wheel_SBv10A01_qty-01.stl	1	tough / abs like resin	-
3DP.09	MIDDLE - CRADLE	mid-cradle_SBv10A01_qty-01.stl	1	tough / abs like resin	-
3DP.10	MIDDLE - FLEX	mid-flex_SBv10A01_qty-01.stl	1	tough / abs like resin	Fragile part, careful when removing from supports
3DP.11	MIDDLE - ROTOR CAP	mid-rotor_SBv10A01_qty-01.stl	1	tough / abs like resin	-
3DP.12	MIDDLE - DPI CAP	mid-dpi_SBv10A01_qty-01.stl	1	tough / abs like resin	-
3DP.13	REAR SURFACE	mid-rotor_SBv10A01_qty-01.stl	1	tough / abs like resin	-
3DP.14	SIDE SURFACE - SWITCH	side-switch_SBv10A01_qty-01.stl	1	tough / abs like resin	-
3DP.15	LEFT SURFACE	side-L-std_SBv10A01_qty-01.stl	1	tough / abs like resin	Left/Right side surface parts skipped for left handed build
3DP.16	RIGHT SURFACE	side-R-std_SBv10A01_qty-01.stl	1	tough / abs like resin	-
3DP.17	ALT-L - LEFT SURFACE	side-L-flip_SBv10A01_qty-01.stl	1	tough / abs like resin	Optional prints for Left/Right handed build - found in "extras" folder
3DP.18	ALT-L - RIGHT SURFACE	side-R-flip_SBv10A01_qty-01.stl	1	tough / abs like resin	Optional prints for Left/Right handed build - found in "extras" folder
3DP.19	CUTTING JIG	cutting-jig_32mm	1	tough / abs like resin	Optional jig for cutting 1/8" tube stock to 32mm in "extras" folder

ID	PART	VENDOR	PART NO	QTY	PRICE (est)	LINK	NOTE
HW-01	M2 NUT - STANDARD	MCMASTER	<a href="#">91828A111</a>	13	\$ 8.00	<a href="#">AMAZON</a>	Generic parts, McMaster Carr for reference
HW-02	M2 X 4MM - BUTTON HEAD SCREW	MCMASTER	<a href="#">91239A703</a>	10	\$ 12.00	<a href="#">AMAZON</a>	Sets available - 1.3mm hex wrench
HW-03	M2 X 8MM - BUTTON HEAD SCREW	MCMASTER	<a href="#">97763A408</a>	2	-	-	-
HW-03	M2 X 16MM - BUTTON HEAD SCREW	MCMASTER	<a href="#">97763A411</a>	3	-	-	-
HW-04	M2.5 NUT - STANDARD	MCMASTER	<a href="#">90591A270</a>	18	\$ 6.00	<a href="#">AMAZON</a>	-
HW-05	M2.5 X 4MM - CUP HEAD SET SCREW	MCMASTER	<a href="#">97763A412</a>	16	\$ 7.00	<a href="#">AMAZON</a>	1.3mm hex wrench
HW-06	1/8" ROD OR TUBE STOCK - CUT TO 32MM LENGTH	Misc	n/a	~1'	\$ 6.00	<a href="#">AMAZON</a>	Rec. aluminum tube. Available at most hardware stores.
HW-08	MOUSE FEET FOR LOGITECH G-PRO	Misc	n/a	-	\$ 7.00	<a href="#">AMAZON</a>	Any 3rd party glides for G-Pro are ok
EL-01	ARDUINO PRO MICRO (5V/16MHz) - NO SOLDERED HEADERS	Misc	n/a	1	\$ 14.00	<a href="#">AMAZON</a>	Any clone is fine, must be 5 volt ver.
EL-02	PMW3389 MOTION SENSOR	TINDIE	n/a	1	\$ 30.00	<a href="#">TINDIE</a>	Supplied by Joe's Sensors and Sundry
EL-03	(A) PCB - CUSTOM BRIDGE BOARD / (B) MIDDLE BUTTONS	JLCPCB	n/a	1	\$ 14.00	<a href="#">JLCPCB</a>	D/L Gerber file from Statial.b GitHub and order through PCB fab house (usually x5 min order)
EL-04	8, 8, 12 PIN - SURFACE MOUNT HEADER - GULL WING - 2.54MM	DIGIKEY	HDR100IMP40M-G-V-SM-ND	1	\$ 1.00	<a href="#">DIGIKEY</a>	Come as 40 pin headers, cut to length
EL-05	5'-6' MICRO USB CABLE OR REPLACEMENT MOUSE CABLE & USB MICRO COMPONENT END	Misc	n/a	1	\$ 10.00	<a href="#">AMAZON</a>	Any Micro USB will work OR order a mouse cable ( <a href="#">AMAZON</a> ) + micro usb end ( <a href="#">AMAZON</a> )
EL-06	MOUSE MICRO SWITCHES	Misc	n/a	5	\$ 20.00	<a href="#">AMAZON</a>	can find cheaper but these look cool
EL-07	PUSH BUTTON MOMENTARY SWITCH - 6mm x 6mm x 5mm	Misc	n/a	1	\$ 6.00	<a href="#">AMAZON</a>	must be 4.5mm (5mm) high version
EL-08	TTC ROTARY ENCODER - FOR GLADIUS III OR RAZER MAMBA	Misc	n/a		\$ 8.00	<a href="#">AMAZON</a>	8mm x 8mm square encoder only!
EL-09	NEOPIXEL 5050 RGB LED	ADAFRUIT	1655	1	\$ 5.00	<a href="#">ADAFRUIT</a>	-
EL-10	2 PIN - JST PH - 2.0MM PITCH - THROUGH HOLE - RIGHT ANGLE	DIGIKEY	<a href="#">S2B-PH-K-S</a>	2	\$ 10.00	<a href="#">AMAZON</a>	Generic JST-PH sets available
EL-11	2 PIN - JST PH - 2.0MM PITCH - MALE CABLE PLUG	DIGIKEY	<a href="#">PHR-2</a>	2	\$ 10.00	<a href="#">AMAZON</a>	PA-09 crimp required (see tools)
EL-12	3 PIN - JST PH - 2.0MM PITCH - THROUGH HOLE - RIGHT ANGLE	DIGIKEY	<a href="#">S3B-PH-K-S</a>	1	-	-	-
EL-13	3 PIN - JST PH - 2.0MM PITCH - MALE CABLE PLUG	DIGIKEY	<a href="#">PHR-3</a>	1	-	-	-
EL-14	5 PIN - JST PH - 2.0MM PITCH - THROUGH HOLE - RIGHT ANGLE	DIGIKEY	<a href="#">S5B-PH-K-S</a>	1	-	-	-
EL-15	5 PIN - JST PH - 2.0MM PITCH - MALE CABLE PLUG	DIGIKEY	<a href="#">PHR-5</a>	1	-	-	-
EL-16	28 GA WIRE - SILICONE	-	n/a	~6'	\$ 13.00	<a href="#">AMAZON</a>	Rec. 6 wire ribbon cable

NAME	NOTE	PRICE	LINK
RESIN BASED 3D PRINTER & TOUGH OR ABS LIKE RESIN	Resin print only. STL, Preform & Lychee Print files available via Github link. Req. ~170mL of resin		
SOLDERING IRON & SOLDER	Attaching headers, ProMicro, PMW sensor and PH ports to bridge board		
WIRE CUTTERS	Used for clearing supports & wiring		
NEEDLE NOSE PLIERS	Used for clearing supports		
XACTO KNIFE	Used for clearing supports & cleanup		
CRIMPING PLIERS FOR JST PH - PA09	Needs to have 1.4mm and 1.6mm connector crimp slots - 4mm thick - PA-09 (or knock off) only. Annoyingly expensive!	\$35.00	<a href="#">AMAZON</a>
LITHIUM GREASE	Highly recommend for lubricating axle of 3D printed scroll wheel	\$8.00	<a href="#">AMAZON</a>
HAND HOBBY SAW	Used for cutting adjustable arm metal tube stock to length. Any metal hand saw or Dremel will work	\$8.00	<a href="#">AMAZON</a>
HEAT SHRINK TUBE (MISC. SIZES)	Will be visible when build is complete so choose a color you like	\$8.00	<a href="#">AMAZON</a>
HOT GLUE / HOT GLUE GUN	Optional for attaching Neopixel to board & securing nuts in slots for easier assembly. Can also use tape.		
NEEDLE FILE SET	Optional - cleaning up prints		
LOC TIGHT - BLUE	Optional - securing attachment screws in place to prevent loosening up over time		
MULTIMETER	Multimeter or continuity tester for checking switches and trouble shooting. Doesn't need to be fancy.		
HEX ALLEN WRENCH - 1.3MM	Hex L-key wrench for all screws. This can be stored in the bottom bracket on Statial.b after assembly is complete.		


**CUSTOM PCB**

The Statial-b uses a custom printed circuit board (EL-03) to connect the Pro Micro (EL-01) and PMW3389 sensor (EL-02). The design has the main bridge board and a smaller middle mouse wire routing board connected by a snap off tab.


Gerber files can be downloaded as a ZIP file from the GitHub repository and ordered through a PCB fabrication house. I would recommend [JLCPCB](#) for low cost boards.

Upload the Statial-b Gerber ZIP file for instant quote order. **Make sure to specify "2 design board" when ordering.**

Select alternate PCB color if desired. The board is a simple dual layer design and all other settings can be left as default (cheapest) for ordering. Most fabrication houses will have a 5 piece minimum order.

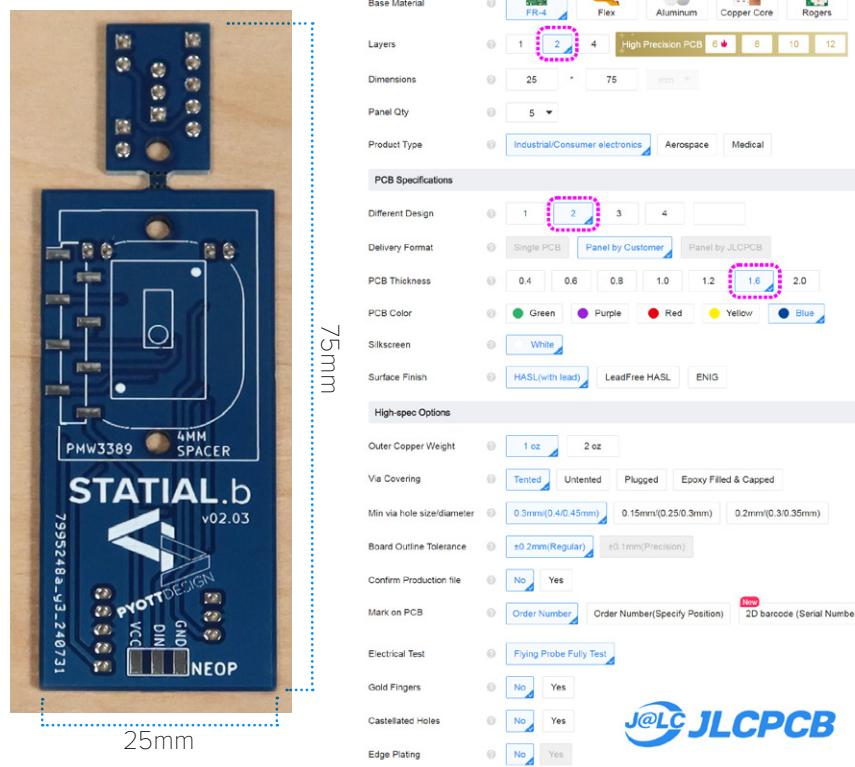

Before starting build, load controller software onto Pro Micro (5v). This is to check that the control board is good before getting to far into assembly process (some of the clone Pro Micros can be a bit sketchy on the reliability front).

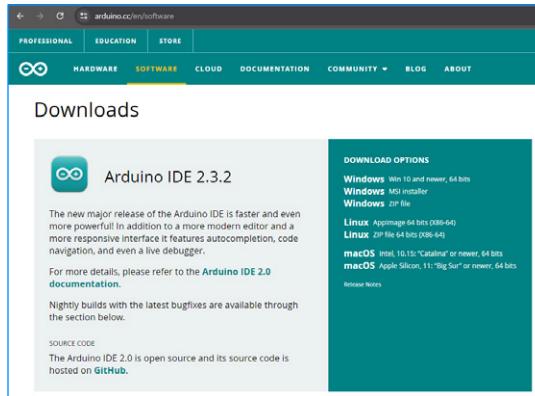


## A ARDUINO IDE

Download and install the Arduino IDE for your OS

## B STATIAL.B SKETCH

Download the STATIAL.b Arduino Sketch from GitHub and open in the Arduino IDE.

```
PMW3389SB_Mouse_03.ino | Arduino IDE 2.3.2
File Edit Sketch Tools Help
File Edit Sketch Tools Help
Arduino Leonardo
PMW3389SB_Mouse_03.ino SIRCOM_PMW3389.ho
1 // rotary encoder
2 rotaryEncoder* encoder = nullEncoder;
3
4 const int ncs = 4; // //PMW3389_S5 pin
5 const int read = 3; // //PMW3389_WRT pin
6
7 int bte_pins[NUMBER] = {NC, NC, NC, NC, NC, NC, NC, NC};
8 int bte_buttons[NUMBER] = {false, false, false, false, false, false, false, false};
9 uint8_t bte_buffer[NUMBER] = {0xFF, 0xFF, 0xFF, 0xFF, 0xFF, 0xFF, 0xFF, 0xFF};
10 char bte_val[NUMBER] = {MOUSE_LEFT, MOUSE_RIGHT, MOUSE_MIDDLE, MOUSE_FORWARD, MOUSE_BACK};
11
12 int key_pins[NUMBER] = {R5}; // R5 pin
13 bool key[NODEFAULT] = {false}; // button state indicator
14 uint8_t key_buffer[NODEFAULT] = {0xFF}; // button debounce buffer
15 char key_val[NODEFAULT] = {0x00}; // button value
16
17 // colors that represent the CPI/PI setting: Red, Orange, Yellow, Green, Blue, Purple
18 int display[NUMBER] = {{255, 0, 0, 0}, {255, 55, 0, 0}, {340, 115, 0, 0}, {4, 155, 100, 0}, {0, 55, 200, 0}, {0, 0, 170, 0}};
19
20 unsigned long colors[NUMBER] = {400, 600, 800, 1000, 1200, 1400, 1600};
21
22 target_set();
23
24 bool target_set() {
25
26
27 }
```

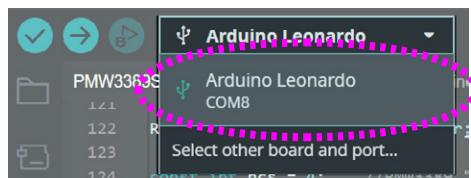



## C PRO MICRO

Plug in Pro Micro board using Micro USB cable. Device should appear as "Arduino Leonardo".

## D LIBRARIES


Add required libraries: Mouse.h, Keyboard.h, Adafruit\_Neopixel.h, RotaryEncoder.h, AdvMouse.h\*


\*AdvMouse.h can be downloaded from Ploopy's GitHub repository and added manually as zip file:  
[GITHUB.COM/PLOOPYCO](https://github.com/ploopyco)

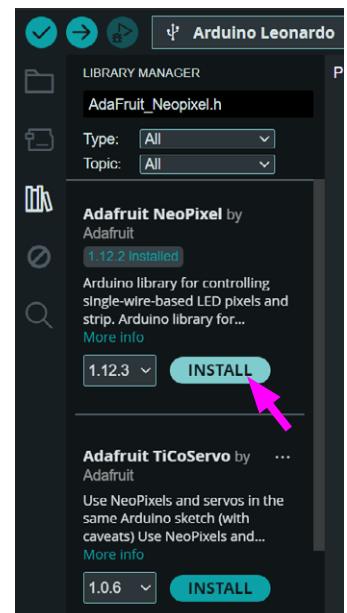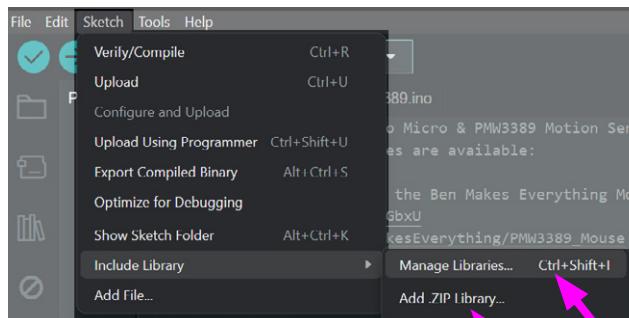

## E INSTALL


Upload sketch to Pro Micro & confirm the board is working. Mouse settings like LED brightness, DPI presets, button mapping, etc. can be adjusted once the Statial.b is fully assembled.

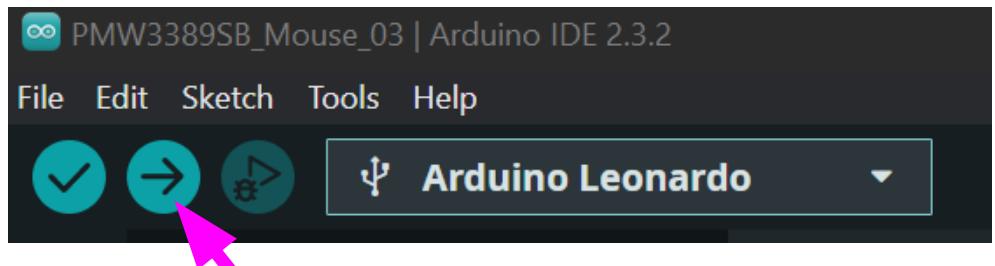

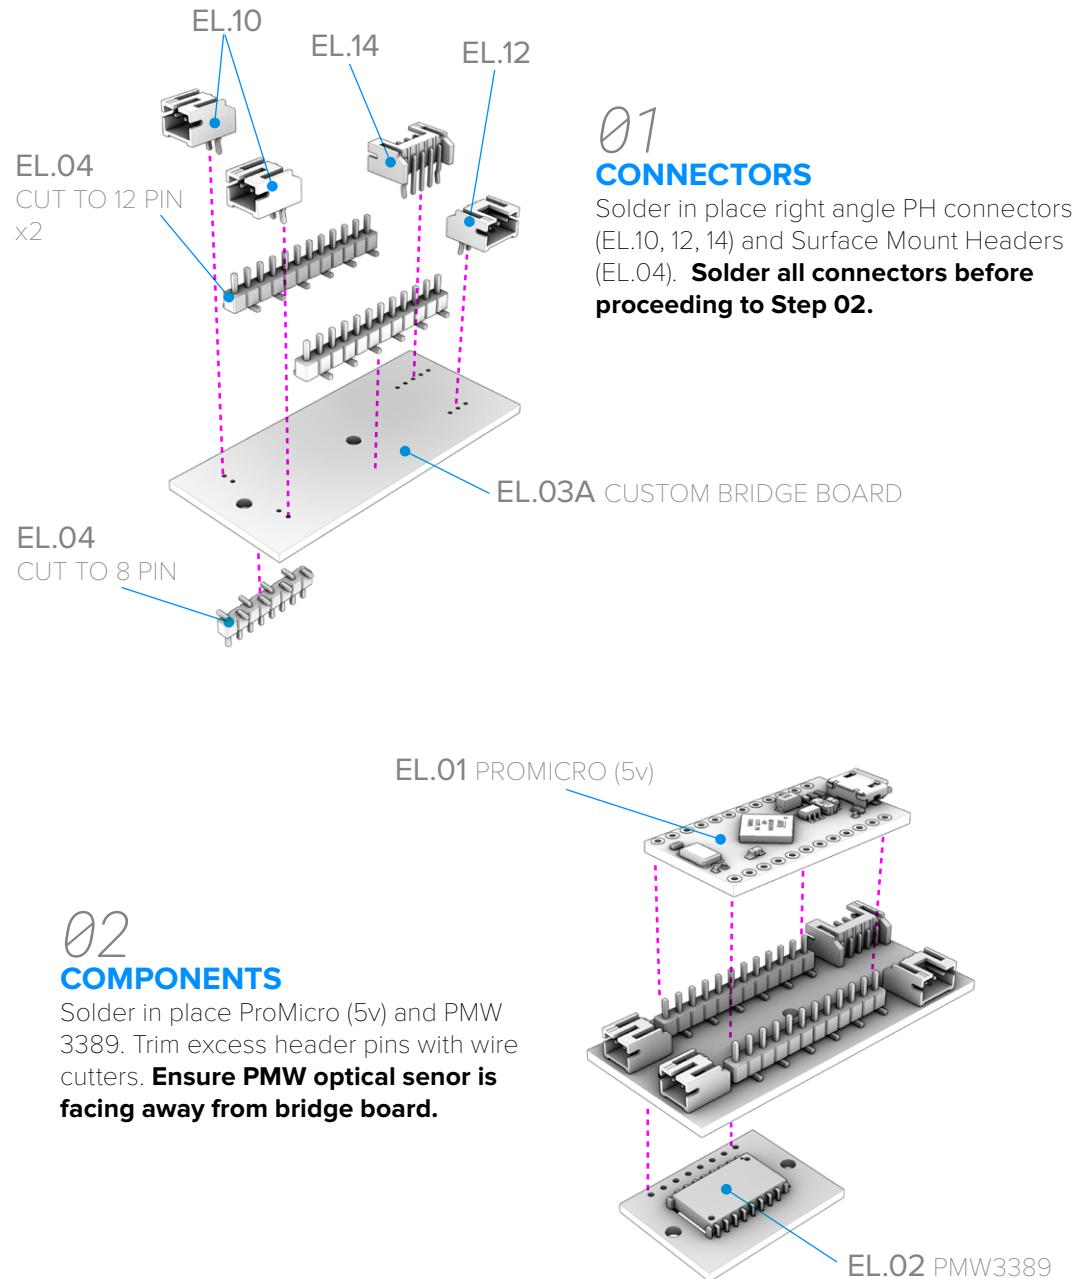

Finished electronics, sensor should be working. Plug in the micro USB connector again to check that mouse tracking is working. Cursor should move when you move the electronics assembly on a surface.


The focusing lens on PMW3389 is loose at this point so be careful while testing and keep it in safe place while continuing assembly.

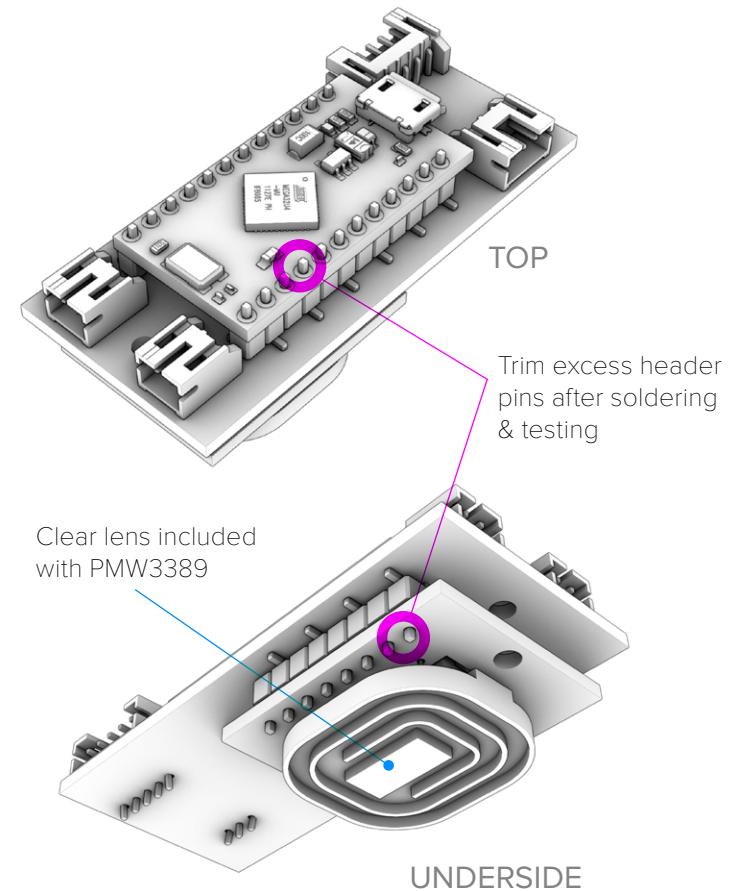


03

**PREPARE MICRO USB CABLE**

Carefully remove Micro USB connector cover & 85mm of sheathing from end of a common Micro USB to USB Type A cable using exacto knife. Cover Micro USB end of cable with heat shrink.

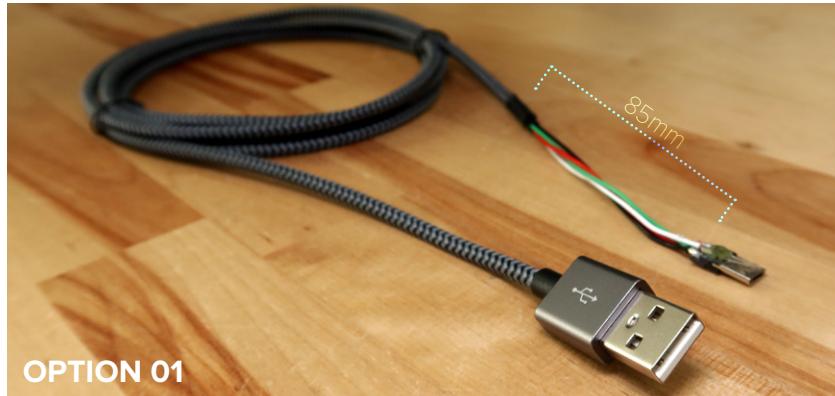**OPTION 01**

Alternatively, you can order a standard mouse replacement cable and Micro USB plug component & resolder. This will give you a thinner more flexible USB cable.

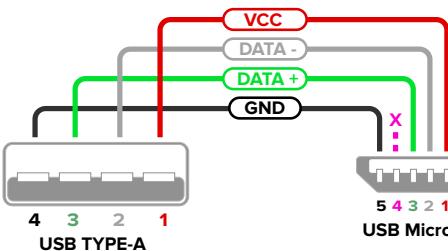

\*DIAGRAM COLOR CODE  
MAY NOT MATCH WIRE  
COLORS!


**OPTION 02**

**BUILD INSTRUCTIONS** V01.00



04

**WIRE NEO PIXEL**

Solder NeoPixel to PCB using 28 gauge wire. Hot glue or double stick tape the LED to top of micro USB plug facing upwards.

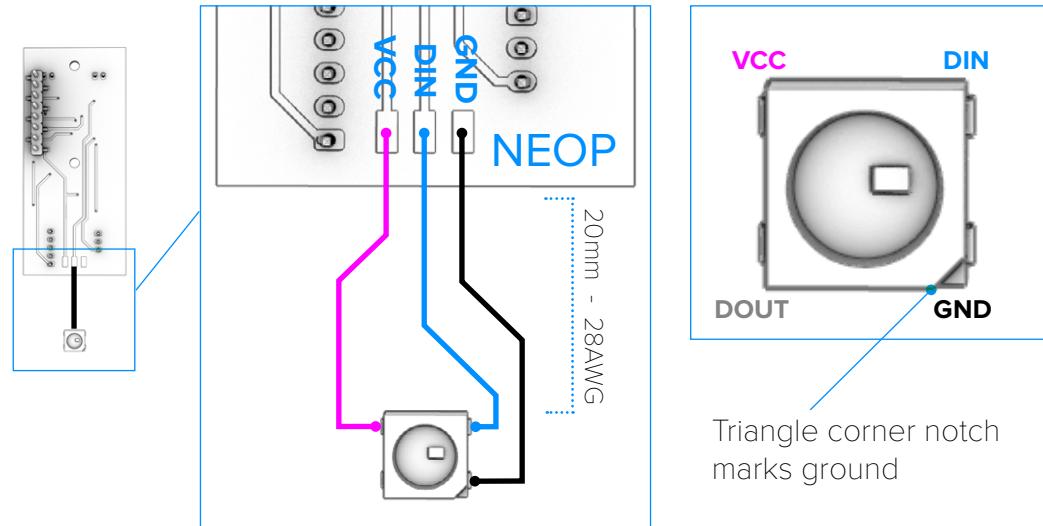


Triangle corner notch  
marks ground

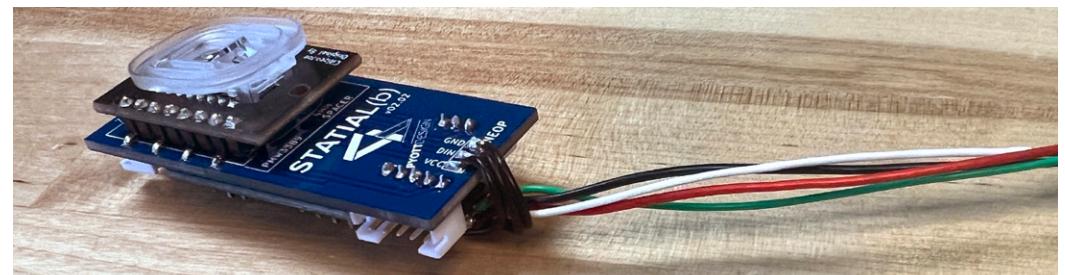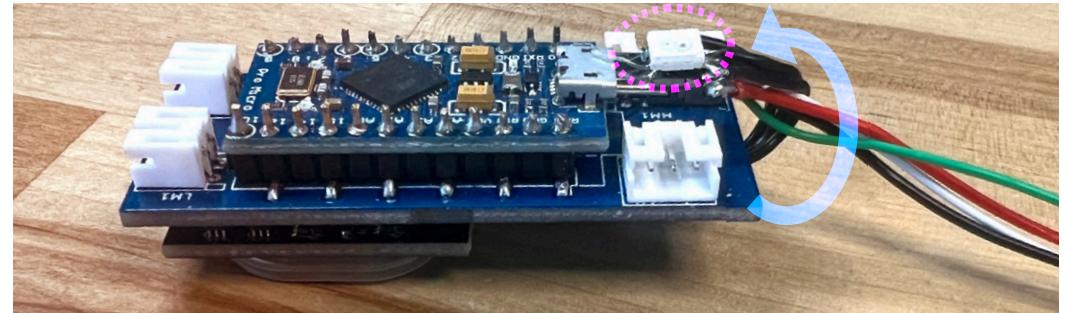

**05  
NUTS**


Seat nuts into holders. Secure with drop of hot glue if loose. Install m2.5 x 4mm screws into ball joint ends.

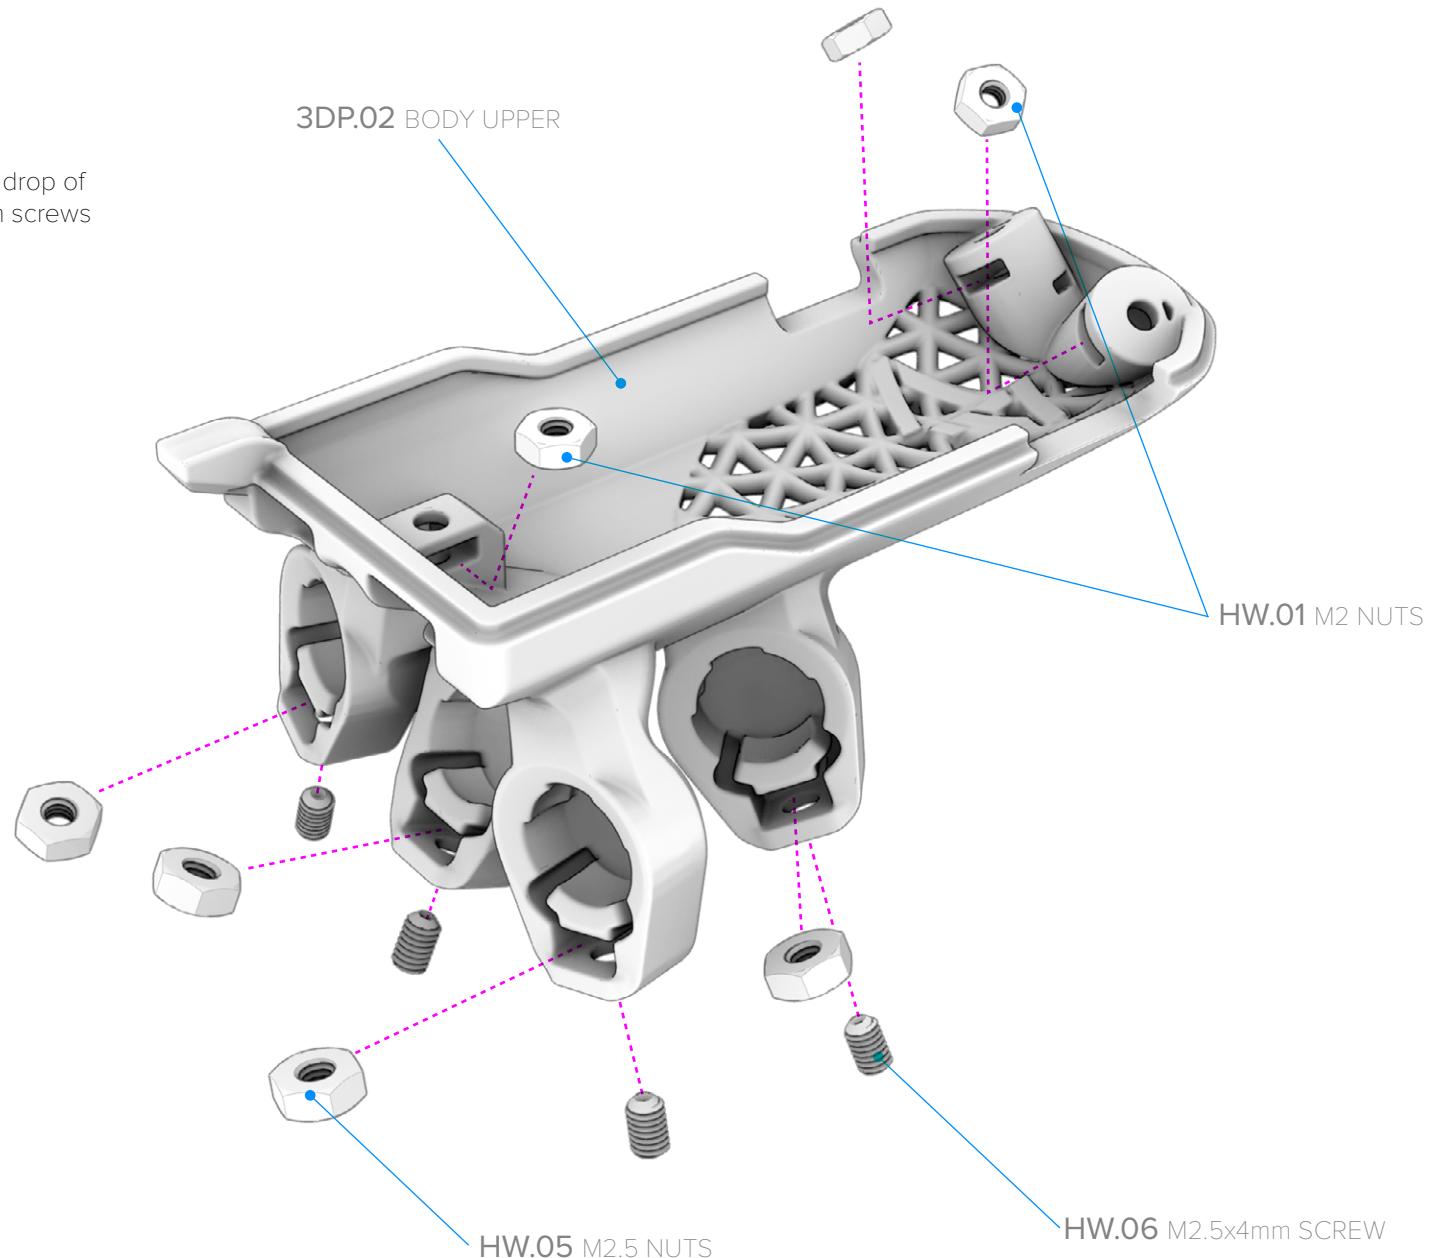


06

**ENCLOSURE**

Set board with PMW3389 lens into base. Unsheathed section of usb cable should wrap under board and out front of enclosure

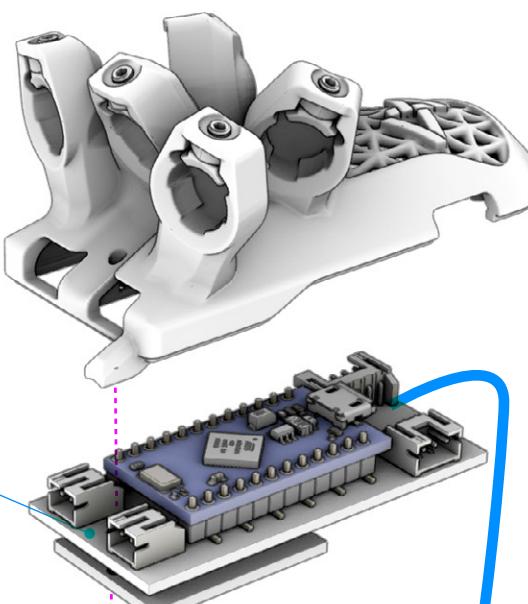

Pro Micro, bridge board and PMW3389 assembly

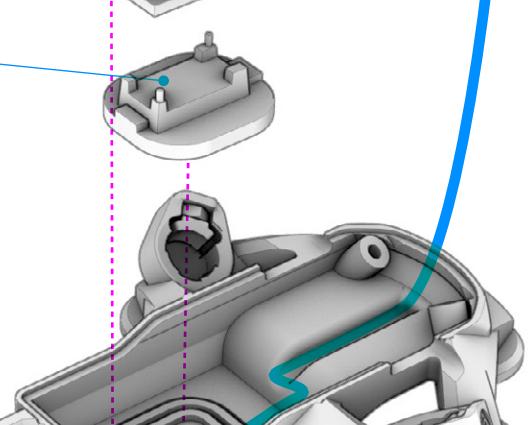

Clear lens included with PMW3389




Micro USB cable path indication

\*Micro USB cable not shown

07

**GLIDES**

Sand down any bumps in glide recesses and ensure surface is clean. Press adhesive backed mouse feet (HW.08) onto enclosure base. Glides must be for the newer generation Logitech G-Pro but can be from any 3rd party vendor.

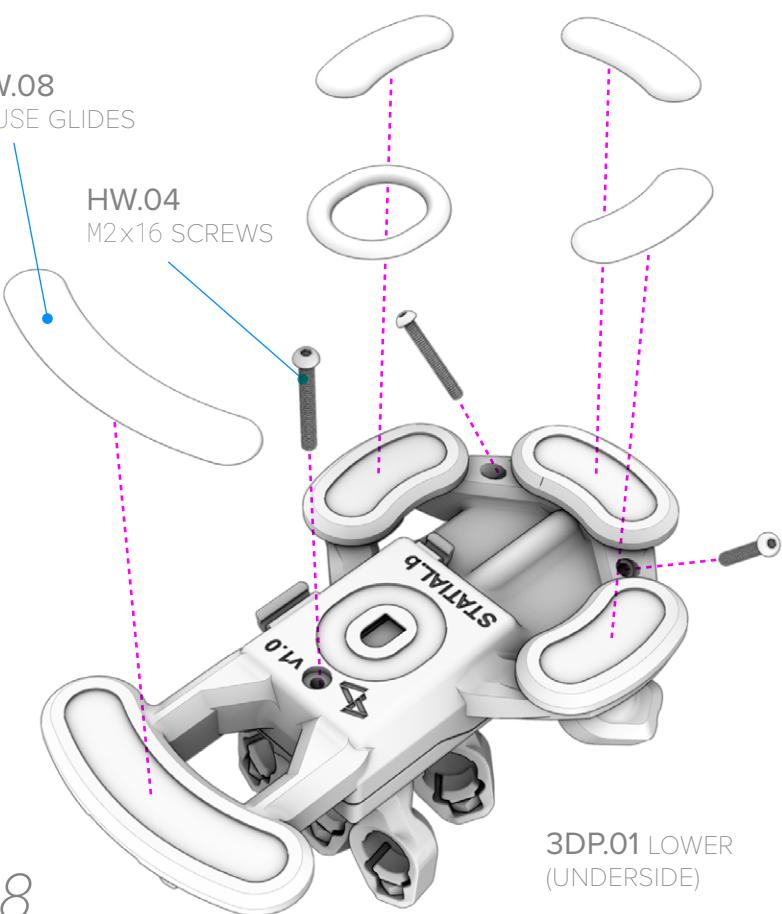


HW.08  
MOUSE GLIDES

HW.04  
M2x16 SCREWS


3DP.01 LOWER  
(UNDERSIDE)

08  
SCREWS

Install m2 x 16mm screws (HW.04) to secure enclosure parts together.

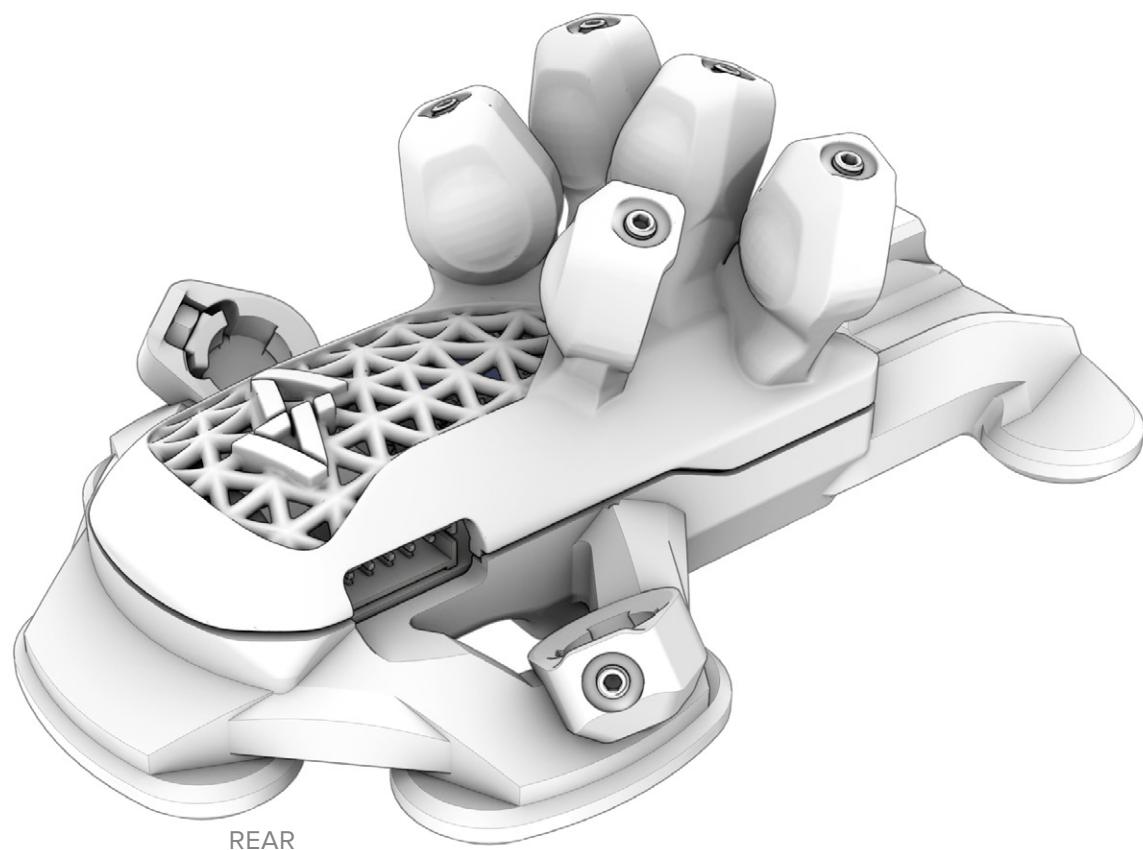

REAR

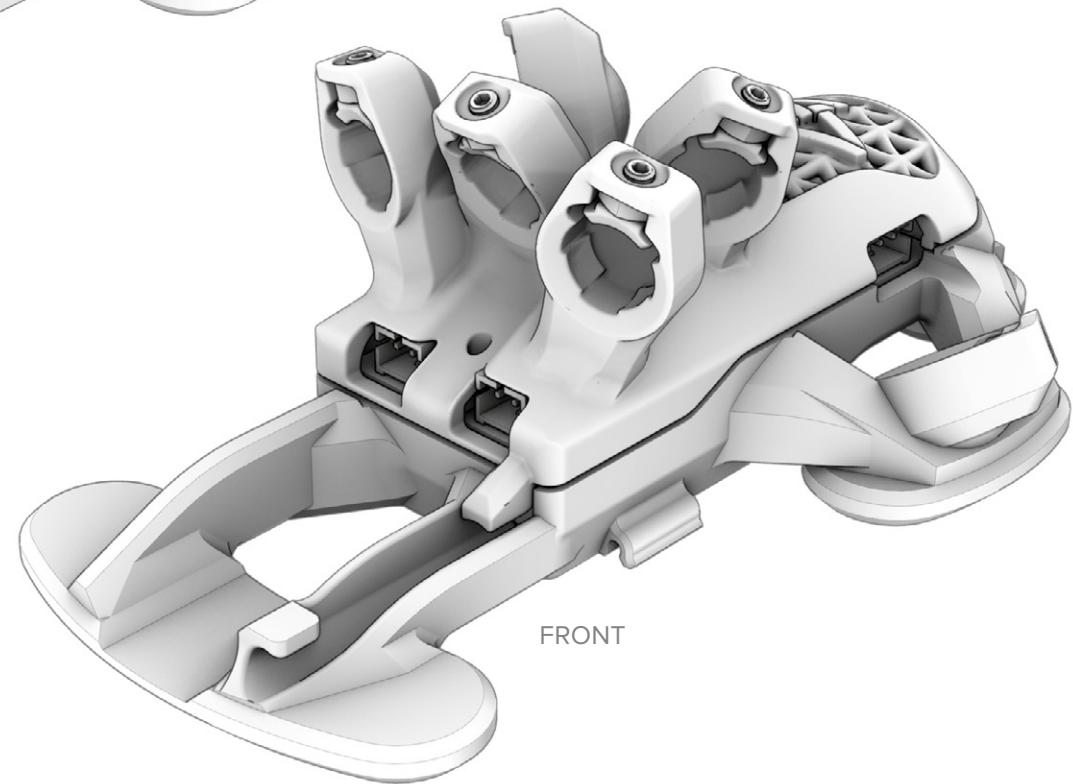


FRONT

\*Micro USB connection  
cable not shown

09

**ARMS**


Put extension arms together. Tube stock can be cut to length using jig supplied in STL.zip "extras" folder. Once everything is tightened in place, none of the components should move. Repeat for total of 4 assemblies.

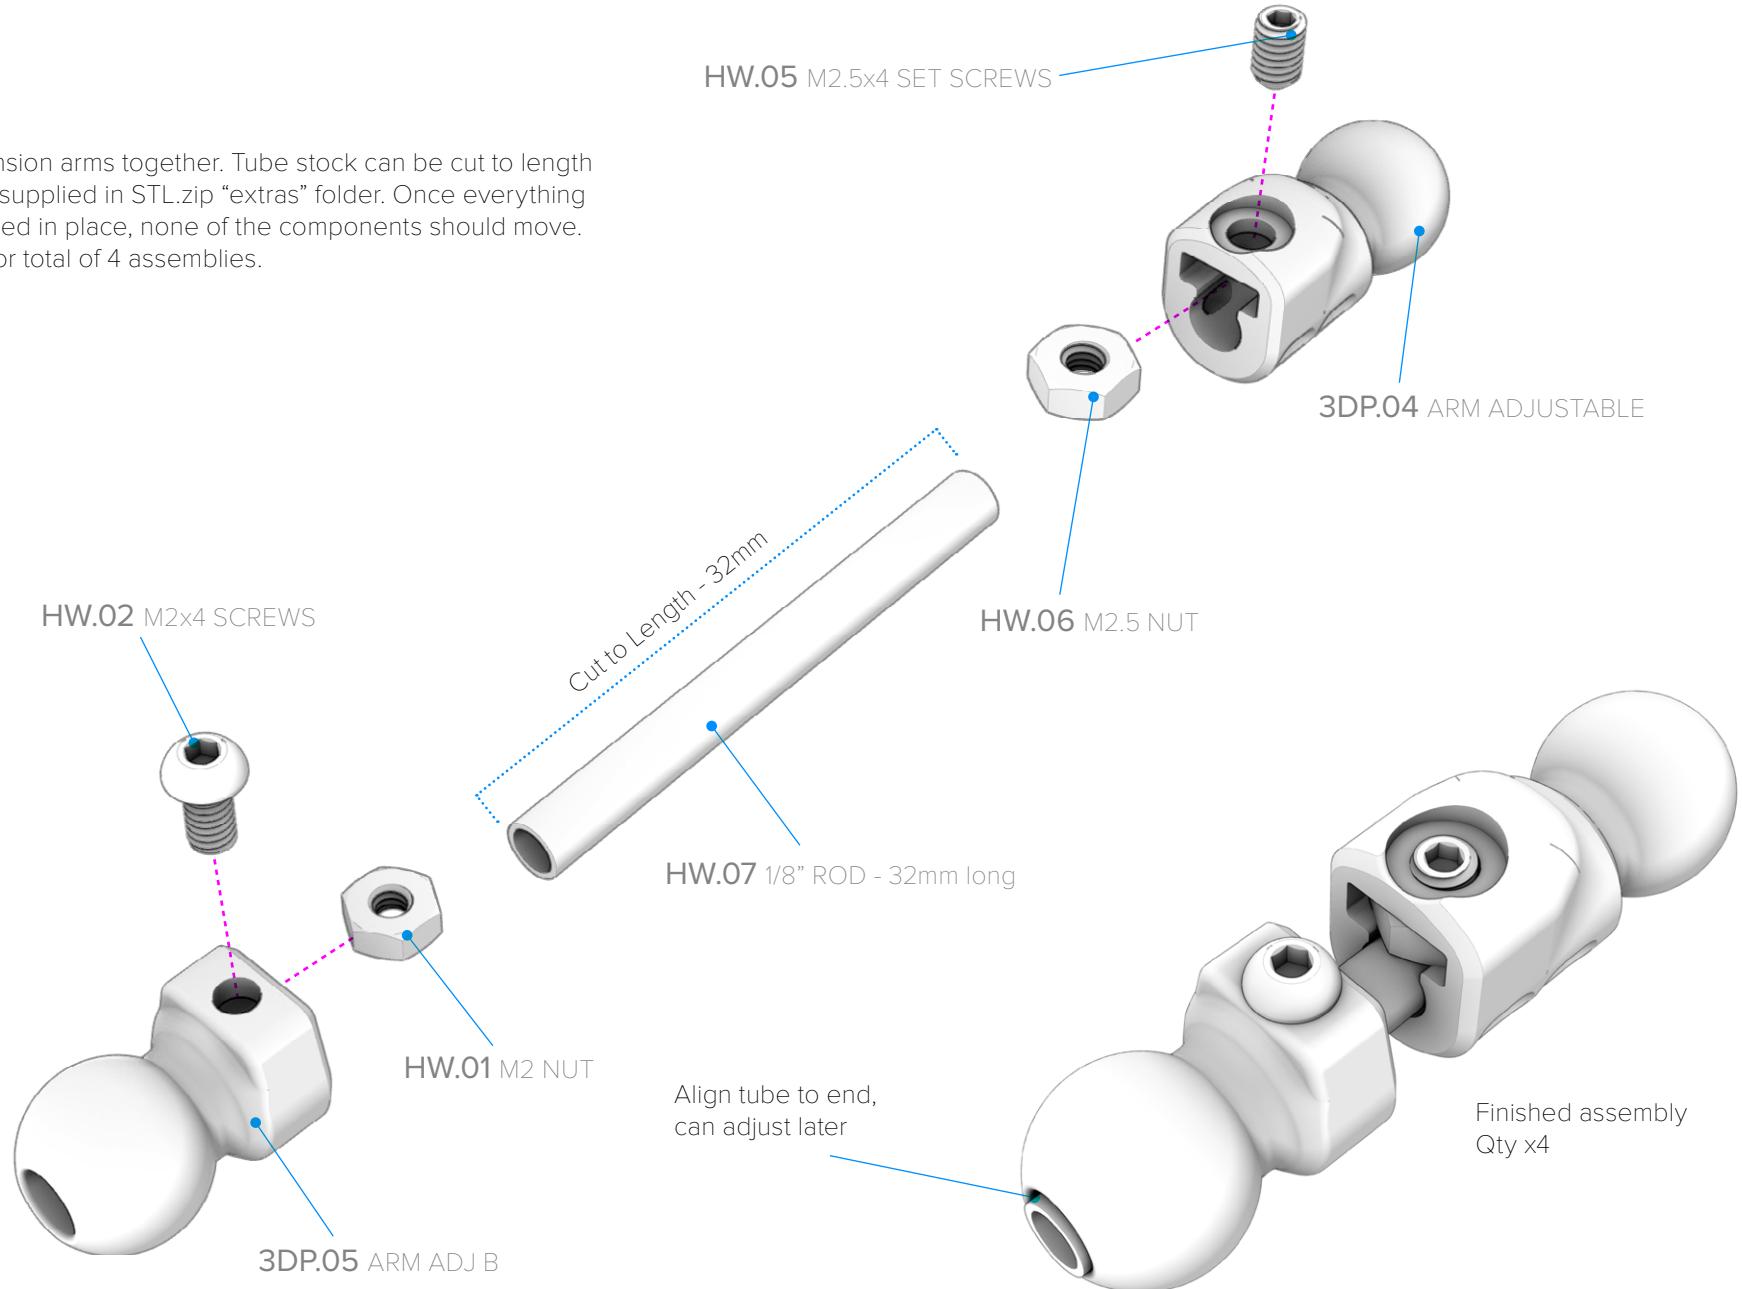


10


**INSTALL ARMS**

Install all arms into ball joint sockets.  
Make sure all lock screws are loose  
during install. All arms should snap into  
place with moderate pressure.

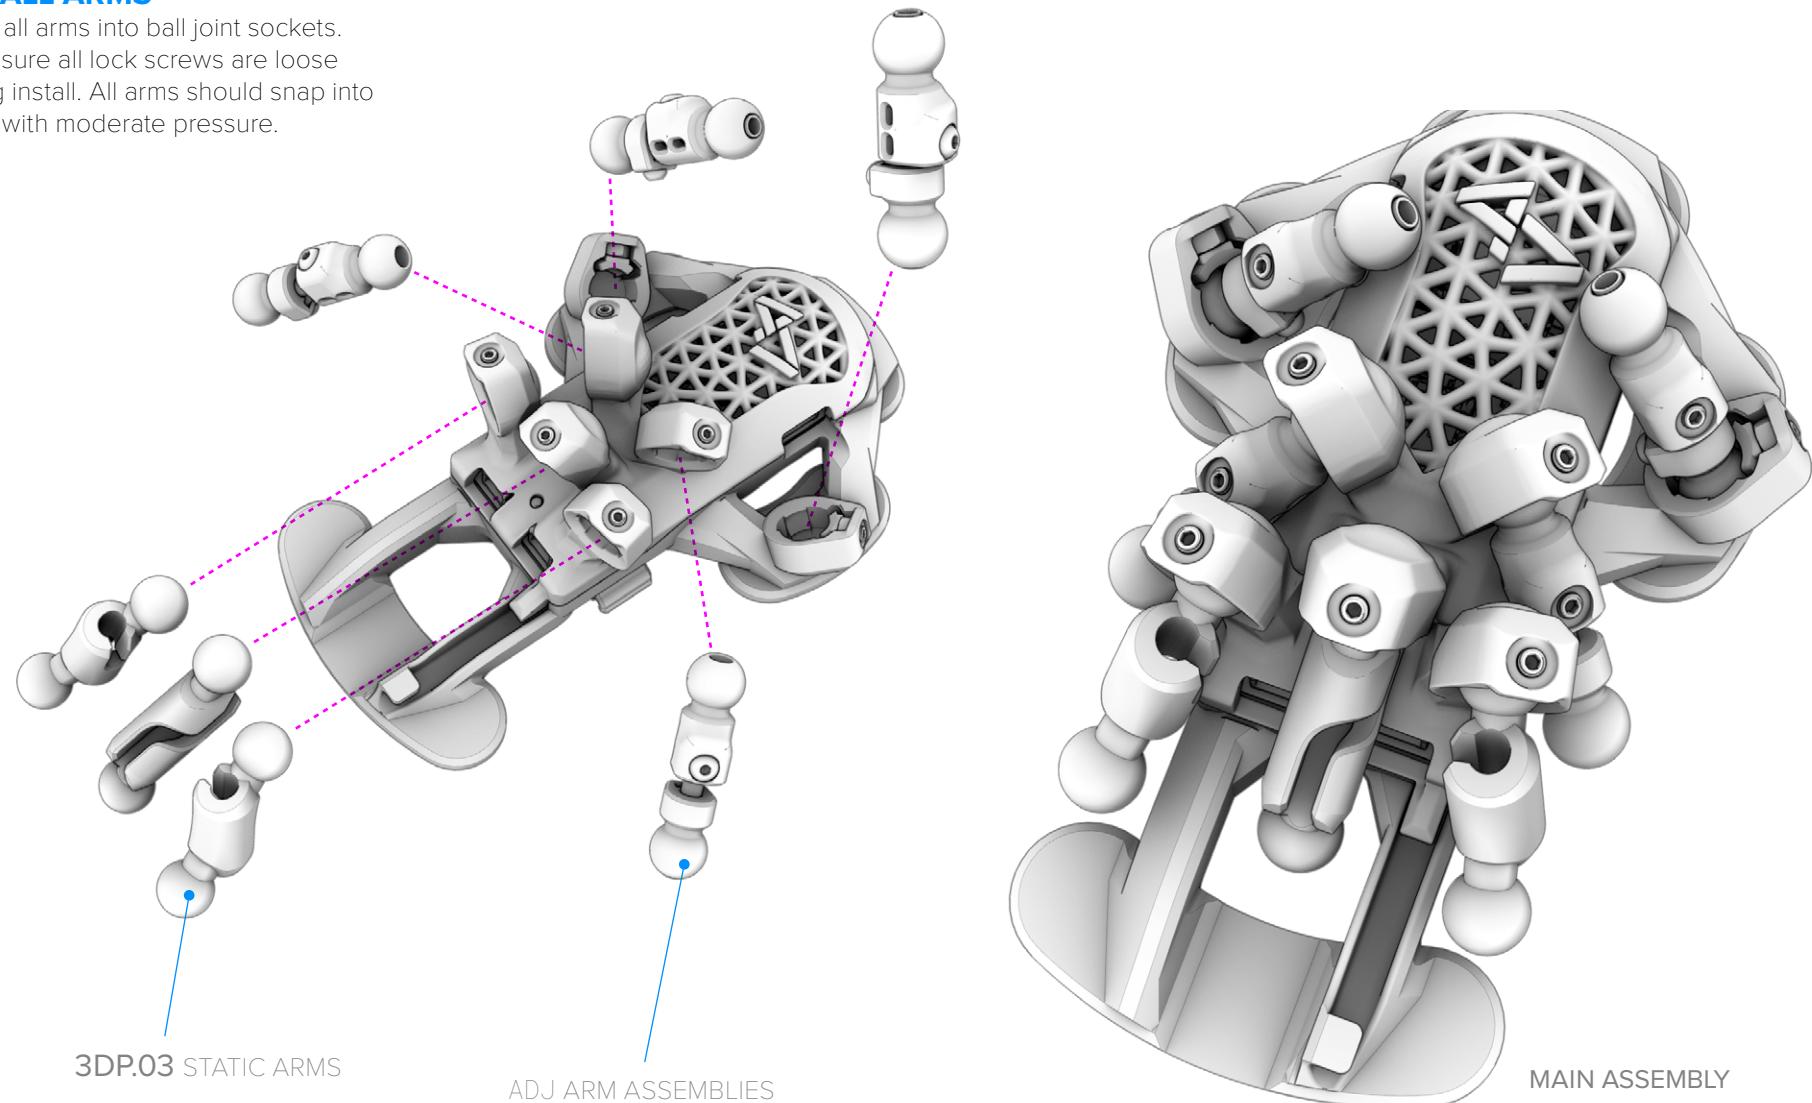

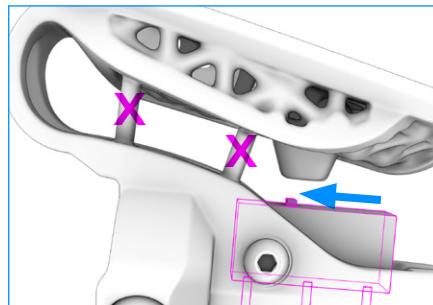


TRIM SUPPORTS AFTER  
FINAL CURE, MOUSE  
SWITCH FACES BACK

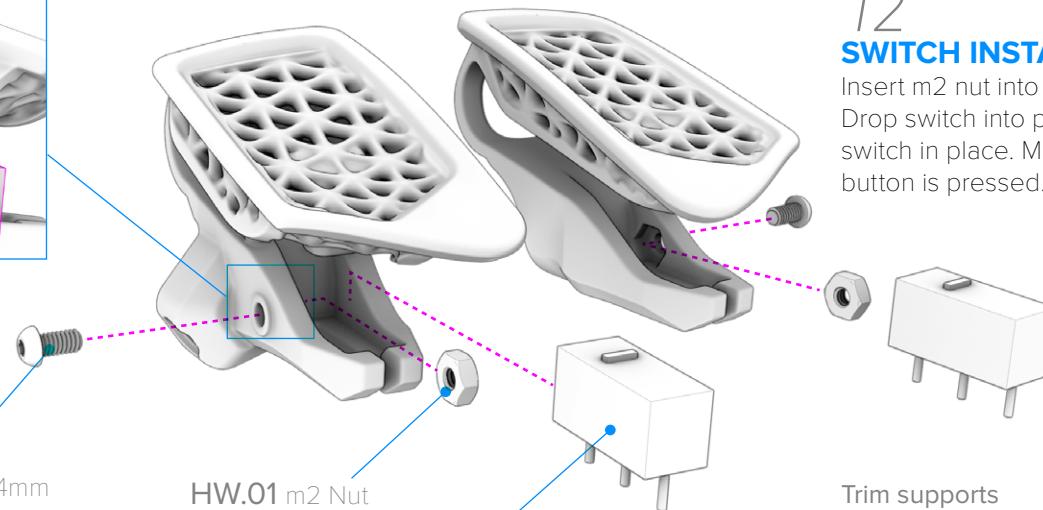

12

### SWITCH INSTALL

Insert m2 nut into capture pocket on inside of switch holder. Drop switch into pocket holder, screw in m2x4mm to secure switch in place. Make sure switch is triggering when mouse button is pressed.

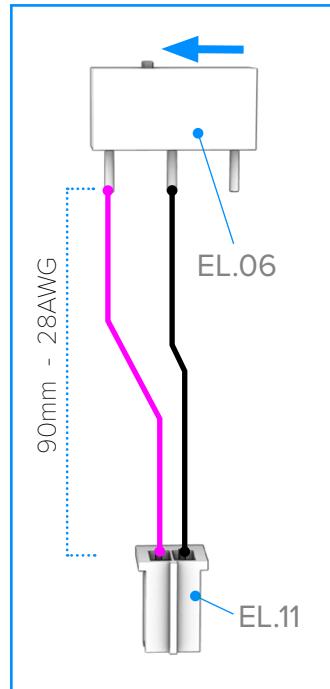

11


### WIRE SWITCH

Solder leads to middle and switch-side posts. Crimp other wire ends and install into JST PH 2 pin plug. Which leads go into which plug post doesn't matter on this set.

13

### BALL JOINT

Install m2.5 nuts and m2.5 x 4mm screws into ball joint ends.

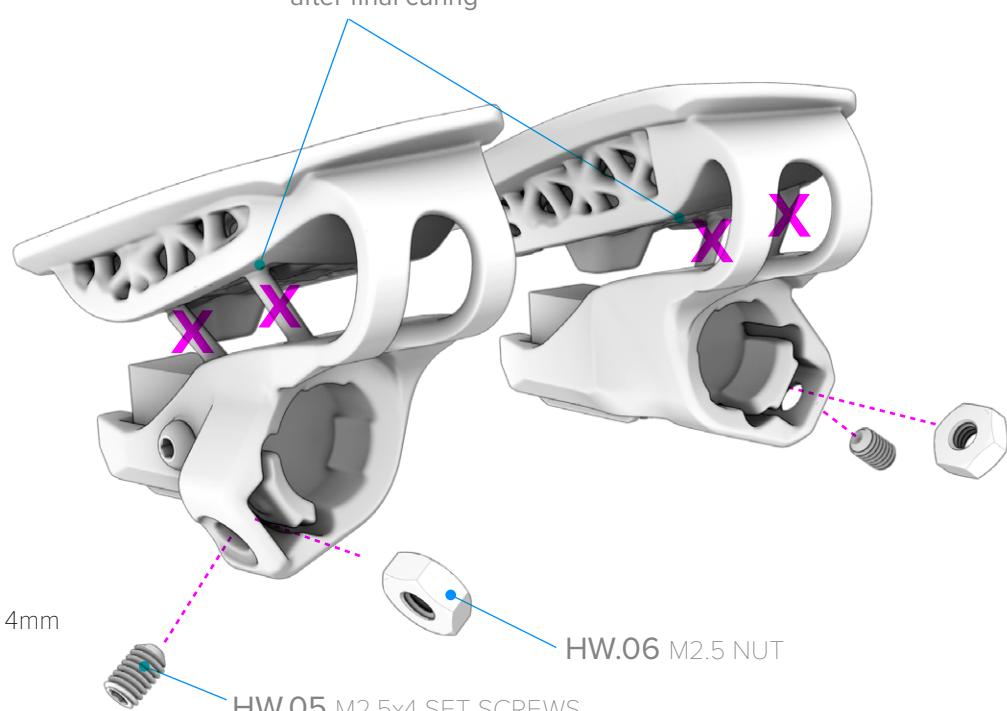



HW.05 M2.5x4 SET SCREWS

HW.06 M2.5 NUT

14

**ROTOR ASSEMBLY**

Press fit rotary encoder into rotor cap. Slide scroll wheel onto encoder and cap. Affix to flex frame using m2x8mm screw. Apply small dab of lithium grease on wheel axle/pivot area. **The Flex Frame is very fragile before being fully assembled. Be careful with it when removing print supports.**

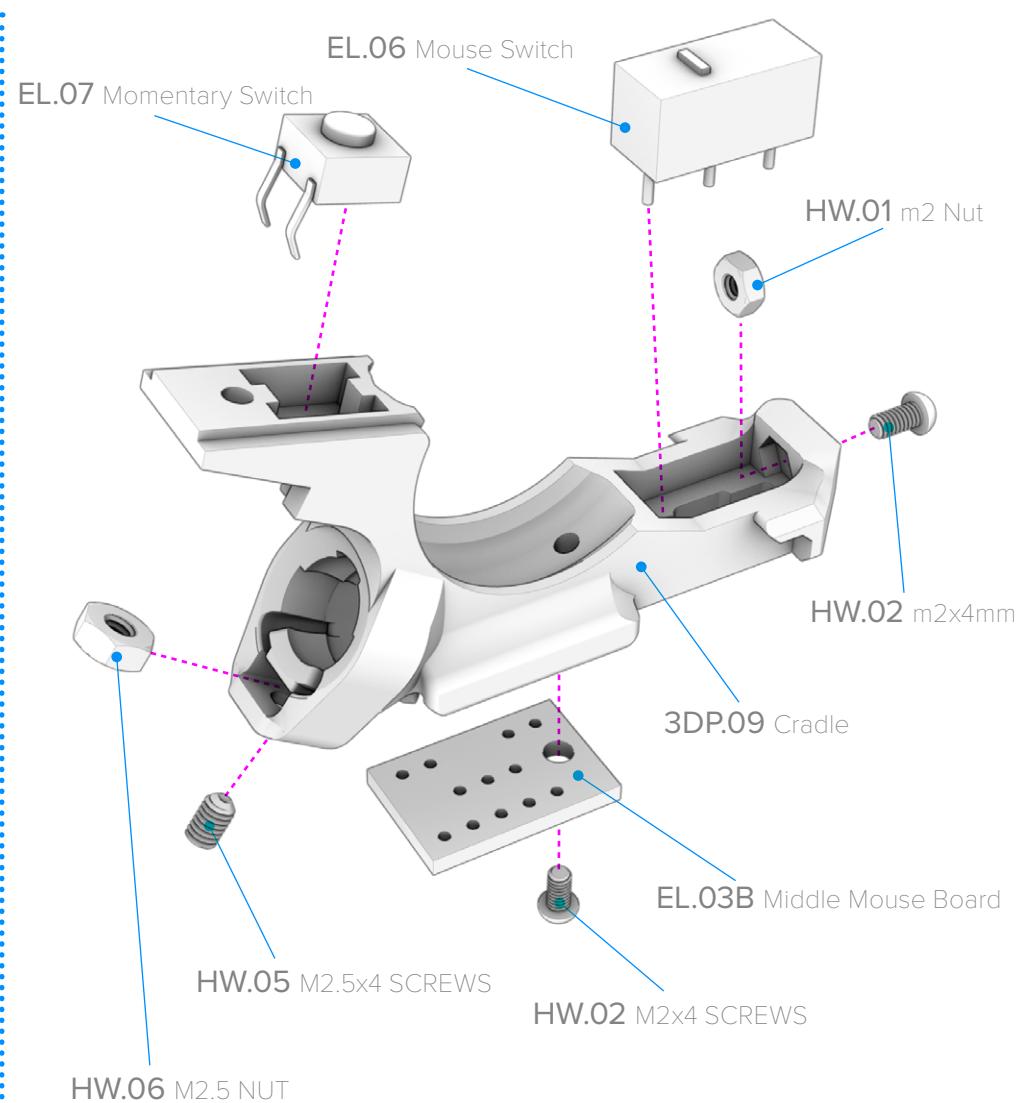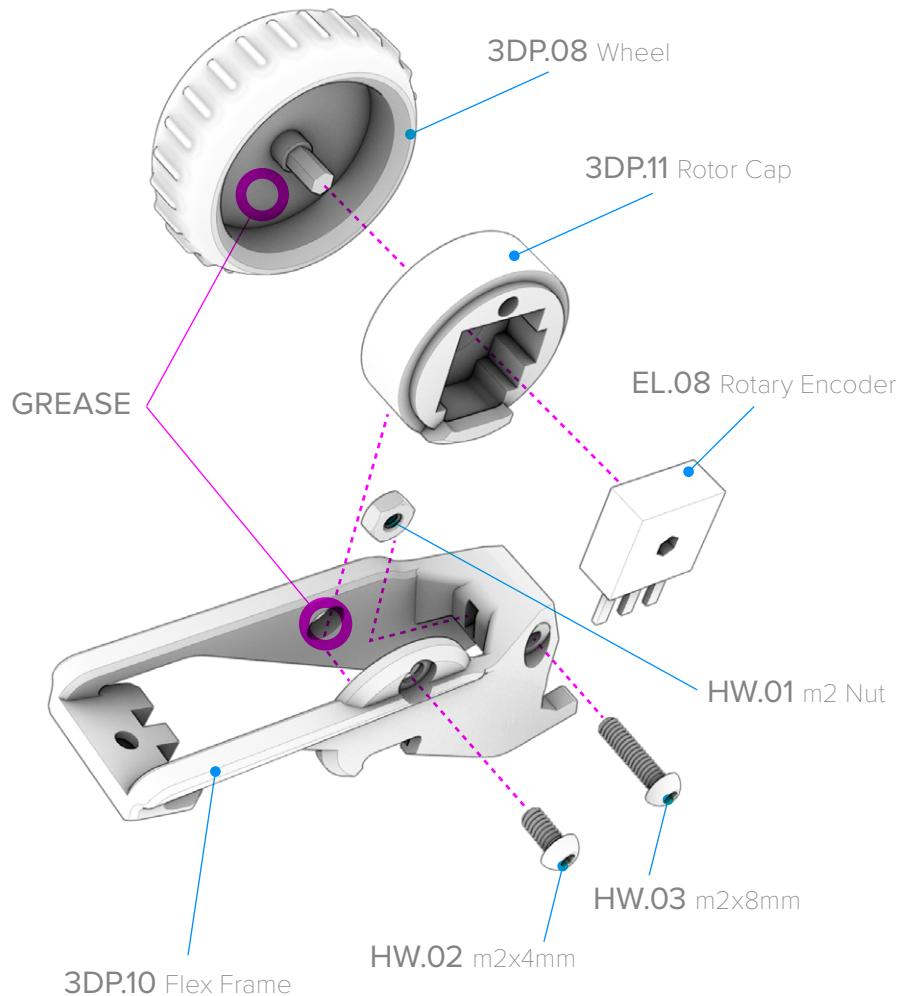



**15**  
**SWITCH INSTALL**


Trim unused posts on side of DPI switch and seat into wheel frame. Install mouse switch retention screw and ball joint retention screw & nut.


## 16 WIRE MIDDLE

This is the most complicated area to wire on the whole build. Rotary encoder, DPI button and Mouse Switch all route into the mini PCB (EL.03B). Please note recommended wire lengths connecting each component. **DPI switch and front mouse button wires must be fed through wheel cradle before final soldering.**

**Ground is center post of 5 pin plug.** Rotary encoder set is on one side, switches are on the other. If there is a mistake made during wiring it can be resoldered or fixed by changing software `#define Btn` and `#define PIN_IN` values in Arduino IDE.

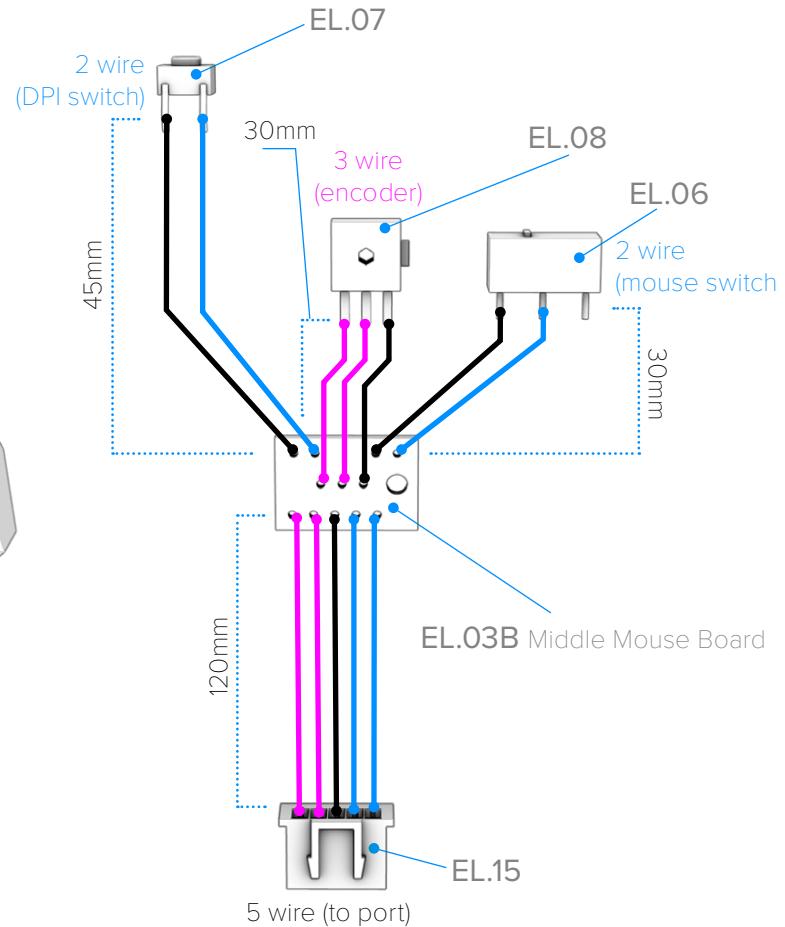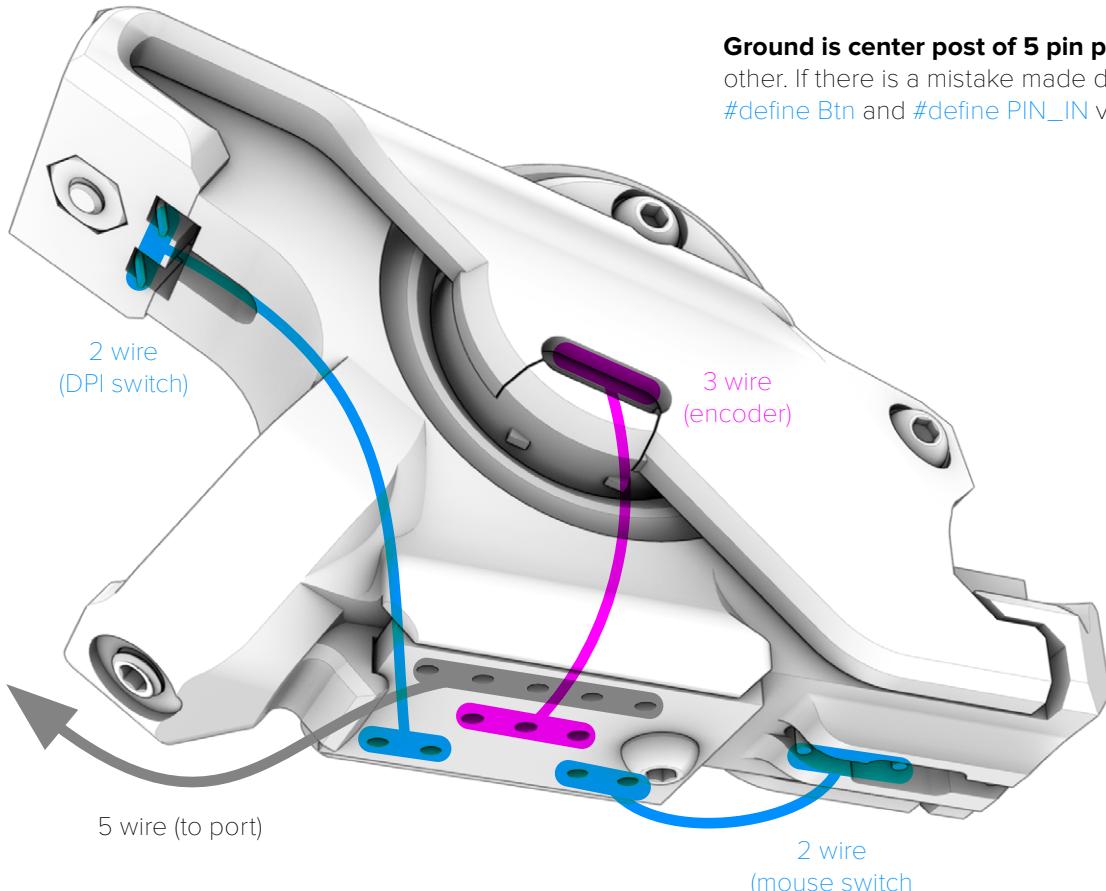

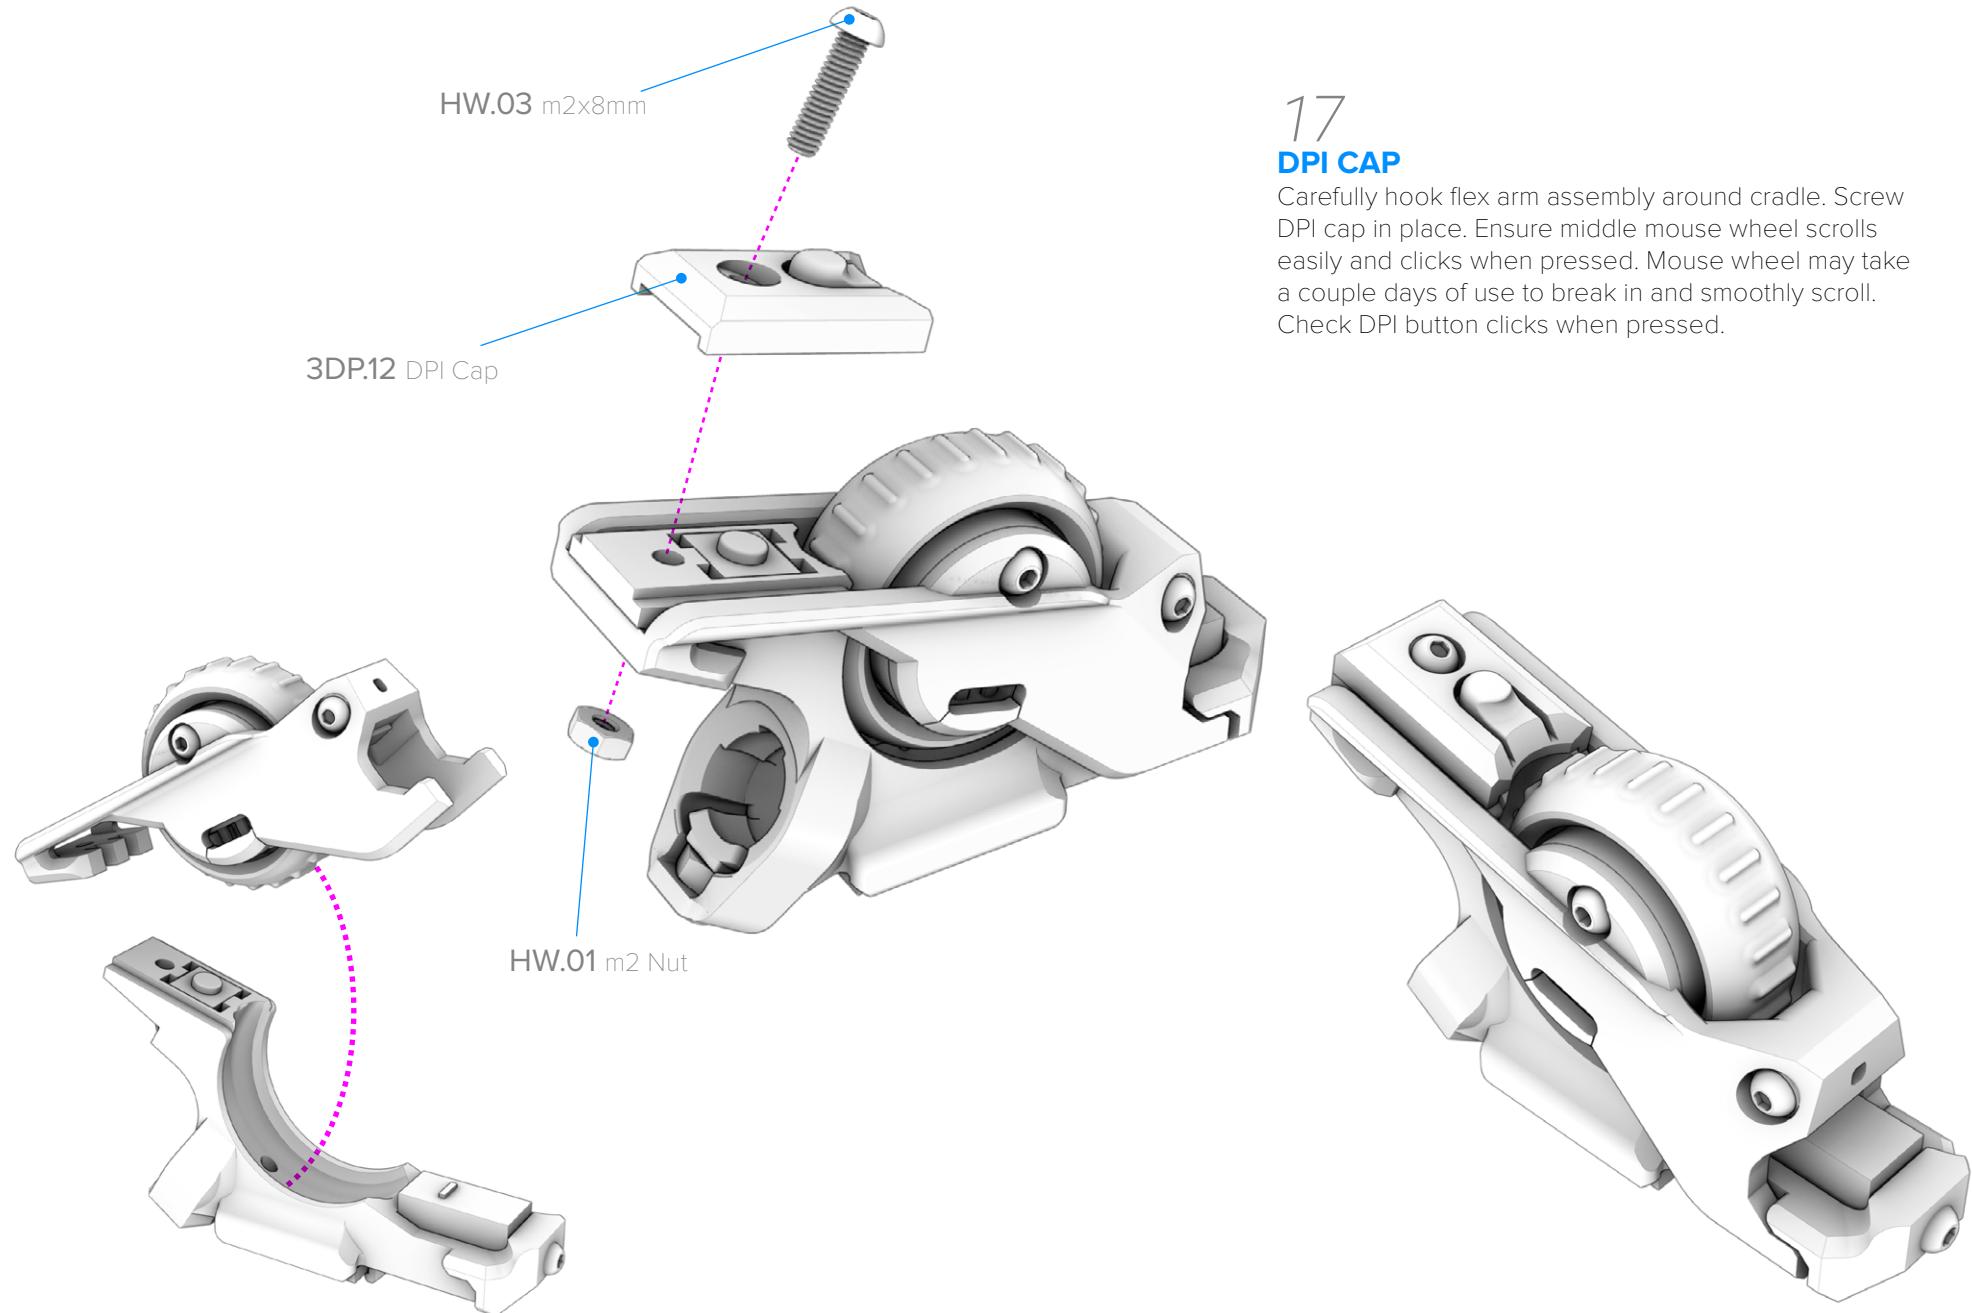

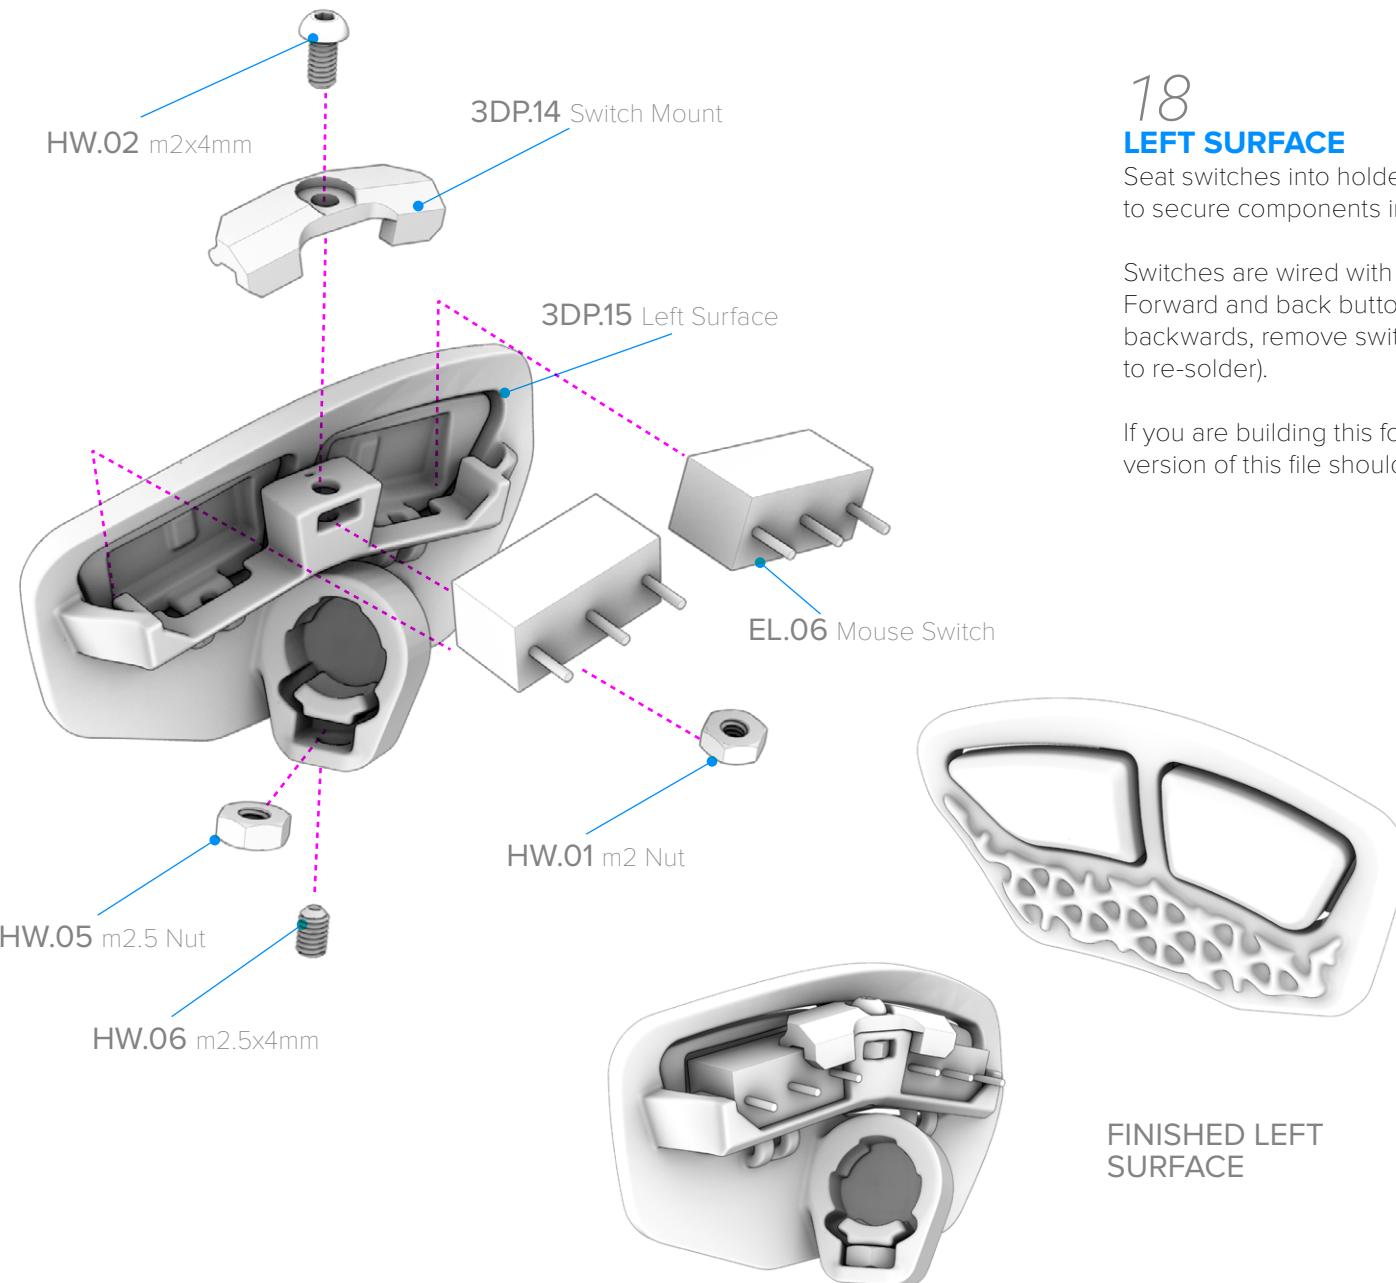



## 18 LEFT SURFACE

Seat switches into holders and m2 nut into slot. Attach Switch Mount to secure components in place. Assemble ball joint clamp.

Switches are wired with shared ground going into center pin of plug. Forward and back buttons are on either side. If button pins are wired backwards, remove switch mount and swap switch locations (no need to re-solder).

If you are building this for left handed use, the alternate mirrored version of this file should be used (found in the STL.zip extras folder).

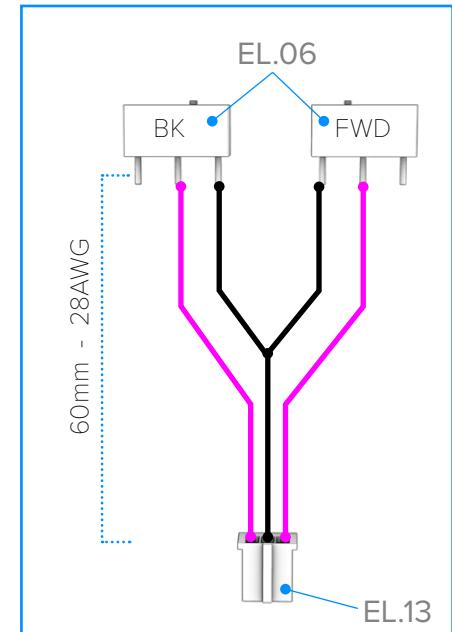


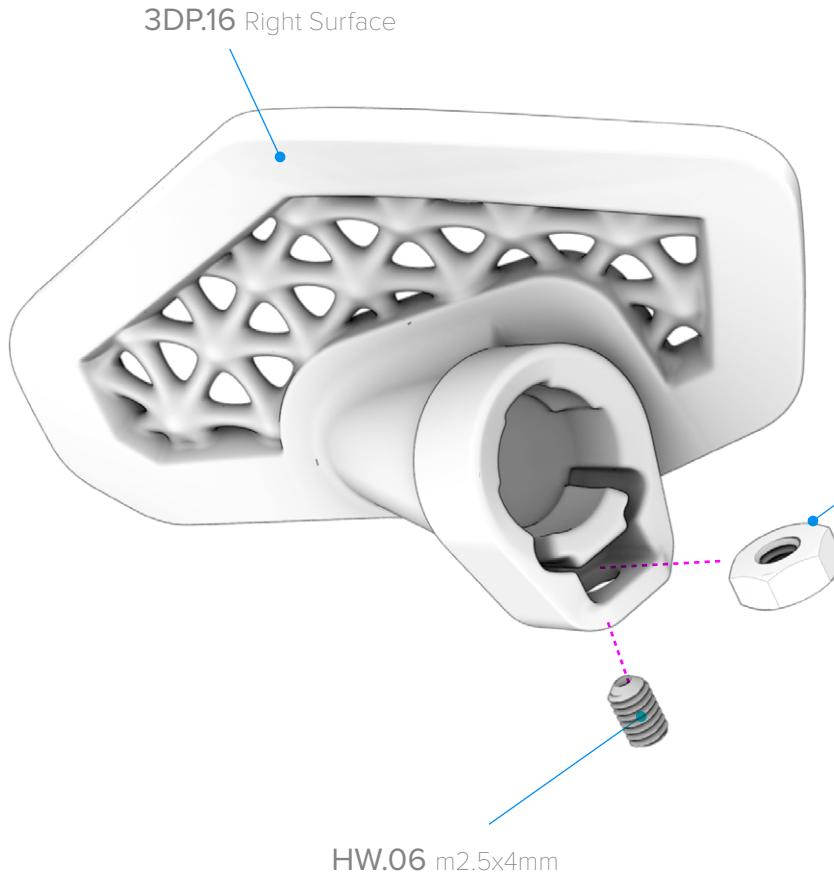


## 19 RIGHT SURFACE

Assemble ball joint clamp with normal screw/nut combo.


If you are building this for left handed use, the alternate mirrored version of this file should be used (found in the STL.zip extras folder).

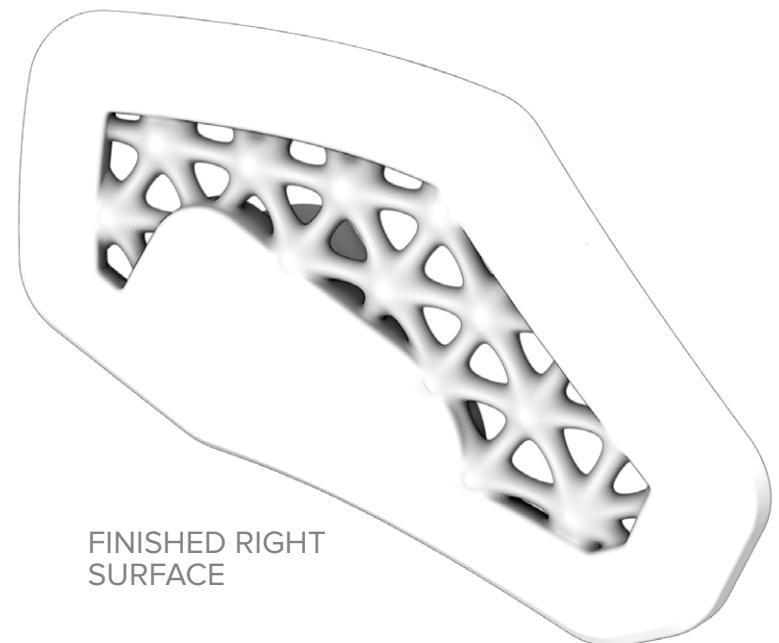



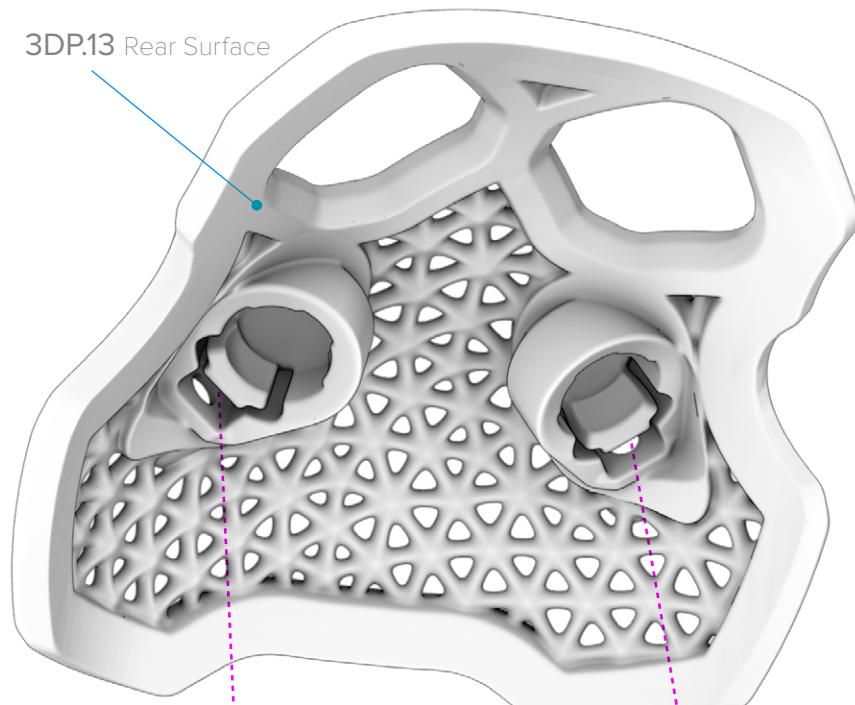


20  
REAR

Assemble ball joint clamp with  
normal screw/nut combo.

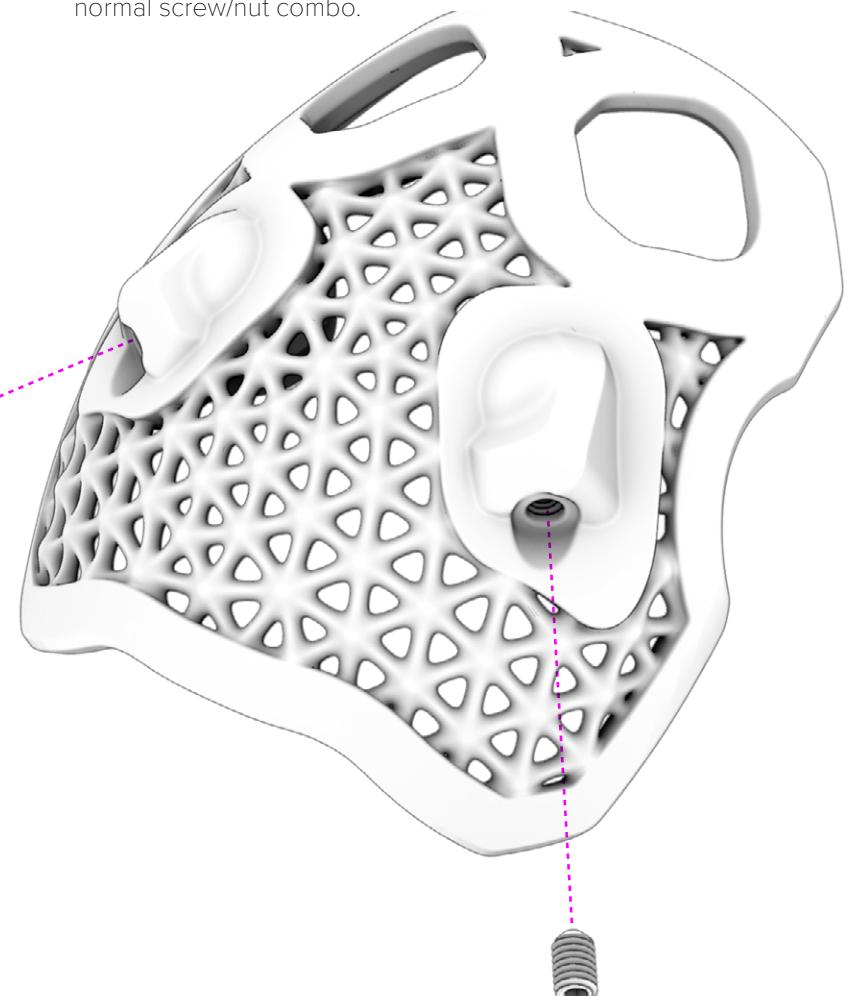


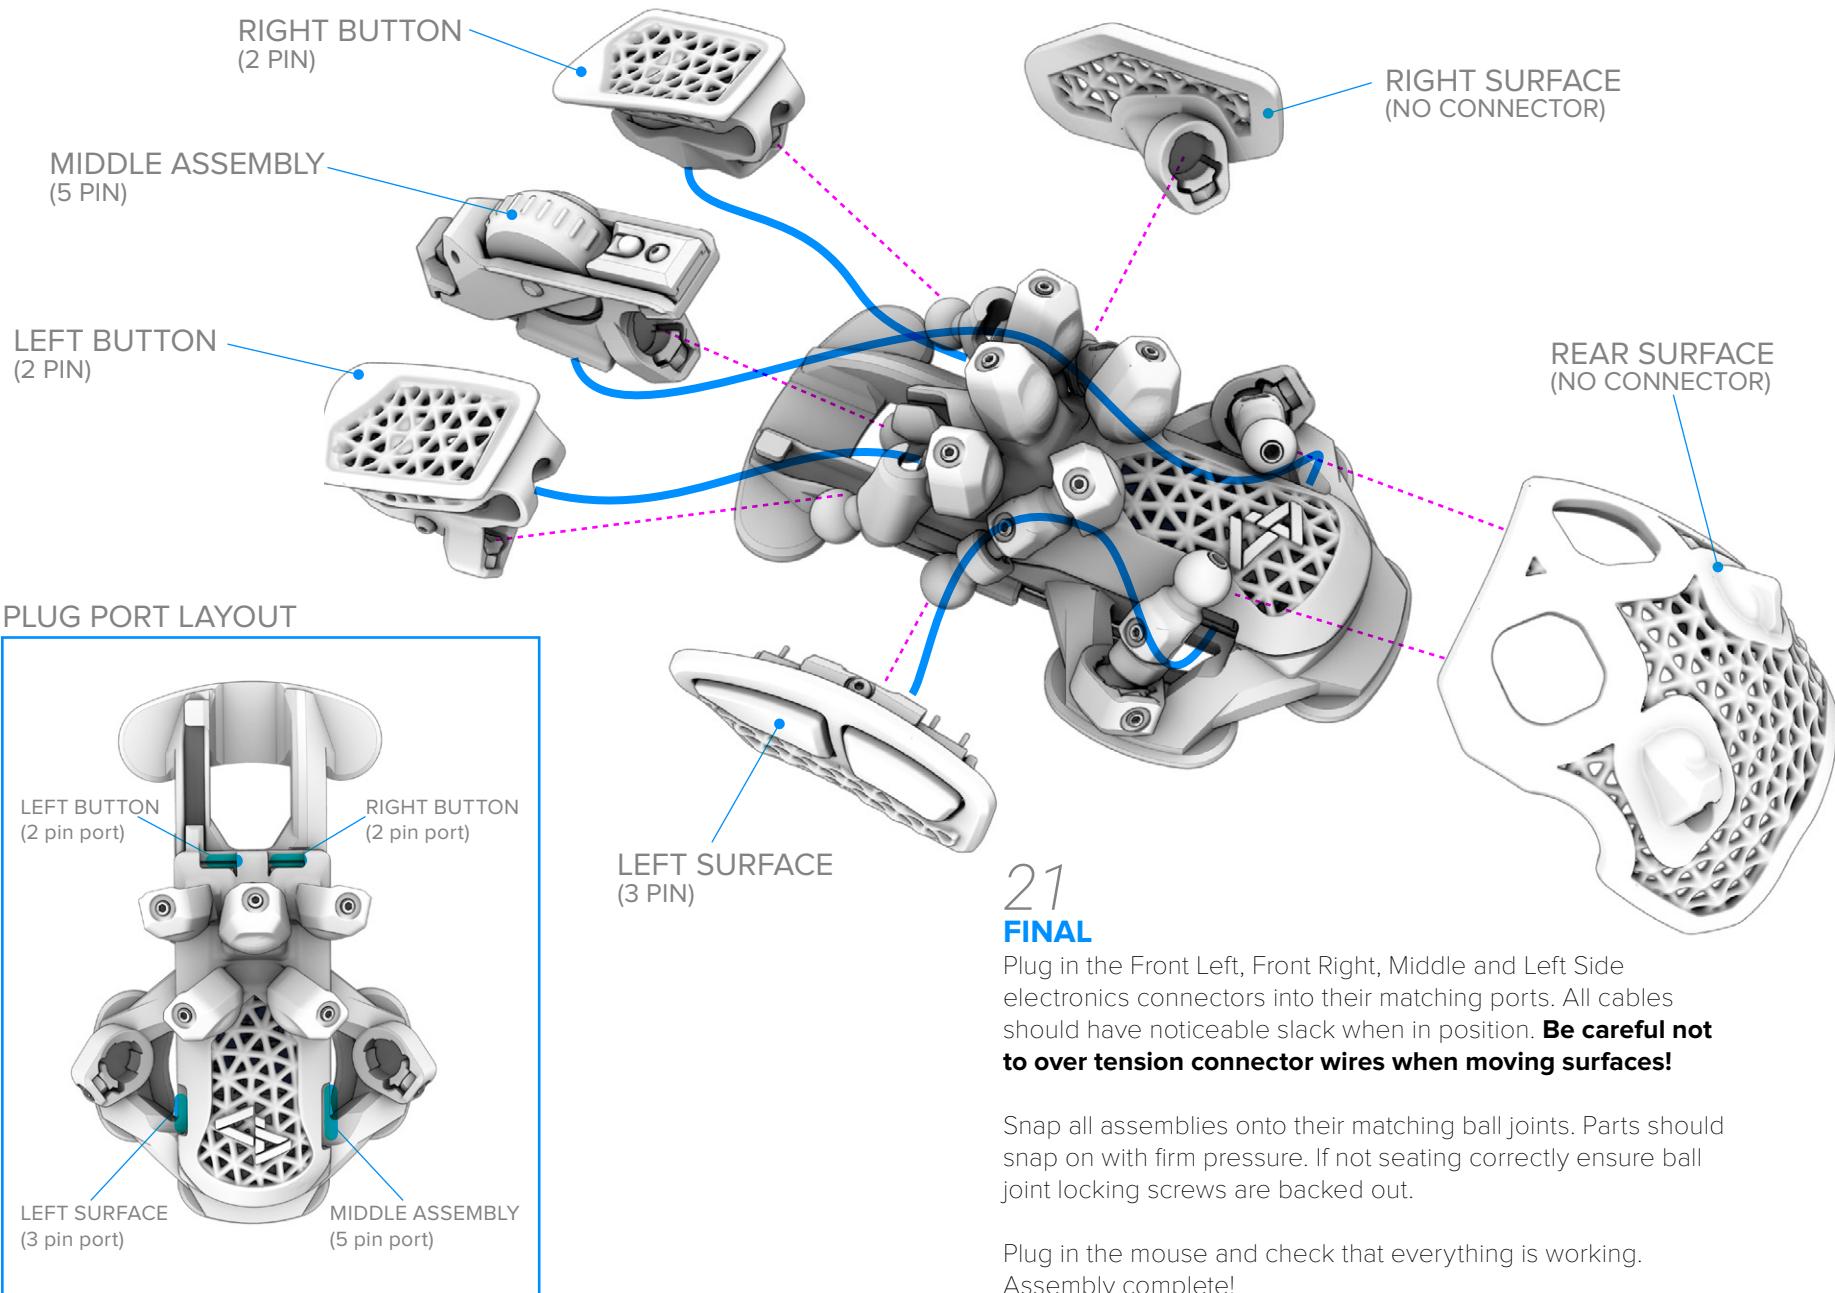

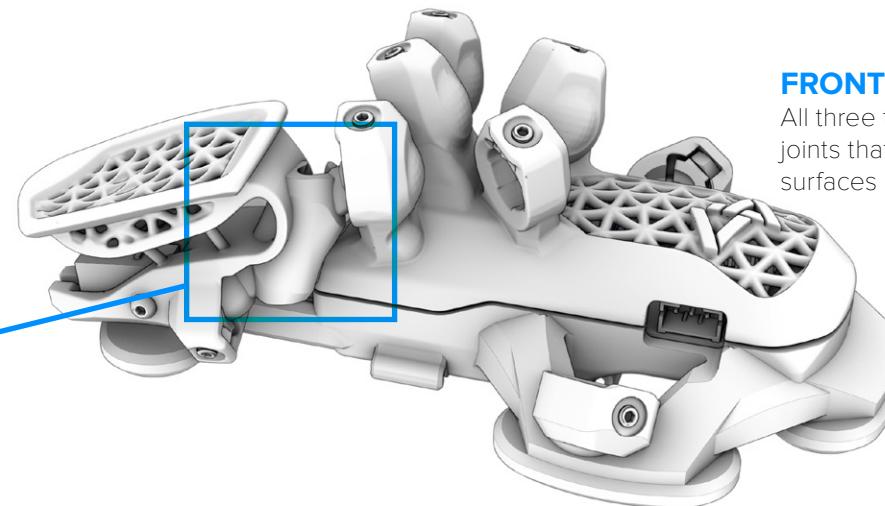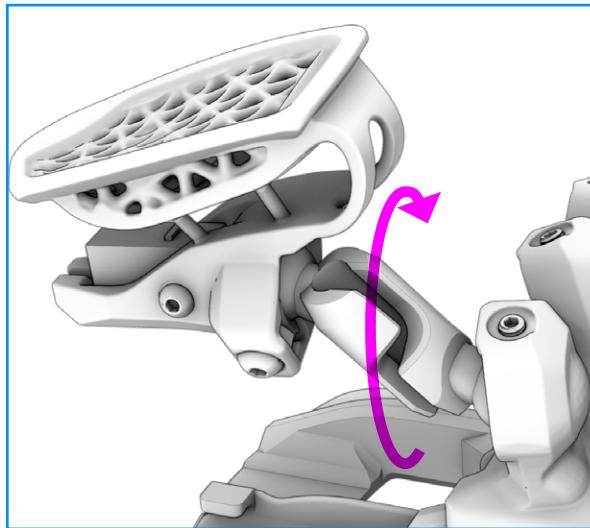

### FRONT ARMS

All three front arms have asymmetrical joints that will shift the connected surfaces up when rotated.

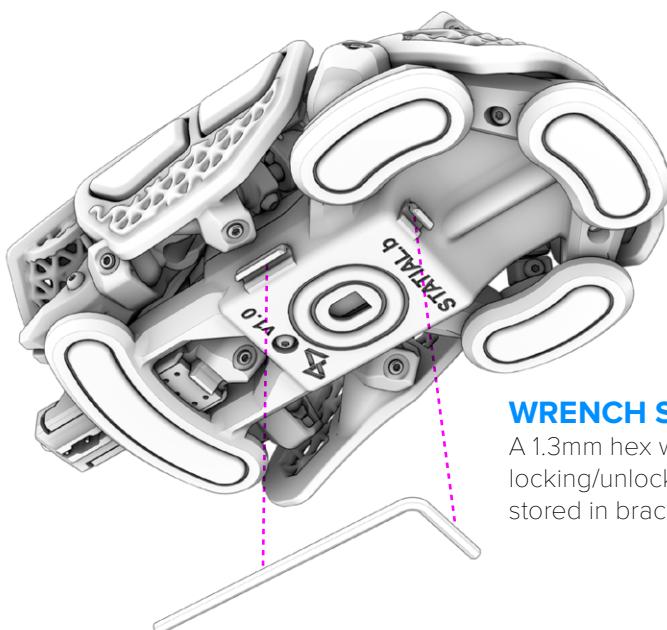



### WRENCH STORAGE

A 1.3mm hex wrench used for locking/unlocking surfaces can be stored in bracket under Statial.b

### 1.3MM WRENCH

It takes some practice to get familiar with which screws release which surfaces for adjustment. Both the 2mm button head screws and 2.5mm set screws use the same size 1.3mm hex wrench. The set screws are always used for adjustable surfaces, the 2mm button head screws are always for “permanent” parts.

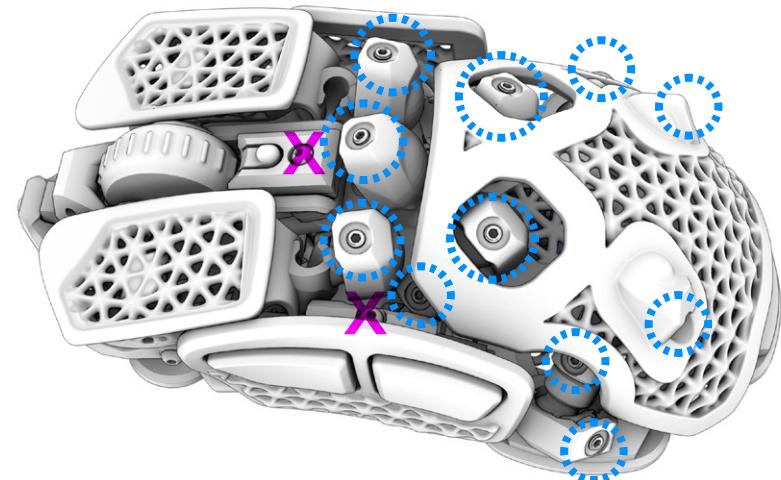

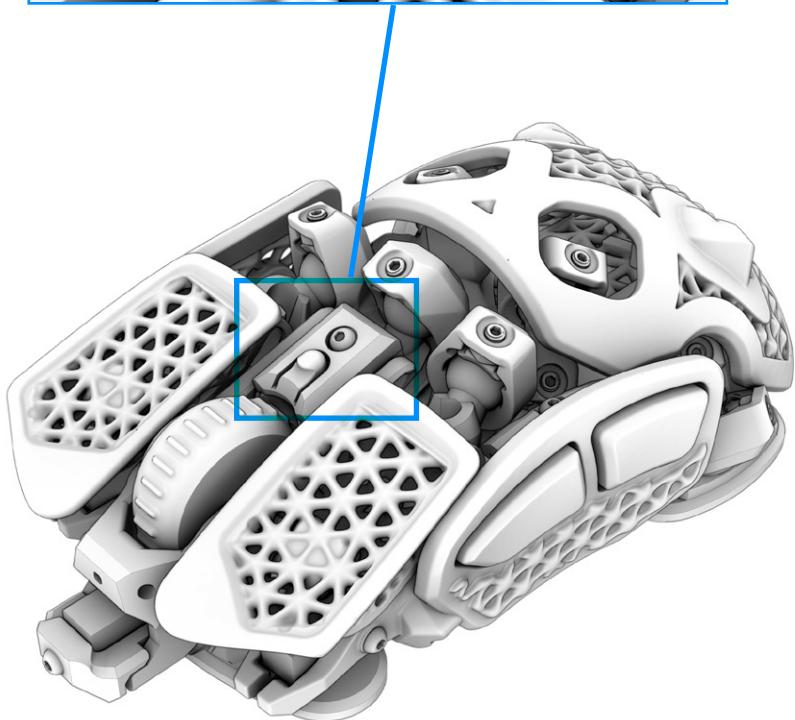

## DPI TOGGLE

The button above the wheel toggles DPI with matching LED color switching. Default startup setting is 2,300 DPI / Purple. Pressing button switches between:

- 400 / Yellow
- 800 / Green
- 1,600 / Teal
- 2,000 / Blue
- **2,300 / Purple (default)**
- 2,600 / Red
- 3,600 / Orange

Key assignments, DPI Presets and LED behavior can be all be altered via the Arduino IDE.

```

127 int Btn_pins[NUMBTN] = {Btn1_Pin, Btn2_Pin, Btn3_Pin, Btn4_Pin, Btn5_Pin};
128 bool Btns[NUMBTN] = {false, false, false, false, false}; // button state indicator
129 uint8_t Btn_buffers[NUMBTN] = {0xFF, 0xFF, 0xFF, 0xFF, 0xFF}; // button debounce buffer
130 char Btn_keys[NUMBTN] = { MOUSE_LEFT, MOUSE_RIGHT, MOUSE_MIDDLE, MOUSE_FORWARD, MOUSE_BACK };

131 int Key_pins[NUMBTN] = { Btn6_Pin };
132 bool Keys[NUMBTN] = { false }; // button state indicator
133 uint8_t Key_buffers[NUMBTN] = { 0xFF }; // button debounce buffer
134 char Key_keys[NUMBTN] /*= {240}*;

135 //Colors that represent the CPI/DPI setting: .Yellow=0, .Green=1, .Teal=2, .Blue=3, .Purple=4, .Red=5
136 int Dpi_color[NUMCPI][6] = {{-140,-115,0,0},{-0,-255,0,0},{-0,-155,-100,0},{-0,-55,-55},{-0,-155,-100,0},{-0,-55,-55}};

137 //Colors that represent the CPI/DPI setting: .Yellow=0, .Green=1, .Teal=2, .Blue=3, .Purple=4, .Red=5
138 int Dpi_color[NUMCPI][6] = {{-140,-115,0,0},{-0,-255,0,0},{-0,-155,-100,0},{-0,-55,-55},{-0,-155,-100,0},{-0,-55,-55}};

139 unsigned long Cpis[NUMCPI] = {-400,-800,-1200,-1600,-2000,-2600,-3600};

140 CpiUpdater {
141   bool target_set;
142   bool updated;
143   uint8_t target_cpi_index;
144 };
145
146 CpiUpdater CpiUpdate = { false, false, 4 }; // Default Dpi = Cpis[2]
147
148 byte initComplete = 0;
149 bool inBurst = false; // in burst mode
150 bool reportSQ = false; // report surface quality
151 int16_t dx, dy;
152
153 unsigned long lastTS;
154 unsigned long lastButtonCheck = 0;
155
156 unsigned long curTime;
```

# CONFIGURATIONS

PYOTT DESIGN

Below are some common grip type configurations for the Statial.b as starting points for further adjustment.

## VARIABLE PALM

When fully collapsed the Statial.b is slightly smaller than a normal high performance mouse. Surfaces can be moved out significantly for XL hands.



## ERGO VERTICAL

Surfaces can be configured to +40° angle to mimic the fit of a vertical mouse. Fixed ends of rear surface arms can be extended or longer sections of tube can be cut for even steeper angles.



## STUBNOSE CLAW

Unlike a normal mouse, the buttons on the Statial.b can pitch forward for different grip types. This allows claw grip users to position buttons perpendicular to pressing motion.



## BACKLESS FINGER

Surfaces can be configured to experiment with alternate grip methods. Finger grip users can remove back surface entirely.

