

M3-Series Annunciators – Basic Models

M3-4R/6R/8R

Features

- Super bright SMD LEDs.
- Master and slave units are available in 4, 6 & 8 windows.
- Incorporates a built-in buzzer in addition to fault alarm relay output.
- User-selectable sequence of operations-Manual/Auto reset/ Manual reset with ring back / FIFO.
- RS485 MODBUS communication output with field selectable device Ids.
- Repeat Relay card Option available.



Ordering Information






Models	No of Windows	Product Size	Source and Stand By Voltage	Output
M3-4R	4	1D	85-270V AC/DC & 12V DC or	Trip Relay - (C-NC-NO), Alarm Relay - (C-NC-NO), AC Fail - (C, NO), DC Fail - (C, NO).
M3-6R	6		85-270V AC/DC & 85-270V AC/DC or	
M3-8R	8		24-48V AC/DC & 12V DC or 24-48V AC/DC & 85-270V AC/DC	

Note: All above models are also available without communication and AC Fail /DC Fail indications.

Side & Front View M3-4R

M3-6R

M3-8R




Over-all and cut-out Dimensions

Models	Dimension Details in mm				Cut-out Dimension in mm	
	W	H	D	E	W1	H1
M3-4R/6R/8R	72	144	121	15	66	139

■ Specifications

Parameters	Models	M3-4R	M3-6R	M3-8R
Function		Programmable Fault Annunciator with RS-485 Communication		
Supply Voltage		85-270V AC/DC or 24-48V AC/DC		
Power Consumption		AC: 12VA Approx. DC:8W Approx.		
Rated Frequency		50 / 60Hz \pm 5% AC ONLY		
No of Windows		4	6	8
Fault input contacts		Potential Free (NO/NC field selectable)		
Communication		RS485 Modbus RTU protocol.		
Stand By Supply		12VDC \pm 10%		
Window colour		Red		
Device Id Selection		Field Programmable		
Window Size		68.0mm X31.0mm(LXW)	68.0mm X 31.0mm(LXW) 34.0mm X 31.0mm(LXW)	34.0mm X 31.0mm(LXW)
Flash rate		Fast:100/Minute \pm 10 Slow :60/Minute \pm 10		
Control Output		4 TRIP Relay(C,NC,NO),Alarm Relay (C,NC,NO) Aux. fail Rly (C & NO),Hooter Rly (C & NO)		
Push Button Control		Integral Push button for Test, Mute, Acknowledge & Reset Function, Provision of output connections for remote access of push Buttons		
Illumination		Low power Super Bright LED'S		
Fault input Signal		Potential Free (NO/NC field selectable)		
Contact Rating		1 C/ O Rated for 5A @ 250 VAC / 30VDC(NO) 3A @ 250VAC / 30VDC (NC)		
Test Facility		Yes		
Audible Output		Internal Buzzer		
Fault Sensitivity		100msec \pm 10mSec		
Sequence of Operation		a) Manual reset b) Auto reset c) Manual Reset + Repeat Alarm d) FIFO Sequence		
Insulation resistance		>100M ohms @500V DC		
Service life (under no load)		10 ⁶ operations minimum		
Electrical life(under full load)		10 ⁵ operations minimum		
Recovery Time		2Sec minimum		
Humidity		85% RH @ 40°C		
Ambient Temperature		Operating : -10 ⁰ C to +55 ⁰ C Storage : -25 ⁰ C to +80 ⁰ C		
Dielectric Strength		a)2.5KV AC, 50Hz for 1 minute. (Between current carrying & non-current carrying parts) b) 1.5KV AC, 50Hz for 1 minute. (Between contacts & control circuit) c) 750V AC, 50Hz for 1 minute. (Between non-continuous relay contacts)		
Electrical Connection		Right angle female pluggable connector		
Over-all Dimension(WXHXD)		72 x 144 x 121 mm		
Cut-out Dimension(WXH)		66 x 139 mm		

Connection Details

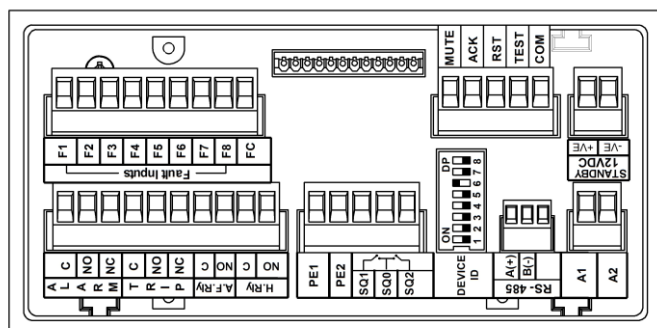

Terminal Details

Aux Supply : 85-270V AC/DC or 24-48V AC/DC
Stand by Supply -Ve & + Ve: 12V DC (1Amp) \pm 10%
Hooter RLY C & NO : Rly contacts for Hooter during power fail
Aux. Fail Rly C & NO : Rly contacts for indicating power failure
Alarm & Trip relay : C,NO&NC for alarm and trip output indication.
PE1 & PE2: Short - Program Enable (PGM) & Open- Program Disable (RUN)
FC: Common fault(FC) I/P terminals for F1-F4,F1-F6, F1- F8,F1-F12,F1-F16,F1-F20,F1-F24.
 Individual fault I/P terminals for respective window (Potential free).Connect WRT
 Fault COM (FC):
F1-----F4 for 4 windows
F1-----F6 for 6 windows
F1-----F8 for 8 windows
MUTE ACK, RST, and TEST: External push buttons for, remote operations
 Connect WRT COM.
SQ1, SQ2: Selection of required sequence of operation connect w.r.t SQ0
A (+), B (-): RS485 Communication terminals