BSS: Soundweb London

This module controls a "Source Matrix" object in a Soundweb London program.

CERTIFIED
CRESTRON®
Integrated Partner

GENERAL INFORMATION

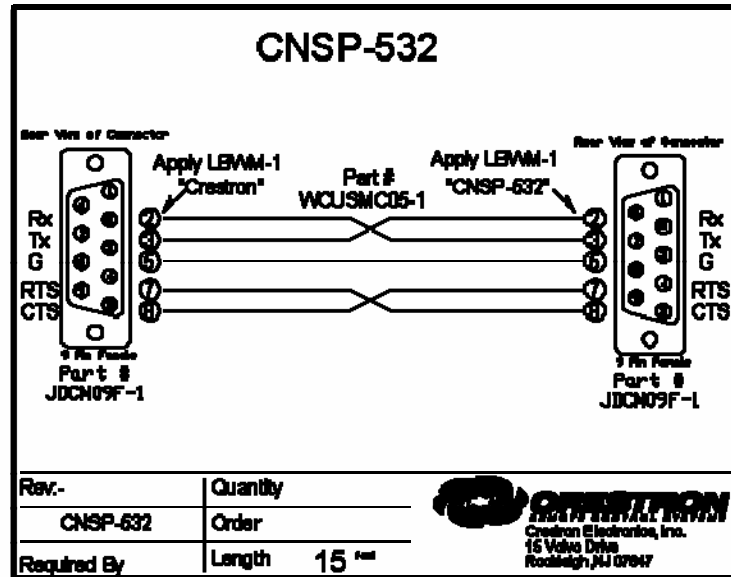|	
SIMPLWINDOWS NAME:	BSS Soundweb London Source Matrix v4.2
CATEGORY:	Mixer
VERSION:	V4.2
SUMMARY:	This module controls a "Source Matrix" object in a Soundweb London program.
GENERAL NOTES:	Each object in a Soundweb London program is given an object number. You have to specify the object id of the "Source Matrix" object that is to be controlled. (objectID parameter) The TX and RX of this module should be connected to a "BSS Soundweb London Node v4.2.usp" module. This "Node" module needs to have its "Node" parameter set to the node of the Soundweb London device to control. When you subscribe to a State-Variable, the Soundweb London will send an unsolicited updates automatically whenever that state-variable is changed in order to keep the Crestron system in sync with the London without requiring extra effort from the programmer to set up 'polling', or requiring the Crestron processor to constantly check for updates. The first time the subscribe message is sent the Soundweb London will respond with its current state much like a 'GET' statement. The Soundweb London will keep sending updates until a 'UNSUBSCRIBE' input is pulsed. Normal practice would be to tie the Subscribe input to the TCP/IP connection feedback so that if a socket is dropped it will automatically sync when the socket is re-established. If using RS232, putting a 1 on the subscribe input will ensure true-feedback. NOTE: The subscribe and un-subscribe signals must be mutually exclusive as transitions from low-to-high while the other signal is already high is not allowed. If this error state is encountered, an error message will be sent to the console.
CRESTRON HARDWARE REQUIRED:	X-series or preferable 2-series
SETUP OF CRESTRON HARDWARE:	The demo program was created on a CP2E with TPS-4000 The Soundweb London is to be connected on a com port with a standard crossed cable and the following settings: 115200, 8, 1, N Or to use TCP/IP: Port 1023
VENDOR FIRMWARE:	3.06
VENDOR SETUP:	Soundweb London Blu-160

©2003 Crestron Electronics, Inc.
15 Volvo Drive • Rockleigh, NJ 07647
800.237.2041 / 201.767.3400

www.crestron.com

I2P Certified Modules can be found archived on our website in the Design Center. For more information please contact our Technical Sales Deptartment at techsales@crestron.com. Specifications subject to change without notice.

CABLE DIAGRAM:

CONTROL:

inputForOutputX	A	set the input for output X. 1d to 96d
subscribe	D	Subscribe to the number of outputs defined by the "iMAXOUPUT" parameter. For example: when the parameter is set to "6d", pulsing the subscribe input will subscribe to the first 6 outputs.
unsubscribe	D	Unsubscribe to the number of outputs defined by the "iMAXOUTPUT" parameter. For example: when the parameter is set to "6d", pulsing the unsubscribe input will unsubscribe to the first 6 outputs.
rx	S	connected to the "modulesRx" of the correct "BSS Soundweb London Node v4.2.usp" module

FEEDBACK:

inputForOutputX_fb	A	input feedback for output X
tx	S	connected to the "modulesTx" of the correct "BSS Soundweb London Node v4.2.usp" module

PARAMETERS:

objectID	d	specifies which objectID is to be controlled. (3 bytes, for example: "\x00\x00\x01") (get this information from the BSS programmer)
iMAXOUTPUT	d	Set the highest used output. When you use for example only "inputForOutput4" and "inputForOutput15", this parameter needs to be set to "15d"

TESTING:

OPS USED FOR TESTING:	4.003.0015
COMPILER USED FOR TESTING:	2.12.44
SAMPLE PROGRAM:	BSS Soundweb London v4.2 Demo Program
REVISION HISTORY:	V1.0 Creation V3 – BSS made changes to a number of modules. V4.0 – Changed the RX$ input on the Simpl+ modules to from a STRING_INPUT to a BUFFER_INPUT. Changed the room combine module so it requests the current value when it is done making changes. V4.1 – Changed subscribing to two input signals one for subscribing and one for unsubscribing. Changed the module from an .usp file and an .umc file to just an .usp file. V4.2 – Updated help file

©2003 Crestron Electronics, Inc.
15 Volvo Drive • Rockleigh, NJ 07647
800.237.2041 / 201.767.3400

www.crestron.com

I2P Certified Modules can be found archived on our website in the Design Center. For more information please contact our Technical Sales Deptartment at techsales@crestron.com. *Specifications subject to change without notice.*