


# CCS3.3 编程环境搭建及 ADP16F01 开发板软件调试说明

应用开发部

进芯电子
Advancechip

目录

一、 安装环境需求.....1
二、 CCS3.3 的安装.....1
三、 SEED510PLUS 驱动安装.....5
四、 芯片编译文件替换.....10
五、CCS3.3 使用环境配置.....11
六、软件烧录.....13

# 一、安装环境需求

本文是基于 win7 64 位系统及 win10 64 位系统下的 CCS3.3 及 SEED 510 plus 驱动安装说明。不适用于除 win7 和 win10 以外的任何系统。

安装前的准备：一台 win7 64 位或 win10 64 位（最好不要是家庭版）的电脑（C 盘可用空间需大于 4G）、一台 SEED 510 PLUS 仿真器、基于 16 系列芯片的板卡

Win7 64 位：安装前需关闭杀毒软件、断开网络链接

Win10 64 位：需关闭所有杀毒软件、防火墙、数字签名、断开网络链接

关闭数字签名方法：


https://zhidao.baidu.com/question/1994138220113092547.html


由于存在系统兼容性问题，安装过程需严格按照本文档流程进行，否则出现的蓝屏、死机、数据丢失、硬件损坏、软件无法运行等后果由实操者自行承担。

# 二、CCS3.3 的安装


在本文所在路径的文件夹下找到 CCS3.3 的安装包，打开安装：

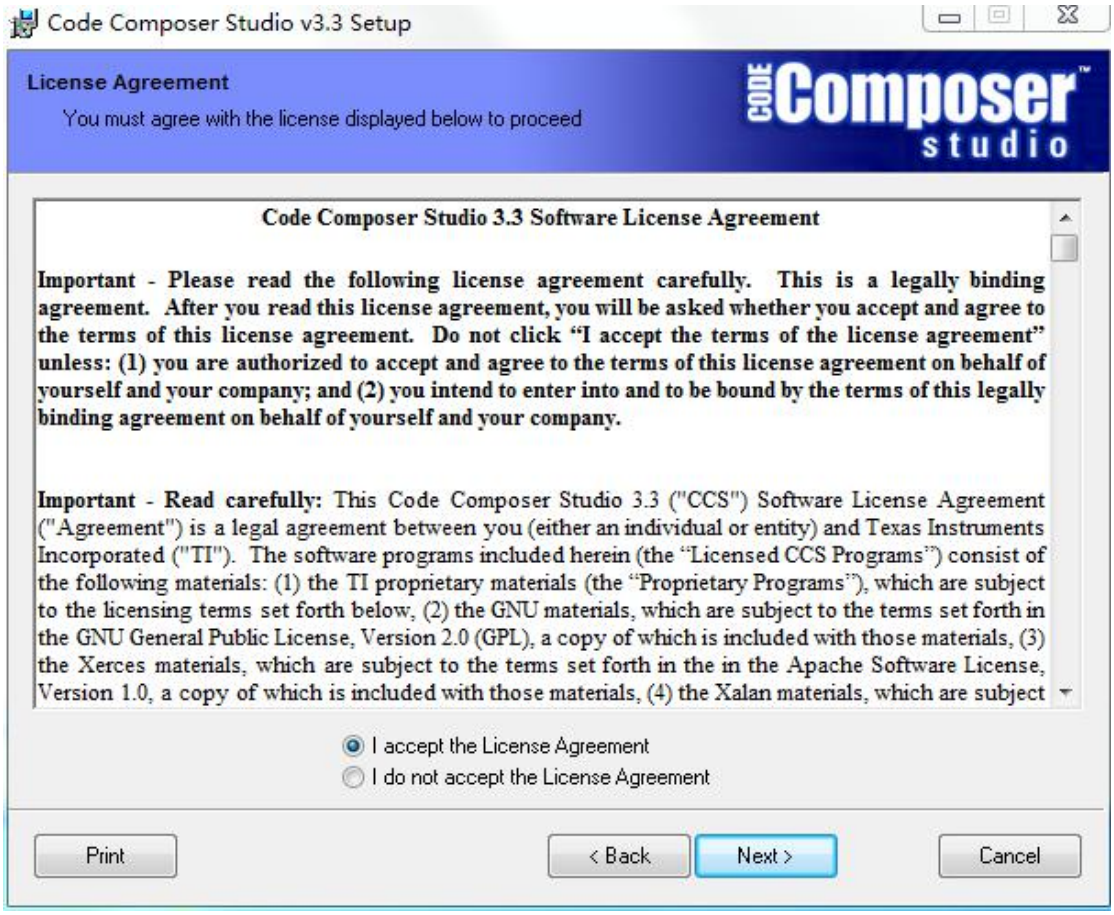


Code Composer Studio v3.3 Setup
License Agreement
You must agree with the license displayed below to proceed
Code Composer studio
Code Composer Studio 3.3 Software License Agreement
Important - Please read the following license agreement carefully. This is a legally binding agreement. After you read this license agreement, you will be asked whether you accept and agree to the terms of this license agreement. Do not click "I accept the terms of the license agreement" unless: (1) you are authorized to accept and agree to the terms of this license agreement on behalf of yourself and your company; and (2) you intend to enter into and to be bound by the terms of this legally binding agreement on behalf of yourself and your company.
Important - Read carefully: This Code Composer Studio 3.3 ("CCS") Software License Agreement ("Agreement") is a legal agreement between you (either an individual or entity) and Texas Instruments Incorporated ("TI"). The software programs included herein (the "Licensed CCS Programs") consist of the following materials: (1) the TI proprietary materials (the "Proprietary Programs"), which are subject to the licensing terms set forth below, (2) the GNU materials, which are subject to the terms set forth in the GNU General Public License, Version 2.0 (GPL), a copy of which is included with those materials, (3) the Xerces materials, which are subject to the terms set forth in the in the Apache Software License, Version 1.0, a copy of which is included with those materials, (4) the Xalan materials, which are subject
I accept the License Agreement
I do not accept the License Agreement
Print
< Back
Next >
Cancel

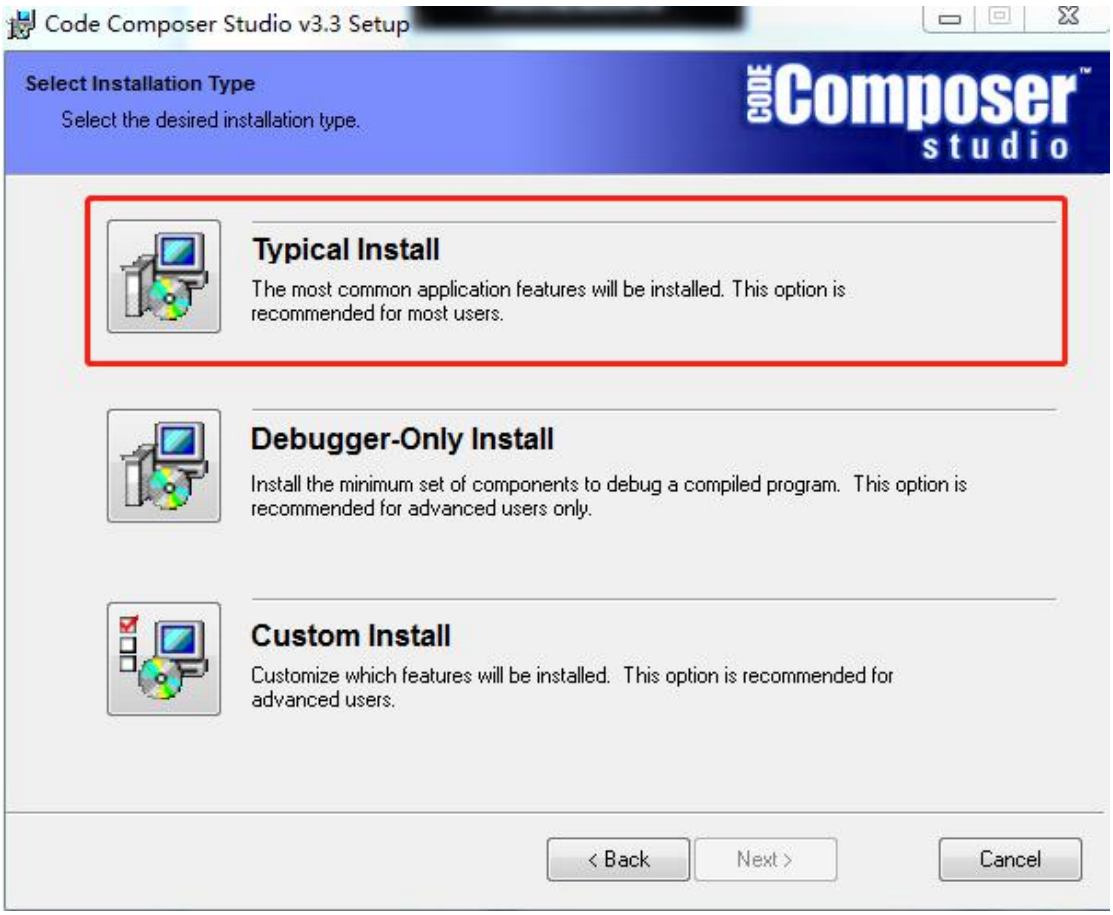

Code Composer Studio v3.3 Setup
Select Installation Type
Select the desired installation type.
Code Composer studio
Typical Install
The most common application features will be installed. This option is recommended for most users.
Debugger-Only Install
Install the minimum set of components to debug a compiled program. This option is recommended for advanced users only.
Custom Install
Customize which features will be installed. This option is recommended for advanced users.
< Back
Next >
Cancel

ccs 安装路径必须为 C 盘

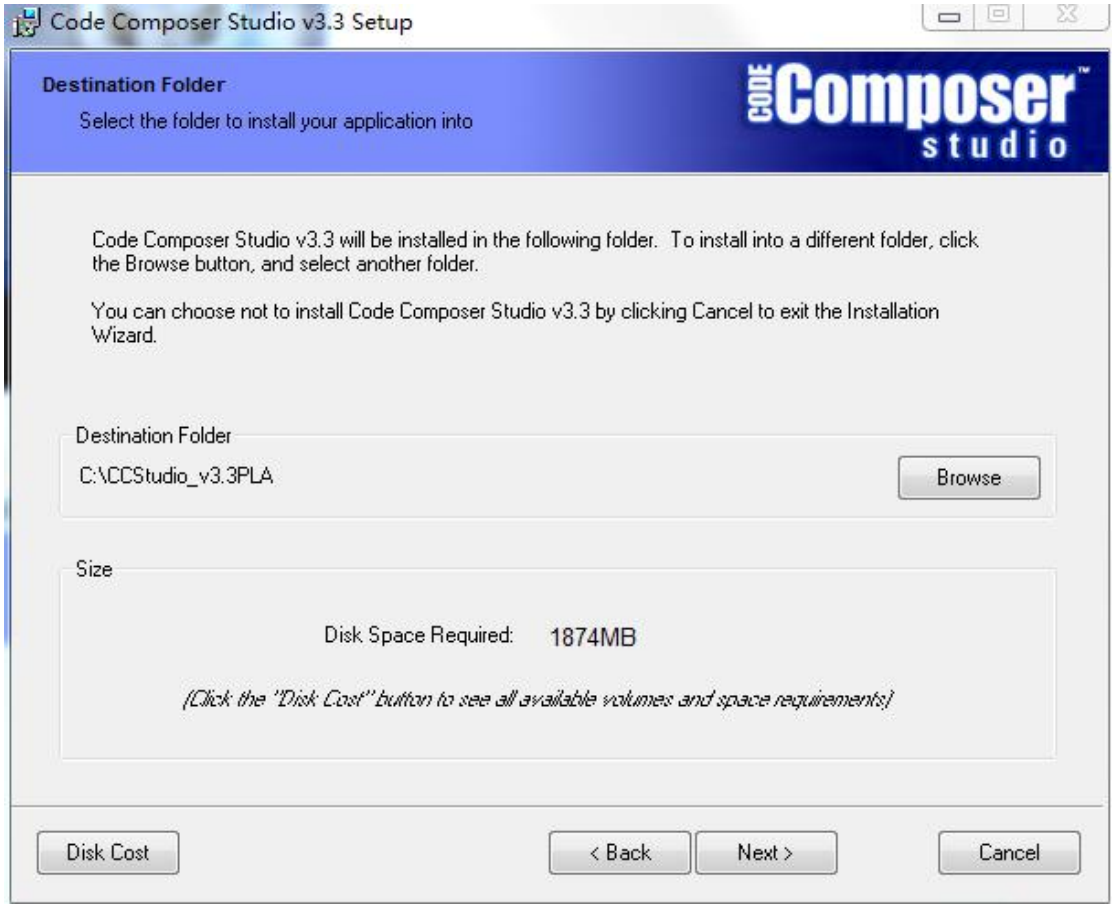




此处可能等待时间过长需耐心等待，同时需注意及时处理安装过程中出现的弹窗，点击忽略或关闭，否则也会一直卡在此处。

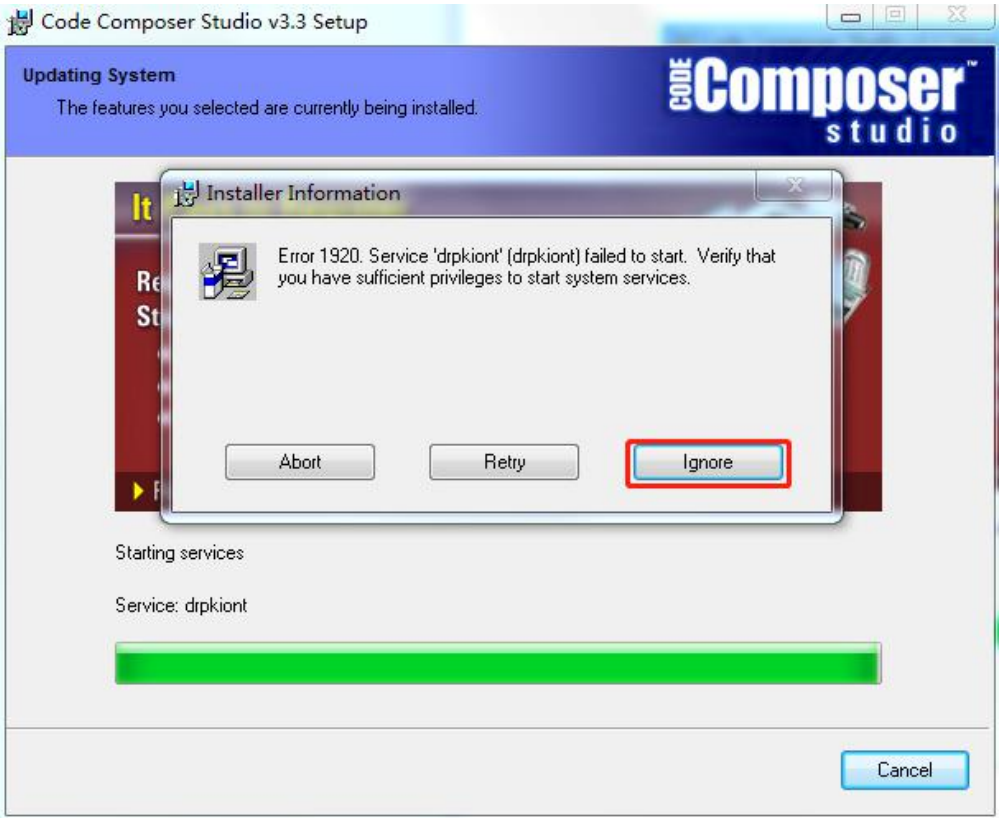







至此 CCS3.3 软件已完成安装，注意不要在此时打开 CCS3.3，否则可能将导致后续安装完成不能使用、蓝屏、死机等问题。


# 三、SEED510PLUS 驱动安装

在本文档路径文件夹下找到 510PLUS 驱动安装包，先打开名为“SEED+XDS510PLUS.exe”的安装包进行安装。

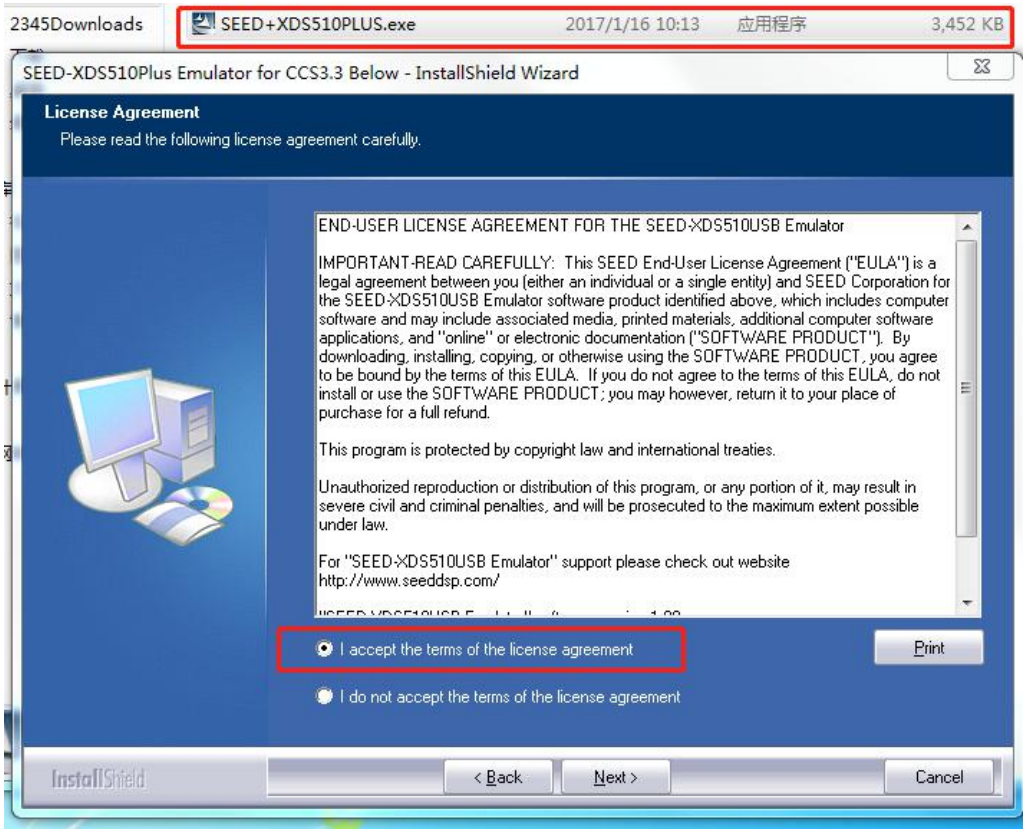

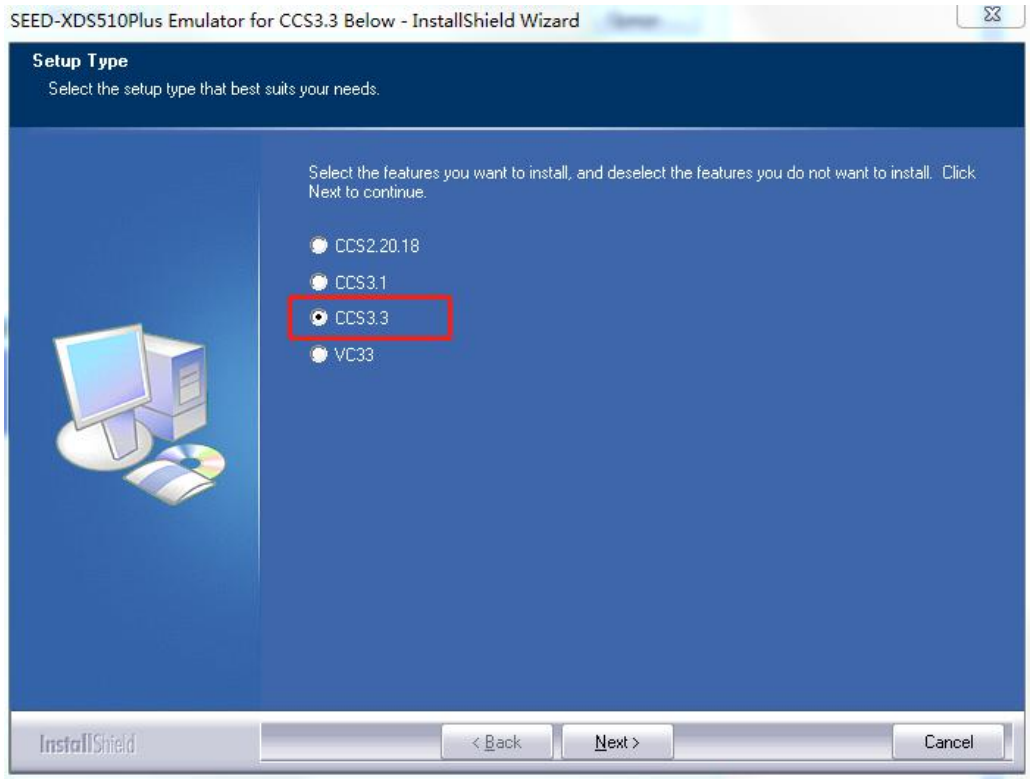注意安装路径必须在 CCS3.3 所在文件夹。




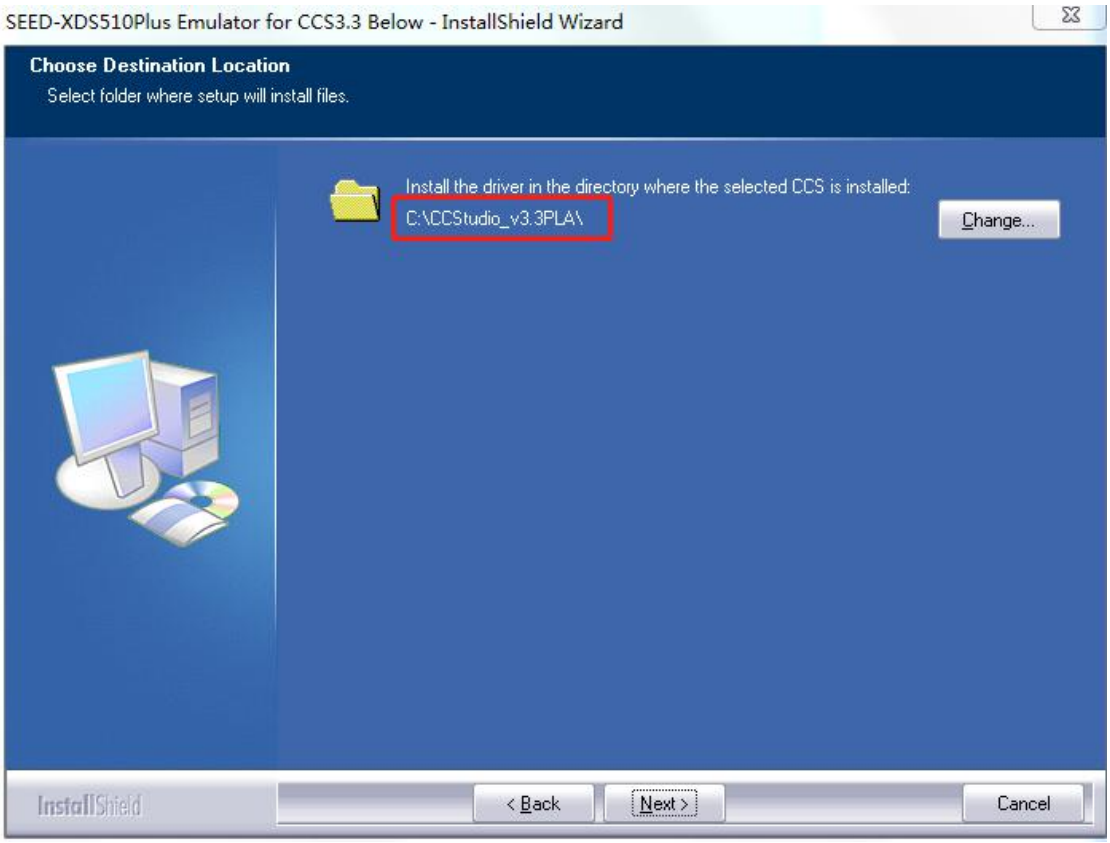





至此第一个驱动已正确安装。

将仿真器与电脑连接检查驱动是否安装完整，若出现是未知设备这需继续安装第二个驱动安装包，若是能够正常检测到 SEED510PLUS 驱动，可跳过第二个驱动的安装。

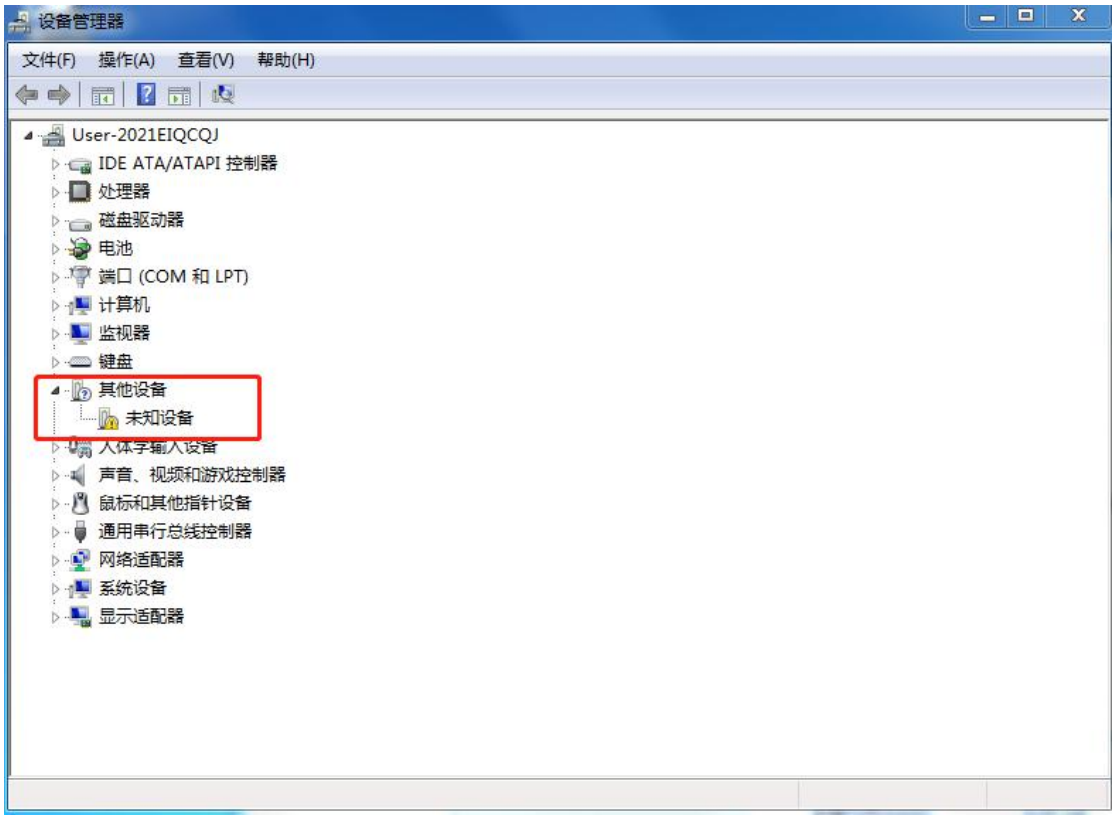



第二个驱动是名为“SEED-XDS510Plus Emulator for CCS4.x.exe”的安装包。需拔除仿真器与电脑的连接再进行安装。

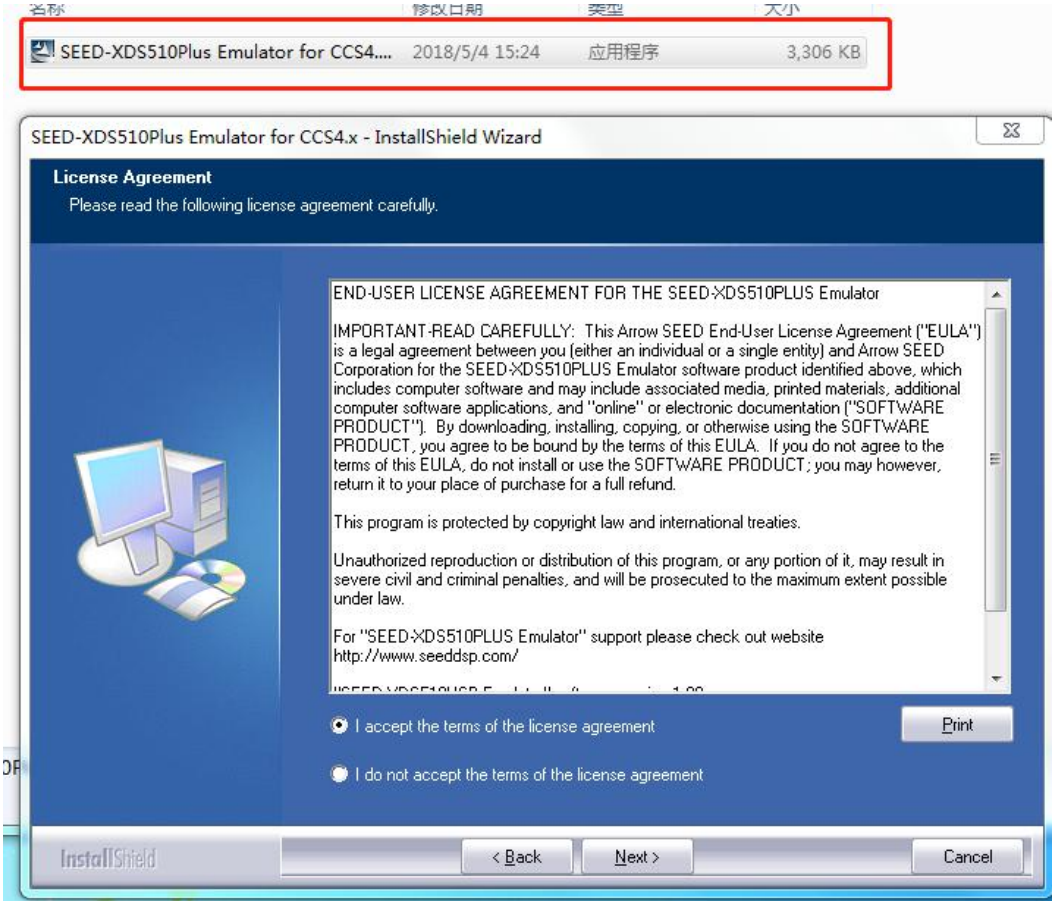

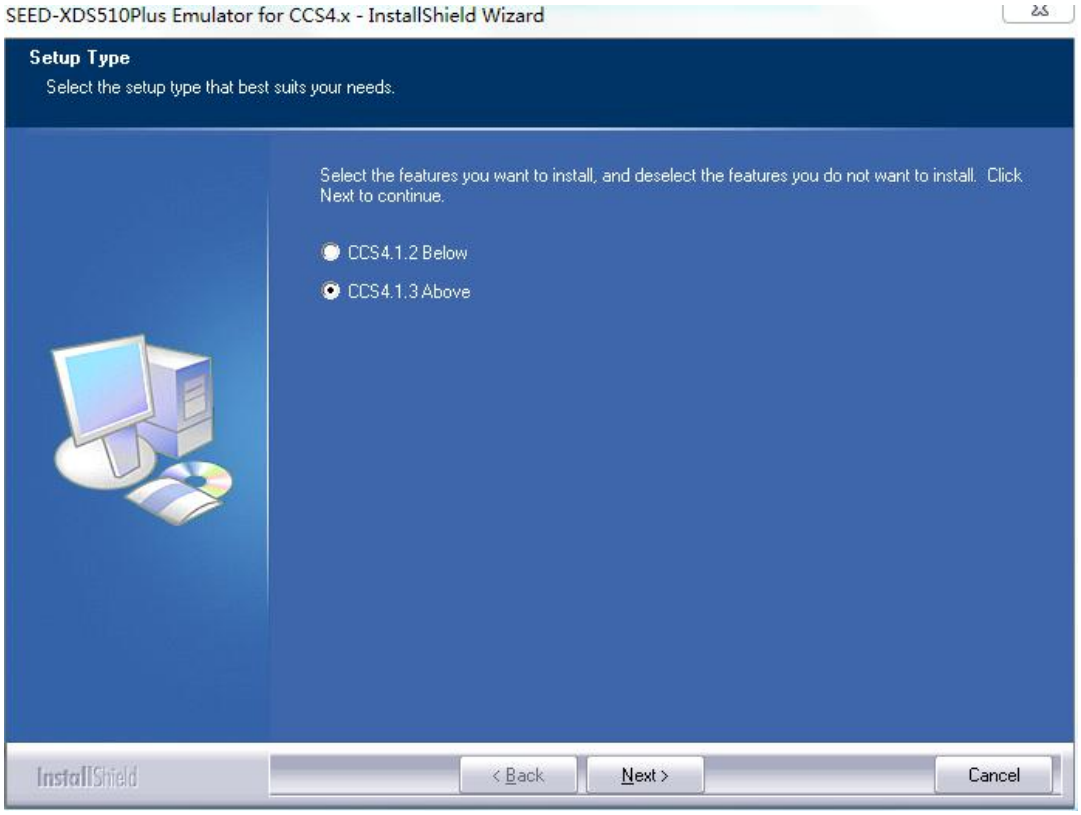


此处默认路径不对，需要修改安装路径到 ccs3.3 所在路径。

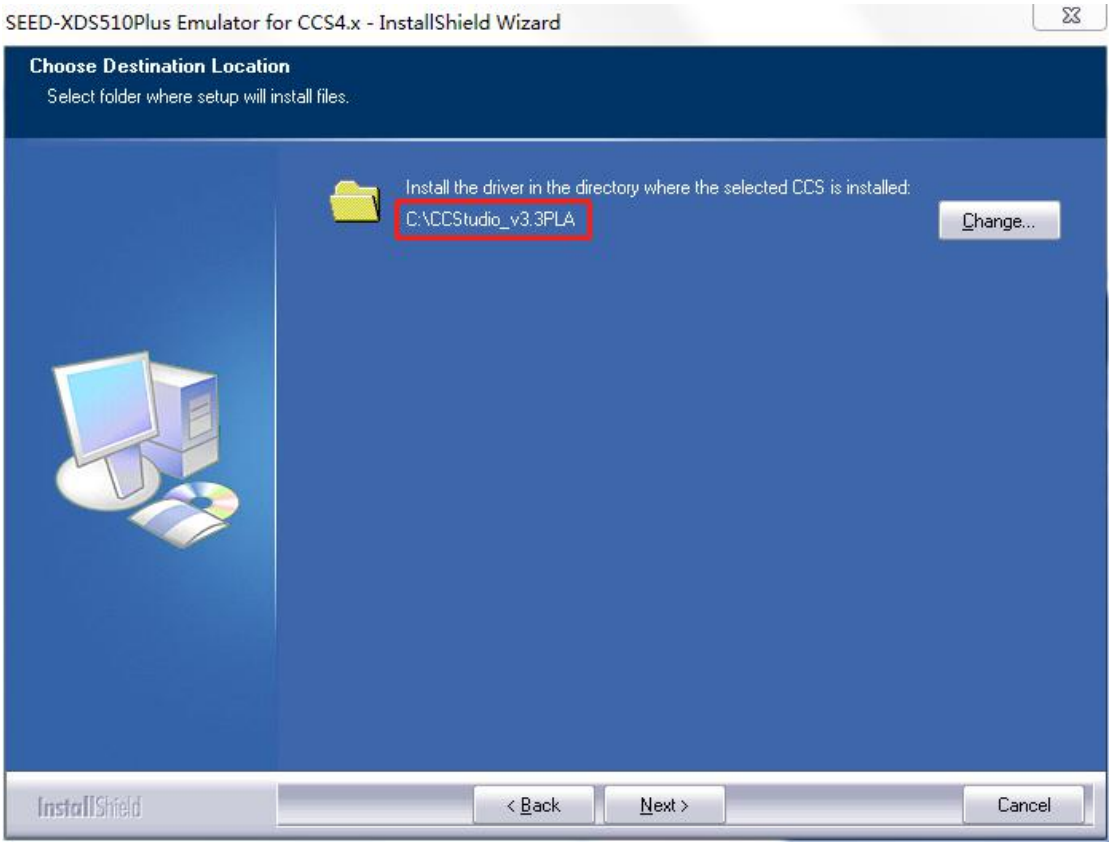








至此再次将仿真器与电脑相连接检查驱动，此处仿真器驱动已安装完成。若您的电脑还是不能正确检测到仿真器驱动，则需要更换电脑操作系统或更换电脑。

# 四、芯片编译文件替换


CCS3.3 中安装的芯片编译文件只适用于 TI 的芯片，这里需要将进芯 16 系列的编译于 CCS3.3 中的原有文件进行替换，文件路径及需要替换的文件夹见下图所示。

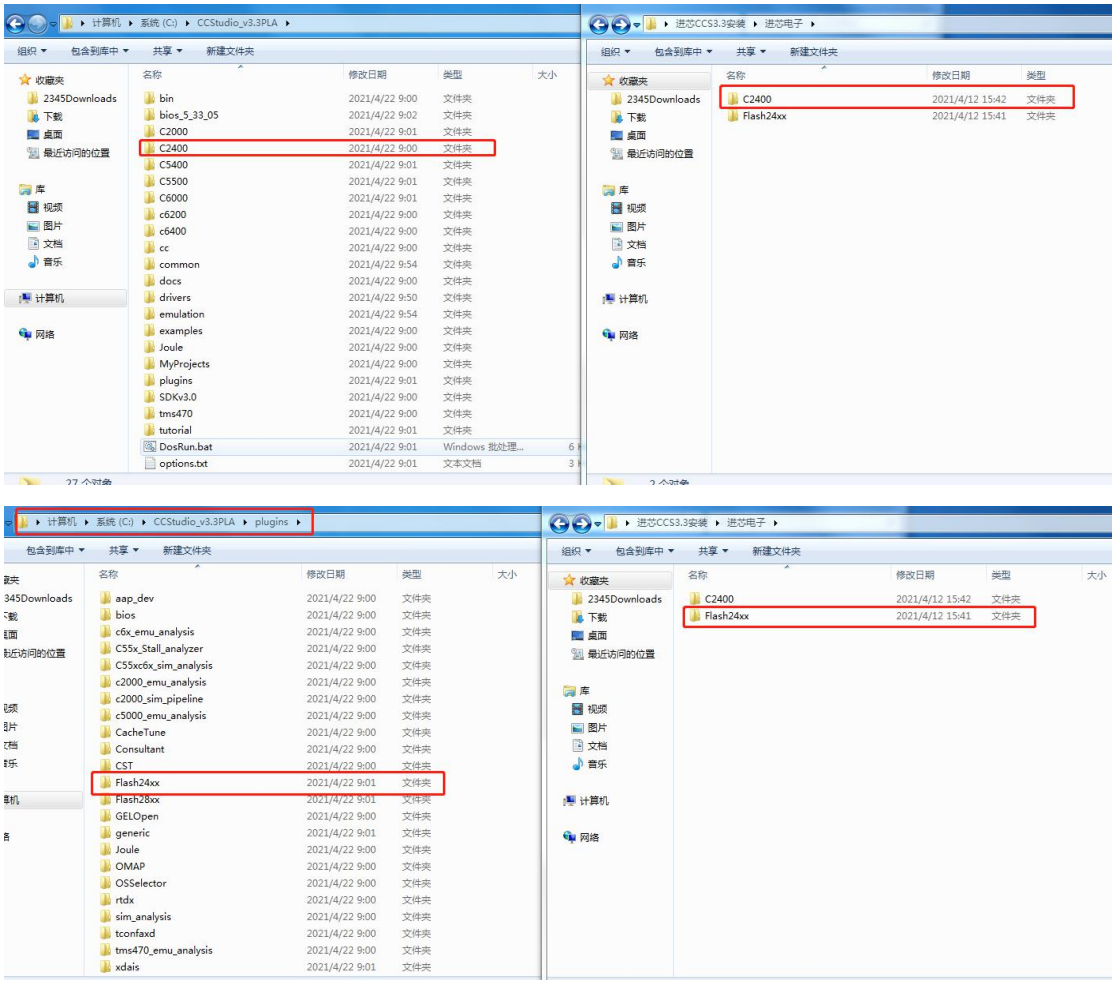


至此已完成 CCS3.3 和 510PLUS 驱动的安装。

# 五、CCS3.3 使用环境配置

首次打开 CCS3.3 需要先打开“Setup CCStudio v3.3”进行环境配置，如下图所示，在筛选框中添加筛选条件后，选择“F2407 SEEDXDS510PLUS Emulator”双击添加后，点击保持“Save&Quit”，出现错误警告后点击“Ignore”，并关闭启动的窗口。

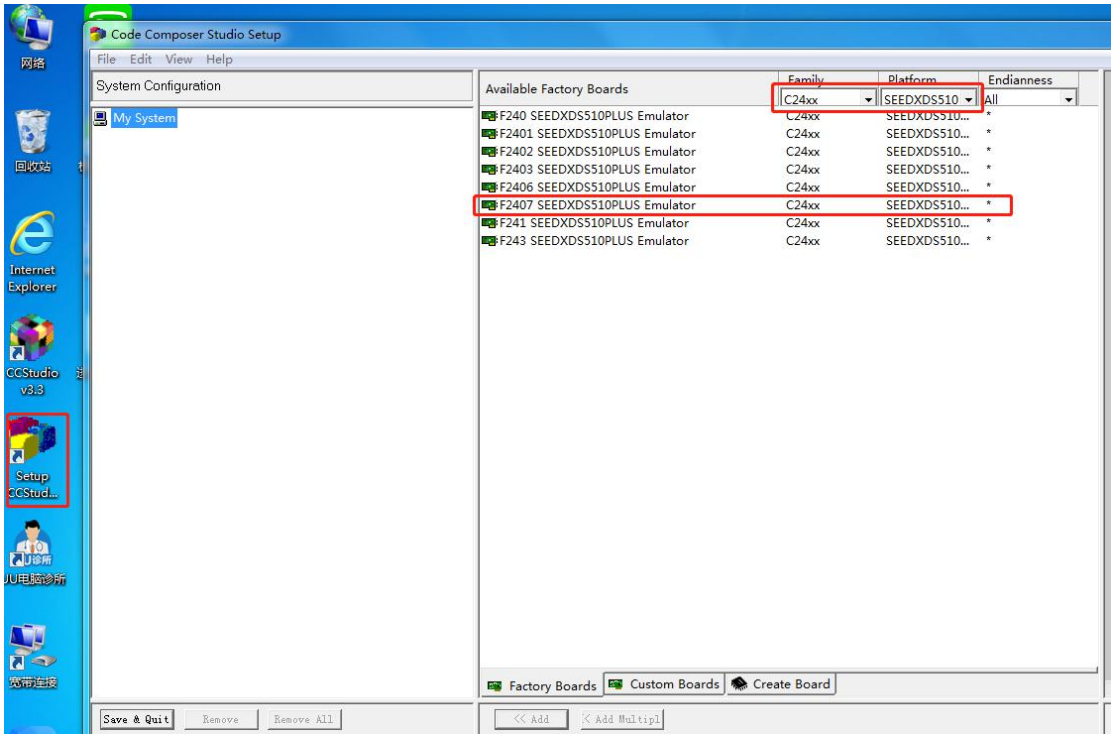



使用 CCS3.3 进行在线仿真时，必须按照如下顺序：


仿真器与办卡连接、仿真器与电脑连接、板卡上电、打开 CCS

若顺序颠倒，ccs 将无法与板卡正常连接。

打开 CCS 后，点击“Debug”、“Connect”连接到板卡。

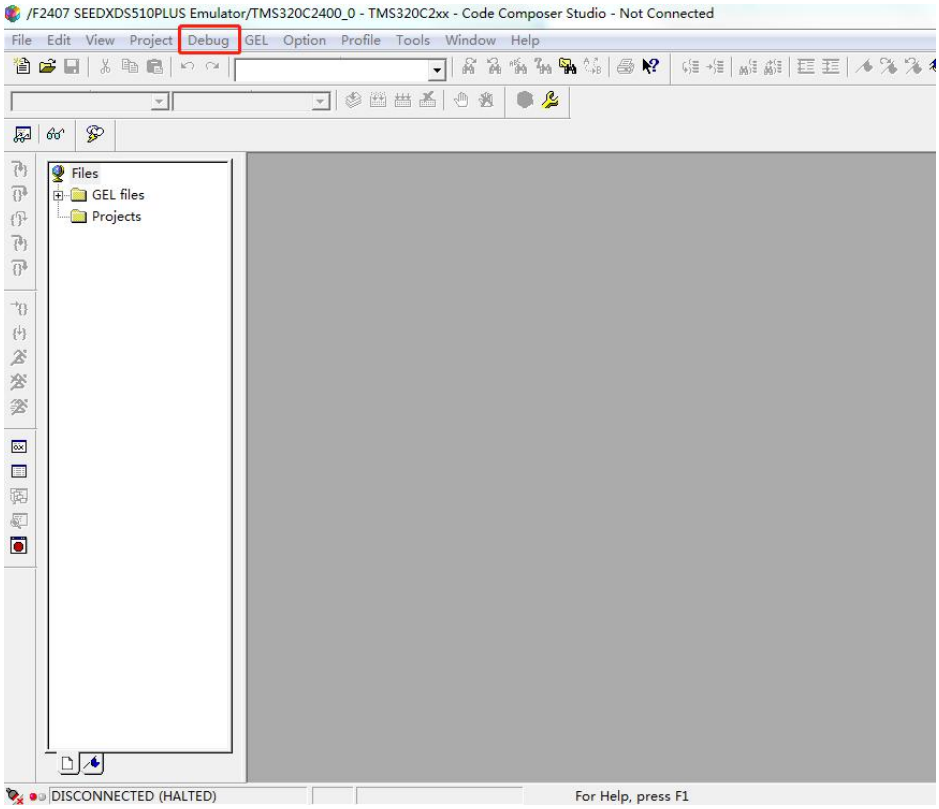



出现如下画面说明，ccs 与板卡之间已经正确连接可以进行程序调试和在线仿真了。

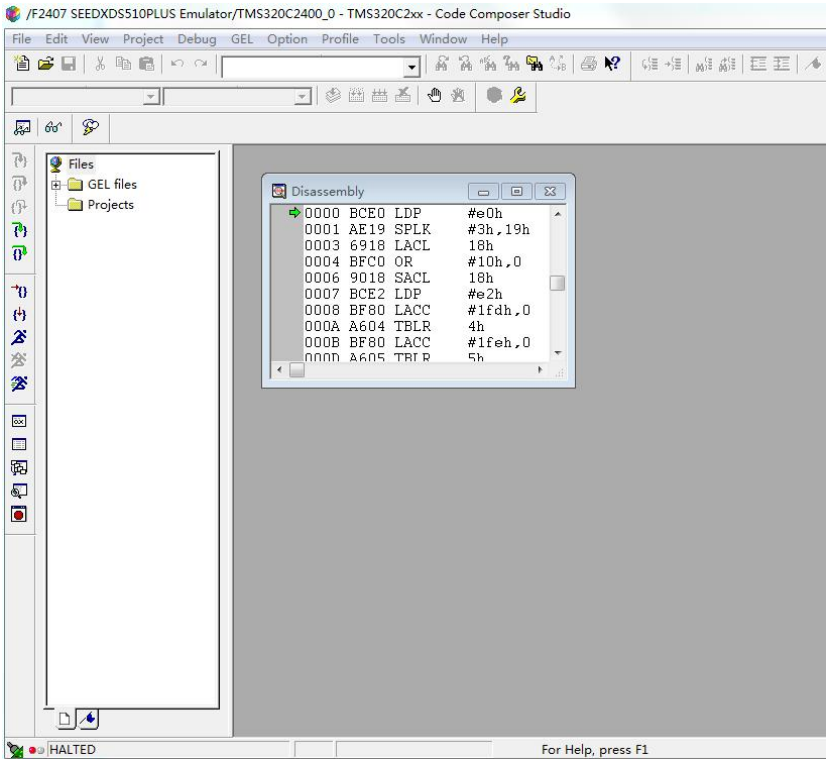



Win10 64 位系统的电脑如果在打开 CCS 的过程中出现卡在开启画面无反应、闪退、未响应等问题时，还需找到本文当所在路径下名为“dotnetfx35.exe”的安装包，安装.NET Framework 3.5 插件，也可自行下载.NET Framework 3.5，安装完成后再次打开 ccs 即可正常打开。

# 六、软件烧录


点击菜单栏 Project--->open..打开工程。

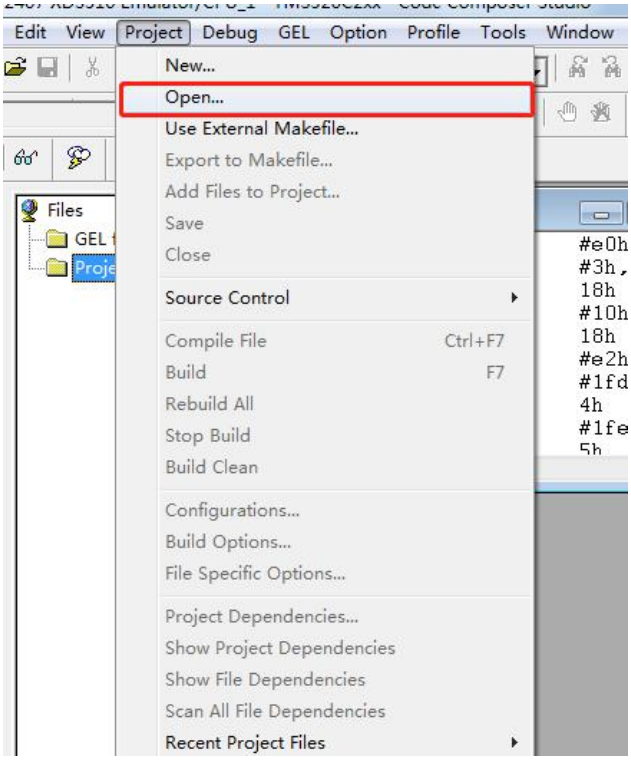



选择后缀为 pjt 的文件打开。

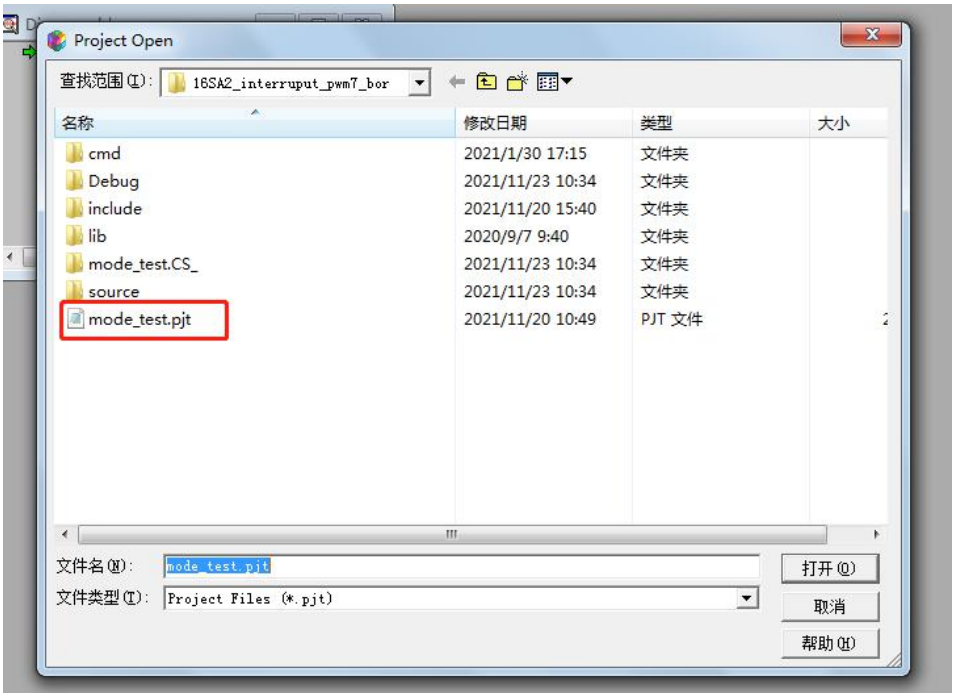



在工程栏中选择 main.c 文件打开，然后点击红框中的编译图标进行编译。编译，生成.out 文件，如果程序有错误，必须修改正确，直到编译无误。

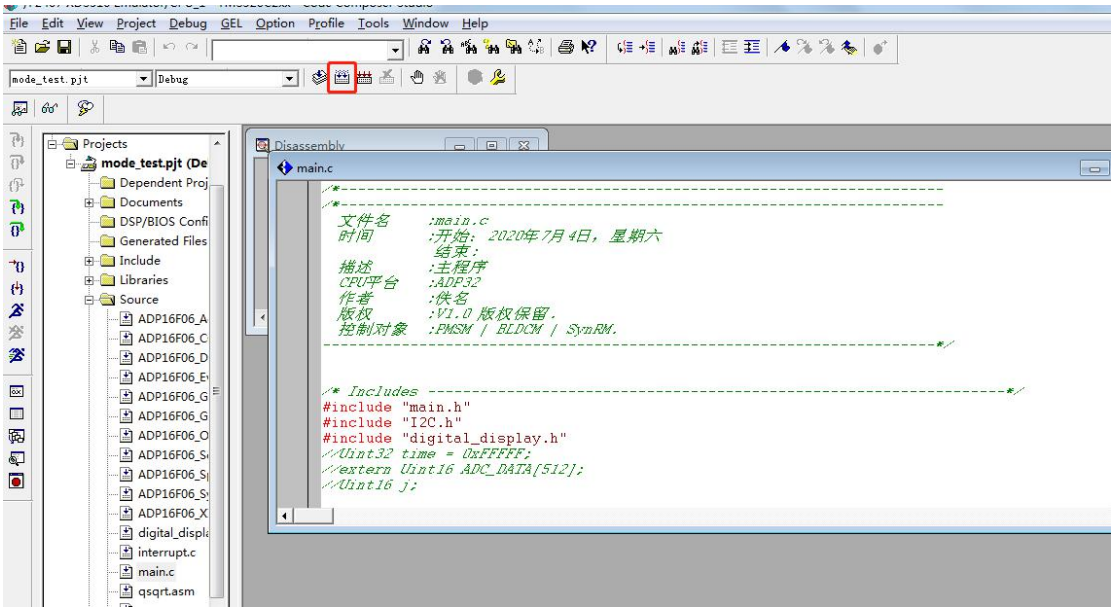



点击红款中的带闪电图标进行烧录，此方式是将软件烧录到芯片 flash 中。

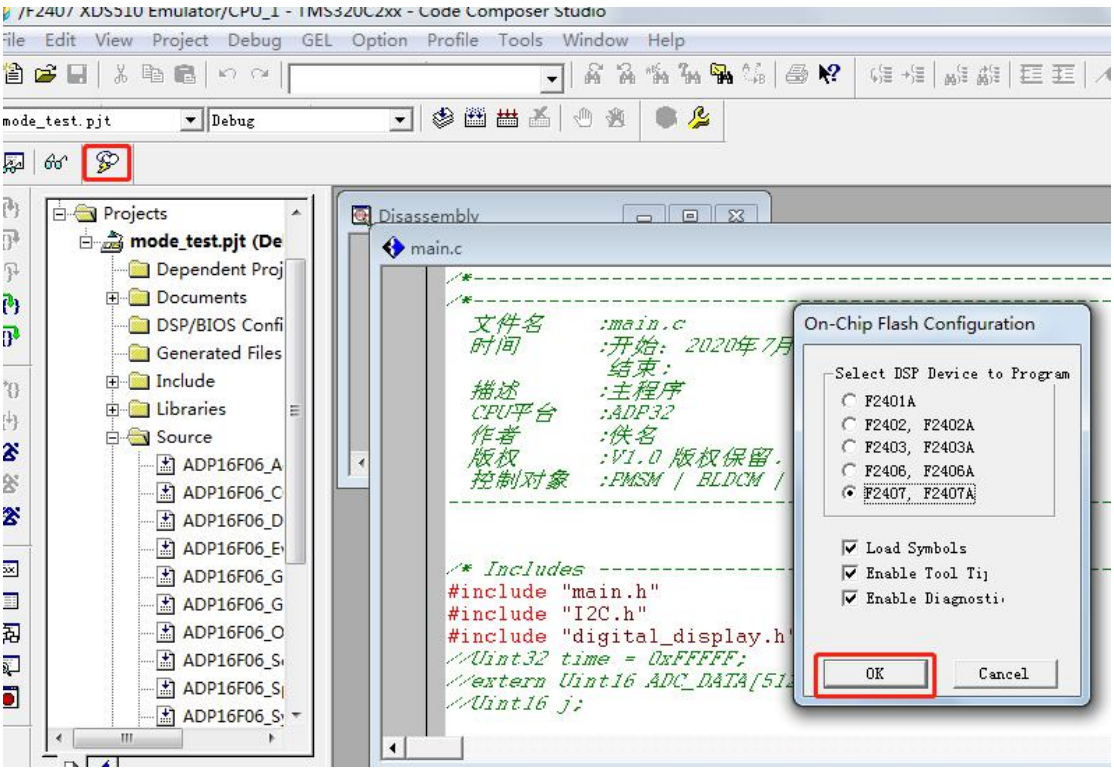



将 PLL 调整至 2.0 进行烧录。

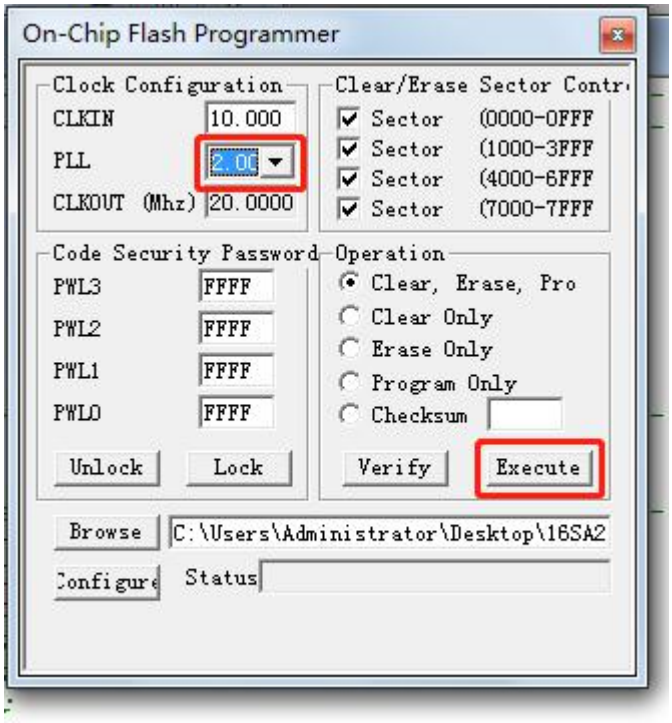


烧录过程采用中断的方式进行，若中途遇到干扰或接触不良可能导致连接中断软件退出等问题，此时需要重复以上步骤，重新进行板子上电和仿真器连接，并进行程序下载，直至出现下图红框中的提示，即为烧录完成。

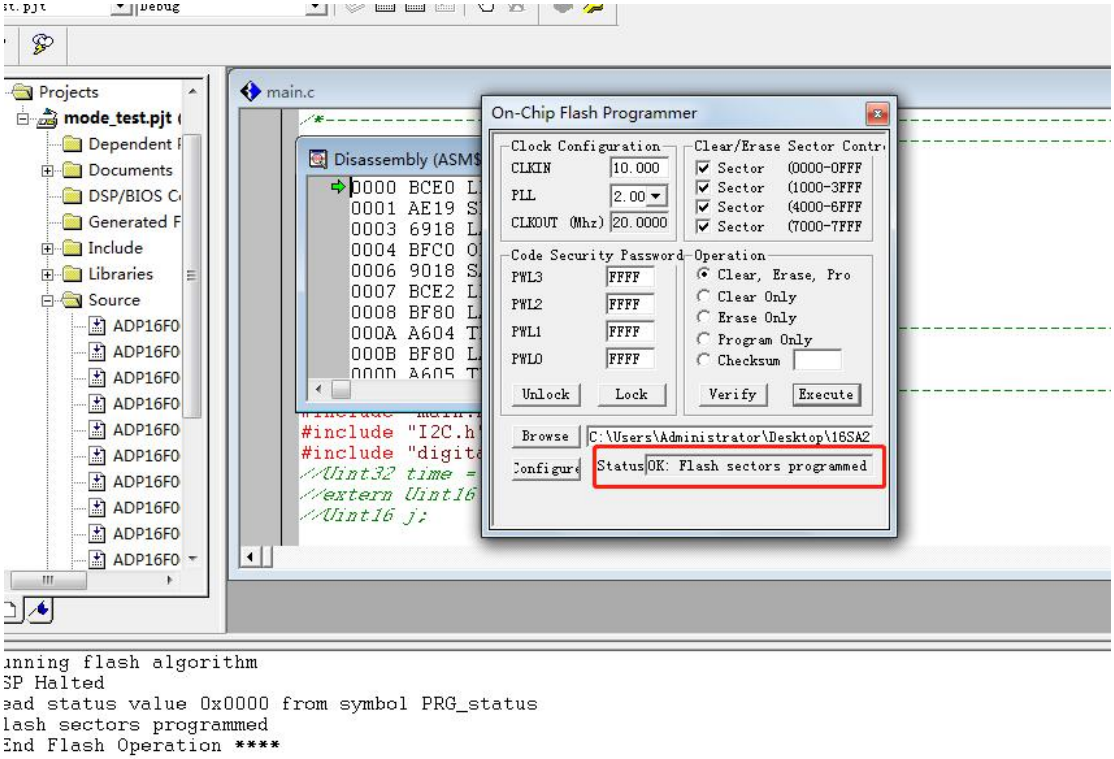


在烧录完成后，首先需要进行 CPU 复位，再运行软件进行调试。

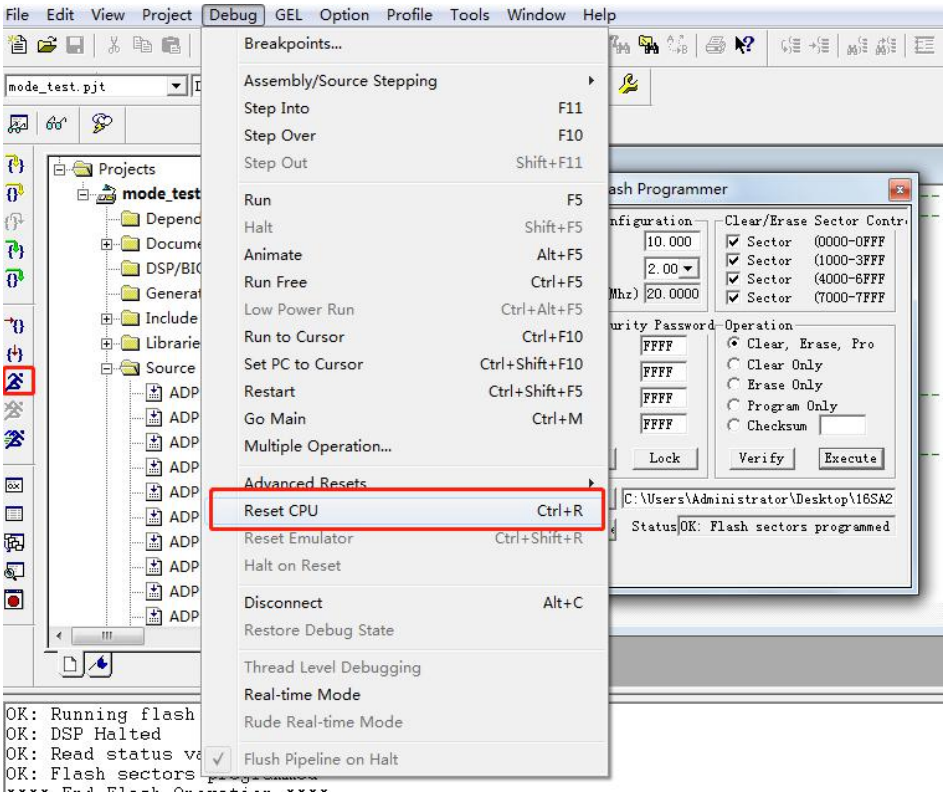


至此软件烧录完成。此例程为开发板点灯实验，点击 RUN 后可观察到开发板上 LED 灯的状态变化。

