



LCD Monitor User Manual

MA270UP (MA270U-B) / MA320UP (MA320U-B)
MA270S (MA270S-T) / MA320UG (MA320UG-T)

Copyright

Copyright © 2025 by BenQ Corporation. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of BenQ Corporation.

Disclaimer

BenQ Corporation makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties, merchantability or fitness for any particular purpose. Further, BenQ Corporation reserves the right to revise this publication and to make changes from time to time in the contents hereof without obligation of BenQ Corporation to notify any person of such revision or changes.

BenQ flicker-free technology maintains a stable backlight with a DC dimmer that eliminates the primary cause of monitor flicker, making it easier on the eyes. The performance of flicker-free may be affected by external factors such as poor cable quality, unstable power supply, signal interference, or poor grounding, and not limited to the above mentioned external factors. (Applicable for flicker-free models only.)

MacBook® is a trademark of Apple Inc.

Product support

This document aims to provide the most updated and accurate information to customers, and thus all contents may be modified from time to time without prior notice. Please visit the website for the latest version of this document and other product information. Available files vary by model.

1. Make sure your computer is connected to the Internet.
2. Visit the local website from Support.BenQ.com. The website layout and content may vary by region/country.
 - User manual and related document
 - Drivers and applications
 - (EU only) Dismantled information: Available on the user manual download page. This document is provided based on Regulation (EU) 2019/2021 to repair or recycle your product. Always contact the local customer service for servicing within the warranty period. If you wish to repair an out-of-warranty product, you are recommended to go to a qualified service personnel and obtain repair parts from BenQ to ensure compatibility. Do not disassemble the product unless you are aware of the consequences. If you cannot find the dismantled information on your product, contact the local customer service for assistance.

Firmware upgrade

You are recommended to upgrade the product to the latest firmware version (if available) and refer to the most up-to-date user manual to make best use of the product.

To upgrade your monitor, download and install the **Display QuickKit** software from the BenQ website.

- Support.BenQ.com > model name > **Software & Driver** > **Display QuickKit** (available only when your monitor is compatible)
- Support.BenQ.com > **Display QuickKit** (availability may vary by region)

The software utility checks the compatibility of your monitor automatically once launched. Refer to the user manual of the software utility for instructions.

If your monitor is not compatible with **Display QuickKit**, and you wonder if there is an updated firmware version available, please contact BenQ customer service.

Advanced software

Apart from the built-in technologies and features available on this product, you are provided with more software applications to enhance and extend the product functionality. Download the software and its user guide as instructed from the BenQ website.

• Display Pilot 2

Display Pilot 2 is a software utility that allows for quick accurate tuning of the display with the ability to easily save and use monitor configurations that are best suited for you. All adjustments are controlled via software to eliminate the need to use the monitor on-screen displays (OSD).

Safety precautions

Power safety



Please follow these safety instructions for best performance, and long life for your monitor.



- The AC plug isolates this equipment from the AC supply.
- The power supply cord serves as a power disconnect device for pluggable equipment. The socket outlet should be installed near the equipment and be easily accessible.
- This product should be operated from the type of power indicated on the marked label. If you are not sure of the type of power available, consult your dealer or local power company.
- The Class I pluggable equipment Type A must be connected to protective earth.
- An approved power cord greater or equal to H03VV-F or H05VV-F, 2G or 3G, 0.75mm² must be used.
- Use only the power cord provided by BenQ. Never use a power cord that appears to be damaged or frayed.
- To avoid possible damage to the monitor, do not use it in a region where power supply is unstable.
- Ensure that the power cord is connected to a grounded power outlet before turning on the monitor.
- To avoid possible danger, observe the total electric load when using the monitor with a (multi-outlet) extension cord.
- Always turn off the monitor before unplugging the power cord.

For Germany only:

- (If the weight of the product is less than or equal to 3 kg) An approved power cord greater or equal to H03VV-F, 3G, 0.75mm² must be used.
- (If the weight of the product is more than 3 kg) An approved power cord greater or equal to H05VV-F or H05RR-F, 3G, 0.75mm² must be used.
- (If a remote control is provided) RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

For models with adapter:

- Use only the power adapter supplied with your LCD Monitor. Use of another type of power adapter will result in malfunction and/or danger.
- Allow adequate ventilation around the adapter when using it to operate the device or charge the battery. Do not cover the power adapter with paper or other objects that will reduce cooling. Do not use the power adapter while it is inside a carrying case.
- Connect the power adapter to a proper power source.
- Do not attempt to service the power adapter. There are no service parts inside. Replace the unit if it is damaged or exposed to excess moisture.

Installation

- Do not use your monitor under any of the following environmental conditions:
 - Extremely high or low temperature, or in direct sunlight
 - Dusty places
 - Highly humid, exposed to rain, or close to water
 - Exposed to vibrations or impacts in places such as cars, buses, trains, and other rail vehicles
 - Near heating appliances such as radiators, heaters, fuel stoves, and other heat-generating items (including audio amplifiers)
 - An enclosed place (such as a closet or bookcase) without appropriate ventilation
 - An uneven or sloping surface
 - Exposed to chemical substances or smoke
- Carry the monitor carefully.
- Do not place heavy loads on the monitor to avoid possible personal injury or damage to the monitor.
- Ensure that children do not hang or climb onto the monitor.
- Keep all packing bags out of reach of children.

Operation

- To protect your eyesight, please refer to the user manual to set the optimal screen resolution and the viewing distance.
- To reduce eye fatigue, take a break on a regular basis while using the monitor.
- Avoid taking either one of the following actions for a long time. Otherwise, burn marks may occur.
 - Play images that cannot occupy the screen entirely.
 - Place a still image on the screen.
- To avoid possible damage to the monitor, do not touch the monitor panel by finger tip, pen, or any other sharp objects.
- Excessively frequent plug and unplug of video connectors may cause damage to the monitor.
- This monitor is designed mainly for personal use. If you want to use the monitor in a public place or a harsh environment, contact your nearest BenQ service center for assistance.
- To avoid possible electric shock, do not disassemble or repair the monitor.
- If a bad smell or an abnormal sound appears to come from the monitor, contact your nearest BenQ service center for assistance immediately.

Caution

- The distance between you and the monitor should be 2.5 to 3 times the diagonal width of the screen.
- Looking at the screen for an extended period of time causes eye fatigue and may deteriorate your eyesight. Rest your eyes for 5 ~ 10 minutes for every 1 hour of product use.
- Reduce your eye strain by focusing on objects far away.
- Frequent blinking and eye exercise help keep your eyes from drying out.

Safety notice for remote control (applicable if a remote control is provided)

- Do not put the remote control in the direct heat, humidity, and avoid fire.
- Do not drop the remote control.
- Do not expose the remote control to water or moisture. Failure to do so could result in malfunction.
- Confirm there is no object between the remote control and the remote sensor of the product.
- When the remote control will not be used for an extended period, remove the batteries.

Battery safety notice (applicable if a remote control is provided)

The use of the wrong type of batteries may cause chemical leaks or explosion. Please note the following:

- Always ensure that the batteries are inserted with the positive and negative terminals in the correct direction as shown in the battery compartment.
- Different types of batteries have different characteristics. Do not mix different types.
- Do not mix old and new batteries. Mixing old and new batteries will shorten battery life or cause chemical leaks from the old batteries.
- When batteries fail to function, replace them immediately.
- Chemicals which leak from batteries may cause skin irritation. If any chemical matter seeps out of the batteries, wipe it up immediately using a dry cloth, and replace the batteries as soon as possible.
- Due to varying storage conditions, the battery life for the batteries included with your product may be shortened. Replace them within 3 months or as soon as you can after initial use.
- There may be local restrictions on the disposal or recycling of batteries. Consult your local regulations or waste disposal provider.

If the supplied remote control contains a coin / button cell battery, pay attention to the following notice as well.


- Do not ingest battery. Chemical Burn Hazard.
- The remote control supplied with this product contains a coin / button cell battery. If the coin / button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.
- Keep new and used batteries away from children. If the battery compartment does not close securely, stop using the product and keep it away from children.
- If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

Care and cleaning

- Do not place the monitor face down on the floor or a desk surface directly. Otherwise, scratches on the panel surface may occur.
- The equipment is to be secured to the building structure before operation.
- (For models that support wall or ceiling mounting)
 - Install your monitor and monitor mounting kit on a wall with flat surface.

- Ensure that the wall material and the standard wall mount bracket (purchased separately) are stable enough to support the weight of the monitor.
- Turn off the monitor and the power before disconnecting the cables from the LCD monitor.
- Always unplug the product from the power outlet before cleaning. Clean the LCD monitor surface with a lint-free, non-abrasive cloth. Avoid using any liquid, aerosol or glass cleaners.
- Slots and openings on the back or top of the cabinet are for ventilation. They must not be blocked or covered. Your monitor should never be placed near or over a radiator or heat sources, or in a built-in installation unless proper ventilation is provided.
- Do not place heavy loads on the monitor to avoid possible personal injury or damage to the monitor.
- Consider keeping the box and packaging in storage for use in the future when you may need to transport the monitor.
- Refer to the product label for information on model name, power rating, manufacturing date, barcode, serial number, and identification markings. The locations of labels vary by model. See the illustration below for where the labels can be.

Possible label location:

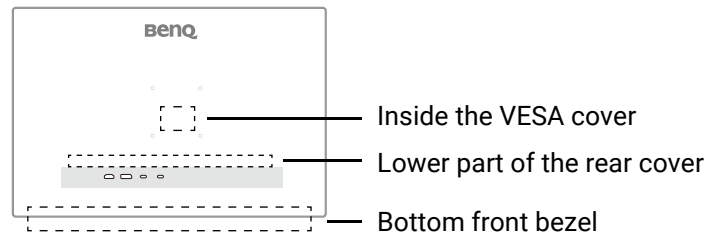

Eye care and flicker-free

- Use of the "Low Blue Light" function helps decrease the blue light emitted from the display to reduce the risk of blue light exposure to your eyes.
- This monitor supports "Low Blue Light" function under any color mode. To enable "Low Blue Light" function, download the bundled software **Display Pilot 2** from BenQ website. In Display Pilot 2, go to **Low Blue Light > Level** and adjust the Low Blue Light value.
- The "User" mode under Color Mode is TUV certified when Low Blue Light is set to 5.
- Looking at the screen for an extended period of time causes eye fatigue and may deteriorate your eyesight. Rest your eyes for 5 ~ 10 minutes for every 1 hour of product use.
- Reduce your eye strain by focusing on objects far way.
- Frequent blinking and eye exercise help keep your eyes from drying out.
- Use of the product for an extended period of time may cause neck tension. You should exercise and stretch properly to reduce neck pain.
- Adjust the surrounding lighting or screen position to minimize reflections and glare on the monitor.

Servicing

- Do not attempt to service this product yourself, as opening or removing covers may expose you to dangerous voltages or other risks. If any of the above mentioned misuse or other accident such as dropping or mishandling occurs, contact qualified service personnel for servicing.
- For replacement of power cord, connection cables, remote control or power adapter, please contact BenQ customer service.

- Contact your place of purchase or visit the local website from Support.BenQ.com for more support.



General warranty information

Note that the monitor warranty may be void if any of the following conditions occurs:

- Documents required for warranty services have been altered by unauthorized use or is illegible.
- The model number or production number on the product has been altered, deleted, removed or made illegible.
- Repairs, modifications, or alterations have been made by unauthorized service organizations or persons.
- Damage caused by improper storage of the monitor (including but not limited to force majeure, direct exposure to sunlight, water, or fire).
- Reception problems occurred due to external signals (such as antenna, Cable TV) outside the monitor.
- Defects caused by abuse or misuse of the monitor.
- Before using the monitor, it is the sole responsibility of the user to check whether the monitor is compatible with local technical standards if the user brings the monitor out of its intended sales area. Failure to do so may cause product breakdown and the user will have to pay the repairing costs.
- It is the sole responsibility of the user if problems (such as data loss and system failure) occurred due to non-factory provided software, parts, and/or non-original accessories.
- Please use the original accessories (e.g. power cable) only with the device to avoid possible dangers such as electric shock and fire.

Typographics

Icon / Symbol	Item	Meaning
	Warning	Information mainly to prevent the damage to components, data, or personal injury caused by misuse and improper operation or behavior.
	Tip	Useful information for completing a task.
	Note	Supplementary information.

In this document, the steps needed to reach a menu may be shown in condensed form, for example: **Menu > System > Information**.




Table of Contents

Copyright	2
Product support	3
Firmware upgrade	3
Advanced software	3
Safety precautions	4
Power safety	4
Installation	5
Operation	5
Safety notice for remote control (applicable if a remote control is provided)	6
Battery safety notice (applicable if a remote control is provided)	6
Care and cleaning	6
Eye care and flicker-free	7
Servicing	7
General warranty information	8
Getting started	10
Getting to know your monitor	12
Front view	12
Back view	13
Connectivity of Thunderbolt™ 4 port on your monitor (MA270S/MA320UG only)	14
Power delivery of USB-C™ port on your monitor	15
Using the monitor wall mounting kit (purchased separately)	16
How to adjust your monitor	17
The control panel	17
5-way controller and basic menu operations	18
Adjusting the screen resolution	20
Preset display modes	21
MA270U/MA270UP/MA320U/MA320UP	21
MA270S	22
MA320UG	25
Video input	28

Getting started

When unpacking please check you have the following items. If any are missing or damaged, please contact the place of purchase for a replacement.

BenQ LCD Monitor	(MA270UP/MA320UP) (MA270S/MA320UG)
Monitor Stand	
Monitor Base	
Cable Holder	
Quick Start Guide	

Safety Instructions	
Regulatory Statements	
Power Cord (Supplied item may differ by model or region.)	
Video Cable: HDMI (MA270UP/MA320UP only)	
USB Cable: USB-C™	



• Available accessories and the pictures shown here may differ from the actual contents and the product supplied for your region. And the package contents may subject to change without prior notice. For cables that are not supplied with your product, you can purchase them separately.

• Consider keeping the box and packaging in storage for use in the future when you may need to transport the monitor. The fitted foam packing is ideal for protecting the monitor during transport.

• Accessories and cables may be included or sold separately depending on the product supplied for your region.




• Always keep the product and accessories out of reach of small children.


• This equipment is not suitable for use in locations where children are likely to be present.

Getting to know your monitor


Front view

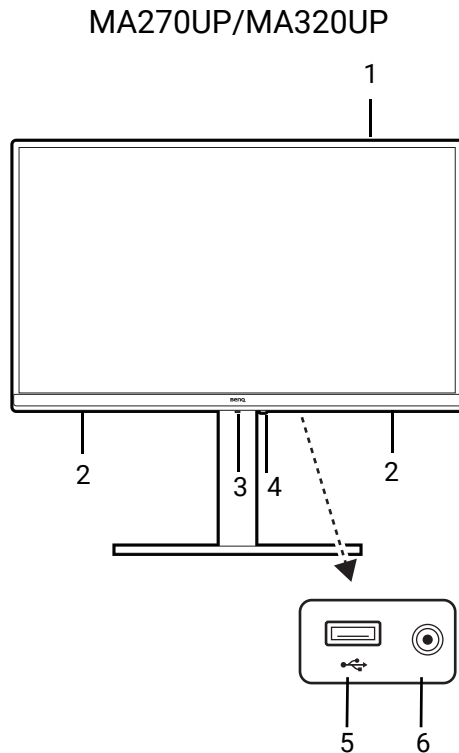

1. Light sensor
2. (MA270UP/MA320UP) Speakers
3. 5-way controller
4. Power button and power LED indicator
5. (MA270UP/MA320UP) USB 3.2 Gen1 Type-A downstream port (for data transfer and power delivery up to 7.5W)
(MA270S/MA320UG) USB 3.2 Gen2 Type-A downstream port (for data transfer and power delivery up to 7.5W)
6. Headphone jack
7. (MA270S/MA320UG) USB 3.2 Gen2 Type-C downstream port (for data transfer and power delivery up to 15W)

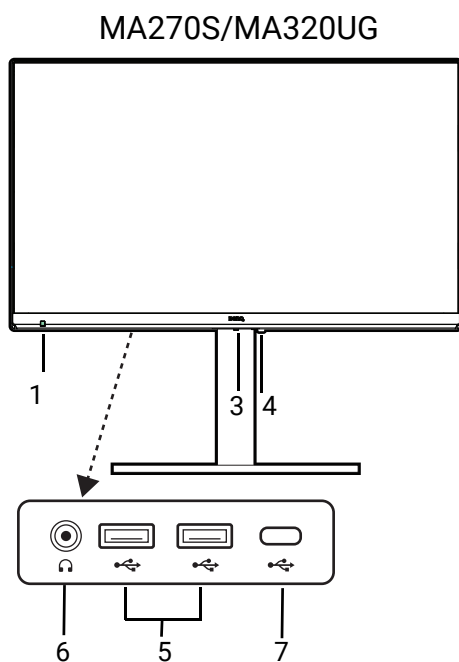

Back view

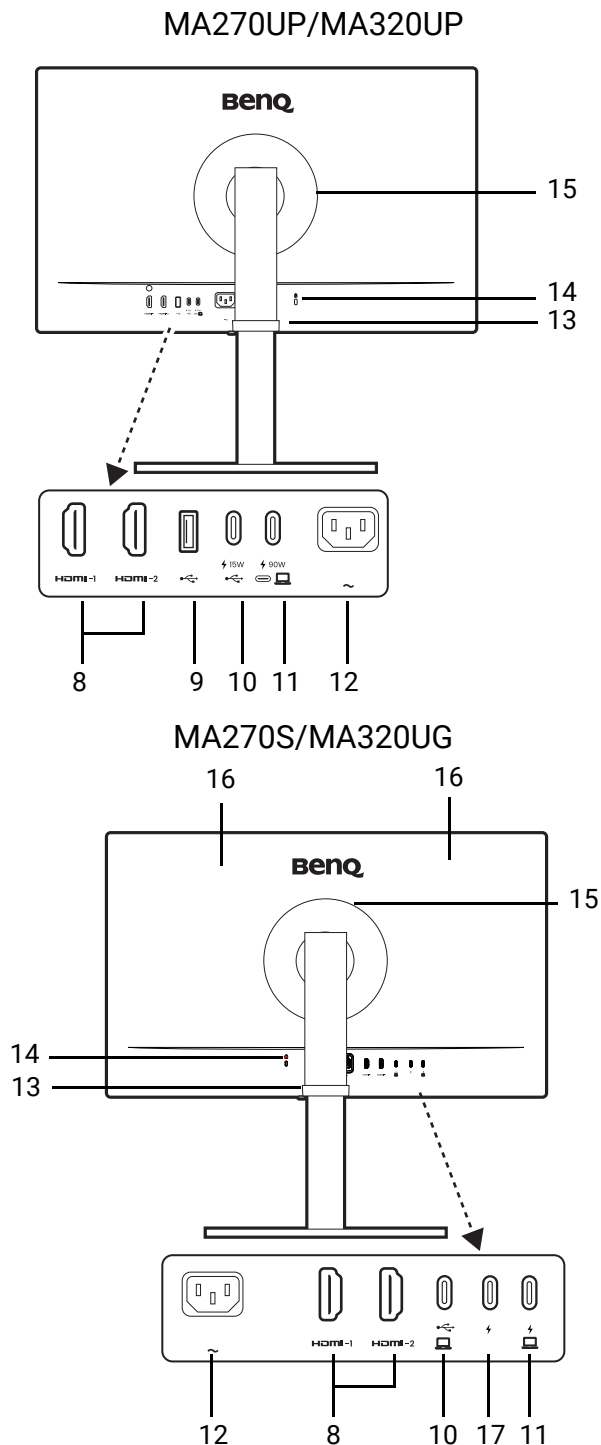

8. HDMI socket
9. USB 3.2 Gen1 Type-A downstream port (for data transfer and power delivery up to 7.5W)
10. (MA270UP/MA320UP) USB 3.2 Gen1 Type-C downstream port (for data transfer and power delivery up to 15W)
(MA270S/MA320UG) USB-C™ port (for video, data transfer and power delivery up to 35W)
11. (MA270UP/MA320UP) USB-C™ port (for video, data transfer and power delivery up to 90W)
(MA270S/MA320UG) Thunderbolt™ 4 socket 1 (*, for video, data transfer and power delivery up to 96W)
12. AC power input jack
13. Cable management
14. Kensington lock slot
15. VESA cover
16. (MA270S/MA320UG) Speakers
17. (MA270S/MA320UG) Thunderbolt™ 4 socket 2 (for video out in daisy chain and power deliver up to 15W)



- *: 1) Thunderbolt™ 4 with up to 40Gbps bandwidth; 2) supports up to two 4K monitors by daisy chain.
- Above diagram may vary depending on the model.
- Picture may differ from product supplied for your region.
- (Applicable for products with white case) The case of the product may turn yellow in about 3 years due to the photo-oxidation reactions induced by light. This is a normal phenomenon and should not be considered as manufacturing defect.

Connectivity of Thunderbolt™ 4 port on your monitor (MA270S/MA320UG only)

The Thunderbolt™ 4 ports on your product are compatible with Thunderbolt™ 4 and USB-C™ connectors. The connectivity, however, may vary depending on the cable used and the capability of the connected computer.

Computer's port for connection	Cable for connection	Monitor's port for connection	Connectivity
Thunderbolt™ port	• Passive Thunderbolt™ 4 cable (as provided) • USB-C™ cable (as provided)	Thunderbolt™ 4 port	OK
USB-C™ port	Passive Thunderbolt™ 4 cable (as provided)	Thunderbolt™ 4 port	OK
USB-C™ port	Active Thunderbolt™ 4 cable (purchased separately)	Thunderbolt™ 4 port	OK (*)
USB-C™ port	USB-C™ cable (as provided)	Thunderbolt™ 4 port	OK

Power delivery of Thunderbolt™ 4 port on your monitor (MA270S/MA320UG only)

With the power delivery function, your monitor helps supply power to the connected Thunderbolt™ 4 devices. Available power varies by port. Make sure the devices are connected to the appropriate ports to be activated properly with sufficient power.

Thunderbolt 1 ()	Thunderbolt 2 ()
5V / 3A	5V / 3A
9V / 3A	N/A
12V / 3A	N/A
15V / 3A	N/A
20V / 4.8A	N/A

Power delivery of USB-C™ port on your monitor

With the power delivery function, your monitor helps supply power to the connected USB-C™ devices.

USB-C™ 90W ()	USB-C™ 35W () (MA270S/MA320UG)	USB-C™ downstream 15W ()
5V / 3A	5V / 3A	5V / 3A
9V / 3A	9V / 3A	N/A
12V / 3A	12V / 2.91A	N/A
15V / 3A	15V / 2.33A	N/A
20V / 4.5A	20V / 1.75A	N/A

- A connected device needs to be equipped with a USB-C™ connector that supports charging function via USB power delivery.
- The connected device can be charged via USB-C™ port even when the monitor is in power saving mode. (*)
- The USB power delivery is up to 90W. If the connected device requires more than 90W for operation or for boot up (when the battery is drained), use the original power adapter that came with the device.
- The information is based on the standard testing criteria and is provided for reference. The compatibility is not guaranteed as the user environments vary. If a separately purchased USB-C™ cable is used, make sure the cable is certified by USB-IF and is full-featured, with power delivery and video / audio / data transfer functions.



*: Charging via USB-C™ in monitor power saving mode and power off mode are available when the **USB-C Awake** function is enabled. To enable the function, download the bundled software **Display Pilot 2** from BenQ website. In **Display Pilot 2**, go to  (**Settings**) > **Advanced** > **Display System Settings**, set **USB-C Awake** and **Standby Charging / Power-off Charging** to **ON**.

Using the monitor wall mounting kit (purchased separately)

The back of your LCD monitor has a VESA standard mount with 100mm pattern, allowing the installation of a wall mount bracket. Before starting to install a monitor wall mounting kit, please read the precautions carefully.

Precautions

- Install your monitor and monitor mounting kit on a wall with flat surface.
- Ensure that the wall material and the standard wall mount bracket (purchased separately) are stable enough to support the weight of the monitor. Refer to the product specifications on the website for weight information.
- Turn off the monitor and the power before disconnecting the cables from the LCD monitor.

1. Remove the monitor stand.

Lay the screen face down on a clean and well-padded surface. Detach the monitor stand.

2. Remove the screws on the back cover.

Use a cross-pointed screwdriver to release the screws on the back cover. The use of a magnetic-head screwdriver is recommended to avoid of losing the screws.



In case you intend to use your monitor on the stand in the future, please keep the monitor base, monitor stand, and screws somewhere safe for future use.


3. Follow the instruction manuals of the wall mount bracket you purchased to complete the installation.



Use four M4 x 10 mm screws to fix a VESA standard wall mount bracket to the monitor. Make sure that all screws are tightened and secured properly. Consult a professional technician or BenQ service for wall mount installation and safety precautions.

How to adjust your monitor


The control panel

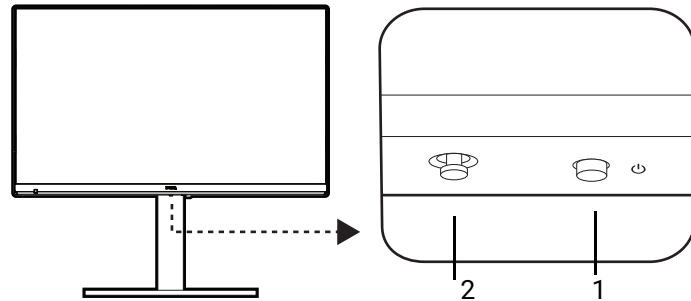

No.	Name	Description
1.	Power key	Turns the power on or off.
2.	5-way controller	Accesses the functions or menu items as instructed by the on-screen icons. See 5-way controller and basic menu operations on page 18 for more information.

5-way controller and basic menu operations


The 5-way controller is located below the lower part of the front bezel. While sitting in front of the monitor, move the controller to the directions instructed by the on-screen icons for menu navigation and operations.

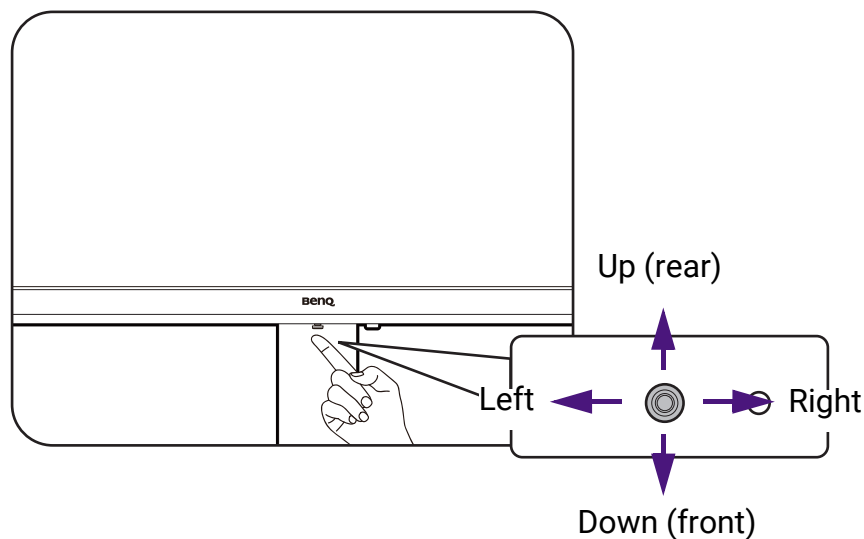


5-way controller operation	Function
(When no menu has been activated)	
Press the 5-way controller	Activates the main menu.
Press the 5-way controller for 5 seconds	Resets all menu settings.
(When a menu has been activated)	
Press	• Confirms the selection. • Exits the main menu.
Move to the right	Goes to the next menu.
Move up	• Goes to the previous menu item. • For up / increase adjustment.
Move down	• Goes to the next menu item. • For down / decrease adjustment.
Move to the left	Returns to the previous menu.

You can use the OSD menu to adjust some of the settings on your monitor. To adjust more settings, please download **Display Pilot 2** software.

1

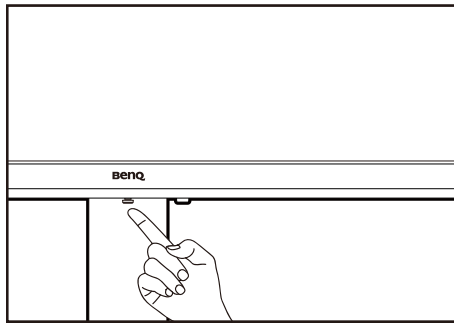

2

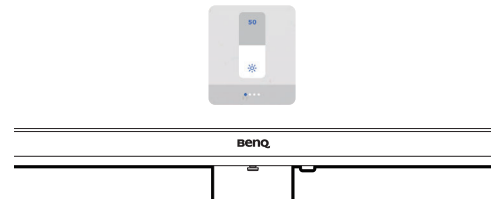

1. Press the 5-way controller to bring up the main menu.
2. Move the 5-way controller to make adjustments or selection.

Adjusting the screen resolution

Due to the nature of liquid crystal display (LCD) technology, the picture resolution is always fixed. For the best display performance, please set the display to its maximum resolution that is the same with the monitor aspect ratio. This is called “Native Resolution” or maximal resolution – that is, the clearest picture. Lower resolutions are displayed on a full screen through an interpolation circuit. Image blurring across pixel boundaries can occur with the interpolated resolution depending upon the image type and its initial resolution.



To find out the monitor aspect ratio and native resolution of the purchased model, please check the Specification on the website.



- To take full advantage of LCD technology you should select the native resolution setting of your PC screen as described below. Be aware that not all PC video cards provide this resolution value. If yours doesn't, check with the video card manufacturer's website for an updated driver for your particular model PC video card which supports this resolution. Software video drivers are often updated and available for new hardware video resolutions. If necessary, you may need to replace and update the PC video card hardware to be able to support the native resolution of the monitor.
- Depending on the operating system on your PC, different procedures should be followed to adjust the screen resolution. Refer to the help document of your operating system for details.

1. Open **Display Properties** and select the **Settings** tab.

You can open **Display Properties** by right-clicking on the Windows desktop and selecting **Properties** from the pop-up menu.

2. Use the slider in the 'Screen area' section to adjust the screen resolution.

Select the recommended resolution (maximum resolution) then click **Apply**.



If you select some other resolution, be aware that this other resolution is interpolated and may not accurately display the screen image as well as it could do at the native resolution setting.

3. Click **OK** then **Yes**.

4. Close the **Display Properties** window.

If your input source does not provide an image which is the same with the monitor aspect ratio, the displayed image may appear stretched or distorted. To maintain the original aspect ratio, image scaling options can be found in the “Display Mode” adjustment. See the user manual for more information.

Adjusting the screen refresh rate

You don't have to choose the highest possible refresh rate on an LCD display, because it is not technically possible for an LCD display to flicker. The best results are obtained by using the factory modes already set in your computer.



Depending on the operating system on your PC, different procedures should be followed to adjust the screen resolution. Refer to the help document of your operating system for details.

1. Double click the **Display** icon in **Control Panel**.
2. From the **Display Properties** window, select the **Settings** tab and click the **Advanced** button.
3. Select the **Adapter** tab, and select an appropriate refresh rate to match one of the applicable factory modes as listed in the specification table.
4. Click **Change**, **OK**, then **Yes**.
5. Close the **Display Properties** window.

Preset display modes

MA270U/MA270UP/MA320U/MA320UP

Timing Support			
PC/Video Signal Support		Input	
Resolution	Frame Frequency	HDMI 2.0	USB-C
640x480	60	V	V
640x480	75	V	V
720x400	70	V	V
720x480	60	V	V
720x576	50	V	V
800x600	60	V	V
800x600	75	V	V
832x624	75	V	V
1024x768	60	V	V
1024x768	75	V	V
1152x870	75	V	V
1280x720	50	V	V
1280x720	60	V	V
1280x800	60	V	V
1280x1024	60	V	V
1280x1024	75	V	V
1680x1050	60	V	V
1600x900	60	V	V
1920x1080	24	V	V
1920x1080	25	V	V
1920x1080	30	V	V
1920x1080	50	V	V
1920x1080	60	V	V
2560x1440	60	V	V
3840x2160	24	V	V
3840x2160	25	V	V
3840x2160	30	V	V
3840x2160	50	V	V
3840x2160	60	V	V

MA270S

Timing Support							
PC/Video Signal Support		When PBP is disabled		PBP (1:1) - Evenly split screen (2560x2880)		PBP (2:1) - The bigger screen (3416x2880)	
Resolution	Frame Frequency	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1
640x480	60	V	V	V	V	V	V
640x480	75	V	V	V	V	V	V
720x400	70	V	V	V	V	V	V
720x480	60	V	V	V	V	V	V
720x576	50	V	V	V	V	V	V
800x600	60	V	V	V	V	V	V
800x600	75	V	V	V	V	V	V
832x624	75	V	V	V	V	V	V
1024x768	60	V	V	V	V	V	V
1024x768	75	V	V	V	V	V	V
1152x870	75	V	V	V	V	V	V
1280x720	50	V	V	V	V	V	V
1280x720	60	V	V	V	V	V	V
1280x800	60	V	V	V	V	V	V
1280x1024	60	V	V	V	V	V	V
1280x1024	75	V	V	V	V	V	V
1280x2880	60						
1600x900	60	V	V	V	V	V	V
1680x1050	60	V	V	V	V	V	V
1704x2880	60						
1920x1080	24	V	V	V	V	V	V
1920x1080	25	V	V	V	V	V	V
1920x1080	30	V	V	V	V	V	V
1920x1080	50	V	V	V	V	V	V
1920x1080	60	V	V	V	V	V	V
2560x1440	60	V	V	V	V	V	V
2560x2880	60			V	V		
3416x2880	60					V	V
3840x2160	24	V	V				
3840x2160	25	V	V				
3840x2160	30	V	V				
3840x2160	50	V	V				
3840x2160	60	V	V				

Timing Support							
PC/Video Signal Support		When PBP is disabled		PBP (1:1) - Evenly split screen (2560x2880)		PBP (2:1) - The bigger screen (3416x2880)	
Resolution	Frame Frequency	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1
3840x2880	50						
3840x2880	60						
5120x2880	60	V	V				
5120x2880	70	V	V				

Timing Support (continued)							
PC/Video Signal Support		PBP (2:1) - The smaller screen (1704x2880)		PBP (3:1) - The bigger screen (3840x2880)		PBP (3:1) - The smaller screen (1280x2880)	
Resolution	Frame Frequency	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1
640x480	60	V	V	V	V	V	V
640x480	75	V	V	V	V	V	V
720x400	70	V	V	V	V	V	V
720x480	60	V	V	V	V	V	V
720x576	50	V	V	V	V	V	V
800x600	60	V	V	V	V	V	V
800x600	75	V	V	V	V	V	V
832x624	75	V	V	V	V	V	V
1024x768	60	V	V	V	V	V	V
1024x768	75	V	V	V	V	V	V
1152x870	75	V	V	V	V	V	V
1280x720	50	V	V	V	V	V	V
1280x720	60	V	V	V	V	V	V
1280x800	60	V	V	V	V	V	V
1280x1024	60	V	V	V	V	V	V
1280x1024	75	V	V	V	V	V	V
1280x2880	60					V	V
1600x900	60	V	V	V	V		
1680x1050	60	V	V	V	V		
1704x2880	60	V	V				
1920x1080	24			V	V		
1920x1080	25			V	V		
1920x1080	30			V	V		
1920x1080	50			V	V		
1920x1080	60			V	V		

Timing Support (continued)							
PC/Video Signal Support		PBP (2:1) - The smaller screen (1704x2880)		PBP (3:1) - The bigger screen (3840x2880)		PBP (3:1) - The smaller screen (1280x2880)	
Resolution	Frame Frequency	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1
2560x1440	60			V	V		
2560x2880	60						
3416x2880	60						
3840x2160	24			V	V		
3840x2160	25			V	V		
3840x2160	30			V	V		
3840x2160	50			V	V		
3840x2160	60			V	V		
3840x2880	50			V	V		
3840x2880	60			V	V		
5120x2880	60						
5120x2880	70						

MA320UG

Timing Support							
PC/Video Signal Support		When PBP is disabled		PBP (1:1) - Evenly split screen (1920x2160)		PBP (2:1) - The bigger screen (2560x2160)	
Resolution	Frame Frequency	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1
640x480	60	V	V	V	V	V	V
640x480	75	V	V	V	V	V	V
720x400	70	V	V	V	V	V	V
720x480	60	V	V	V	V	V	V
720x576	50	V	V	V	V	V	V
800x600	60	V	V	V	V	V	V
800x600	75	V	V	V	V	V	V
832x624	75	V	V	V	V	V	V
960x2160	60						
960x2160	120						
1024x768	60	V	V	V	V	V	V
1024x768	75	V	V	V	V	V	V
1152x870	75	V	V	V	V	V	V
1280x720	50	V	V	V	V	V	V
1280x720	60	V	V	V	V	V	V
1280x800	60	V	V	V	V	V	V
1280x1024	60	V	V	V	V	V	V
1280x1024	75	V	V	V	V	V	V
1280x2160	60						
1280x2160	120						
1600x900	60	V	V	V	V	V	V
1680x1050	60	V	V	V	V	V	V
1920x1080	24	V	V	V	V	V	V
1920x1080	25	V	V	V	V	V	V
1920x1080	30	V	V	V	V	V	V
1920x1080	50	V	V	V	V	V	V
1920x1080	60	V	V	V	V	V	V
1920x1080	100	V	V	V	V	V	V
1920x1080	120	V	V	V	V	V	V
1920x2160	60			V	V		
1920x2160	120			V	V		
2560x1440	60	V	V			V	V
2560x1440	120	V	V			V	V

Timing Support							
PC/Video Signal Support		When PBP is disabled		PBP (1:1) - Evenly split screen (1920x2160)		PBP (2:1) - The bigger screen (2560x2160)	
Resolution	Frame Frequency	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1
2560x2160	60					V	V
2560x2160	120					V	V
2880x2160	60						
2880x2160	120						
3840x2160	24	V	V				
3840x2160	25	V	V				
3840x2160	30	V	V				
3840x2160	50	V	V				
3840x2160	60	V	V				
3840x2160	100	V	V				
3840x2160	120	V	V				

Timing Support (continued)								
PC/Video Signal Support		PBP (2:1) - The smaller screen (1280x2160)		PBP (3:1) - The bigger screen (2880x2160)		PBP (3:1) - The smaller screen (960x2160)		When PBP/FreeSync/VRR/Adaptive Sync is disabled
Resolution	Frame Frequency	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1	HDMI 2.1
640x480	60	V	V	V	V	V	V	V
640x480	75	V	V	V	V	V	V	V
720x400	70	V	V	V	V	V	V	V
720x480	60	V	V	V	V	V	V	V
720x576	50	V	V	V	V	V	V	V
800x600	60	V	V	V	V	V	V	V
800x600	75	V	V	V	V	V	V	V
832x624	75	V	V	V	V	V	V	V
960x2160	60					V	V	
960x2160	120					V	V	
1024x768	60	V	V	V	V			V
1024x768	75	V	V	V	V			V
1152x870	75	V	V	V	V			V
1280x720	50	V	V	V	V			V
1280x720	60	V	V	V	V			V
1280x800	60	V	V	V	V			V

Timing Support (continued)								
PC/Video Signal Support		PBP (2:1) - The smaller screen (1280x2160)		PBP (3:1) - The bigger screen (2880x2160)		PBP (3:1) - The smaller screen (960x2160)		When PBP/FreeSync/VRR/Adaptive Sync is disabled
Resolution	Frame Frequency	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1	USB-C / Thunderbolt	HDMI 2.1	HDMI 2.1
1280x1024	60	V	V	V	V			V
1280x1024	75	V	V	V	V			V
1280x2160	60	V	V					
1280x2160	120	V	V					
1600x900	60			V	V			V
1680x1050	60			V	V			V
1920x1080	24			V	V			V
1920x1080	25			V	V			V
1920x1080	30			V	V			V
1920x1080	50			V	V			V
1920x1080	60			V	V			V
1920x1080	100			V	V			V
1920x1080	120			V	V			V
1920x2160	60							
1920x2160	120							
2560x1440	60			V	V			V
2560x1440	120			V	V			V
2560x2160	60							
2560x2160	120							
2880x2160	60			V	V			
2880x2160	120			V	V			
3840x2160	24							V
3840x2160	25							V
3840x2160	30							V
3840x2160	50							V
3840x2160	60							V
3840x2160	100							V
3840x2160	120							V

Video input

MA270U/MA270UP/MA320U/MA320UP

Color space	YCbCr 4:2:2			
Max. bit	8 bit		10 bit	
Frame frequency	24, 25, 30	50, 60	24, 25, 30	50, 60
HDMI	v	v	v	v
USB-C™	v	v	v	v

Color space	YCbCr 4:4:4 / RGB 4:4:4				YCbCr 4:2:0					
Max. bit	8 bit		10 bit		8 bit		10 bit		12 bit	
Frame frequency	24, 25, 30	50, 60	24, 25, 30	50, 60	24, 25, 30	50, 60	24, 25, 30	50, 60	24, 25, 30	50, 60
HDMI	v	v	v	v ⁽³⁾		v ⁽²⁾		v ⁽²⁾		*v ⁽²⁾
USB-C™ (DP Alt mode)	v	v	v	v ⁽¹⁾						

MA270S

Color space	YCbCr 4:2:2			
Max. bit	8 bit		10 bit	
Frame frequency	24, 25, 30	50, 60, 70	24, 25, 30	50, 60, 70
HDMI	v	v	v	v
USB-C™ / Thunderbolt™ 4	v	v	v	v

Color space	YCbCr 4:4:4 / RGB 4:4:4				YCbCr 4:2:0					
Max. bit	8 bit		10 bit		8 bit		10 bit		12 bit	
Frame frequency	24, 25, 30	50, 60, 70	24, 25, 30	50, 60, 70	24, 25, 30	50, 60	24, 25, 30	50, 60	24, 25, 30	50, 60
HDMI	v	v	v	v		v ⁽²⁾		v ⁽²⁾		v ⁽²⁾
USB-C™ / Thunderbolt™ 4	v	v	v	v						

MA320UG

Color space	YCbCr 4:2:2			
Max. bit	8 bit		10 bit	
Frame frequency	24, 25, 30	50, 60, 100, 120	24, 25, 30	50, 60, 100, 120
HDMI	v	v	v	v
USB-C™ / Thunderbolt™ 4	v	v	v	v

Color space	YCbCr 4:4:4 / RGB 4:4:4				YCbCr 4:2:0					
Max. bit	8 bit		10 bit		8 bit		10 bit		12 bit	
Frame frequency	24, 25, 30	50, 60, 100, 120	24, 25, 30	50, 60, 100, 120	24, 25, 30	50, 60	24, 25, 30	50, 60	24, 25, 30	50, 60
HDMI	v	v	v	v		v ⁽²⁾		v ⁽²⁾		v ⁽²⁾
USB-C™ / Thunderbolt™ 4	v	v	v	v						



- *: The monitor receives 12-bit data and displays 10-bit colors.
 - (1): Video timing 3840 x 2160@50 Hz and 3840 x 2160@59.94 Hz do not support RGB 4:4:4 / YCbCr 4:4:4 10 bit format.
 - (2): Supports the resolution 3840 x 2160 only.
 - (3): Not available for resolution 3840 x 2160.
-

2025/08/19
MA0U

Specifications - MA270UP

Display type	27" wide-screen, UHD, LED backlight monitor
Panel type	IPS panel
Display area	596.736 x 335.664 mm
Native (maximum) resolution	3840 x 2160
Aspect ratio	16:9
Colors	1.07 billion
Contrast / Brightness	1200:1 / 400 cd/m ² (typical)
Response time	5ms (GtG)
Viewing angle (left/right, up/down)	178, 178 (CR _≥ 10)
Hor. Frequency (KHz)	27 - 135 kHz Multi- frequency monitor
Ver. Frequency (Hz)	24 - 76 Hz modes within these parameters
Controls	• 1 button • Power key
Max. power consumption	220 W
Power saving mode	< 0.5 W
Connectivity	• HDMI 2.0 x 2 • USB-C (PD 90W, DP alt mode, Data USB 3.2 Gen1) x 1 • USB 3.2 gen1 Type-A downstream (B.C.1.2, 7.5W) x 2 / • USB 3.2 gen1 Type-C downstream (power up to 15W) x 1 • Headphone jack x 1
Speaker	3W x 2
Temperature (operating)	0 °C - 40 °C
Air humidity (operating)	10% - 90%
Temperature (storage)	-20 °C - 60 °C
Air humidity (storage)	10% - 60%
Operating voltage	100 - 240 V, 50/60 Hz +/- 3 Hz
Tilt (down/up)	-5° ~ 20°
Swivel (left/right)	15°/15°
Height adjustment	115 mm
Pivot	± 90°

Dimensions (H x W x D)	560.07 x 613.8 x 220.2 mm (Highest) 445.07 x 613.8 x 220.2 mm (Lowest)
Weight (without stand and base)	5.14 kg
Weight	8.2 kg



The specifications are subject to change without prior notice.

Specifications - MA270S

Display type	27" wide-screen, 5K, LED backlight monitor
Panel type	IPS panel
Display area	596.736 x 335.664 mm
Native (maximum) resolution	5120 x 2880
Aspect ratio	16:9
Colors	1.07 billion
Contrast / Brightness	2000:1 / 500 cd/m ² (typical)
Response time	5ms (GtG)
Viewing angle (left/right, up/down)	178, 178 (CR _≥ 10)
Hor. Frequency (KHz)	27 - 209 kHz Multi- frequency monitor
Ver. Frequency (Hz)	24 - 76 Hz modes within these parameters (video timing) 48 - 70 Hz modes within these parameters (MediaSync)
Controls	• 1 button • Power key
Max. power consumption	TBD W
Power saving mode	< 0.5 W
Connectivity	• HDMI 2.1 x 2 • Thunderbolt 4 x 1 (Power delivery 96W, Signal Transmission) • Thunderbolt out x 1 (downstream, power delivery up to 15W) • USB-C™ x 1 (Power delivery 35W, Signal Transmission) • USB-C 3.2 Gen 2 x 1; downstream • USB-A 3.2 Gen 2 x 2; downstream • Headphone jack x 1
Speaker	3W x 2
Temperature (operating)	0 °C - 40 °C
Air humidity (operating)	10% - 90%
Temperature (storage)	-20 °C - 60 °C
Air humidity (storage)	10% - 60%
Operating voltage	100 - 240 V, 50/60 Hz +/- 3 Hz

Tilt (down/up)	-5° ~ 20°
Swivel (left/right)	15°/15°
Height adjustment	150 mm
Pivot	± 90°
Dimensions (H x W x D)	579.9 x 614 x 210.5 mm (Highest) 429.9 x 614 x 210.5 mm (Lowest)
Weight (without stand and base)	TBD kg
Weight	TBD kg



The specifications are subject to change without prior notice.

Specifications - MA320UG

Display type	31.5" wide-screen, UHD, LED backlight monitor
Panel type	IPS panel
Display area	697.3056 x 392.2344 mm
Native (maximum) resolution	3840 x 2160
Aspect ratio	16:9
Colors	1.07 billion
Contrast / Brightness	2000:1 / 450 cd/m ² (typical)
Response time	5ms (GtG)
Viewing angle (left/right, up/down)	178, 178 (CR _≥ 10)
Hor. Frequency (KHz)	27 - 275 kHz Multi- frequency monitor
Ver. Frequency (Hz)	24 - 120 Hz modes within these parameters (including video timing) 48 - 120 Hz modes within these parameters (FreeSync Premium/MediaSync/VRR)
Controls	• 1 button • Power key
Max. power consumption	TBD W
Power saving mode	< 0.5 W
Connectivity	• HDMI 2.1 x 2 • Thunderbolt 4 x 1 (Power delivery 96W, Signal Transmission) • Thunderbolt out x 1 (downstream, power delivery up to 15W) • USB-C™ x 1 (Power delivery 35W, Signal Transmission) • USB-C 3.2 Gen 2 x 1; downstream • USB-A 3.2 Gen 2 x 2; downstream • Headphone jack x 1
Speaker	3W x 2
Temperature (operating)	0 °C - 40 °C
Air humidity (operating)	10% - 90%
Temperature (storage)	-20 °C - 60 °C
Air humidity (storage)	10% - 60%
Operating voltage	100 - 240 V, 50/60 Hz +/- 3 Hz

Tilt (down/up)	-5° ~ 20°
Swivel (left/right)	15°/15°
Height adjustment	150 mm
Pivot	± 90°
Dimensions (H x W x D)	TBD mm (Highest) TBD mm (Lowest)
Weight (without stand and base)	TBD kg
Weight	TBD kg



The specifications are subject to change without prior notice.

Specifications - MA320UP

Display type	31.5" wide-screen, UHD, LED backlight monitor
Panel type	IPS panel
Display area	697.3056 x 392.2344 mm
Native (maximum) resolution	3840 x 2160
Aspect ratio	16:9
Colors	1.07 billion
Contrast / Brightness	1300:1 / 550 cd/m ² (typical)
Response time	5ms (GtG)
Viewing angle (left/right, up/down)	178, 178 (CR _≥ 10)
Hor. Frequency (KHz)	27 - 135 kHz Multi- frequency monitor
Ver. Frequency (Hz)	24 - 76 Hz modes within these parameters
Controls	• 1 button • Power key
Max. power consumption	250 W
Power saving mode	< 0.5 W
Connectivity	• HDMI 2.1 x 2 • USB-C (PD 90W, DP alt mode, Data USB 3.2 Gen1) x 1 • USB 3.2 gen1 Type-A downstream (B.C.1.2, 7.5W) x 2 / • USB 3.2 gen1 Type-C downstream (power up to 15W) x 1 • Headphone jack x 1
Speaker	3W x 2
Temperature (operating)	0 °C - 40 °C
Air humidity (operating)	10% - 90%
Temperature (storage)	-20 °C - 60 °C
Air humidity (storage)	10% - 60%
Operating voltage	100 - 240 V, 50/60 Hz +/- 3 Hz
Tilt (down/up)	-5° ~ 20°
Swivel (left/right)	15°/15°
Height adjustment	115 mm
Pivot	± 90°

Dimensions (H x W x D)	608.77 x 714.5 x 220.2 mm (Highest) 493.77 x 714.5 x 220.2 mm (Lowest)
Weight (without stand and base)	6.05 kg
Weight	9.1 kg



The specifications are subject to change without prior notice.

Regulatory statements

- 
- Not all models are available in all regions. If certain safety regulations are required for specific region, BenQ ensures that products available in that region are complied with the requested regulations.
 - This document provides country- and region-specific regulatory notices and compliance information for BenQ LCD monitors. Some of these notices may not apply to your product.

Accessibility Requirements for Rehabilitation Act of 1973, Section 508

BenQ's commitment to accessible products allows us to support government in making accessible technology choices. The product is compliant with Section 508 guidelines by including the assistive features as below:

- The product has colored "Power" indicators. Refer to the user manual for color definitions. While the monitor is in standby or sleep mode, it uses less than 2 watts of electricity.
- The product has a variety of settings of pre-programmed flicker-free timing to make the screen shown on the monitor readily accessible. The default timing setting is automatically turned on every time the monitor is powered up, and thus reduces the hassle of user intervention.
- The product has options for brightness and contrast adjustments that text and images could be displayed differently to meet the demands of the visually impaired. Other similar adjustments are also available by using the On-Screen Display (OSD) controls on the products.
- The product includes user-selectable color controls, such as color temperature selections (Monitor: 5800K, 6500K and 9300K, Projector: 5500K, 6500K, 7500K and 9300K), with a wide range of contrast levels
- The product usually has one or two speakers for audio performance which allow users (including hearing impaired) to interact with the computer systems connected. Speaker controls are typically located on the front-panel.
- Firmware of the product contains unique product information that helps computer systems to identify BenQ products and activate their Plug-and-Play function when connected.
- The product is compatible with the PC99 standard. For example, connectors are color-coded to help users easily connecting products to computer systems correctly.
- Some models of BenQ's monitors and projectors contain additional USB and DVI ports for connection to more devices such as a special headphone to assist the hearing impaired.
- BenQ's customer service provides answers and assistance to all our customers through phone calls, facsimiles, e-mails, or websites.
- The product comes with user manuals, which are available on the official local website. Visit the local website from www.BenQ.com or zowie.beng.com (for e-Sports monitors) > **Support** > **Download & FAQ** > the purchased model > the **User Manual** tab to access the user manuals. Other types of documents may be available upon requests.

TCO Certified

This section applies only to products bearing the TCO Certified logo.
Visit <https://tcocertified.com/product-finder> for the models that are TCO Certified. For the information on the sustainable features of the certified product, access the information document called "TCO Certified Document" from <https://www.benq.com/en-us/support/recycling/regulatory-statements.html>.

FCC Statements

Federal Communications Commission (FCC) Notice (U.S. Only)
WARNING: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received including interference that may cause undesired operation.

- 
- CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
 - (U.S. only) Visit www.benq.com/en-us or zowie.benq.com/en-us (for e-Sports monitors) > **Support** > **Download & FAQ** > the purchased model > the **User Manual** tab to access the SDoC (Supplier's Declaration of Conformity) document. If multiple SDoC documents are available, refer to the one that its **Model name** is identical with the **Model ID** on the rating label of the product. You may not find your product's SDoC document online as it was not required at the time the product was manufactured. However, it does not change the fact that the product has been tested to comply with FCC standards, as indicated by the FCC logo on the product or on the rating label.

Energy Star (applicable only for models bearing the Energy Star logo)



This product qualifies for ENERGY STAR® in the factory default (Home configuration) setting. Changing the factory default settings or enabling other features may increase power consumption that could exceed the limits necessary to qualify for ENERGY STAR®. Refer to ENERGYSTAR.gov (www.energystar.gov) for more information on the ENERGY STAR® program.

Visit the local website from www.BenQ.com or zowie.benq.com (for e-Sports monitors) and refer to the "Specifications" tab for more regulation information.

警語及注意事項

- 警語：使用過度恐傷害視力。
- 注意事項：
- 使用 30 分鐘請休息 10 分鐘。
 - 未滿 2 歲幼兒不看螢幕，2 歲以上每天看螢幕不要超過 1 小時。

Taiwan RoHS (適用於無喇叭的型號)

單元		限用物質及其化學符號					
	鉛 (Pb)	汞 (Hg)	鎘 (Cd)	六價鉻 (Cr ⁶⁺)	多溴聯苯 (PBB)	多溴二苯醚 (PBDE)	
塑料外框	○	○	○	○	○	○	
後殼	○	○	○	○	○	○	
液晶螢幕	—	○	○	○	○	○	
電路板組件	—	○	○	○	○	○	
電源板組件	—	○	○	○	○	○	
底座	○	○	○	○	○	○	
電源線	—	○	○	○	○	○	
其它線材	—	○	○	○	○	○	
• 備考 1. "○" 係指該項限用物質之百分比含量未超出百分比含量基準值。							
• 備考 2. "—" 係指該項限用物質為排除項目。							

Taiwan RoHS (適用於無喇叭有電源供應器的型號)

單元		限用物質及其化學符號					
	鉛 (Pb)	汞 (Hg)	鎘 (Cd)	六價鉻 (Cr ⁶⁺)	多溴聯苯 (PBB)	多溴二苯醚 (PBDE)	
塑料外框	○	○	○	○	○	○	
後殼	○	○	○	○	○	○	

單元	限用物質及其化學符號					
	鉛 (Pb)	汞 (Hg)	鎘 (Cd)	六價鉻 (Cr ⁶⁺)	多溴聯苯 (PBB)	多溴二苯醚 (PBDE)
液晶螢幕	—	○	○	○	○	○
電路板組件	—	○	○	○	○	○
電源供應器	—	○	○	○	○	○
底座	○	○	○	○	○	○
電源線	—	○	○	○	○	○
其它線材	—	○	○	○	○	○
・備考1. "○" 係指該項限用物質之百分比含量未超出百分比含量基準值。						
・備考2. "—" 係指該項限用物質為排除項目。						

Taiwan RoHS（適用於有喇叭的型號）

限用物質含有情況標示聲明

單元	限用物質及其化學符號					
	鉛 (Pb)	汞 (Hg)	鎘 (Cd)	六價鉻 (Cr ⁶⁺)	多溴聯苯 (PBB)	多溴二苯醚 (PBDE)
塑料外框	○	○	○	○	○	○
後殼	○	○	○	○	○	○
液晶螢幕	—	○	○	○	○	○
電路板組件	—	○	○	○	○	○
電源板組件	—	○	○	○	○	○
喇叭	—	○	○	○	○	○
底座	○	○	○	○	○	○
電源線	—	○	○	○	○	○
其它線材	—	○	○	○	○	○
・備考1. "○" 係指該項限用物質之百分比含量未超出百分比含量基準值。						
・備考2. "—" 係指該項限用物質為排除項目。						

Taiwan RoHS（適用於有喇叭有電源供應器的型號）

限用物質含有情況標示聲明

單元	限用物質及其化學符號					
	鉛 (Pb)	汞 (Hg)	鎘 (Cd)	六價鉻 (Cr ⁶⁺)	多溴聯苯 (PBB)	多溴二苯醚 (PBDE)
塑料外框	○	○	○	○	○	○
後殼	○	○	○	○	○	○
液晶螢幕	—	○	○	○	○	○
電路板組件	—	○	○	○	○	○
電源供應器	—	○	○	○	○	○
喇叭	—	○	○	○	○	○
底座	○	○	○	○	○	○
電源線	—	○	○	○	○	○
其它線材	—	○	○	○	○	○
・備考1. "○" 係指該項限用物質之百分比含量未超出百分比含量基準值。						
・備考2. "—" 係指該項限用物質為排除項目。						

電源についての安全対策

接地接続は必ず電源プラグを電源に接続する前に行ってください。また、接地接続を外す場合には必ず電源プラグを電源から切り離してから行って下さい。
電源コードは必ず本製品に付属の物を使用してください、同梱した電源コードセットは本機以外の電気機器で使用できません。

VCCI (CLASS B) (applicable only for models with VCCI certificate)

この装置は、クラスB機器です。この装置は、住宅環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。
取扱説明書に従って正しい取り扱いをして下さい。

VCCI-B

JIS C 0950 (applicable only for models with JIS C 0950 certificate) (証明書のあるモニターモデルにのみ適用可能)

日本工業規格番号JIS C 0950（通称：J-Moss）は、包装箱（外箱）、カタログ類（取扱説明書、印刷物、ウェブサイトなど）へ表示する方法について規定した、電気・電子機器の日本工業規格です。
対象となる特定の化学物質は、下記となります。

	含有マーク	当該化学物質が指定の含有基準値を超えている場合の製品に付与するマーク。
	グリーンマーク	当該化学物質が、含有マークの除外事項を除き指定の含有基準値以下である製品に、メーカーが任意で表示することが出来るマーク。
	R Mark	R Mark is used if the amount of the specific chemical substances is over the specified standards.
	G Mark	G Mark can be used voluntarily if the amount of the specific chemical substances is under the specified standards (excluding the exceptions as specified by the R Mark standards).

EU REACH SVHC Disclosure on Candidate List

REACH (Registration, Evaluation, Authorization and Restriction of Chemicals, EC 1907/2006) is the European Union's (EU) chemical substances regulatory framework. REACH requires BenQ Corporation to provide customers with sufficient information on Substances of Very High Concern (SVHC) contained in products in concentration above 0.1% weight by weight (w/w) to allow safe use of the product.

RoHS Statement

This product is compliant to implemented RoHS (Restriction of Hazardous Substances) type regulations worldwide.

Japan RoHS

機器名称: モニター (スピーカーなしのモデルの)

ユニット	化学物質記号					
	Pb	Hg	Cd	Cr (VI)	PBB	PBDE
フロントトリム	0	0	0	0	0	0
バックシェِل	0	0	0	0	0	0
LCDパネル	除外項目	0	0	0	0	0
主なプリント基板	除外項目	0	0	0	0	0
ボタン制御プリント基板	除外項目	0	0	0	0	0
パワープリント基板	除外項目	0	0	0	0	0
ベーススタンド	0	0	0	0	0	0
電源コード	除外項目	0	0	0	0	0
I/Oケーブル	除外項目	0	0	0	0	0
注記: 「○」は、算出対象物質の含有率が含有率基準値以下であることを示している。 注記2: 「除外項目」は、算出対象物質が含有マークの除外項目に該当していることを示している。						

JIS C 0950:2021

機器名称: モニター (スピーカー付きモデルの)

ユニット	化学物質記号					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
フロントトリム	0	0	0	0	0	0
バックシェِل	0	0	0	0	0	0
LCDパネル	除外項目	0	0	0	0	0
主なプリント基板	除外項目	0	0	0	0	0
ボタン制御プリント基板	除外項目	0	0	0	0	0
パワープリント基板	除外項目	0	0	0	0	0
トランペット	除外項目	0	0	0	0	0
ベーススタンド	0	0	0	0	0	0
電源コード	除外項目	0	0	0	0	0
I/Oケーブル	除外項目	0	0	0	0	0
注記: 「○」は、算出対象物質の含有率が含有率基準値以下であることを示している。 注記2: 「除外項目」は、算出対象物質が含有マークの除外項目に該当していることを示している。						

JIS C 0950:2021

EU RoHS (for models without speakers)

Coarse Classification	Chemical Substance Table									
	Pb	Hg	Cd	Cr ⁺⁶	PBB	PBDE	DEHP	BBP	DBP	DIBP
Front bezel	0	0	0	0	0	0	0	0	0	0
Back cover	0	0	0	0	0	0	0	0	0	0
LCD panel	Exempted	0	0	0	0	0	0	0	0	0
Main PCBA	Exempted	0	0	0	0	0	0	0	0	0
Keypad PCBA	Exempted	0	0	0	0	0	0	0	0	0
Power PCBA	Exempted	0	0	0	0	0	0	0	0	0
Stand	0	0	0	0	0	0	0	0	0	0
Power cord	Exempted	0	0	0	0	0	0	0	0	0
I/O cable	Exempted	0	0	0	0	0	0	0	0	0
*: PCBA consisted of bare printed circuit board, soldering and its surface-mounted elements, such as resistors, capacitors, arrays, connectors, chips, etc. NOTE 1: The "0" indicates that the percentage content of the substance to be calculated is not exceeding the reference percentage content of EU RoHS directive (2011/65/EU & EU 2015/863). NOTE 2: The "exempted" item means that the specified chemical substance corresponds to the items exempted by the EU RoHS directive (2011/65/EU & EU 2015/863).										

EU RoHS (for models with speakers)

Coarse Classification	Chemical Substance Table									
	Pb	Hg	Cd	Cr ⁺⁶	PBB	PBDE	DEHP	BBP	DBP	DIBP
Front bezel	0	0	0	0	0	0	0	0	0	0
Back cover	0	0	0	0	0	0	0	0	0	0
LCD panel	Exempted	0	0	0	0	0	0	0	0	0
Main PCBA	Exempted	0	0	0	0	0	0	0	0	0
Keypad PCBA	Exempted	0	0	0	0	0	0	0	0	0
Power PCBA	Exempted	0	0	0	0	0	0	0	0	0
Speaker	Exempted	0	0	0	0	0	0	0	0	0
Stand	0	0	0	0	0	0	0	0	0	0
Power cord	Exempted	0	0	0	0	0	0	0	0	0
I/O cable	Exempted	0	0	0	0	0	0	0	0	0
*: PCBA consisted of bare printed circuit board, soldering and its surface-mounted elements, such as resistors, capacitors, arrays, connectors, chips, etc. NOTE 1: The "0" indicates that the percentage content of the substance to be calculated is not exceeding the reference percentage content of EU RoHS directive (2011/65/EU & EU 2015/863). NOTE 2: The "exempted" item means that the specified chemical substance corresponds to the items exempted by the EU RoHS directive (2011/65/EU & EU 2015/863).										

Turkey RoHS

EEE Yönetmeliğine Uygundur Elektrikli Ve Elektronik Eşyalarda Bazı Zararlı Maddelerin Kullaniminin Sınırlandırılmasına Dair Yönetmelik

Ukraine RoHS

України ТЕХНІЧНИЙ РЕГЛАМЕНТ обмеження використання деяких небезпечних речовин в електричному та електронному обладнанні (від 3 грудня 2008 р. N 1057): Обладнання відповідає вимогам Технічного регламенту обмеження використання деяких небезпечних речовин в електричному та електронному обладнанні

India RoHS

Restriction on Hazardous Substances statement (India)
This product complies with the "India" E-waste Rule 2016* and prohibits use of lead, mercury, hexavalent chromium, polybrominated biphenyls or PolyBrominated Diphenyl Ethers in concentrations exceeding 0.1 weight% and 0.01 weight for cadmium except for exemptions set in Schedule 2 of the Rule.

Vietnam RoHS

Công ty BenQ tuyên bố rằng tất cả các sản phẩm mang nhãn hiệu BenQ được thiết kế và sản xuất phù hợp với Thông tư 30/2011/TT-BCT của Việt Nam về việc hạn chế các chất độc hại và nồng độ tối đa của chất độc cho phép trong các vật liệu đồng nhất (ngoại trừ các trường hợp miễn trừ được liệt kê trong Thông tư này).

Korea notice (applicable only for models with KCC compliance)

Class B; 8급 기기 (가정용 방송통신기자재)	이 기기는 가정용(B급) 전자파적합기기로서 주로 가정에서 사용하는 것을 목적으로 하며, 모든 지역에서 사용할 수 있습니다.
------------------------------------	--

E-Waste Declaration for India



This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about E-Waste and the places to drop off your waste equipment for recycling in India please visit <https://www.benq.com/en-us/support/recycling/global-recycle.html>.

BenQ India Private Limited
Importer EPR Regn. No: IM-19-000-10-AACCA6005C-22 (Under India PWM, 2016 as amended) Thickness: ≥0.05 mm

Bangladesh RoHS Statement

This product shipping to Bangladesh comply with RoHS requirements as prescribed in the Hazardous Waste (E-waste) Management Rules, 2021 by Government of Bangladesh.

Bangladesh E-waste Management Reminder

Please manage, dismantle, dispose of, or recycle e-waste properly as per the Environmental Protection Rules, 1997 to avoid the harm that may be caused to the environment and ecosystem, public interest and public health.

Distributor and recycling service:
Surovi Enterprise Ltd.
House 4, Road 16
Sector # 14, Uttara, Dhaka-1230

www.surovienterprise.net
www.surovigroup.com

Cell# +880-18-47052070
or +880-17-14077062

有关 China WEEE 废弃电器电子产品回收处理管理条例

产品废弃时请交给当地有资质的回收单位处理。

China RoHS

10 依据中国《电器电子产品有害物质限制使用管理办法》，为控制和减少电子信息产品废弃后对环境造成的污染，促进生产和销售低污染电子信息产品，保护环境 and 人体健康，仅提供有关本产品可能含有有毒及有害物质如后：

(适用于无喇叭的型号)

部件名称	产品中有害物质的名称及含量									
	有害物质									
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)	邻苯二甲酸 二正丁酯 (DBP)	邻苯二甲酸 丁基苯酯 (BBP)	邻苯二甲酸 二异丁酯 (DIBP)	邻苯二甲酸二 (2-乙基)己酯 (DEHP)
塑料外框	0	0	0	0	0	0	0	0	0	0
后壳	0	0	0	0	0	0	0	0	0	0
LCD 面板	X	0	0	0	0	0	0	0	0	0
主基板	X	0	0	0	0	0	0	0	0	0
按键基板	X	0	0	0	0	0	0	0	0	0
电源基板	X	0	0	0	0	0	0	0	0	0
底座	0	0	0	0	0	0	0	0	0	0
电源线	X	0	0	0	0	0	0	0	0	0
其他线材	X	0	0	0	0	0	0	0	0	0

*: 电路板组件包括印刷电路板及其构成的零部件，如电阻、电容、集成电路、连接器等。
本表格依据 SJ/T 11364 的规定编制。
O: 表示该有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求下。
X: 表示该有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。
上表中打“X”的部件中，应功能需要，部分有害物质含量超出 GB/T 26572 规定的限量要求，但符合欧盟ROHS法规要求(属于豁免部分)。

(适用于有喇叭型号)

部件名称	产品中有害物质的名称及含量									
	有害物质									
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)	邻苯二甲酸二正丁酯 (DBP)	邻苯二甲酸丁基酯 (BBP)	邻苯二甲酸二异丁酯 (DIBP)	邻苯二甲酸二(2-乙基)己酯 (DEHP)
塑料外框	0	0	0	0	0	0	0	0	0	0
后壳	0	0	0	0	0	0	0	0	0	0
LCD 面板	X	0	0	0	0	0	0	0	0	0
主基板	X	0	0	0	0	0	0	0	0	0
按键基板	X	0	0	0	0	0	0	0	0	0
电源基板	X	0	0	0	0	0	0	0	0	0
喇叭	X	0	0	0	0	0	0	0	0	0
底座	0	0	0	0	0	0	0	0	0	0
电源线	X	0	0	0	0	0	0	0	0	0
其他线材	X	0	0	0	0	0	0	0	0	0
*：电路板组件包括印刷电路板及其构成的零部件，如电阻、电容、集成电路、连接器等。										
本表格依据 SJ/T 11364 的规定编制。 0：表示该有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求下。 X：表示该有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。 上表中打“X”的部件中，应功能需要，部分有害物质含量超出 GB/T 26572 规定的限量要求，但符合欧盟ROHS法规要求(属于豁免部分)。										

有关中国“电器电子产品有害物质限制使用管理办法”之相关规定请参考信息产业部所公布之信息。



为贯彻《电器电子产品有害物质限制使用管理办法》，依据《电器电子产品有害物质限制使用合格评定制度实施安排》所规定的要求实施，采用自我声明作为合格评定标识。

EC DOC & CE mark

DECLARATION OF CONFORMITY

The device complies with the requirements set out in the Council Directives relevant Union harmonisation legislation:

- EMC Directive 2014/30/EU
- LVD Directive 2014/35/EU
- RoHS Directive 2011/65/EU & (EU) 2015/863
- Ecodesign Directive 2009/125/EC
- Turkish ErP (Decision 2010/643)

DÉCLARATION DE CONFORMITÉ

L'appareil est conforme aux exigences définies dans les directives du Conseil relatives à la législation d'harmonisation de l'Union :

- Directive EMC 2014/30/UE
- Directive LVD 2014/35/UE
- Directive RoHS 2011/65/UE et (UE) 2015/863
- Directive sur l'écoconception 2009/125/CE
- ErP turque (décision 2010/643)

DECLARACIÓN DE CONFORMIDAD

El dispositivo cumple los requisitos impuestos en las directivas del Consejo relativas a la legislación de armonización de la Unión Europea:

- Directiva sobre compatibilidad electromagnética 2014/30/UE
- Directiva sobre baja tensión 2014/35/UE
- Directiva sobre sustancias peligrosas 2011/65/UE y (UE) 2015/863
- Directiva sobre diseño ecológico 2009/125/CE
- ErP de Turquía (Decisión 2010/643)

DECLARAÇÃO DE CONFORMIDADE

O dispositivo está conforme aos requisitos das Diretivas do Conselho e relevante legislação de harmonização da União Europeia:

- Diretiva EMC 2014/30/UE
- Diretiva LVD 2014/35/UE
- Diretiva RoHS 2011/65/UE & (UE) 2015/863
- Diretiva Ecodesign 2009/125/CE
- ErP Turca (Decisão 2010/643)

DICHIARAZIONE DI CONFORMITÀ

Il dispositivo è conforme con i requisiti definiti nelle Direttive del Consiglio relative alla Norma sull'armonizzazione dell'Unione:

- Direttiva EMC 2014/30/UE
- Direttiva LVD 2014/35/UE
- Direttiva RoHS 2011/65/UE e (UE) 2015/863
- Direttiva Ecodesign 2009/125/CE
- ErP turca (Decisione 2010/643)

KONFORMITÄTSEKLÄRUNG

Das Gerät entspricht den Anforderungen der entsprechenden EU-Harmonisierungsrichtlinien des Rates:

- EMV-Richtlinie 2014/30/EU
- LVD-Richtlinie 2014/35/EU
- RoHS-Richtlinie 2011/65/EU & (EU) 2015/863
- Ökodesign-Richtlinie 2009/125/EG
- Türkische ErP (Beschluss 2010/643)

ЗАЯВЛЕНИЕ О СООТВЕТСТВИИ

Это устройство отвечает требованиям, изложенным в Директивах Совета о гармонизации соответствующих законов государств, входящих в состав Европейского союза (ЕУ):

- Директива 2014/30/ЕУ об электромагнитной совместимости
- Директива 2014/35/ЕУ о низковольтном оборудовании
- Директива 2011/65/ЕУ и (ЕУ) 2015/863 об ограничении использования определенных видов опасных веществ в электрическом и электронном оборудовании (RoHS)
- Директива 2009/125/ЕС, устанавливающая требования к экологическому проектированию продукции
- Турецкая Директива по энергоэффективности (Решение 2010/643)

Oświadczenie zgodności

Urządzenie jest zgodne z wymaganiami określonymi w odpowiednich unijnych Dyrektywach harmonizacyjnych Rady:

- Dyrektywa EMC 2014/30/UE
- Dyrektywa niskonapięciowa 2014/35/UE
- Dyrektywa RoHS 2011/65/UE i (UE) 2015/863
- Dyrektywa w sprawie ekoprojektu 2009/125/WE
- Turecka dyrektywa ErP (decyzja 2010/643)

UYUM BEYANI

Aygit, Konsey Yönergeleri ile ilgili Birlik uyum mevzuatında belirtilen şartlara uygundur.

English

Français

Español

Português

Italiano

Deutsch

Русский

Polski

Türkçe

- EMC Yönergesi 2014/30/EU
- LVD Yönergesi 2014/35/EU
- RoHS Yönergesi 2011/65/EU & (EU) 2015/863
- Eko-tasanım Yönergesi 2009/125/EC
- Türkçe ErP (Karar 2010/643)

ÖVERENSSTÄMMELSESESKLÄRING

Enheten är i överensstämmelse med kraven i Rådets direktiv, relevant til EU's lovgivning om harmonisering:

- EMC-direktiv 2014/30/EU
- LVD-direktiv 2014/35/EU
- RoHS-direktiv 2011/65/EU og (EU) 2015/863
- Erp-direktiv 2009/125/EF
- Tyrkisk ErP (beslutning 2010/643)

Dansk

VAATIMUSTENMUKAISUUSVAKUUTUS

Laite on Euroopan neuvoston direktiivien olennaisen unionin harmonisointilainsäädännön vaatimusten mukainen:

- EMC-direktiivi 2014/30/EU
- LVD-direktiivi 2014/35/EU
- RoHS-direktiivi 2011/65/EU & (EU) 2015/863
- Ecodesign-direktiivi 2009/125/EY
- Turkin ErP (Päätös 2010/643)

Suomi

SÄMSVARSEKLÄRING

Enheten överholder kraven i EU-rådets harmoniseringsdirektiver:

- EMC-direktiv 2014/30/EU
- LVD-direktiv 2014/35/EU
- RoHS-direktiv 2011/65/EU & (EU) 2015/863
- Ecodesign-direktiv 2009/125/EC
- Tyrkisk ErP (beslutning 2010/643)

Norsk

KONFORMITETSDEKLARATION

Enheten uppfyller kraven som anges i Rådets direktivs relevanta harmoniseringslagstiftning för Europeiska unionen:

- EMC-direktivet 2014/30/EU
- LVD-direktivet 2014/35/EU
- RoHS-direktiv 2011/65/EU & (EU) 2015/863
- Direktivet om ekodesign 2009/125/EG
- Turkiska ErP (beslut 2010/643)

Svenska

DECLARAȚIE DE CONFORMITATE

Dispozitivul respectă cerințele menționate în Directivele Consiliului și în legislația armonizată relevantă la nivelul Uniunii:

- Directiva privind compatibilitatea electromagnetică 2014/30/UE
- Directiva privind tensiunea joasă 2014/35/UE
- Directiva RoHS 2011/65/UE și (UE) 2015/863
- Directiva privind proiectarea ecologică 2009/125/CE
- ErP Turcia (Decizia 2010/643)

Română

PROHLÁŠENÍ O SHODĚ

Zařízení odpovídá požadavkům stanoveným ve směrnicih Rady podle příslušných harmonizačních právních předpisů Unie:

- Směrnice o elektromagnetické kompatibilitě 2014/30/EU
- Směrnice o elektrických zařízeních nízkého napětí 2014/35/EU
- Směrnice o RoHS 2011/65/EU a (EU) 2015/863
- Směrnice o ekodesignu 2009/125/ES
- Turecká ErP (rozhodnutí 2010/643)

Čeština

VERKLARING VAN OVERENSTEMMING

Het apparaat voldoet aan de vereisten van de relevante richtlijnen van de Raad met betrekking tot harmonisatiewetgeving in de Unie:

- EMC-richtlijn 2014/30/EU
- LVD-richtlijn 2014/35/EU
- RoHS-richtlijn 2011/65/EU & (EU) 2015/863
- Richtlijn inzake ecologisch ontwerp 2009/125/EG
- Turkse ErP (Besluit 2010/643)

Nederlands

MEGFELÉLŐSÉGI NYILATKOZAT

Az eszköz megfelel a Tanács irányelvek releváns uniós harmonizálási rendelkezései által felállított követelményeknek:

- 2014/30/EU EMC-irányelv
- 2014/35/EU LVD-irányelv
- 2011/65/EU és (EU) 2015/863 RoHS-irányelv
- 2009/125/EK Ecodesign-irányelv
- Török ErP (2010/643-es határozat)

Magyar

VÝHLÁSENIE O ZHODE

Zariadenie spĺňa požiadavky stanovené v smerniciach Rady týkajúcich sa príslušnej zosúladzujúcej legislatívy Únie:

- Smernica EMC 2014/30/EU
- Smernica LVD 2014/35/EU
- Smernica RoHS 2011/65/EU a (EU) 2015/863
- Smernica o ekodizajne 2009/125/ES
- Turecké ErP (Rozhodnutie 2010/643)

Slovensky

IZJAVA O SKLADNOSTI

Naprava ustreza zahtevam, določenih v direktivah Sveta, relevantnih za harmonizacijo zakonodaje Evropske unije:

- Direktiva EMC 2014/30/EU
- Direktiva LVD 2014/35/EU
- Direktiva RoHS 2011/65/EU in (EU) 2015/863
- Direktiva Ecodesign 2009/125/ES
- Turški ErP (odločitev 2010/643)

Slovenščina

DEKLARACIJA O USKLADENOSTI

Ovaj uređaj sukladan je s odredbama postavljenim u direktivama Vijeća vezanim uz relevantne harmonizacijske zakone Unije:

- EMC Direktiva 2014/30/EU
- LVD Direktiva 2014/35/EU
- RoHS Direktiva 2011/65/EU & (EU) 2015/863
- Direktiva o ekološkom dizajnu 2009/125/EZ
- Turski ErP (Odluka 2010/643)

Hrvatski

WEEE



WEEE Battery

WEEE directive

Disposal of Waste Electrical and Electronic Equipment and/or Battery by users in private households in the European Union.

This symbol on the product or on the packaging indicates that this can not be disposed of as household waste. You must dispose of your waste equipment and/or battery by handing it over to the applicable take-back scheme for the recycling of electrical and electronic equipment and/or battery. For more information about recycling of this equipment and/or battery, please contact your city office, the shop where you purchased the equipment or your household waste disposal service. The recycling of materials will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and environment.

English

Recycling information: See <https://www.benq.com/en-us/support/recycling/global-recycle.html> for details.

Français

Directive WEEE

Instructions de mise au rebut des appareils électriques et électroniques et/ou des piles usagées par les utilisateurs dans les foyers privés dans l'Union Européenne. La présence de ce symbole sur le produit ou son emballage indique que vous ne devez pas jeter ce produit dans une poubelle normale. Vous êtes responsable de jeter vos appareils usagés et/ou vos piles. À cet effet, vous êtes tenu de les remettre à un point de collecte agréé pour le recyclage des appareils électriques et électroniques et/ou des piles. Pour plus d'informations sur les lieux de collecte des appareils usagés et/ou des piles, veuillez contacter votre mairie, le magasin où vous avez acheté le produit ou votre service de traitement des déchets ménagers. Le recyclage de vos appareils usagés permet de préserver les ressources naturelles et de s'assurer que ces appareils sont recyclés dans le respect de la santé humaine et de l'environnement.

Informations relatives au recyclage : Consultez le site <https://www.benq.com/en-us/support/recycling/global-recycle.html> pour plus de détails.

Directiva WEEE

Español

Desahacerse de aparatos eléctricos y electrónicos y/o baterías por parte de los usuarios en hogares de la Unión Europea.

La presencia de este símbolo en el producto o en el empaquetado indica que no debe depositarlo con la basura doméstica cuando desee deshacerse de él. Debe desahacer su equipamiento residual y/o baterías entregándolos al organismo de recogida para el reciclado de equipamiento eléctrico y electrónico. Para obtener más información acerca del reciclado de este equipo y/o las baterías, póngase en contacto con la oficina local, la tienda donde compró el equipo o su servicio de desecho de residuos doméstico. El reciclaje de materiales ayudará a conservar los recursos naturales y garantizará que se recicla de forma que proteja la salud humana y el medioambiente.

Información sobre reciclaje: Consulte la página Web <https://www.benq.com/en-us/support/recycling/global-recycle.html> para obtener detalles.

Diretiva WEEE

Português

Eliminação de resíduos de equipamentos eléctricos e electrónicos e / ou baterias por utilizadores domésticos na União Europeia.

Este símbolo no produto ou na embalagem indica que não pode ser eliminado como lixo doméstico. Deve eliminar os equipamentos eléctricos velhos e / ou baterias entregando-os ao abrigo do esquema de recolhas aplicável para a recolagem de equipamento eléctrico e electrónico e / ou baterias. Para mais informações sobre a recolagem deste produto, contacte as autoridades locais, a loja onde adquiriu o equipamento, ou o prestador de serviços de recolha de lixo doméstico e / ou baterias. A recolagem de materiais contribuirá para a conservação dos recursos naturais e assegura que são reciclados de forma a proteger a saúde humana e o ambiente. Informações sobre reciclagem: Consulte <https://www.benq.com/en-us/support/recycling/global-recycle.html> para obter mais detalhes.

Direttiva RAEE

Italiano

Smaltimento di attrezzature elettriche ed elettroniche e/o batteria per i privati nella Comunità Europea.

Questo simbolo sul prodotto o sulla confezione significa che l'attrezzatura deve essere smaltita separatamente dai rifiuti urbani. L'utente deve smaltire l'attrezzatura e/o la batteria consegnandola agli operatori di ritiro dell'usato o presso punti designati di raccolta rifiuti per il riciclaggio di attrezzature elettriche ed elettroniche e/o della batteria. Per altre informazioni sul riciclaggio di questa attrezzatura e/o della batteria, rivolgersi alle autorità locali, al negozio in cui è stata acquistata l'attrezzatura oppure al servizio di smaltimento rifiuti. Il riciclaggio dei materiali aiuterà a conservare le risorse naturali e ad assicurare che siano riciclati in modo da salvaguardare la salute e l'ambiente. Informazioni sul riciclaggio: Per i dettagli, vedere il sito <https://www.benq.com/en-us/support/recycling/global-recycle.html>.

WEEE-Richtlinie

Deutsch

Entsorgung von Elektro- und Elektronikgeräten und/oder Batterien in privaten Haushalten in der Europäischen Union.

Dieses Symbol am Produkt oder der Verpackung weist darauf hin, dass das Produkt nicht mit dem Hausmüll entsorgt werden darf. Entsorgen Sie Ihre Altgeräte und/oder Batterien, indem Sie diese einem geeigneten Sammelsystem zum Recyceln von Elektro- und Elektronikgeräten und/oder Batterien übergeben. Weitere Informationen zum Recyceln dieser Geräte und/oder Batterien erteilt Ihnen gerne Ihre Stadtverwaltung, das Geschäft, in dem Sie das Gerät kauften, oder Ihr Entsorgungsunternehmen für Hausmüll. Das Recycling von Rohstoffen hilft, natürliche Ressourcen zu schonen, und sorgt dafür, dass das Recycling auf eine Weise durchgeführt wird, die dem Schutz unserer Gesundheit und Umwelt zugute kommt.

Informationen zum Recyceln: Details hierzu siehe <https://www.benq.com/en-us/support/recycling/global-recycle.html>.

Директива ЕС об утилизации электрического и электронного оборудования

Русский

Утилизация отходов электрического и электронного оборудования и (или) батареек пользователями, проживающими в частных домовладениях в Европейском Союзе.

Данная маркировка на товаре или его упаковке означает, что данный товар не должен утилизироваться вместе с другими бытовыми отходами. Необходимо утилизировать обработавшее оборудование (или) батарейки путем их передачи в специальный пункт приема для переработки обработанного электрического или электронного оборудования и (или) батареек. Более подробную информацию об утилизации оборудования и (или) батареек можно получить в местном муниципальном управлении, организации по утилизации бытовых отходов или в магазине, где был приобретен товар. Утилизация материалов поможет сохранить природные ресурсы и предотвратить потенциальное негативное влияние на окружающую среду и здоровье людей. Сведения об утилизации: подробную информацию см. на сайте: <https://www.benq.com/en-us/support/recycling/global-recycle.html>

Dyrektywa WEEE

Polski

Ustawienie odpadów sprzętu elektrycznego i elektronicznego i/lub baterii przez prywatnych użytkowników z gospodarstw domowych w krajach Unii Europejskiej.

Obecność na produkcie lub opakowaniu tego symbolu oznacza, że urządzenia nie można wyrzucić z odpadami domowymi. Zużyty sprzęt i/lub baterię należy przekazać w celu przetworzenia do sieci gromadzenia zużytego sprzętu elektrycznego i elektronicznego i/lub baterii. Dalsze informacje dotyczące przetwarzania tego sprzętu i/lub baterii, można uzyskać w urzędzie miejskim, w sklepie, w którym zakupiono sprzęt lub w lokalnej firmie zajmującej się utylizacją odpadów. Przetwarzanie materiałów pomaga w zachowaniu zasobów naturalnych i z zapewnia przetwarzanie w sposób bezpieczny dla zdrowia ludzi i dla środowiska. Informacje o recyklingu: Szczegółowe informacje dostępne są pod adresem <https://www.benq.com/en-us/support/recycling/global-recycle.html>.

WEEE direktifi

Türkçe

Atık Elektrikli ve Elektronik Ürünlerin ve/veya Pillerin kullancıları tarafından Avrupa Birliğinde özel ev atığı olarak atılması.

Ürününizi veya paketinizi bu işaret bulunun bir ev atığı olmadığını göstermektedir. Atık ekipmanınızı ve/veya pillinizi, elektrikli ve elektronik cihazın ve/veya pilin yeniden işlenmesi için uygun geri alma merkezine göre atmalısınız. Bu cihazın ve/veya pilin yeniden işlenmesi hakkında daha fazla bilgi için lütfen bölgenizdeki ofis, cihazı satın aldığınız mağaza veya ev atığı imha servisini ile temasa geçiniz. Malzemelerin yeniden işlenmesi, doğal kaynakların korunmasına yardım edecek ve insan sağlığı ve çevreyi koruyacak şekilde yeniden işlenmesi sağlayacaktır.

Geri dönüşüm bilginiz: Ayrıntılar için bkz. <https://www.benq.com/en-us/support/recycling/global-recycle.html>

WEEE direktiv

Dansk

Bortskaffelse af Elektrisk og Elektronisk udstyr og/eller Batterier der bruges i private husholdninger i den Europæiske Union.

Dette symbol på produktet eller på indpakningen indikerer at det kan bortskaffes som husholdningsaffald. Du skal bortskaffe dit affalds elektrisk og/eller batteri ved at indlevere det til en passende affaldsordning for genbrug af elektrisk og elektronisk udstyr og/eller batterier. For mere information om genbrug af dette udstyr og/eller batteri kontakt din lokale kommune, den forretning hvor du har købt udstyret, eller dit affaldsselskab. Genbrug af materialer vil hjælpe med til at bevare naturlige ressourcer og sikre at det bliver genbrugt på en måde som beskytter den menneskelige sundhed og miljøet. Genbrugsinformation: Se <https://www.benq.com/en-us/support/recycling/global-recycle.html> for detaljer.

WEEE-direktivi

Suomi

Käyttäjien yksityiskohtaloksisen sähkö- ja elektroniikkalaitteiston ja/tai paristojen hävittäminen Euroopan unionissa.

Tämä symboli tuoteesta tai sen pakkauksessa ilmaisee, että tuotetta ei saa hävittää kotitalousjätteen mukana. Jäteläite ja/tai paristot on hävitettävä toimittamalla se asianmukaiseen sähkö- ja elektroniikkalaitteiston ja/tai paristojen kierrätysohjelmastaan. Halutessasi lisätietoja tämän tuotteen ja/tai paristojen kierrätyksestä ota yhteyttä paikalliseen viranomaiseen, liikkeeseen, josta ostat tuotteen, tai jätetuotepalveluyritykseen. Materiaalien kierrätyks auttaa säästämään luonnon resursseja ja varmistamaan, että laite kierrätetään tavalla, joka suojelee ihmisten terveyttä ja ympäristöä.

Kierrätystiedot: Katso lisätietoja osoitteesta <https://www.benq.com/en-us/support/recycling/global-recycle.html>.

WEEE-direktiv

Norsk

Deponering av elektriske og elektronisk utstyr og/eller batteri av brukere i private hjem i den europeiske unionen.

Dette symbolet på produktet eller emballasjen betyr at dette ikke kan deponeres sammen med husholdningsavfall. Du må deponere utstyret og/eller batteriet på en miljøstasjon for elektrisk og elektronisk utstyr og/eller batteri. For mer detaljert informasjon om resirkulering av dette produktet og/eller batteri, ta kontakt med de lokale kommunale miljømyndighetene eller butikken der du kjøpte produktet. Resirkuleringen av materialene vil hjelpe til å bevare naturressurser og påse at det resirkuleres på en måte som verner om både mennesker og miljøet.

Informasjon om resirkulering: Du finner mer informasjon på <https://www.benq.com/en-us/support/recycling/global-recycle.html>

WEEE-direktiv

Svenska

Kassering av elektrisk och elektronisk utrustning och/eller batterier av användare i privata hushåll inom den Europeiska unionen.

Det här symbolet på produkten eller förpackningen betyder att denna produkt inte får hanteras som hushållsavfall. Du måste kassera din utrustning och/eller dina batterier genom att lämna över den till källsortering för återvinning av elektrisk och elektronisk utrustning och/eller batterier. För mer information om återvinning av den här utrustningen och/eller dessa batterier kan du kontakta ditt kommunkontor, affären där utrustningen köptes eller återvinningssentralen för hushållsavfall. Återvinning av material hjälper oss att bevara naturresurser och tillförsäkra att det återvinns på ett sätt som skyddar människors hälsa och miljö. Återvinningsinformation: Se <https://www.benq.com/en-us/support/recycling/global-recycle.html> för detaljer.

Directiva WEEE

Română

Eliminarea echipamentelor electrice și electronice uzate și / sau a acumulatorilor uzate de către utilizatorii casnici din Uniunea Europeană.

Acest simbol de pe produs sau de pe ambalaj indică faptul că acest produs nu se tratează asemenea deșeurilor menajere. Trebuie să eliminați echipamentul uzat și / sau acumulatorul ducându-l la centrale de colectare pentru reciclarea echipamentului electric și electronic și / sau a acumulatorilor. Pentru informații suplimentare despre reciclarea acestui echipament și / sau a acumulatorilor, contactați administrația locală, magazinul de unde ați cumpărat echipamentul sau serviciul de salubritate. Reciclarea produselor contribuie la conservarea resurselor naturale și asigură faptul că produsul se reciclează într-o manieră care protejează sănătatea umană și mediul înconjurător. Informații privind reciclarea: Vizitați <https://www.benq.com/en-us/support/recycling/global-recycle.html> pentru detalii.

Směrnice WEEE

Čeština

Likvidace použitých elektrických a elektronických výrobků a/nebo baterií pro domácnosti v zemích EU.

Tento symbol na výrobku nebo na jeho balení označuje, že je zakázáno výrobek likvidovat společně s komunálním odpadem. Použitý elektrický nebo elektronický výrobek a/nebo baterii jste povinni odevzdat na vyhrazeném sběrném místě k další recyklaci. Další informace o recyklaci použitého elektrického nebo elektronického výrobku a/nebo baterie vám poskytnou orgány místní samosprávy, nejbližší sběrná služba nebo prodejce, u kterého jste výrobek zakoupili. Recyklace materiálů pomáhá zachovávat přírodní zdroje a zajišťuje, že bude recyklace provedena takovým způsobem, který nepoškozuje lidské zdraví a životní prostředí.

Informace o recyklaci: Podrobnosti viz <https://www.benq.com/en-us/support/recycling/global-recycle.html>.

Nederlands

WEEE-richtlijn

Verwijdering van afval van elektrische en elektronische apparaten en/of batterijen door gebruikers in privé-huishoudens in de Europese Unie.

Dit symbool op het product of op de verpakking geeft aan dat het niet als huishoudelijk afval mag worden verwijderd. U dient uw versleten apparaat en/of batterijen af te geven volgens het toepasselijke terugnameschema voor de recyclage van elektrische en elektronische apparaten. Voor meer informatie over de recyclage van dit apparaat en/of batterijen, kunt u contact opnemen met uw lokaal stadsbestuur, de winkel waar u het apparaat hebt gekocht of het vuilnisverwerkingsbedrijf. Dankzij de recyclage van materialen worden de natuurlijke bronnen bewaard en wordt het apparaat gerecycled op een manier die de menselijke gezondheid en het milieu beschermt. Recycle-informatie: Zie <https://www.benq.com/en-us/support/recycling/global-recycle.html> voor details.

Magyar

WEEE direktiva

Az Európai Unióban a magánháztartások elektromos és elektronikus hulladékaiknak és/vagy akkumulátorok kezeléséről szóló irányelv.

A termék vagy a csomagoláson ez a szimbólum azt jelzi, hogy a termék nem tehető a háztartási hulladékok közé. A készüléket és/vagy akkumulátorát az elektronikus és elektromos hulladékként és/vagy akkumulátorként vonatkozó visszavételi rendszert ben kell visszajuttatnia. A készülék és/vagy akkumulátor begyűjtéséről bővebb információkat kaphat a helyi önkormányzatnál, a vásárlás helyén vagy a háztartási hulladékot elszállító szolgáltatójánál. Az anyagok begyűjtése hozzájárul a természeti erőforrások megőrzéséhez és biztosítja, hogy a hulladékok gyűjtése az emberi egészséget és a környezetet védő módon történjen.

Ujrahasznosítási információ: a részleteket lásd a <https://www.benq.com/en-us/support/recycling/global-recycle.html> oldalon.

Slovensky

Smernice WEEE

Nakladanie s elektrickými a elektronickými zariadeniami a batériami určenými na likvidáciu používateľmi v domácnostiach v rámci Európskej únie.

Tento symbol na výrobku, jeho príslušenstve alebo na jeho obale znamená, že tento výrobok nesmie byť likvidovaný spolu s domovým odpadom. Pri likvidácii elektrických a elektronických zariadení a batérií je potrebné odniesť ich na určené zberné miesto na recyklovanie. Ďalšie informácie o recyklovaní tohto zariadenia a batérie vám poskytne buď miestny úrad alebo obchod, v ktorom ste zariadenie zakúpili, prípadne služba likvidácie domového odpadu. Recyklovanie materiálov pomáha šetriť prírodné zdroje a zabezpečuje, že sú zariadenia recyklované spôsobom, ktorý chráni zdravie ľudí a životné prostredie.

Informácie o recyklácii: podrobnosti nájdete na <https://www.benq.com/en-us/support/recycling/global-recycle.html>.

Slovenski

Direktive OEEB

Odlaganje odpadne električne in elektronske opreme in/ali baterij za uporabnike v zasebnih gospodinjstvih v Evropski uniji.

Ta oznaka na izdelku in njegovi embalaži pomeni, da izdelka ni dovoljeno odlagati med ostale gospodinjstvske odpadke. Svojo odpadno opremo in/ali baterije morate izročiti pristojnim v veljavnem programu recikliranja električne in elektronske opreme in/ali baterij. Za več informacij o recikliranju te opreme in/ali baterij kontaktirajte lokalni urad, trgovino, kjer ste opremo kupili, ali smetarsko službo, pristojno za vaše gospodinjstvo. Recikliranje materialov pripomore k ohranjanju naravnih virov in zagotavlja, da se reciklirajo na način, ki varuje zdravje ljudi in okolje.

Informacije o recikliranju: za podrobnosti glejte <https://www.benq.com/en-us/support/recycling/global-recycle.html>.

Hrvatski

WEEE direktiva

Odlaganje električnih i elektroničkih uređaja i/ili baterija u otpad od strane korisnika u privatnim kućanstvima u Europskoj uniji.

Ovaj znak na proizvodu ili na pakiranju govori da se on ne može odlagati zajedno s kućnim otpadom. Svoje uređaje za otpad i/ili baterije trebate odložiti tako da ih odložite u skladu s planom povrata uređaja radi zbrinjavanja i recikliranja električnih i elektroničkih uređaja i/ili baterija. Više podataka o recikliranju ovog uređaja i/ili baterije potražite u vašem mjesnom uredu, u trgovini gdje ste kupili proizvod ili u službi koja prikuplja vaš kućni otpad. Recikliranje materijala pomaže ščuvati prirodne resurse i osigurava reciklažu na način koji štiti ljudsko zdravlje i okoliš.

Podaci o recikliranju: Podrobnosti pogledajte na <https://www.benq.com/en-us/support/recycling/global-recycle.html>.

Notices for UK only

- The mains lead (power cable) on the equipment comes with a moulded plug incorporating a fuse.
- The rating of the fuse is indicated on the pin face of the plug and, if it requires replacing, a fuse approved by ASTA or BSI to BS 1362 of the same rating must be used.
- If the plug has a detachable fuse cover, remember to place the fuse cover back if you need to change the fuse.
- Do NOT use a plug without the fuse cover. If the fuse cover is missing, contact your nearest BenQ Customer Service Center for assistance.

UKCA Declaration of Conformity

The object of the declaration described above is in conformity with the relevant UK harmonisation legislation:

- Electromagnetic Compatibility Regulations 2016
- Electrical Equipment (Safety) Regulations 2016
- The Ecodesign for Energy-Related Products and Energy Information (Amendment) (EU Exit) Regulations 2019
- The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012

Battery Disposal Regulations for Brazil (Regras para o Descarte de Pilhas e Baterias no Brasil)

Após o uso, as pilhas e/ou baterias deverão ser entregues ao estabelecimento comercial ou rede de assistência técnica autorizada.