Final Report Of Robotics



by

Yuwei Zhao[1], Haohao Qi[2], Yilin Zhang[3]

In contributions of

[1] *Data Processing & Experiment Implementation*
[2] *Initial Draft & Images Collection*
[3] *Paper Writing & Experiment Implementation*

ROBOTICS

SCHOOL OF MATHEMATICAL AND COMPUTER SCIENCES

HERIOT-WATT UNIVERSITY

June 2025

Abstract

In accordance with the Academic Regulations, the thesis must contain an abstract preferably not exceeding 200 words, bound in to precede the thesis. The abstract should appear on its own, on a single page. The format should be the same as that of the main text. The abstract should provide a synopsis of the thesis and shall state clearly the nature and scope of the research undertaken and of the contribution made to the knowledge of the subject treated. There should be a brief statement of the method of investigation where appropriate, an outline of the major divisions or principal arguments of the work and a summary of any conclusions reached. The abstract must follow the Title Page.

Contents

1 Introduction **1**
- 1.1 Our Car Lobster . . . 1
- 1.2 Four Aims of the Laboratory . . . 1
- 1.3 Result Summary . . . 2

2 Experiments **3**
- 2.1 Light Seeking . . . 3
  - 2.1.1 Theory and Technical Background . . . 3
  - 2.1.2 Method . . . 3
  - 2.1.3 Results . . . 3
- 2.2 Line following . . . 3
  - 2.2.1 Theory and Technical Background . . . 3
  - 2.2.2 Method . . . 4
  - 2.2.3 Results . . . 6
- 2.3 Obstacle avoiding . . . 6
  - 2.3.1 Theory and Technical Background . . . 6
  - 2.3.2 Method . . . 6
  - 2.3.3 Results . . . 6
- 2.4 Environment Measurement . . . 7
  - 2.4.1 Theory and Technical Background . . . 7
  - 2.4.2 Method . . . 7
  - 2.4.3 Results . . . 7

3 Conclusions **8**

A Contribution Statement **9**

B Source Code **10**
- B.1 Lab 3: Light Seeking . . . 10
  - B.1.1 carDrive.cpp . . . 10
  - B.1.2 lightToward.cpp . . . 11
- B.2 Lab 4: Line Following . . . 12
  - B.2.1 dataTrans.h . . . 12
  - B.2.2 Motion_setting.h . . . 13
  - B.2.3 Motion_control.h . . . 14
  - B.2.4 main.cpp . . . 16
- B.3 Lab 7: Obstacles Avoiding . . . 16
  - B.3.1 Motion_setting.h . . . 16
  - B.3.2 Motion_control.h . . . 17
  - B.3.3 Servo_control.h . . . 19
  - B.3.4 Ultrasound_control.h . . . 20
  - B.3.5 main.cpp . . . 20
- B.4 Lab 8: Environment Measurement . . . 21
  - B.4.1 MotionDetect.h . . . 21
  - B.4.2 MotionSetting.h . . . 22

B.4.3 MotionControl.h 23
B.4.4 FactorDetect.h 24
B.4.5 LCDDemonstrate.h 25
B.4.6 main.cpp 26

References **28**

Bibliography **29**

Glossary

IR Infrared Transducer.

LDR Light-Dependent Resistor.

Lobster Super Ultra Hyper Mega Advanced Senior Superior Elite Lobster.

PID Proportional-Integral-Derivative.

Chapter 1

Introduction

1.1 Our Car Lobster

The main aim of this laboratory is to build our own robotic car named "**Super Ultra Hyper Mega Advanced Senior Superior Elite Lobster**", abbreviated as "**Lobster**". Its name comes from the shape, which in our opinion is a good sigh of strength and speed. Haohao Qi is responsible for our car's shape and color design. She measures its internal dimensions and builds a 3D model using Blender. Yuwei Zhao operates a 3D printer with permission from his club.

In southern China, lobsters are considered a delicious delicacy. When harvesting them in the fields, locals find them difficult to catch due to their speed. Similarly, we hope our robotic car, Lobster, will be fast and robust.

1.2 Four Aims of the Laboratory

We have done four contributions to it, which are recorded in Lab 3 (light seeking), Lab 5 (line following), Lab 7 (obstacles avoiding) and Lab 8 (environment measurement). Thus, Lobster could have the following functionalities:

1. Follow the light on the floor and adjust its direction toward the light source.
2. Follow a 1 to 3 cm wide black line on the floor. The line can be straight, curved, or quarter-shaped.
3. Move straight and avoid obstacles. When reaches obstacles such as walls, Lobster will turn to another direction to avoid collisions.
4. Measure temperature, humidity and atmospheric pressure, display the readings and adjust motor speed accordingly.

If Lobster has installed light seeking module, then it cannot track lines any more, and the same applies to the other two functionalities. In short, only one of these four modules works at a time.

1.3 Result Summary

Basic approaches of the four experiments have been successfully completed.

We used two light-dependent resistors (LDRs) to detect changes in light intensity. Lobster can recognize a straight white light in the front of it within 15 cm long and 10 cm wide.

Proportional-integral-derivative control (PID) was creatively applied in line tracking. We used **TCRT5000** infrared (IR) sensor feedback to distinguish between black and non-black surfaces on the ground. Interestingly, we found that sensor feedback exhibits a linear response while in the middle of black and white, which enabled the implementation of PID control. As a result, Lobster is able to move at a speed of 0.5 m/s in straight lines, and 0.3 m/s in curved ones.

For obstacle avoidance, Lobster was placed in a $3 \times 3\,\mathrm{m}^2$ square place with walls around. **HC-SR04** ultrasonic distance sensor was used in this experiment to measure mainly front distance. We also used a **SG90** servo motor to change HC-SR04's direction to avoid a side crash. Lobster passes a 1-minute test in is square place without any collisions.

In the eighth laboratory experiment, we used a **BME280** sensor to measure humidity, atmospheric pressure, and temperature. The collected data is displayed on a small screen mounted on Lobster's back. Based on these measurements, Lobster can determine whether it is on the ground or in the air. Accordingly, its wheel rotation speed is adjusted based on the detected state.

Chapter 2

Experiments

2.1 Light Seeking

2.1.1 Theory and Technical Background

Give a brief description of the background theory for the experiment being tackled. Please cite appropriate work. Feel free to add figures into this section, where each figure and each equation may reduce the number of words you use.

2.1.2 Method

Describe the technical procedures to collect the results. Add figures into this section, where each figure and each equation may reduce the number of words you use.

2.1.3 Results

Add all appropriate figures and analysis. No formal word count for this section, however, please keep text as concise as possible.

2.2 Line following

2.2.1 Theory and Technical Background

TCRT5000 is the most important IR sensor in this experiment as shown in figure 2.1. It mainly includes an IR Tx (transmitter) and IR Rx (receiver), the former of which is a Photodiode while the latter is a Phototransistor.[1] It is capable of detecting changes in light intensity. The infrared-emitting diode of this device continuously emits infrared light. When the emitted infrared light is not reflected or the reflected intensity is insufficient, the phototransistor remains in the cut-off state. The module's output terminal is at a low voltage level, and the indicator diode stays off. When an object to be detected enters the detection range, the infrared light is reflected back with sufficient intensity. The phototransistor then enters the saturation state, its module's output terminal switches to a high voltage level, and the indicator diode is illuminated.

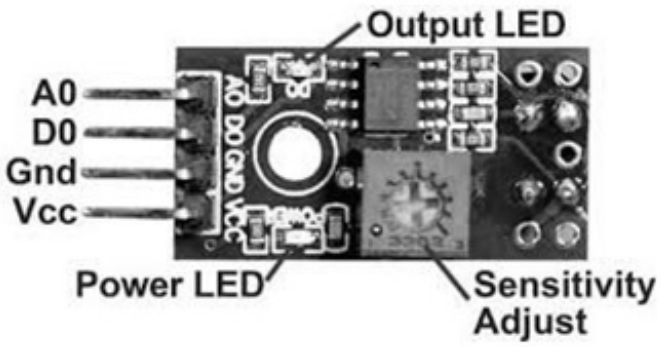


Figure 2.1: A TCRT5000 IR Sensor Module mainly includes parts like TCRT5000 IR sensor, power LED, reflective sensor, adjustment of sensitivity, and output LED

2.2.2 Method

The IR sensor voltage coming back was measured as 4.15 ± 0.1 V on black lines, and 0.15 ± 0.1 V on white ground. We observed a We found a linear transition region that in the middle of black and white surfaces, enabling analog position detection. Therefore, we realized that it can be applied under PID control.

The linear voltage gradient permits error quantification for PID control. PID control is a combined method of proportional, integral and derivative control. To implement PID control, there should be a standard, standing for adjustment goal. The most recent value should be measured and then calculate the *error* between them. Simply proportional adjustment is the quickest and easiest way, which is just a proportional coefficient (Kp) times error, described as equation (2.1).

$$P = Kp * error \tag{2.1}$$

Integral control is similar. Its difference is that each time the integral coefficient (Ki) times the total sum of all errors calculated in the history, described as equation (2.2).

$$I = Ki * \int_0^t error * dt \tag{2.2}$$

And derivative control, as its name suggests, is a derivative coefficient (Kd) times the deviation between this error and the last error. It can be described as equation (2.3) where dt refers to the time offset.

$$D = Kd * \frac{error}{dt} \tag{2.3}$$

The total PID control is all three adjustments added together. All equations above are described mathematically, but are challenging for computers to understand. In coding environment, they need to be changed *discretely*, which, in total, can be described as equation (2.4), where $e(k)$= position error related to time t. In car situations, PD control is better than full PID control because integral term accumulates historical error causes overshoot.

$$\text{PID Output} = K_p e(k) + K_i \sum_{\tau=0}^{k} e(\tau) + K_d(e(k) - e(k-1)) \tag{2.4}$$

Left, middle, right (needs a figure here figure 2.2). We turn left upside down, thus in the middle it is linear. Process very left and very right such that linear width is longer figure 2.3.

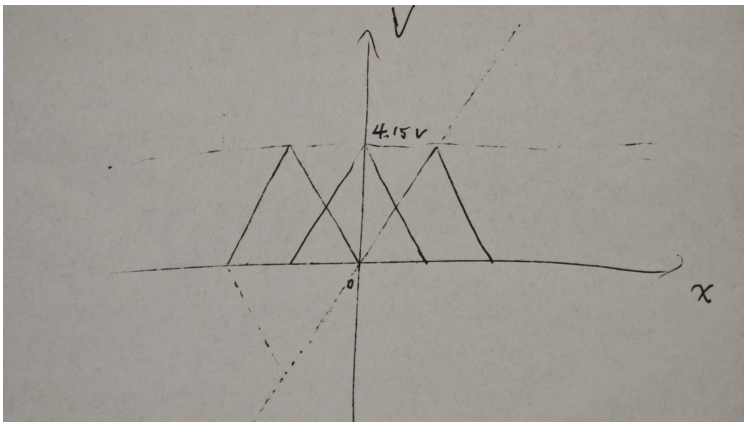


Figure 2.2: A voltage-position graph with three TCRT5000's data on it

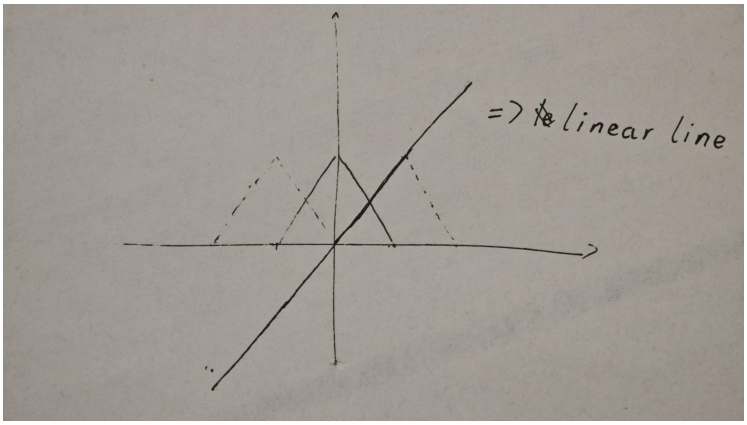


Figure 2.3: Processed the graph such that it shows a linear line

Also applied a not-found-line process. It stores the last direction of deviation, and keeps rotating at the same place until Lobster find a black line.

PID and no-line-process both need to adjust parameters.

3. Sensor Array Configuration Three IR sensors (Left/Middle/Right) provide directional data: - *Left/Right*: Mounted inverted to extend linear range (Fig. X) - *Signal Processing*: Voltage thresholds dynamically adjusted to maximize usable linear width

4. Line-Loss Recovery Protocol Upon losing track: 1. Recall last deviation direction (e.g., "right-trending") 2. Execute in-place rotation toward memorized direction 3. Terminate when any sensor detects black line

5. Parameter Optimization Critical tuning targets: - PD gains (K_p, K_d) - Line-loss rotation speed - Signal acceptance thresholds

2.2.3 Results

Add all appropriate figures and analysis. No formal word count for this section, however, please keep text as concise as possible.

2.3 Obstacle avoiding

2.3.1 Theory and Technical Background

Give a brief description of the background theory for the experiment being tackled. Please cite appropriate work. Feel free to add figures into this section, where each figure and each equation may reduce the number of words you use.

2.3.2 Method

Describe the technical procedures to collect the results. Add figures into this section, where each figure and each equation may reduce the number of words you use.

2.3.3 Results

Add all appropriate figures and analysis. No formal word count for this section, however, please keep text as concise as possible.

2.4 Environment Measurement

2.4.1 Theory and Technical Background

Give a brief description of the background theory for the experiment being tackled. Please cite appropriate work. Feel free to add figures into this section, where each figure and each equation may reduce the number of words you use.

2.4.2 Method

Describe the technical procedures to collect the results. Add figures into this section, where each figure and each equation may reduce the number of words you use.

2.4.3 Results

Add all appropriate figures and analysis. No formal word count for this section, however, please keep text as concise as possible.

Chapter 3

Conclusions

Please give the conclusions from the characterisations including a summary of the results collected.

Appendix A

Contribution Statement

Appendices, labelled A, B etc., should be treated as additional chapters and should normally follow the main text. Appendices may consist of supporting material of considerable length or of lists, documents, commentaries, tables or other evidence that if included in the main text, would interrupt its flow. The style of appendices must be consistent with the style of the main text. Long appendices may be divided into sections, labelled as Appendix A.1 etc., with corresponding sub-section numbering, which must be entered in the table of contents. Alternatively, short appendices may be attached to individual chapters, as an extra section with a heading of style 3.7 Appendix

The contributions of each team member are as follows:

– Yuwei Zhao: Responsible for data processing and experiment implementation.

– Yilin Zhang: Contributed to the initial draft and collected supporting images.

– Haohao Qi: Wrote the final report and participated in experiment implementation.

Appendix B

Source Code

B.1 Lab 3: Light Seeking

See GitHub Repository.

B.1.1 carDrive.cpp

```
/* 4PIN-MODE */
int in1Pin = 4;
int in2Pin = 5;
int in3Pin = 8;
int in4Pin = 9;

int light_LEFT = 2;
int light_RIGHT = 7;

int baseSpeed = 150;

float leftComp = 1.00;
float rightComp = 0.94;

void setup() {
  // put your setup code here, to run once:
  pinMode(in1Pin, OUTPUT);
  pinMode(in2Pin, OUTPUT);
  pinMode(in3Pin, OUTPUT);
  pinMode(in4Pin, OUTPUT);

  pinMode(light_LEFT, OUTPUT);
  pinMode(light_RIGHT, OUTPUT);

  digitalWrite(light_LEFT, LOW);
  digitalWrite(light_RIGHT, LOW);
}

void loop() {
  // put your main code here, to run repeatedly:
  boolean reverse = 0;
  setLeft(reverse, baseSpeed * leftComp);
  setRight(reverse, baseSpeed * rightComp);
  delay(5);
}

// Left Wheel CONTROL
void setLeft(boolean reverse, int speed) {
  speed = constrain(speed, 0, 255);
  digitalWrite(in1Pin, reverse);
  analogWrite(in2Pin, speed);
  digitalWrite(light_LEFT, HIGH);
}

// Right Wheel CONTR OL
void setRight(boolean reverse, int speed) {
```

```
  speed = constrain(speed, 0, 255);
  digitalWrite(in3Pin, reverse);
  analogWrite(in4Pin, speed);
  digitalWrite(light_RIGHT, HIGH);
}
```

B.1.2 lightToward.cpp

```
/* 4PIN-MODE */
int in1Pin = 5;
int in2Pin = 6;
int in3Pin = 9;
int in4Pin = 10;

// tail lights
int leftLight = 2;
int rightLight = 8;

// speed setting
int base_Speed = 120;
int decelerated_Speed = 110;
int accelerated_Speed = 170;

// fluctuating rate
float leftComp = 1.00;
float rightComp = 1.00;

// ldr offset
int left_offset = 10;
int right_offset = -20;
int expect_Gap = left_offset - right_offset;

void setup() {
  // put your setup code here, to run once:
  Serial.begin(9600);
  pinMode(in1Pin, OUTPUT);
  pinMode(in2Pin, OUTPUT);
  pinMode(in3Pin, OUTPUT);
  pinMode(in4Pin, OUTPUT);
  pinMode(leftLight, OUTPUT);
  pinMode(rightLight, OUTPUT);

  // Initialize
  analogWrite(in1Pin, 0);
  analogWrite(in4Pin, 0);
  digitalWrite(in2Pin, LOW);
  digitalWrite(in3Pin, LOW);
  digitalWrite(leftLight, LOW);
  digitalWrite(rightLight, LOW);
}

void loop() {
  // put your main code here, to run repeatedly:
  boolean reverse = 0;

  int sensorValue_LEFT = analogRead(A5);
  int sensorValue_RIGHT = analogRead(A0);
  int GAP = abs((sensorValue_LEFT + left_offset) - (sensorValue_RIGHT +
  right_offset));

  Serial.print("LEFT: ");
  Serial.print(sensorValue_LEFT);
  Serial.print("\t RIGHT: ");
  Serial.print(sensorValue_RIGHT);
  Serial.print("\t GAP: ");
```

```
  Serial.println(GAP);

  Turn(reverse, sensorValue_LEFT, sensorValue_RIGHT, GAP);

  delay(10); // read arguments every 10ms
}

// Left Wheel CONTROL
void setLeft(boolean reverse, int speed) {
  speed = constrain(speed, 0, 255);
  digitalWrite(in2Pin, reverse);
  analogWrite(in1Pin, speed);
}

// Right Wheel CONTROL
void setRight(boolean reverse, int speed) {
  speed = constrain(speed, 0, 255);
  digitalWrite(in3Pin, !reverse);
  analogWrite(in4Pin, 255 - speed);
}

// car Turn CONTROL - LIGHT Toward
void Turn(boolean reverse, int Left, int Right, int Gap) {
   // If light exists
  if(Left < 1019 || Right < 1019) {
    if(Gap >= expect_Gap) {
      if(Left < Right) { // Turn LEFT
        setLeft(reverse, decelerated_Speed * leftComp);
        setRight(reverse, accelerated_Speed * rightComp);
        digitalWrite(rightLight, LOW);
        digitalWrite(leftLight, HIGH);
      }
      if(Right < Left) { // Turn RIGHT
        setLeft(reverse, accelerated_Speed * leftComp);
        setRight(reverse, decelerated_Speed * rightComp);
        digitalWrite(leftLight, LOW);
        digitalWrite(rightLight, HIGH);
      }
    } else { // Go FORWARD
      setLeft(reverse, base_Speed * leftComp);
      setRight(reverse, base_Speed * rightComp);
      digitalWrite(leftLight , HIGH);
      digitalWrite(rightLight, HIGH);
    }
  } else { // STOP
    setLeft(reverse, 0);
    setRight(reverse, 0);
    digitalWrite(leftLight, LOW);
    digitalWrite(rightLight, LOW);
  }
}
```

B.2 Lab 4: Line Following

B.2.1 dataTrans.h

```
#ifndef DataTransfer_H
#define DataTransfer_H

#include <ADS1115_WE.h>
#include <Wire.h>

extern ADS1115_WE adc;
```

```
8
9  struct IRStatus {
10   float left;
11   float middle;
12   float right;
13 };
14
15 float readChannel(ADS1115_MUX channel) {
16   adc.setCompareChannels(channel);
17   return adc.getResult_V();
18 }
19
20 IRStatus statusDetect() {
21   IRStatus status;
22   status.left = readChannel(ADS1115_COMP_0_GND);
23   status.middle = readChannel(ADS1115_COMP_1_GND);
24   status.right = readChannel(ADS1115_COMP_2_GND);
25
26   Serial.print("Left: ");
27   Serial.print(status.left);
28   Serial.print(" V; Middle: ");
29   Serial.print(status.middle);
30   Serial.print(" V; Right: ");
31   Serial.print(status.right);
32   Serial.println(" V");
33
34   return status;
35 }
36
37 #endif
```

B.2.2 Motion_setting.h

```
1  #ifndef MotionSetting_h
2  #define MotionSetting_h
3
4  #define leftComp 0.99
5  #define rightComp 1.00
6
7  /* 4pin - mode */
8  int in1Pin = 4;
9  int in2Pin = 5;
10 int in3Pin = 7;
11 int in4Pin = 6;
12
13 // tail lights
14 int leftLightPin = 2;
15 int rightLightPin = 8;
16
17 // Left Wheel CONTROl
18 void setLeft(bool reverse, int speed) {
19   speed = constrain(speed, 0, 255);
20   digitalWrite(in1Pin, reverse);
21   analogWrite(in2Pin, speed);
22   digitalWrite(leftLightPin, reverse ? LOW: HIGH);
23 }
24
25 // Right Wheel CONTROL
26 void setRight(bool reverse, int speed) {
27   speed = constrain(speed, 0, 255);
28   digitalWrite(in3Pin, reverse);
29   analogWrite(in4Pin, speed);
30   digitalWrite(rightLightPin, reverse ? LOW: HIGH);
31 }
32
```

```
// STOP
void fullStop() {
  digitalWrite(in1Pin, LOW);
  analogWrite(in2Pin, 0);
  digitalWrite(in3Pin, LOW);
  analogWrite(in4Pin, 0);
  digitalWrite(leftLightPin, LOW);
  digitalWrite(rightLightPin, LOW);
}

// Go STRAIGHT
void goStraight(bool reverse, int leftSpeed, int rightSpeed) {
  setLeft(reverse, leftSpeed * leftComp);
  setRight(reverse, rightSpeed * rightComp);
}

// Turn LEFT
void turnLeft(bool leftReverse, bool rightReverse, int leftSpeed, int
rightSpeed) {
  setLeft(leftReverse, leftSpeed * leftComp);
  setRight(rightReverse, rightSpeed * rightComp);
}

// Turn RIGHT
void turnRight(bool leftReverse, bool rightReverse, int leftSpeed, int
rightSpeed) {
  setLeft(leftReverse, leftSpeed * leftComp);
  setRight(rightReverse, rightSpeed * rightComp);
}

#endif
```

B.2.3 Motion_control.h

```
#ifndef MotionControl_H
#define MotionControl_H

#include "dataTrans.h"

#define THRESHOLD 1.0

float cal_error(IRStatus);
float calculate_pid(float);
void motor_control(float);
void lostLineHandling(float);

const int baseSpeed = 105;
const float max_pid = 60.0;

float Kp = 5.6;
float Ki = 0;
float Kd = 5;

int lostCount = 0;

float last_valid_error = 0;

void carDrive() {
  IRStatus status = statusDetect();

  float error = cal_error(status);

  if(error == 666) {
    lostCount++;
    if(lostCount >= 10) { // 10
```

```
      lostLineHandling(last_valid_error);
      lostCount = 0;
    }
  } else {
    lostCount = 0;
    float pid_val = calculate_pid(error);
    motor_control(pid_val);
  }

  Serial.print("Error: ");
  Serial.println(error);
}

void lostLineHandling(float last_error) {
  unsigned long startTime = millis();

  if (last_error < 0) {
    turnLeft(false, true, 55, 115);
  } else {
    turnRight(true, false, 115, 55);
  }

  while (millis() - startTime < 100) {
    IRStatus current = statusDetect();

    if (current.middle > THRESHOLD || current.left > THRESHOLD ||
    current.right > THRESHOLD) {
      fullStop();
      return;
    }
  }

  fullStop();
}

float cal_error(IRStatus status) {
  float error = status.left - status.right;
  if (status.middle <= THRESHOLD) {
    if (status.left > THRESHOLD) {
      error = 9 - status.left;
    } else if (status.right > THRESHOLD) {
      error = status.right - 9;
    } else {
      error = 666;
    }
  }
  return error;
}

float calculate_pid(float error) {
  static float I = 0;
  static float previous_error = 0;

  if (error != 666) {
    last_valid_error = error;
  }

  float P = error;
  I += error;
  I = constrain(I, -25, 25);
  float D = error - previous_error;

  float PID_value = (Kp * P) + (Ki * I) + (Kd * D);

  previous_error = error;

  return constrain(PID_value, -max_pid, max_pid);
```

```
}

void motor_control(float PID_value) {
  int left_motor_speed = baseSpeed - PID_value;
  int right_motor_speed = baseSpeed + PID_value;

  left_motor_speed = constrain(left_motor_speed, 50, 200);
  right_motor_speed = constrain(right_motor_speed, 50, 200);

  goStraight(false, left_motor_speed, right_motor_speed);
}

#endif
```

B.2.4 main.cpp

```
#include "motion_setting.h"
#include "motion_control.h"
#include "dataTrans.h"

#define I2C_ADDRESS 0x48

ADS1115_WE adc = ADS1115_WE(I2C_ADDRESS);

void setup() {
  Wire.begin();
  Serial.begin(9600);

  if(!adc.init()) {
    Serial.println("ERROR: ADS1115 connected failed!");
  }

  adc.setConvRate(ADS1115_860_SPS);
  adc.setVoltageRange_mV(ADS1115_RANGE_6144);
  adc.setMeasureMode(ADS1115_CONTINUOUS);

  // Wheel Driver
  pinMode(in1Pin, OUTPUT);
  pinMode(in2Pin, OUTPUT);
  pinMode(in3Pin, OUTPUT);
  pinMode(in4Pin, OUTPUT);
  // Light Driver
  pinMode(leftLightPin, OUTPUT);
  pinMode(rightLightPin, OUTPUT);
}

void loop() {
  carDrive();
}
```

B.3 Lab 7: Obstacles Avoiding

B.3.1 Motion_setting.h

```
#ifndef MotionSetting_h
#define MotionSetting_h

/* 4pin - mode */
int in1Pin = 4;
int in2Pin = 5;
int in3Pin = 7;
```

```
int in4Pin = 6;

// tail lights
int leftLightPin = 2;
int rightLightPin = 8;

float leftComp = 1.00;
float rightComp = 1.00;

// Left Wheel CONTROl
void setLeft(bool reverse, int speed) {
  speed = constrain(speed, 0, 255);
  digitalWrite(in1Pin, reverse);
  analogWrite(in2Pin, speed);
  digitalWrite(leftLightPin, reverse ? LOW: HIGH);
}

// Right Wheel CONTROL
void setRight(bool reverse, int speed) {
  speed = constrain(speed, 0, 255);
  digitalWrite(in3Pin, reverse);
  analogWrite(in4Pin, speed);
  digitalWrite(rightLightPin, reverse ? LOW: HIGH);
}

// STOP
void fullStop() {
  digitalWrite(in1Pin, LOW);
  analogWrite(in2Pin, 0);
  digitalWrite(in3Pin, LOW);
  analogWrite(in4Pin, 0);
  digitalWrite(leftLightPin, LOW);
  digitalWrite(rightLightPin, LOW);
}

// Go STRAIGHT
void goStraight(bool reverse, int speed) {
  setLeft(reverse, speed);
  setRight(reverse, speed);
}

// Go BACK
void goBack(bool reverse, int speed) {
  setLeft(!reverse, 255 - speed * leftComp);
  setRight(!reverse, 255 - speed * rightComp);
}

// Turn LEFT
void turnLeft(bool reverse, int speed) {
  setLeft(!reverse, 255 - speed * leftComp);
  setRight(reverse, speed * rightComp);
}

// Turn RIGHT
void turnRight(bool reverse, int speed) {
  setLeft(reverse, speed * leftComp);
  setRight(!reverse, 255 - speed * rightComp);
}

#endif
```

B.3.2 Motion_control.h

```
#ifndef MotionControl_h
#define MotionControl_h
```

```
3
4  #define front_border_VALUE 40
5  #define side_border_VALUE 40
6  #define corner_safe_VALUE 25
7
8  int baseSpeed = 200;
9  int turnSpeed = 100;
10 int deceleratedSpeed = 110;
11
12 bool reverse = false;
13
14 enum ActionStep {
15   STEP_IDLE,
16   STEP_BACK,
17   STEP_BACK_EXTRA,
18   STEP_TURN_RIGHT_90,
19   STEP_DONE
20 };
21
22 ActionStep currentStep = STEP_IDLE;
23 unsigned long actionStartTime = 0;
24 unsigned long lastActionEndTime = 0;
25 bool inAction = false;
26 bool recentlyAvoidedCorner = false;
27
28 void carDrive(float leftDist, float frontDist, float rightDist) {
29   if (!inAction) {
30     if(recentlyAvoidedCorner && millis() - lastActionEndTime < 800) {
31       fullStop();
32       return;
33     } else {
34       recentlyAvoidedCorner = false;
35     }
36   }
37
38   if (inAction) {
39     unsigned long now = millis();
40     switch (currentStep) {
41       case STEP_BACK:
42         if (now - actionStartTime < 100) {
43           goBack(reverse, deceleratedSpeed);
44         } else {
45           if (rightDist <= side_border_VALUE) {
46             currentStep = STEP_BACK_EXTRA;
47           } else {
48             currentStep = STEP_TURN_RIGHT_90;
49           }
50           actionStartTime = now;
51         }
52         return;
53
54       case STEP_BACK_EXTRA:
55         if (now - actionStartTime < 100) {
56           goBack(reverse, deceleratedSpeed);
57         } else {
58           currentStep = STEP_TURN_RIGHT_90;
59           actionStartTime = now;
60         }
61         return;
62
63       case STEP_TURN_RIGHT_90:
64         if (now - actionStartTime < 300) {
65           turnRight(reverse, turnSpeed);
66         } else {
67           currentStep = STEP_DONE;
68           actionStartTime = now;
69         }
```

```
70          return;
71
72        case STEP_DONE:
73          fullStop();
74          inAction = false;
75          currentStep = STEP_IDLE;
76          lastActionEndTime = millis();
77          recentlyAvoidedCorner = true;
78          return;
79
80        default:
81          fullStop();
82          inAction = false;
83          currentStep = STEP_IDLE;
84          return;
85      }
86    }
87
88    float leftSafeDist = (leftDist * frontDist) / sqrt(pow(leftDist, 2) +
      pow(frontDist, 2));
89    float rightSafeDist = (rightDist * frontDist) / sqrt(pow(rightDist, 2) +
      pow(frontDist, 2));
90
91    fullStop();
92
93    if (leftSafeDist <= corner_safe_VALUE || rightSafeDist <=
      corner_safe_VALUE) {
94      currentStep = STEP_BACK;
95      inAction = true;
96      actionStartTime = millis();
97      return;
98    }
99
100   if (frontDist <= front_border_VALUE) {
101     currentStep = STEP_BACK;
102     inAction = true;
103     actionStartTime = millis();
104     return;
105   }
106
107   goStraight(reverse, baseSpeed);
108 }
109
110 #endif
```

B.3.3 Servo_control.h

```
1  #ifndef EngineControl_h
2  #define EngineControl_h
3
4  #include <Servo.h>
5
6  #define SERVO_INTERVAL 150
7
8  Servo MyServo;
9
10 int angles[] = {0, 90, 180, 90};
11 int curr = 0;
12 int lastAngle = angles[0];
13
14 unsigned long lastServoTime = 0;
15
16 int servoRotate() {
17   unsigned long currentServoTime = millis();
18
```

```
  if(currentServoTime - lastServoTime >= SERVO_INTERVAL) {
    curr = (curr + 1) % 4;
    int angle = angles[curr];
    MyServo.write(angle);

    lastServoTime = currentServoTime;
    lastAngle = angle;
  }

  return lastAngle;
}

#endif
```

B.3.4 Ultrasound_control.h

```
#ifndef Ultrasound_h
#define Ultrasound_h

int trigPin = 3;
int echoPin = 11;

float duration;

float distanceDetect() {
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
  digitalWrite(trigPin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigPin, LOW);

  duration = pulseIn(echoPin, HIGH);
  float distance = (duration * 0.0343) / 2;

  return distance;
}

#endif
```

B.3.5 main.cpp

```
#include "motion_setting.h"
#include "motion_control.h"
#include "servo_control.h"
#include "ultrasound_control.h"

#define ANGLE_INTERVAL 30

float leftDist = 0;
float frontDist = 0;
float rightDist = 0;

unsigned long lastAngleTime = 0;

bool isWaiting = false;

void setup() {
  Serial.begin(9600);
  // Wheel Driver
  pinMode(in1Pin, OUTPUT);
  pinMode(in2Pin, OUTPUT);
  pinMode(in3Pin, OUTPUT);
  pinMode(in4Pin, OUTPUT);
```

```
  // Light Driver
  pinMode(leftLightPin, OUTPUT);
  pinMode(rightLightPin, OUTPUT);
  // Engine Driver
  MyServo.attach(10);
  // Ultrasound Driver
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
}

void loop() {
  int angle = servoRotate();
  int distance = distanceDetect();

  unsigned long currentAngleTime = millis();

  if(!isWaiting) {
    switch(angle) {
      case 0:
        leftDist = distance;
        Serial.print("Left: ");
        Serial.println(leftDist);
        isWaiting = true;
        lastAngleTime = currentAngleTime;
        break;
      case 90:
        frontDist = distanceDetect();
        Serial.print("Front: ");
        Serial.println(frontDist);
        isWaiting = true;
        lastAngleTime = currentAngleTime;
        break;
      case 180:
        rightDist = distance;
        Serial.print("Right: ");
        Serial.println(rightDist);
        isWaiting = true;
        lastAngleTime = currentAngleTime;
        break;
    }
    carDrive(leftDist, frontDist, rightDist);
  } else if(currentAngleTime - lastAngleTime >= ANGLE_INTERVAL) {
    isWaiting = false;
  }
}
```

B.4 Lab 8: Environment Measurement

B.4.1 MotionDetect.h

```
#ifndef MotionDetect_H
#define MotionDetect_H

#include <Adafruit_MPU6050.h>
#include <Adafruit_Sensor.h>
#include <math.h>

extern Adafruit_MPU6050 mpu;

struct variables {
  float x;
  float y;
  float z;
```

```
};

extern variables accData;
extern variables gyroData;

void getVariables() {
  sensors_event_t a, g, temp;
  mpu.getEvent(&a, &g, &temp);

  accData = { a.acceleration.x - 0.40, a.acceleration.y + 0.16,
  a.acceleration.z + 0.560 };
  gyroData = { g.gyro.x + 0.02, g.gyro.y - 0.06, g.gyro.z + 0.02 };
}

void mpuPrint() {
  getVariables();

  Serial.println("------------- MPU6050  -------------");

  Serial.println("| ----- Accelerations (m/s^2) ---- |");
  Serial.print("|    x: "); Serial.print(accData.x);
  Serial.print(", y: "); Serial.print(accData.y);
  Serial.print(", z: "); Serial.print(accData.z);
  Serial.println("    |");

  Serial.println("| --------- Gyro (rad/s) --------- |");
  Serial.print("|    x: "); Serial.print(gyroData.x);
  Serial.print(", y: "); Serial.print(gyroData.y);
  Serial.print(", z: "); Serial.print(gyroData.z);
  Serial.println("   |");

  Serial.println("-------------------------------------");
}

#endif
```

B.4.2 MotionSetting.h

```
#ifndef MotionSetting_h
#define MotionSetting_h

#define leftComp 0.99
#define rightComp 1.00

/* 4pin - mode */
int in1Pin = 4;
int in2Pin = 5;
int in3Pin = 7;
int in4Pin = 6;

// tail lights
int leftLightPin = 2;
int rightLightPin = 8;

// Left Wheel CONTROl
void setLeft(bool reverse, int speed) {
  speed = constrain(speed, 0, 255);
  digitalWrite(in1Pin, reverse);
  analogWrite(in2Pin, speed);
  digitalWrite(leftLightPin, reverse ? LOW: HIGH);
}

// Right Wheel CONTROL
void setRight(bool reverse, int speed) {
  speed = constrain(speed, 0, 255);
```

```
  digitalWrite(in3Pin, reverse);
  analogWrite(in4Pin, speed);
  digitalWrite(rightLightPin, reverse ? LOW: HIGH);
}

// STOP
void fullStop() {
  digitalWrite(in1Pin, LOW);
  analogWrite(in2Pin, 0);
  digitalWrite(in3Pin, LOW);
  analogWrite(in4Pin, 0);
  digitalWrite(leftLightPin, LOW);
  digitalWrite(rightLightPin, LOW);
}

// Go STRAIGHT
void goStraight(bool reverse, int speed) {
  setLeft(reverse, speed * leftComp);
  setRight(reverse, speed * rightComp);
}

#endif
```

B.4.3 MotionControl.h

```
#ifndef MotionControl_H
#define MotionControl_H

#include "MotionSetting.h"

bool reverse = false;
int baseSpeed = 150;

bool isLifted = false;

const float LIFT_THRESHOLD = 8.5f;
const float GROUND_THRESHOLD = 10.0f;
const unsigned long DEBOUNCE_TIME = 250;

void carDrive() {
  getVariables();
  static unsigned long lastStateChangeTime = 0;
  static bool stableState = false;

  float acc = sqrt(pow(accData.x, 2) + pow(accData.y, 2) + pow(accData.z,
  2));

  bool stateChanged = false;
  unsigned long currentTime = millis();

  if (stableState) {
    if (acc >= GROUND_THRESHOLD) {
      if (lastStateChangeTime == 0) {
        lastStateChangeTime = currentTime;
      } else if (currentTime - lastStateChangeTime >= DEBOUNCE_TIME) {
        stableState = false;
        isLifted = false;
        stateChanged = true;
        lastStateChangeTime = 0;
      }
    } else {
      lastStateChangeTime = 0;
    }
  } else {
    if (acc <= LIFT_THRESHOLD) {
```

```
      if (lastStateChangeTime == 0) {
        lastStateChangeTime = currentTime;
      }
      else if (currentTime - lastStateChangeTime >= DEBOUNCE_TIME) {
        stableState = true;
        isLifted = true;
        stateChanged = true;
        lastStateChangeTime = 0;
      }
    } else {
      lastStateChangeTime = 0;
    }
  }

  if(isLifted) {
    goStraight(reverse, baseSpeed);
  } else {
    fullStop();
  }
}

#endif
```

B.4.4 FactorDetect.h

```
#ifndef FactorDetect_H
#define FactorDetect_H

#include <Adafruit_BME280.h>
#include <Adafruit_Sensor.h>

extern Adafruit_BME280 bme;

float getTemperature() {
  return bme.readTemperature();
}

float getHumidity() {
  return bme.readHumidity();
}

float getPressure() {
  return bme.readPressure() / 100.0F;
}

void getBMEData(float &temp, float &hum, float &pres) {
  temp = getTemperature();
  hum = getHumidity();
  pres = getPressure();
}

void bmePrint() {
  float temp, hum, pres;
  getBMEData(temp, hum, pres);

  Serial.println("------------------------------ BME280
  ------------------------------");

  Serial.print("| Temprature: "); Serial.print(temp); Serial.print("");
  Serial.print(", Humidity: "); Serial.print(hum); Serial.print("%");
  Serial.print(", Air pressure: "); Serial.print(pres); Serial.println("hPa
  |");


  Serial.println("-------------------------------------------------------------------
```

```
}

#endif
```

B.4.5 LCDDemonstrate.h

```
#ifndef LCDDemonstrate_H
#define LCDDemonstrate_H

#include <LiquidCrystal_I2C.h>
#include "FactorDetect.h"
#include "MotionDetect.h"

extern LiquidCrystal_I2C lcd;

void basicDemonstrate() {
  lcd.setCursor(2, 0);
  lcd.print("LORD LOBSTER");
  lcd.setCursor(4, 1);
  lcd.print("Group #15");
}

void bmeDemonstrate() {
  static unsigned long lastScrollTime = 0;
  static int scrollIndex = 0;

  float temp, hum, pres;
  getBMEData(temp, hum, pres);

  String fullText = "T:" + String(temp, 2) + "C "
                  + "H:" + String(hum, 2) + "% "
                  + "P:" + String(pres, 2) + "hPa ";

  const int windowWidth = 16;

  fullText += "    " + fullText;

  unsigned long currentTime = millis();
  if (currentTime - lastScrollTime > 250) {
    lcd.setCursor(0, 0);
    lcd.print(fullText.substring(scrollIndex, scrollIndex + windowWidth));
    scrollIndex++;
    if (scrollIndex > fullText.length() - windowWidth) {
      scrollIndex = 0;
    }
    lastScrollTime = currentTime;
  }
}

void mpuDemonstrate() {
  static unsigned long lastScrollTime = 0;
  static int scrollIndex = 0;

  getVariables();

  String fullText = String("acc: ") + "x:" + String(accData.x, 2) + " "
                  + "y:" + String(accData.y, 2) + " "
                  + "z:" + String(accData.z, 2) + " "
                  + String("gyro: ") + "x: " + String(gyroData.x, 2) + " "
                  + "y:" + String(gyroData.y, 2) + " "
                  + "z: " + String(gyroData.z, 2) + " ";

  const int windowWidth = 16;

  fullText += "    " + fullText;
```

```

  unsigned long currentTime = millis();
  if (currentTime - lastScrollTime > 250) {
    lcd.setCursor(0, 1);
    lcd.print(fullText.substring(scrollIndex, scrollIndex + windowWidth));
    scrollIndex++;
    if (scrollIndex > fullText.length() - windowWidth) {
      scrollIndex = 0;
    }
    lastScrollTime = currentTime;
  }
}

#endif
```

B.4.6 main.cpp

```
#include "FactorDetect.h"
#include "LCDDemonstrate.h"
#include "MotionDetect.h"
#include "MotionSetting.h"
#include "MotionControl.h"

#include <Wire.h>

Adafruit_BME280 bme;
Adafruit_MPU6050 mpu;
LiquidCrystal_I2C lcd(0x27, 16, 2);

void setup() {
  Wire.begin();
  Serial.begin(115200);
  while(!Serial);

  delay(1000);

  bme.begin(0x76);
  mpu.begin(0x68, &Wire);
  lcd.init();
  lcd.backlight();

  // Wheel Driver
  pinMode(in1Pin, OUTPUT);
  pinMode(in2Pin, OUTPUT);
  pinMode(in3Pin, OUTPUT);
  pinMode(in4Pin, OUTPUT);
  // Light Driver
  pinMode(leftLightPin, OUTPUT);
  pinMode(rightLightPin, OUTPUT);
}

variables accData;
variables gyroData;

unsigned long lastPrintTime = 0;

void loop() {
  carDrive();

  static bool basicShown = false;
  if (!basicShown) {
    basicDemonstrate();
    basicShown = true;
    delay(2500);
    lcd.clear();
```

```
49    }
50
51    bmeDemonstrate();
52    mpuDemonstrate();
53
54    static unsigned long lastPrintTime = 0;
55    unsigned long currentTime = millis();
56    if(currentTime - lastPrintTime >= 2000) {
57      bmePrint();
58      mpuPrint();
59      Serial.println();
60
61      lastPrintTime = currentTime;
62    }
63  }
```

References

[1] *TCRT5000(L) Reflective Optical Sensor with Transistor Output*. Document Number: 83760, Revision A4. Vishay Telefunken. 2000.

Bibliography

B. Anglois. *This is a paper*. 2005.

F. Ovalie. *Robert*. 2005.

C. Cuthor. *Charlie*. 2003.

E. Absol. *Danger*. 2005.

S. Andre. *Orange*. 2003.

W. Kor. *Poule*. 2001.