

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout


Pinout view

System view

Search:

Categories: A-Z

- System Core >
- Analog >
- Timers >
- Connectivity >
- Computing >
- Middleware and Software Packs >

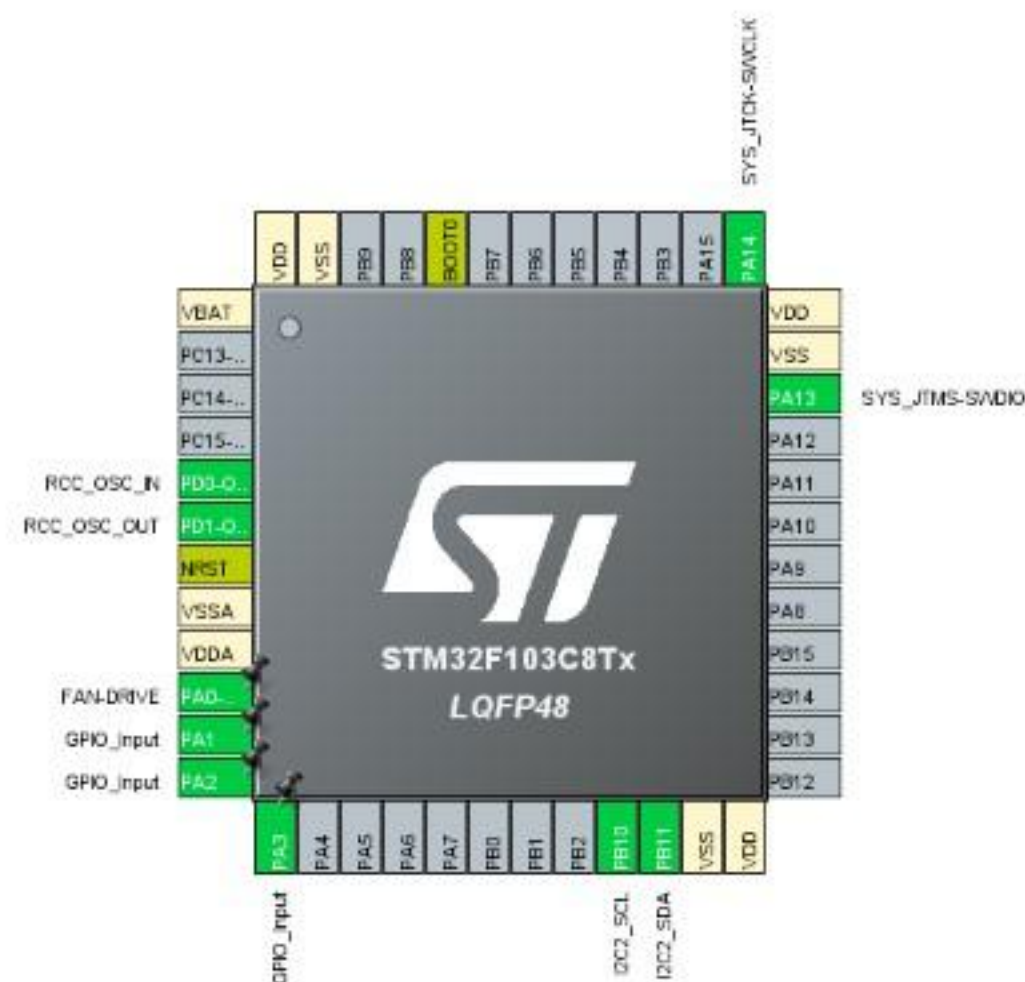

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

TIM3 Mode and Configuration

Mode

Slave Mode	Disable
Trigger Source	Disable
☒ Internal Clock	
Channel1	Disable
Channel2	Disable
Channel3	Disable
Channel4	Disable
Combined Channels	Disable
☐ XOR activation	

Configuration

Reset Configuration

☒ Parameter Settings ☒ User Constants ☒ NVIC Settings ☒ DMA Settings

Configure the below parameters :

Search (Ctrl+F)

Counter Settings


Prescaler (PSC - 16 bits value)	7199
Counter Mode	Up
Counter Period (AutoReload Register -	4999
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

Pinout view

System view

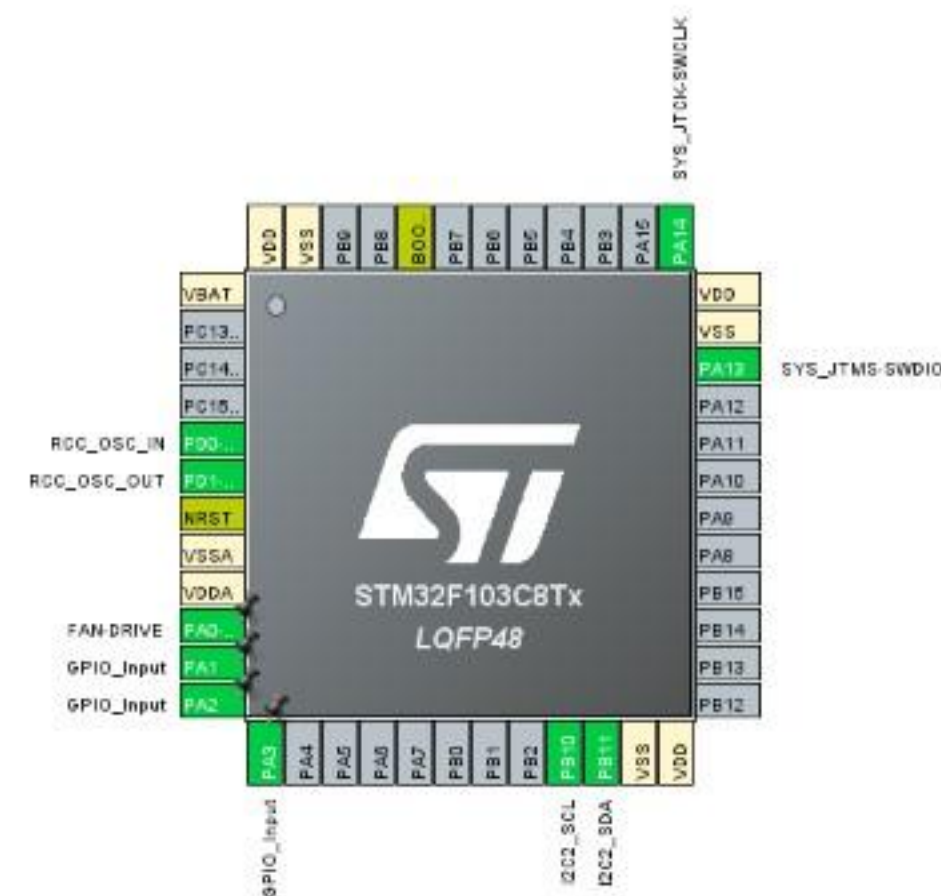

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

TIM3 Mode and Configuration

Mode

Slave Mode

Trigger Source

☒ Internal Clock

Channel1

Channel2

Channel3

Channel4

Combined Channels

☐ XOR activation

Configuration


Reset Configuration

☒ Parameter Settings ☒ User Constants ☒ NVIC Settings ☒ DMA Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0

Pinout view

System view

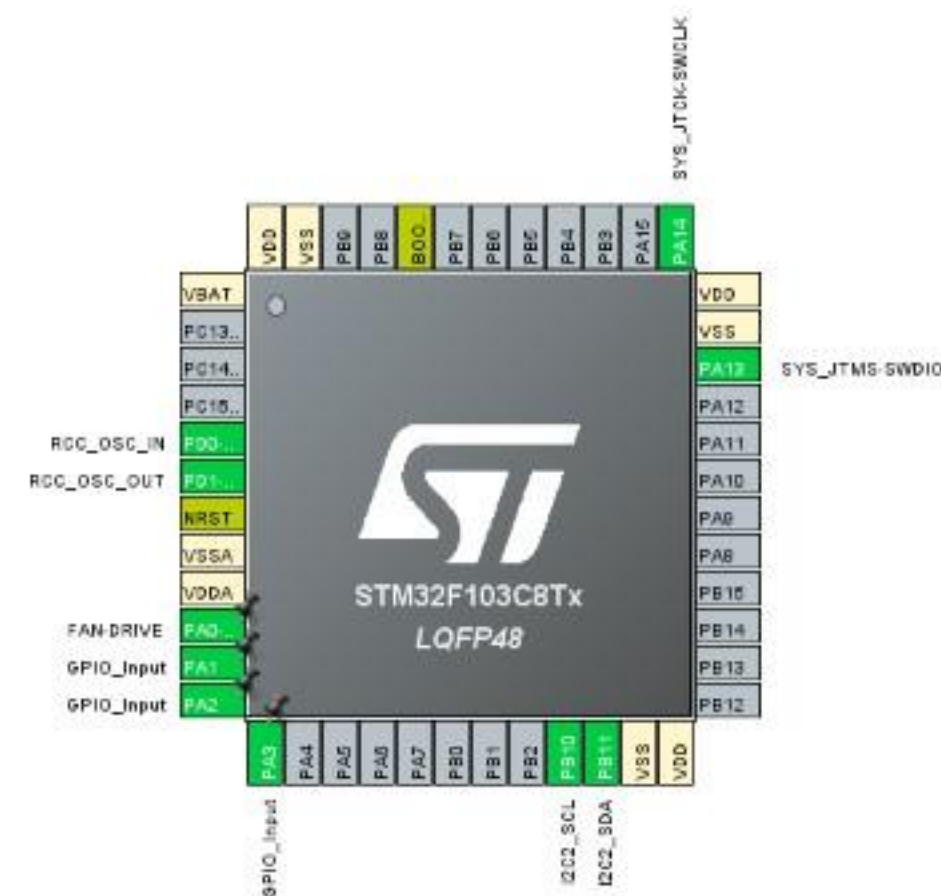

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

▼ Pinout

RCC Mode and Configuration

Mode

High Speed Clock (HSE) Crystal/Ceramic Resonator

Low Speed Clock (LSE) ☐ Disable

☐ Master Clock Output

Configuration

Reset Configuration

Parameter Settings

👤 User Constants

🔗 NVIC Settings

GPIO Settings

Configure the below parameters :

 Search (Ctrl+F)

- System Parameters

VDD voltage (V)

3.3V

Prefetch Buffer

Enabled

Flash Latency(WS)

2 WS (3 CPU cycle)

- ▼ RCC Parameters

HSI Calibration Value

16

HSE Startup Timeout Value (ms)

100

LSE Startup Timeout Value (ms)

5000

 Pinout view

System view

