

PT GALAKSI MEGATAMA INDONESIA

Manufacturer of record

CERTIFICATION INFORMATION REQUIREMENTS — FILLED WORKING COPY

IECEx/ATEX Certification Information Requirements**Gas Leak Detector (GLD) V2**

This document follows, item by item, the section order of the ExCB checklist as it appears in the internal working-draft template (source file below), filled in with GLD's confirmed design data. Task-style annotations from that working draft have been rewritten here as professional status notes.

Document Control

Document title	IECEx/ATEX Certification Information Requirements — Gas Leak Detector (GLD) V2 (Filled Working Copy)
Document no.	GMI/GLD/IECEX-CIR/2026-001
Revision	0.9
Date	7 October 2026
Status	Working Document — Draft for Internal Review
Classification	Confidential — prepared for ATEX/IECEx certification body (ExCB) submission
Based on (source template)	IECEx ATEX Certification Information Requirements_Rev18092026.docx (internal working draft, 18 Sep 2026)
Applicant / Manufacturer	PT Galaksi Megatama Indonesia
Companion document	Dokumen_Teknis_Sertifikasi_GLD_IECEx_ATEX (exhaustive item-by-item status tracking) — authoritative for item-level status where the two documents differ

Scope of this document. This is a compilation of design evidence and an honest readiness assessment against the ExCB checklist, prepared in support of a future submission — it is not itself a certificate and does not constitute self-certification. The product is still at from-scratch development/prototype stage; no finalized, serialized units exist yet.

Revision History

REVISION	DATE	DESCRIPTION
0.1	22 September 2026	Initial issue — filled in against the internal working-draft template (IECEx ATEX Certification Information Requirements_Rev18092026.docx),

		covering all three sections of the checklist.
0.2	22 September 2026	Total weight corrected to 2.3 kg; IP rating confirmed as IP66; operating humidity confirmed as 10–90% RH non-condensing; cable gland confirmed as M20×1.5 (IP66-rated) — all raised to Final (Section 2.3). Power consumption rounded to 8 W. Removed the ambiguous “no plastic or PVC” parenthetical from the product description (Section 2.1) and generalized “L-bracket” to “bracket” in that same narrative sentence (the dimensioned bracket/U-bolt specification in Section 2.3 is unaffected). “GLD V2 (Version 2)” simplified to “GLD V2”. Layout fix: kept the Section 2.6.b BOM paragraph together across the page break.
0.3	22 September 2026	“Bracket”/“L-bracket” terminology corrected throughout to “U-bolt mounting plate” (Sections 2.1, 2.3, 2.6.a), matching the actual CAD drawing (a flat 250×250 mm plate secured by 2× U-bolts — not an angled/L-shaped bracket).
0.4	24 September 2026	Total weight, operating temperature, and operating humidity (Section 2.3) updated to 2.378 kg, –20°C to +60°C, and 5–95% RH respectively, per current project specification data.
0.5	28 September 2026	Type of protection narrowed to a single team recommendation, Ex d (flameproof enclosure), in Section 2.5 — selected over Ex e and Ex i based on the existing ADC12 die-cast enclosure with a stainless-steel mesh flame path and the MQ-sensor heaters' continuous, unregulated power draw. Section 2.6.e updated accordingly. Still an internal recommendation, not an ExCB decision.
0.6	28 September 2026	Applicant/Manufacturer identity simplified to a single entity, PT Galaksi Megatama Indonesia (document

		number prefix changed to GMI/...). The separate “design and development authority” and “technical partner” entries were removed (letterhead, Document Control, Sections 1.2, 1.4).
0.7	30 September 2026	Section 2.6.f populated with a preliminary internal surface-temperature measurement (normal, maximum-load and fan-stalled conditions), extrapolated to +60°C ambient: highest value ≈114°C against an effective T4 limit of 130°C. Status raised to Partially available; open measurement items listed.
0.8	7 October 2026	Section 2.6.a extended with the released main-board electrical schematic (26 sheets, Section 2.6.a.7) and ten annotated PCB layout views with board data (Section 2.6.a.8).
0.9	7 October 2026	Section 2.6.a.1 added: complete mechanical, enclosure and assembly drawing set (ATEX CASING v2 sheet and six CAD views, all seven GLD ATEX CASE v3 sheets, BP18-1Z supplier drawing, component/structure/terminal/grounding drawings, assembly sequence and MQ sensor dimension drawings), with a drawing register.

Table of Contents

1. Basic Information (Application and Organization).....	5
1.1 · Application Form.....	5
1.2 · Manufacturer's Business License / Company Registration Certificate.....	5
1.3 · Manufacturer's Organizational Chart and Contact Information.....	5
1.4 · Address of Manufacturing Plant and Brief Introduction of Production Facilities.....	6
1.5 · ISO 9001 Certificate, Quality Manual, and Directory of Procedure Documents (for QAR/QAN review).....	6
2. Technical Documentation.....	7
2.1 · Detailed Product Description.....	7
2.2 · Product Name, Model, and Specification List.....	7
2.3 · Complete and Clear Functional Description and Technical Parameters (Electrical, Mechanical, etc.).....	8
2.4 · Clear Product Photos (Overall and Key Components).....	10
2.5 · Description of Intended Use and Installation Environment.....	11
2.6 · Design and Manufacturing Information.....	11
3. Sample Information.....	91
3.1 · Model, Serial Number, and Status of the Sample.....	91
3.2 · Necessary Test Fixtures or Auxiliary Equipment.....	91

1. Basic Information (Application and Organization)

Application form (provided by ExCB as a template). Manufacturer's business license/company registration certificate. Manufacturer's organizational chart and contact information. Address of manufacturing plant and brief introduction of production facilities. (If applicable) ISO 9001 certificate, quality manual, and directory of procedure documents (for QAR/QAN review).

1.1 • Application Form

Issued by the ExCB as a template; not yet received.

Status: Template not yet received from the ExCB.

1.2 • Manufacturer's Business License / Company Registration Certificate

The Applicant and Manufacturer named in this application is PT Galaksi Megatama Indonesia, which holds the Indonesian industrial manufacturing business license (NIB) relevant to fabricating the equipment.

Particular	Value
Registered legal name	PT Galaksi Megatama Indonesia
Legal form	Perseroan Terbatas (limited liability company), National Private / PMDN, Small Enterprise scale
Business registration number (NIB)	0510220020593, issued 5 Oct 2022 (OSS system)
Taxpayer ID (NPWP)	61.126.496.1-427.000, registered 29 Sep 2022
Deed of establishment	Deed No. 52, 22 Sep 2022 (Notary Steffi Alphanie, S.H., M.Kn., Cilegon City)
Ministerial ratification	MOLHR Decree No. AHU-0067398.AH.01.01.Year 2022 (29 Sep 2022)
Registered (domicile) address	Plaza Summarecon Bekasi, Jl. Bulevar Ahmad Yani Kav. K.01, Level 7, Bekasi City, West Java 17143
Relevant KBLI (business scope)	25119, 25120 (tanks/reservoirs/containers of metal, incl. pressurized gas cylinders), 28221, 25920

Status: Available — legal documents on file with sworn English translations (Fikri Said Obed, S.S., 19 Sep 2026). Legal form/shareholding, business registration, and domicile address confirmed; ISO 9001 certification status addressed separately below.

1.3 • Manufacturer's Organizational Chart and Contact Information

The statutory Board of Directors and Board of Commissioners are known from the deed of establishment:

Position	Name
President Director	Nur Rohman
Director	Antonius Prasetyo
Commissioner	Crisa Andi Sujatmiko

Status: Partially available — statutory officers known. A functional organizational chart (design/production/quality reporting lines) and named ExCB correspondence contacts (certification project contact, technical contact, quality contact) have not yet been provided.

1.4 • Address of Manufacturing Plant and Brief Introduction of Production Facilities

Registered office and NIB-registered production sites of the Manufacturer, PT Galaksi Megatama Indonesia:

Site	Address / Role
Registered office	Plaza Summarecon Bekasi, Jl. Bulevar Ahmad Yani Kav. K.01, Level 7, Bekasi City, West Java
Production site 1	Jl. Kp. Jatipilar, Cikarang Selatan, Bekasi Regency
Production site 2	Jl. WR Supratman, Mustikajaya, Bekasi City
Electronics design/assembly	Native EasyEDA/JLCPCB project; fabrication/assembly provider and its address to be confirmed in writing

Status: Partially available — registered addresses on file (general metal-fabrication license, KBLI 25120 covers pressurized gas cylinders; not an Ex-specific manufacturing license). Floor area, principal equipment, staffing, and nominal throughput (“brief introduction” requested by the checklist) not yet provided. Production location for serial units has not been fixed — the product is at prototype stage.

1.5 • ISO 9001 Certificate, Quality Manual, and Directory of Procedure Documents (for QAR/QAN review)

Whether the manufacturer currently holds ISO 9001 certification, and if so its certificate number, scope, issuing body, and validity period, is to be confirmed. Quality manual and procedure-document index not yet provided.

Status: To be confirmed / to be provided. Under both IECEx and ATEX schemes, a quality system covering Ex production is expected before certificates are issued (IECEX Quality Assessment Report, or the corresponding production-quality/product-verification route under ATEX) whether or not ISO 9001 is held; the applicable route is to be confirmed with the ExCB.

2. Technical Documentation

2.1 • Detailed Product Description

The Gas Leak Detector (GLD) is an IoT-based, multi-sensor gas leak detection device designed for the early detection of flammable and process gases in oil & gas refinery environments (process units, tank farms, pipe racks, and storage/loading-unloading areas).

Functionally, the GLD integrates eight channels of metal-oxide semiconductor gas sensors (MQ series), an edge-AI microcontroller/processor (ESP32-S3), and a LoRa radio module (star-topology wireless transmission) within a single fixed-point unit installed at locations with gas-leak risk. An on-device AI gas-classification model runs directly on the unit so that detection decisions do not depend on a continuous connection to a central server. When gas concentration exceeds a defined threshold, the unit triggers a local alarm (an integrated visual/audible alarm module) and simultaneously transmits an alarm notification over the LoRa network to the operator dashboard.

The enclosure is designed for hazardous-area deployment at refinery sites, using metal materials (aluminum alloy — ADC12 die-cast grade — and stainless steel) and mounted via a U-bolt mounting plate to existing structures without drilling or welding. The current production power configuration is continuous 24 VDC, supplied via an AC/DC adapter (220 VAC/50 Hz → 24 VDC) connected to the site electrical supply. The Node Sensor (GLD) itself receives only 24 VDC at its terminal and never carries 220 VAC internally — the AC/DC adapter is a separate, site-supplied device outside the physical boundary of the certified unit.

Important: this design-intent description does not constitute a claim that the enclosure has passed testing or has been Ex-certified. The explosion-protection scheme, gas group, temperature class, and target installation zone are addressed in Section 2.5.

2.2 • Product Name, Model, and Specification List

Field	Value
Product name	Gas Leak Detector (GLD)
Model / version	GLD V2
Manufacturer	PT Galaksi Megatama Indonesia
Program owner	PT Pertamina Patra Niaga (initial deployment site: Refinery Unit IV, Cilacap)
Primary function	Acquisition of 8-channel gas sensor data and LoRa transmission
Microcontroller	ESP32-S3-WROOM-1U-N16R8
LoRa radio module	E22-900MM22S
Dimensions (L×W×H)	200 × 90 × 290 mm
Enclosure material	Aluminum alloy (ADC12 die-cast) + stainless steel

2.3 • Complete and Clear Functional Description and Technical Parameters (Electrical, Mechanical, etc.)

Functional workflow (normal operating mode): sense → process → transmit. Each of the eight gas sensors continuously samples ambient conditions → data is normalized and classified by the on-device AI model (ESP32-S3) → the result is transmitted over the LoRa network (star-topology transmission) at a configurable interval, or immediately (event-driven) when an alarm condition is detected. Gas alarms are triggered through two parallel channels: a local visual/audible alarm module on the unit itself, and a push notification transmitted over the LoRa network to the dashboard.

Electrical Parameters:

Parameter	Specification
Input voltage	24 VDC (continuous)
Source adapter (if AC-fed)	220 VAC / 50 Hz input → 24 VDC output
Internal voltage rails	5 VDC (sensor/heater circuitry), 3.3 VDC (ESP32-S3 logic)
Measured power consumption	8 W @ 24 VDC (≈ 0.33 A) — production configuration
Cable/PSU sizing margin	≥ 1 A per unit (sizing margin only; actual draw is well below this)
Power cable	2-conductor, labeled L+/L- (positive/negative of the 24 VDC supply), each conductor ≈ 0.75 mm diameter
Electrical protection	Resettable PPTC fuses (F1/F2), TVS/ESD suppression diodes, Schottky diodes on power rails

Sensor and Communication Parameters:

Parameter	Specification
Gas sensor array	8 channels, metal-oxide (MQ-2, MQ-3B, MQ-4, MQ-5, MQ-6, MQ-7B, MQ-8, MQ-135)
Signal acquisition	24-bit multi-channel ADC (ADS1256IDBR, 30,000 SPS), 500 ms scan interval
AI gas-classification model	On-device classifier — 3 classes: Clean Air, LPG, H ₂ ; alarm at confidence $\geq 30\%$. Does not yet cover CO ₂ , Benzene, CO, or H ₂ S
Temperature/humidity telemetry	SHT40 sensor (auxiliary)
LoRa radio	E22-900MM22S, star-topology transmission, 920–923 MHz ISM band (Indonesia)
Data transmission interval	Configurable, default 10 s; alarm events transmitted immediately
RS-485 / Modbus interface	Read-only Modbus RTU slave, 9600 bit/s 8N1, Unit ID 1 (THVD1410DR) — 8 read-only registers for external integration; not used for product control

Mechanical Parameters:

Parameter	Specification	Status
Dimensions (L×W×H)	200 × 90 × 290 mm	Final
Total weight	2.378 kg	Final (project-confirmed, not yet calibration-verified)
Enclosure material	Aluminum alloy (ADC12 die-cast) + stainless steel	Final (see caveat below)
Mounting method	U-bolt mounting plate (2"/DN50), no drilling/welding	Final
Ingress protection (IP rating)	IP66	Final
Cable entry (gland)	M20×1.5 cable gland (IP66-rated), power cable L+/L-, ≈ 0.75 mm/conductor	Final (see note below)
Antenna mounting	External, SMA male connector	Final
Operating temperature range	-20°C to +60°C (ambient)	Final (project-confirmed)
Operating humidity range	5–95% RH, non-condensing	Final (project-confirmed)

Caveat on the ADC12 enclosure grade. ADC12 is the material called out on a Chinese enclosure-component manufacturer's drawing for a related die-cast sub-component ("Universal Base," part no. BP18-1Z, from the same casing-partner supply chain — Section 2.6.a); the "GLD ATEX CASE v3" drawing of the main enclosure body itself does not carry its own material callout. ADC12 has been confirmed as the enclosure grade on the basis that the same casing manufacturer's die-cast product line uses this alloy consistently — an extrapolation from the supplier's sub-component drawing, not a direct material callout on the main enclosure drawing. This should be verified against the casing partner's own datasheet for the enclosure body before formal ExCB submission.

Caveat on cable gland. M20×1.5 matches the thread size used on the BP18-1Z reference drawing from the same casing manufacturer (Section 2.6.a) and is a standard, IP66-rated gland size well suited to a 2-conductor cable with ≈0.75 mm conductors — selected by engineering judgment from that reference, not from an independent gland datasheet or fit test on GLD's own enclosure. This should be confirmed by test/fit-check before formal ExCB submission. The operating temperature and humidity ranges above are current project-specification values (24 Sep 2026), not yet documented against a calibrated test record.

Three operating modes are distinguished at firmware level:

Mode	Purpose	Use restriction
Inference	Normal gas-class inference and alarm operation	Production operating mode after commissioning
Dataset	Engineering / data-collection activity	Not a substitute for approved detection operation
Nulling	Sensor baseline / calibration activity	Clean air only; approved procedure; requires complete 8/8 result

2.4 • Clear Product Photos (Overall and Key Components)

The photographs below were taken directly from the Node Sensor (GLD) V2 prototype unit.



Assembled unit — motherboard, sensor module, mesh cover, casing, external antenna, and local alarm module.



Enclosure, rear view — mounting flange and cable-entry area.

2.5 • Description of Intended Use and Installation Environment

The GLD is intended for continuous, fixed-point monitoring of flammable and toxic gas leaks in oil & gas refinery hazardous areas: process units, tank farms, pipe racks, and loading/unloading areas.

Parameter	Value	Status
Gas group	IIC	Internal recommendation, not an ExCB decision
Temperature class	T4 ($\leq 135^{\circ}\text{C}$)	Target — preliminary internal measurement supports it (Section 2.6.f); formal verification outstanding
Area classification	Zone 1, Equipment Category 2G, Group II	Requested — subject to ExCB assessment
Type of protection	Ex d — flameproof enclosure	Internal recommendation, not an ExCB decision

Type of protection selected over Ex e and Ex i based on the existing enclosure design: a die-cast aluminum (ADC12) housing with a stainless-steel mesh cover over the sensing element, functioning as a flame path/flame arrestor — the same pattern used by the three comparable certified gas detectors reviewed as references (all Ex d). Ex i was set aside because the MQ-series sensor heaters draw continuous power ($\approx 0.75\text{ W}$ each) directly from an unregulated 24 VDC supply rather than through certified current-limiting barriers, difficult to reconcile with intrinsically-safe energy limits for Group IIC.

These classification parameters are the applicant's proposal, recorded here as a request, not as an agreed or granted classification. Cluster Head and Gateway devices are assumed to always sit in a safe area (project assumption, not the result of a formal area-classification study by Pertamina).

2.6 • Design and Manufacturing Information


2.6.a • Complete Drawings (Assembly, Component, Electrical Schematic, PCB Layout, Enclosure Structure, Junction Box, Terminal, Grounding)

An electrical schematic capture and a corresponding 9-sheet block-diagram set exist for the GLD V2 main board, exported from the native EasyEDA/JLPCB source project, with pin-to-net traceability evidence.

PERTAMINA GLD / SCHEMATIC BLOCK DIAGRAM


02 Distribusi daya utama

Tiga masukan daya, pemilihan sumber 5 V, rail analog, dan catu sensor.

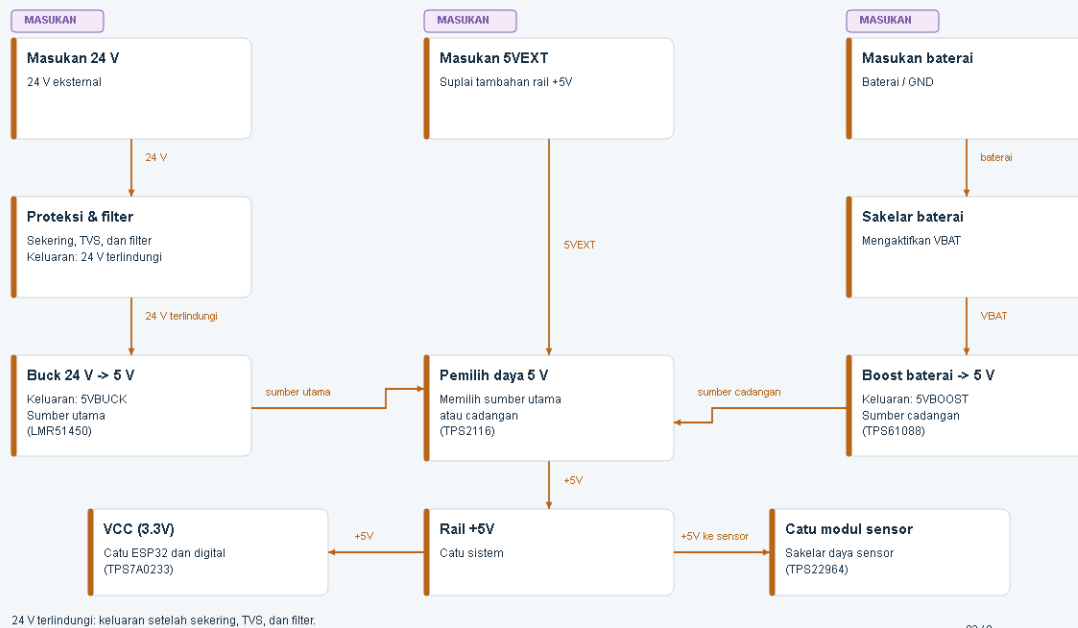


02 / 9

Schematic block diagram, sheet 2 of 9 — main power distribution.

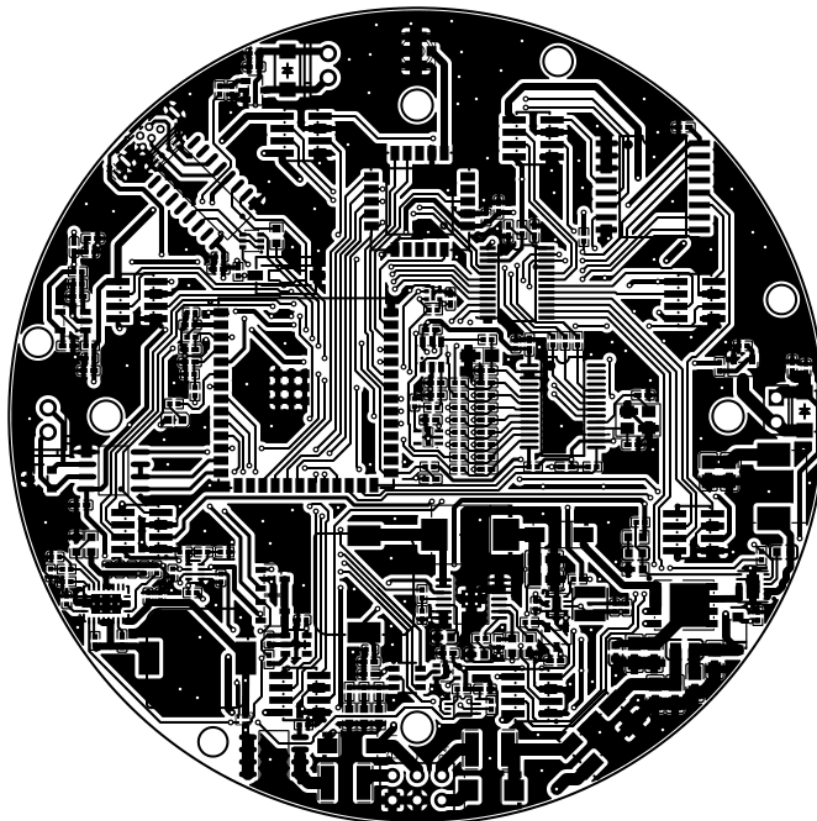


Main board PCB layout (top copper) — native EasyEDA/JLPCB export, production-intent board.

A dimensioned mechanical drawing exists for the enclosure's external envelope and mounting hardware, drafted from a solid CAD model (STEP format, millimeter units):

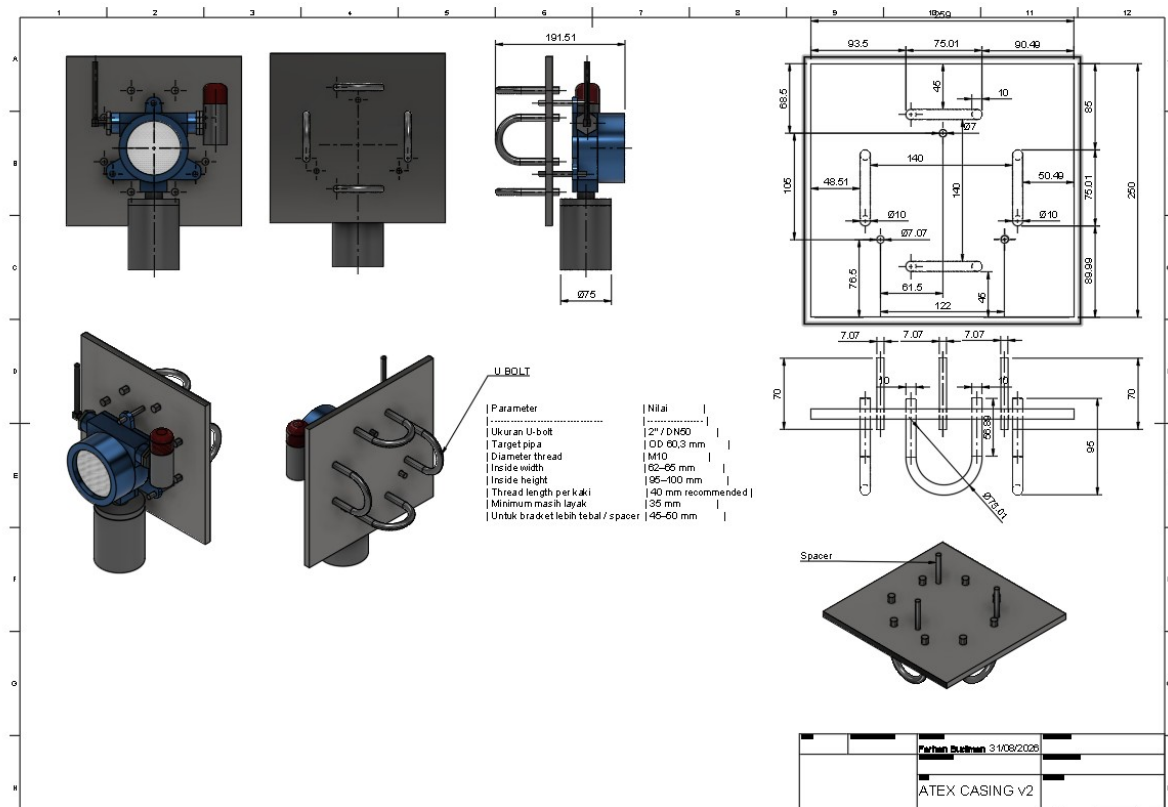


Enclosure envelope & U-bolt mounting plate assembly — dimensioned drawing sheet (drafted 31 Aug 2026, from a STEP solid model).

A separate, internal contingency/alternate enclosure design ("GLD ATEX CASE v3") exists in parallel with the primary commercial-enclosure sourcing path referenced in Section 2.3:

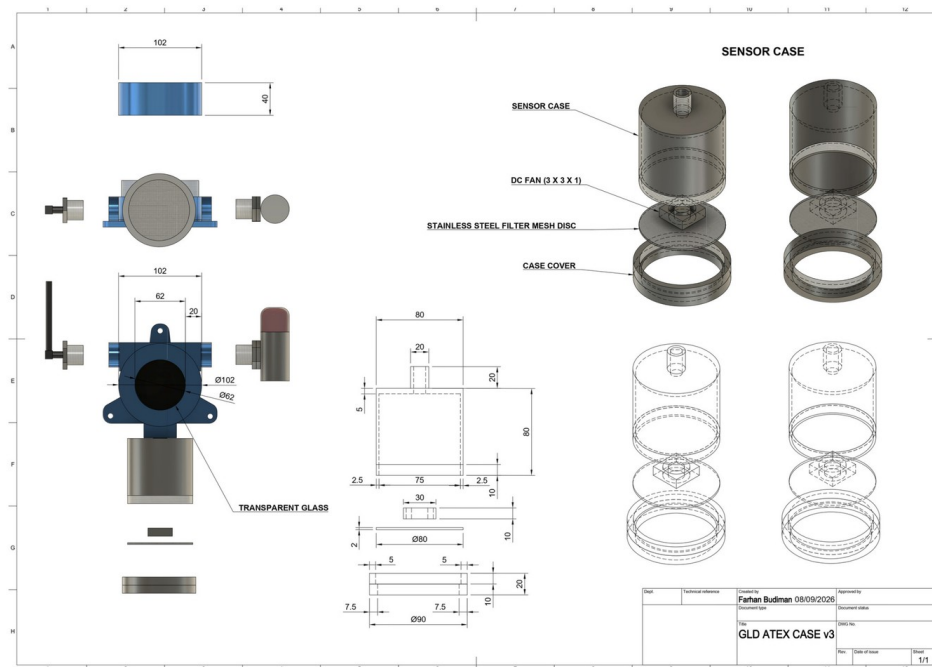

“GLD ATEX CASE v3” dimensioned drawing sheet (Farhan Budiman, 8 Sep 2026) — internal contingency/alternate enclosure design, not the confirmed production enclosure.

A candidate junction-box/terminal sub-component drawing has also been received via the casing partner's supply chain (Chinese enclosure-component manufacturer):

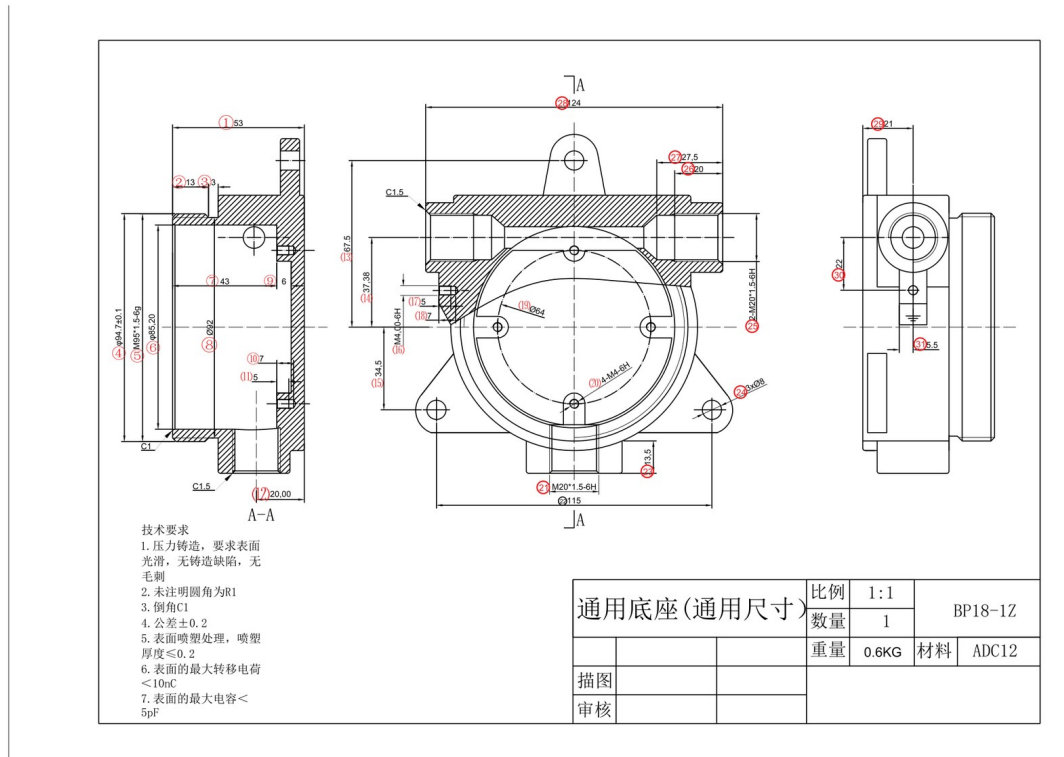

“Universal Base” BP18-1Z — supplier reference drawing (ADC12 die-cast aluminum alloy, 0.6 kg). Candidate component under evaluation; footprint does not match GLD's main enclosure, not yet confirmed as part of GLD's design.

Drawing type	Status
Electrical schematic — main board	Available — 26 sheets PGLD-GLD-V4-MB-SCH-01 to -26, rev. 1.0 (Section 2.6.a.7); sensor-module board schematic not yet included
PCB layout — main board	Partially available — 10 views PGLD-GLD-V4-MB-PCB-01 to -10 (Section 2.6.a.8); layout rev/date, laminate data and sensor-module board layout open
Assembly drawing	Partially available — covers external envelope and mounting hardware, not internal PCB/component assembly sequence
Component drawing	Not yet available
Enclosure structure drawing (gap, length, volume)	Partially available — external envelope dimensioned; Ex-d-specific flame-path parameters not yet called out
Junction box / terminal / grounding connection drawings	Candidate reference only — BP18-1Z drawing above, not yet confirmed as part of GLD's design

2.6.a.1 Mechanical, enclosure and assembly drawings — complete set

This subsection reproduces every mechanical, enclosure and assembly drawing currently available for the GLD: the CAD drawings of the primary enclosure and mounting plate, the full sheet set of the GLD ATEX CASE v3 enclosure design, the supplier drawing of the candidate junction-box base, and the component, structure, terminal, grounding, assembly-sequence and sensor drawings of the manufacturer's design package. Each figure carries a reference number (M-xx) listed in the register below.


Drawing register

Ref.	Title	Type	Group
M-A1	ATEX CASING v2 — enclosure envelope & U-bolt mounting plate, dimensioned sheet	Dimensioned CAD drawing	A
M-A2	ATEX CASING v2 — six orthographic CAD views (front, rear, left, right, top, bottom)	CAD render	A
M-B1	GLD ATEX CASE v3 — sheet 1: isometric views of the assembled detector	CAD render	B
M-B2	GLD ATEX CASE v3 — sheet 2: top and bottom views	CAD render	B
M-B3	GLD ATEX CASE v3 — sheet 3: side and rear views	CAD render	B
M-B4	GLD ATEX CASE v3 — sheet 4: front/back and mounting-lug views	CAD render	B
M-B5	GLD ATEX CASE v3 — sheet 5: exploded views (four viewpoints)	CAD exploded view	B
M-B6	GLD ATEX CASE v3 — sheet 6: exploded views of the sensor-head stack	CAD exploded view	B
M-B7	GLD ATEX CASE v3 — sheet 7: dimensioned drawing with title block	Dimensioned CAD drawing	B
M-C1	Universal Base BP18-1Z — supplier reference drawing	Supplier dimensioned drawing	C
M-D1	LoRa antenna, MQ sensor and enclosure body & cover	Component photographs	D
M-D2	Rubber gasket — locations	Component photographs	D
M-D3	Rubber gasket — part	Component photograph	D
M-D4	Stainless wire-mesh plate	Component photographs	D
M-D5	Visual/audible alarm beacon; motherboard inside base casing	Component photographs	D
M-D6	Motherboard with MQ sensors inside base casing	Component photograph	D
M-D7	Common base design	Dimensioned drawing	D
M-D8	Overall exploded views I and II	Exploded line drawing	D
M-D9	Overall exploded view III	Exploded line drawing	D
M-D10	Motherboard PCB power-in and PCB cover (terminal module)	CAD render	D
M-D11	Motherboard and PCB cover	CAD render	D
M-D12	Component drawing	Component photographs	D
M-D13	Electrical block diagram and enclosure structure	Block diagram / dimensioned drawing	D
M-D14	Terminal — 24 VDC power in	Photographs	D
M-D15	Grounding	Photograph	D
M-E1	Assembly drawing — exploded view	Assembly illustration	E
M-E2	Assembly step — casing cover	Assembly illustration	E
M-E3	Assembly step — sensor case and rubber gasket	Assembly illustration	E
M-E4	Assembly step — LED & buzzer	Assembly illustration	E
M-E5	Assembly step — 24 VDC power in	Assembly illustration	E
M-E6	Assembly step — put motherboard into base casing	Assembly photographs	E
M-E7	Assembly step — secure motherboard; install LoRa antenna cable	Assembly photographs	E
M-E8	Assembly step — antenna position	Assembly photographs	E

Ref.	Title	Type	Group
M-E9	Assembly step — alarm cables, DC fan and cover closure	Assembly photographs	E
M-F1	MQ-2 and MQ-3 — sensor parameters and dimension drawings	Sensor data sheet	F
M-F2	MQ-4 and MQ-5 — sensor parameters and dimension drawings	Sensor data sheet	F
M-F3	MQ-6 and MQ-7 — sensor parameters and dimension drawings	Sensor data sheet	F
M-F4	MQ-8 and MQ-135 — sensor parameters and dimension drawings	Sensor data sheet	F


Status of this drawing set: the CAD sheets (M-A1, M-B7, M-C1, M-D7) carry real dimensions and title blocks; the remaining figures are CAD renders, line illustrations or photographs of production parts. Controlled, toleranced drawings that call out the Ex d flame-path parameters (joint gap and length, thread engagement, free internal volume) are still to be issued by the enclosure manufacturer. Two figures still show superseded details: M-E3 labels a battery case and M-D14 labels the power input as "battery or 24 VDC"; the production configuration is 24 VDC only. M-E8 records that the antenna has moved from the side to the top of the base enclosure.

A. Primary enclosure and mounting — ATEX CASING v2

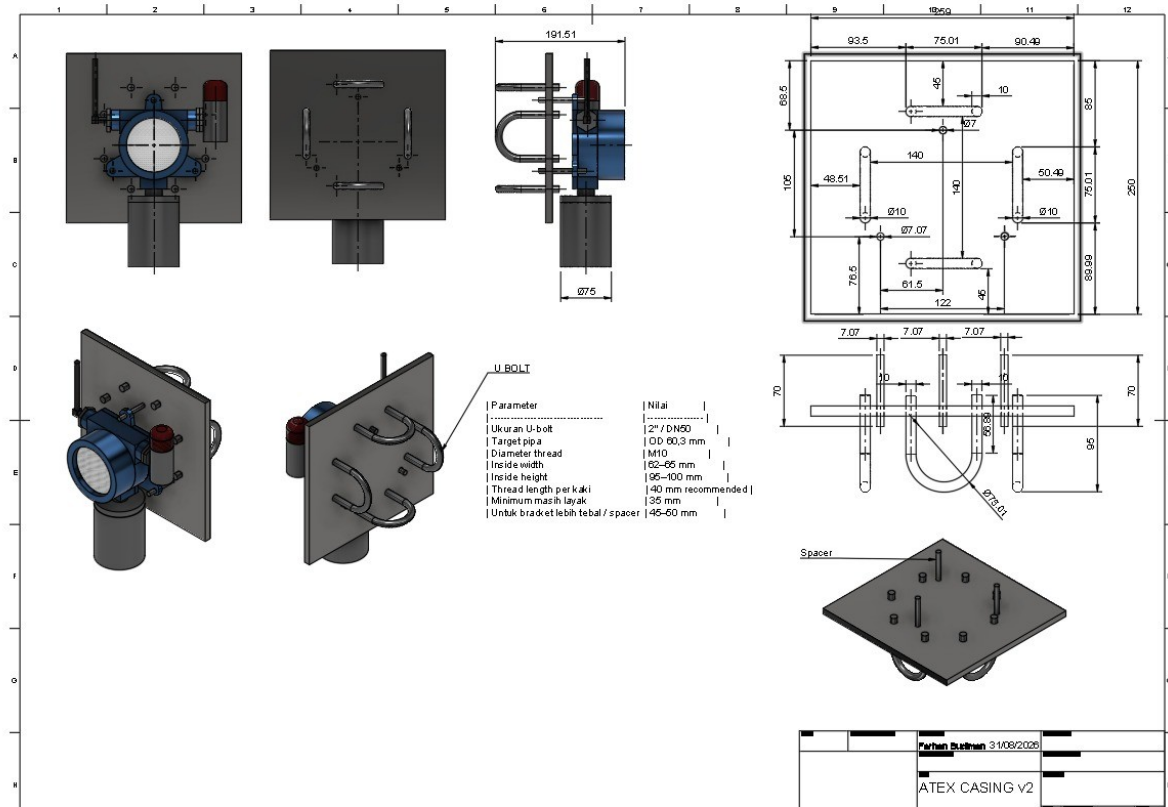


M-A1. ATEX CASING v2 — enclosure envelope & U-bolt mounting plate, dimensioned sheet


Orthographic and isometric views with real dimensions (enclosure neck $\varnothing 75$ mm, overall probe height 191.51 mm, mounting plate 250 x 250 mm with toleranced hole pattern), U-bolt parameter table (2"/DN50, M10 thread) and title block (drafted 31 Aug 2026). Drawn from the STEP solid model (mm).

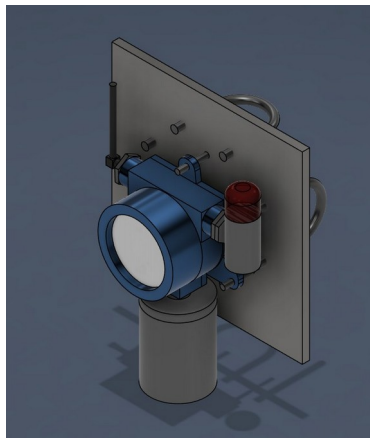


Front view

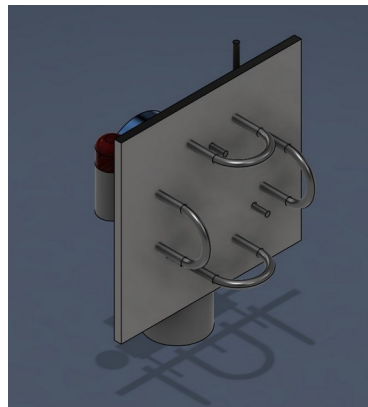


Rear view

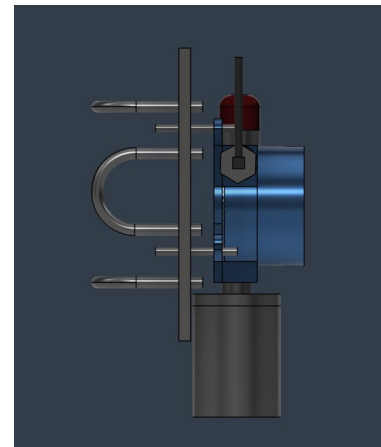


Left view

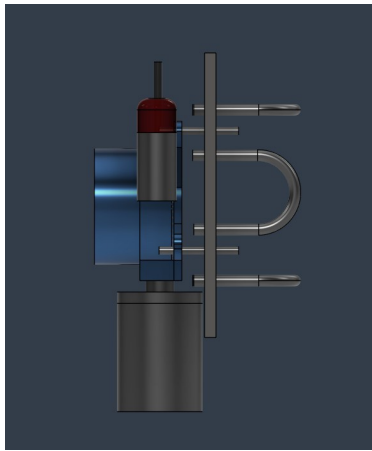

Right view

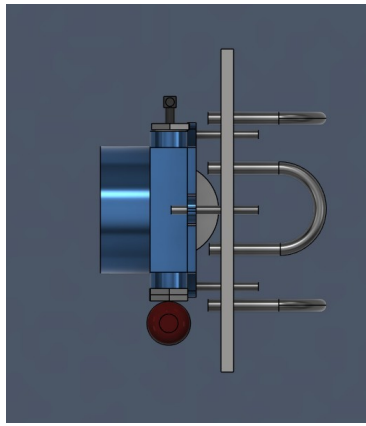

Top view

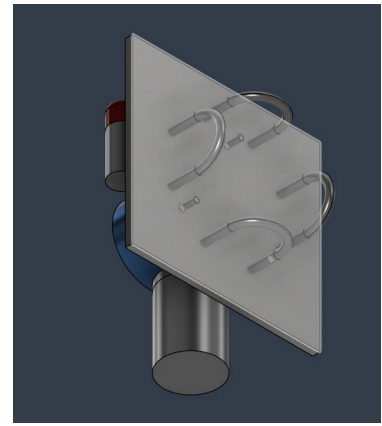


Bottom view

M-A2. ATEX CASING v2 — six orthographic CAD views


Rendered from the same STEP solid model as M-A1 (enclosure, sensor head and U-bolt mounting plate).

B. Enclosure design GLD ATEX CASE v3 — complete sheet set

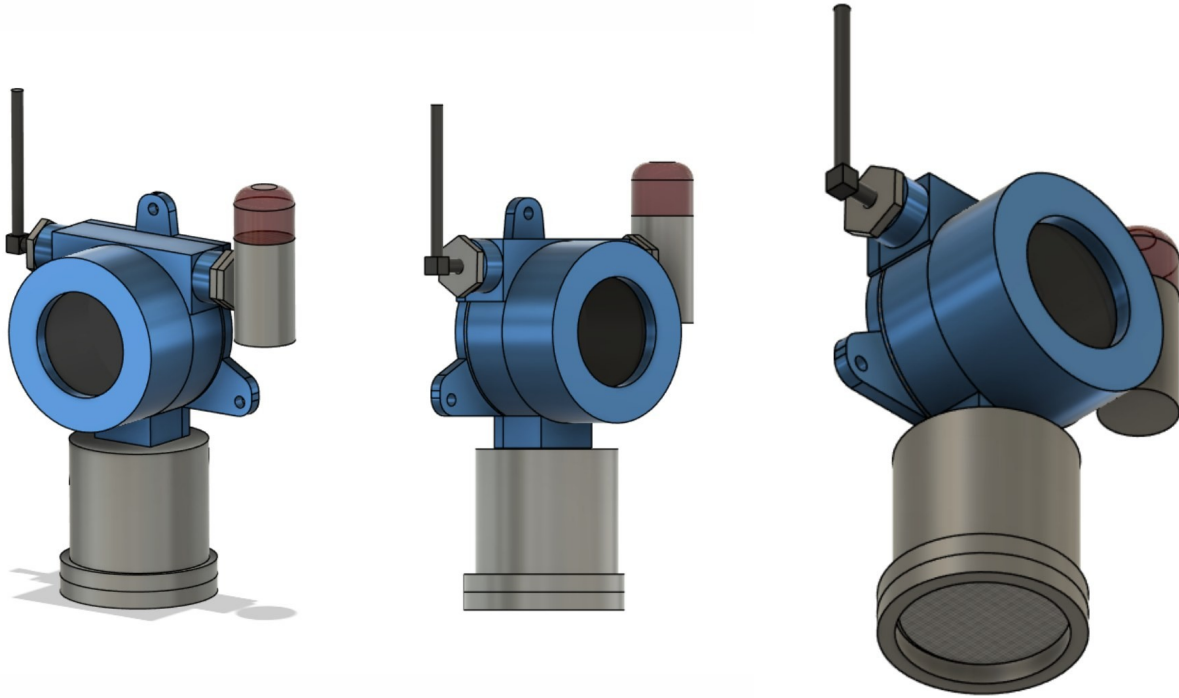


M-B1. GLD ATEX CASE v3 — sheet 1: isometric views of the assembled detector

Assembled enclosure with sensor head, external antenna and alarm beacon, three isometric viewpoints.

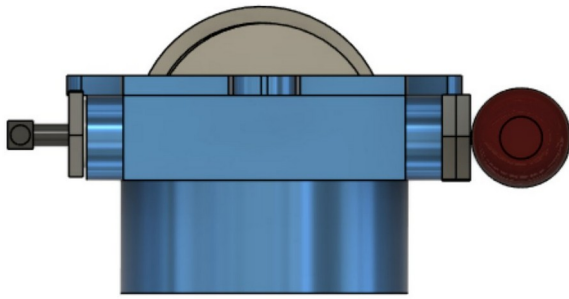


TOP

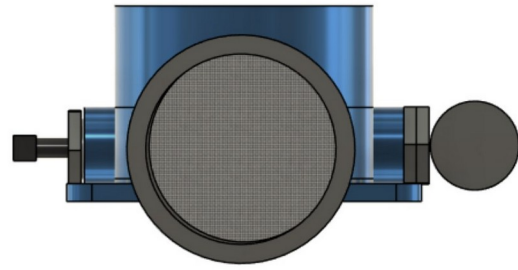

BOTTOM


M-B2. GLD ATEX CASE v3 — sheet 2: top and bottom views

Top view (cable-entry bosses, alarm beacon, antenna) and bottom view (sensor-head mesh face).

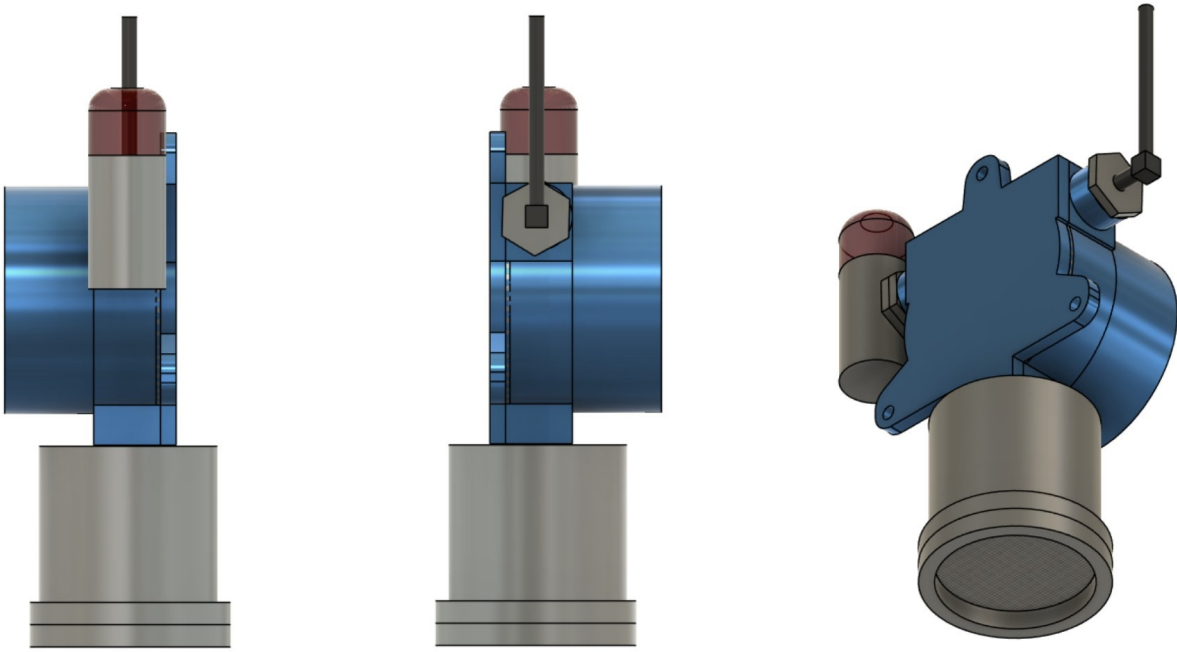


M-B3. GLD ATEX CASE v3 — sheet 3: side and rear views

Left, right and rear-isometric views showing the base, sensor head, beacon and antenna positions.

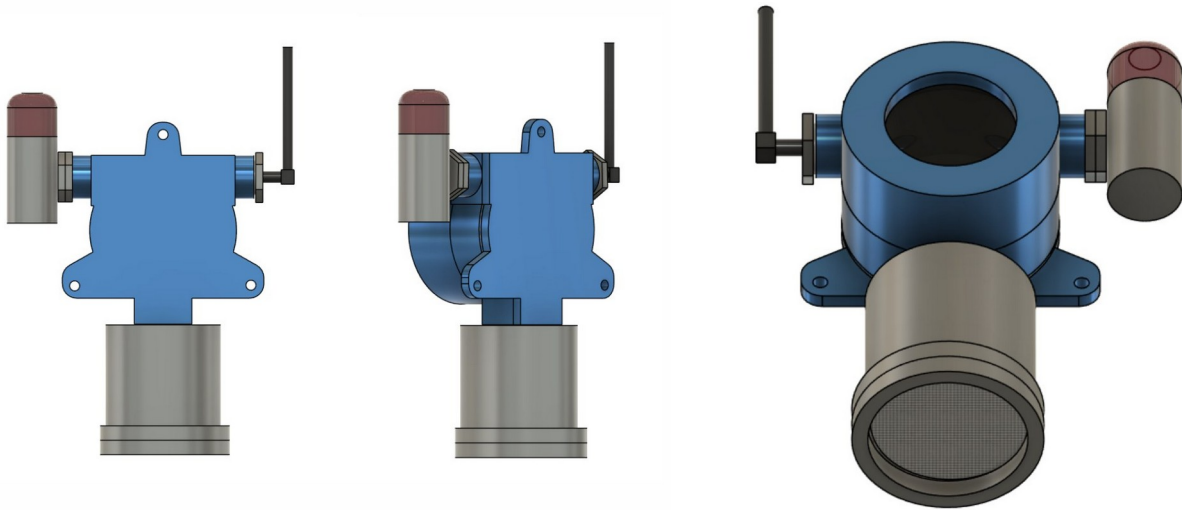


M-B4. GLD ATEX CASE v3 — sheet 4: front/back and mounting-lug views

Views showing the wall-mounting lugs of the base and the cover opening.

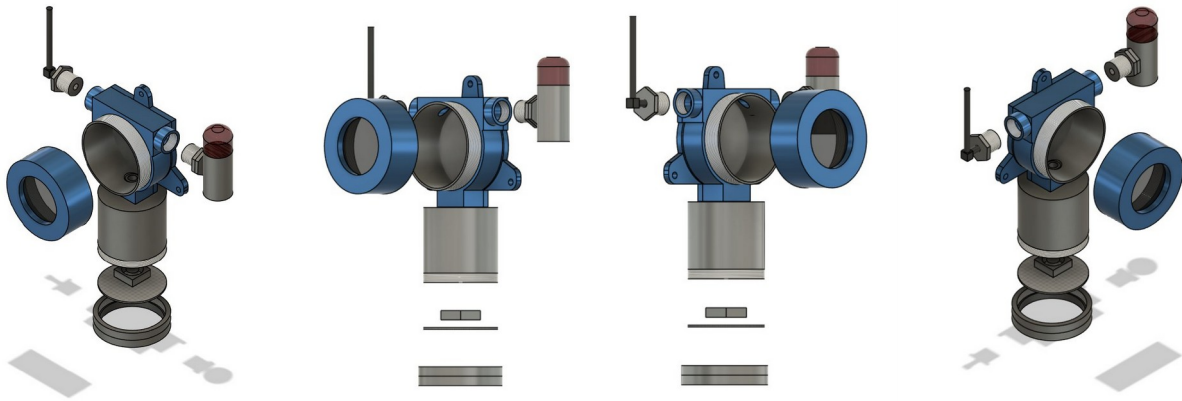


M-B5. GLD ATEX CASE v3 — sheet 5: exploded views (four viewpoints)

Exploded assembly: base, cover, sensor case, mesh disc, sensor-case cover, beacon, antenna and glands.

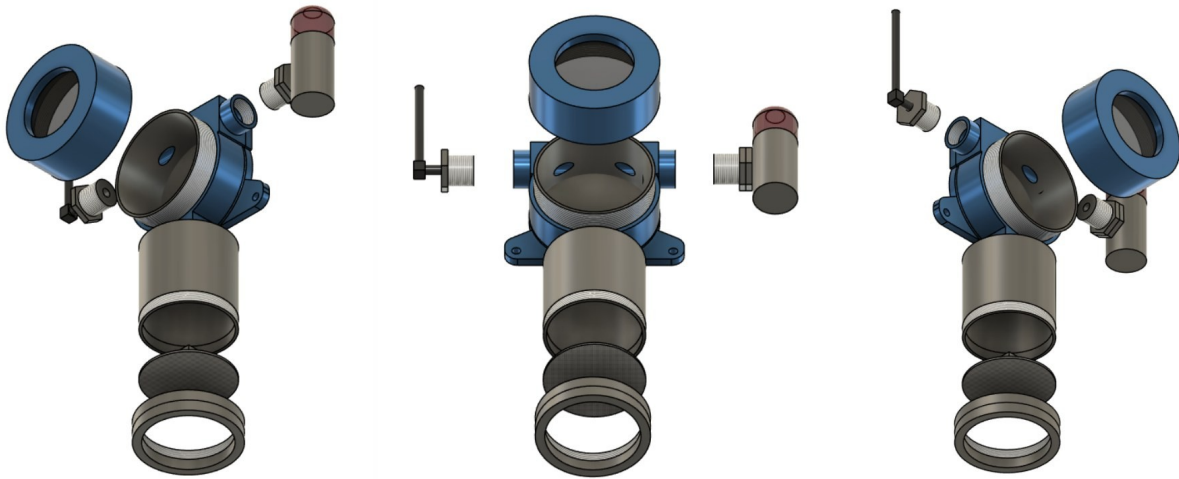

M-B6. GLD ATEX CASE v3 — sheet 6: exploded views of the sensor-head stack


Sensor case, DC fan, stainless-steel filter mesh disc and case cover shown in stacking order.

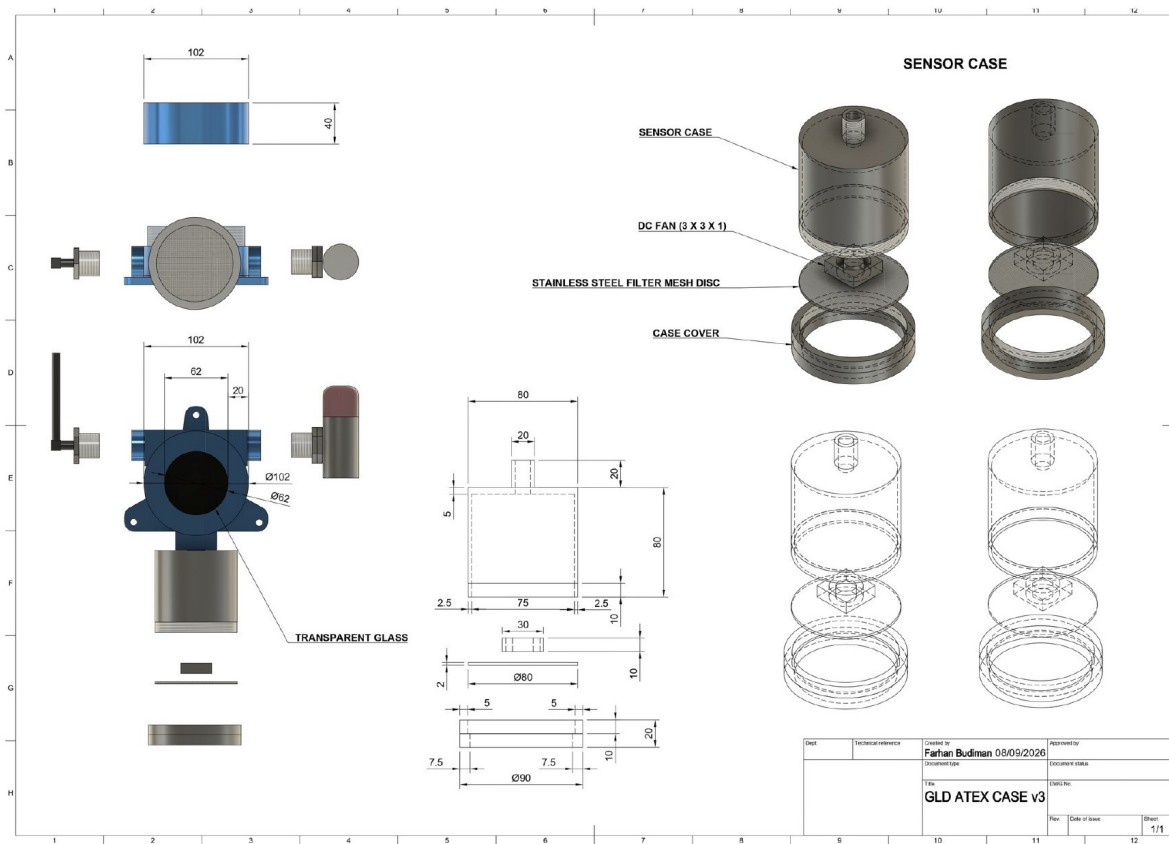

M-B7. GLD ATEX CASE v3 — sheet 7: dimensioned drawing with title block

Dimensioned orthographic views and section of the sensor case; callouts for sensor case, DC fan, stainless-steel filter mesh disc, case cover and transparent glass; title block “GLD ATEX CASE v3” (drafted 8 Sep 2026). Internal contingency/alternate enclosure design.

C. Junction-box / terminal base — supplier drawing

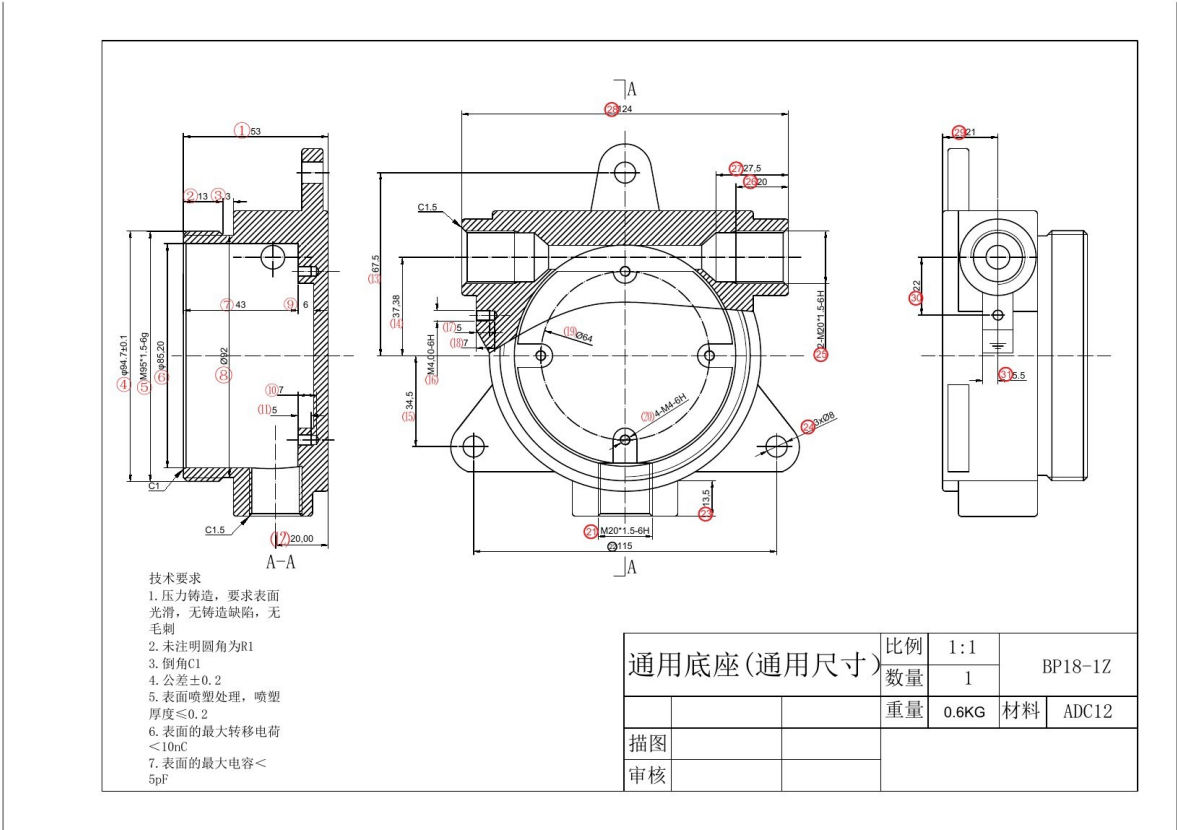

M-C1. Universal Base BP18-1Z — supplier reference drawing

Die-cast base, material ADC12, 0.6 kg, scale 1:1: 2 × M20×1.5-6H cable-entry threads, 4 × M4-6H and 1 × M5×1.5-6g fixing threads, 3 × Ø8 mm mounting holes, internal bore up to Ø94.7 mm, overall ≈124 × 115 × 67.5 mm. Candidate junction-box/terminal sub-component from the casing supply chain.

D. Components, structure, terminal and grounding



Figure 4-14. GLD V2 – LoRa Antenna

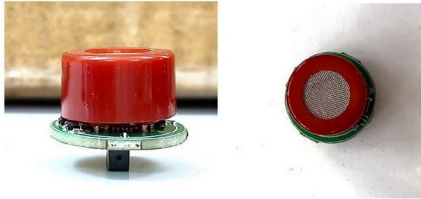


Figure 4-15. GLD V2 – MQ Sensor

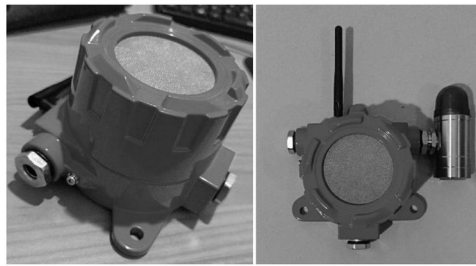


Figure 4-xx GLD V2 - Enclosure Body & Cover

M-D1. LoRa antenna, MQ sensor and enclosure body & cover

External LoRa antenna with cable, MQ sensor with integrated stainless-steel mesh, and the enclosure body and cover (production parts).



M-D2. Rubber gasket — locations

Rubber gaskets fitted at the cover-to-body and sensor-head joints (four locations marked).

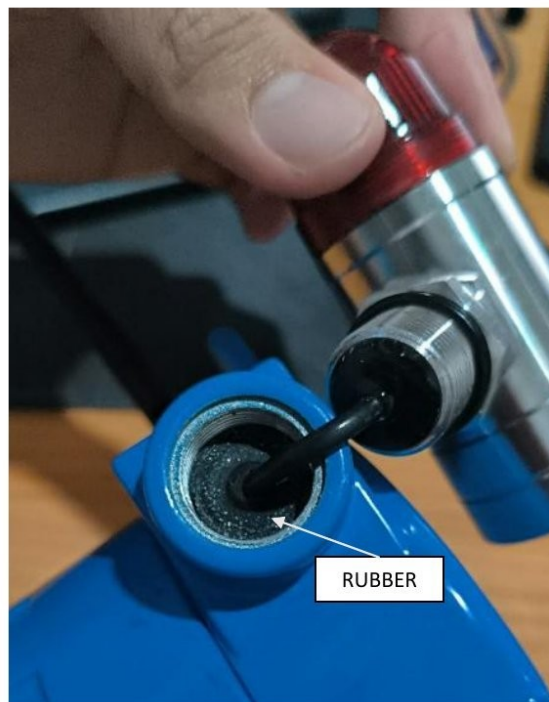


Figure 4-xx GLD V2 - Gasket - Rubber Gasket

M-D3. Rubber gasket — part

Rubber gasket as a separate part.

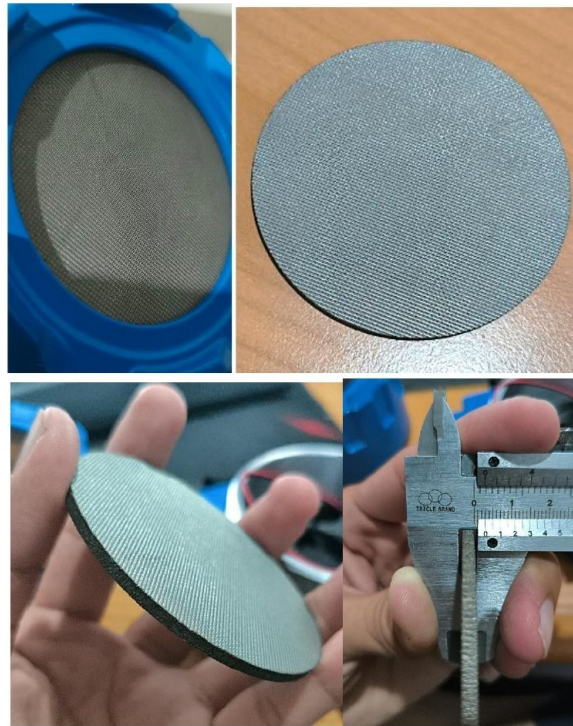


Figure 4-xx GLD V2 - Stainless Wire-Mesh Plate

M-D4. Stainless wire-mesh plate

Front stainless-steel wire-mesh plate (gas inlet) and its seating in the cover.



Figure 4-xx GLD V2 - Visual/Audible Alarm Beacon



Figure 4-xx GLD V2 – PCB Motherboard Inside Base Casing

M-D5. Visual/audible alarm beacon; motherboard inside base casing

LED and buzzer beacon with rubber gasket; main PCB mounted in the base enclosure.



M-D6. Motherboard with MQ sensors inside base casing

Main PCB with the eight MQ sensors fitted, seen through the open base enclosure.

Common Base Design

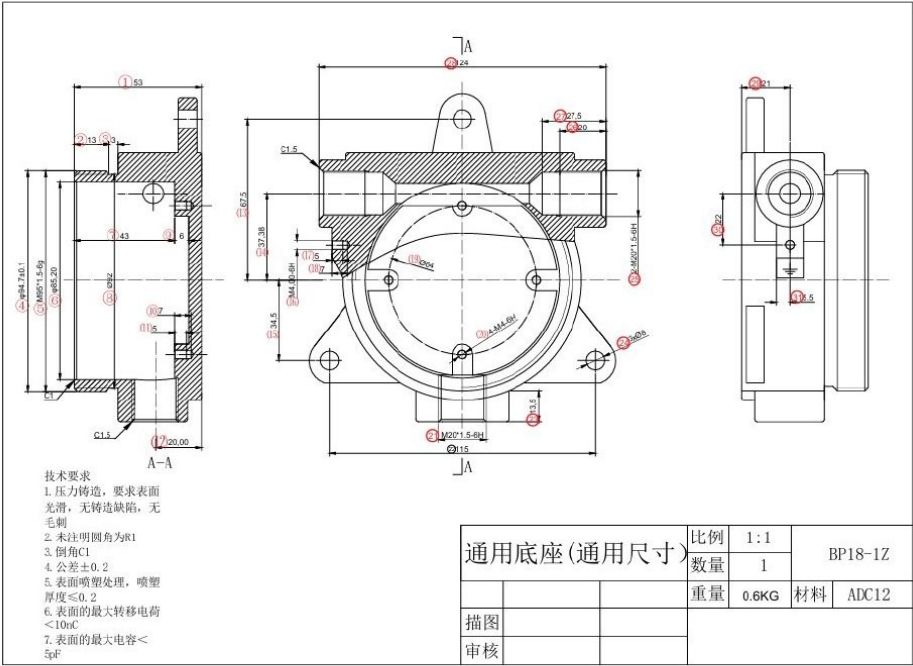


Figure 6-xx GLD V2 – Common Base Design

M-D7. Common base design

Dimensioned base design drawing with title block.

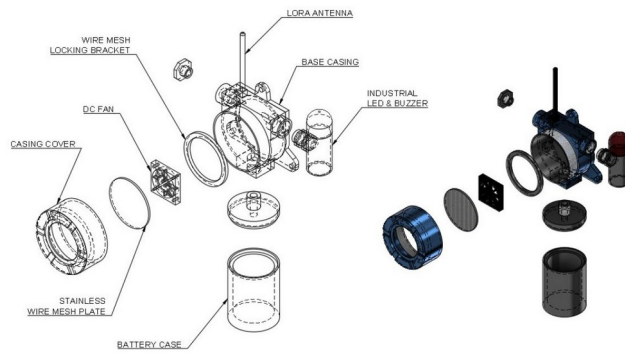


Figure 6-xx GLD V2 – Overall Exploded View I




Figure 6-xx GLD V2 – Overall Exploded View II

M-D8. Overall exploded views I and II

Labelled exploded line drawings of the complete detector (cover, mesh, fan, sensor head, base, glands, beacon, antenna).

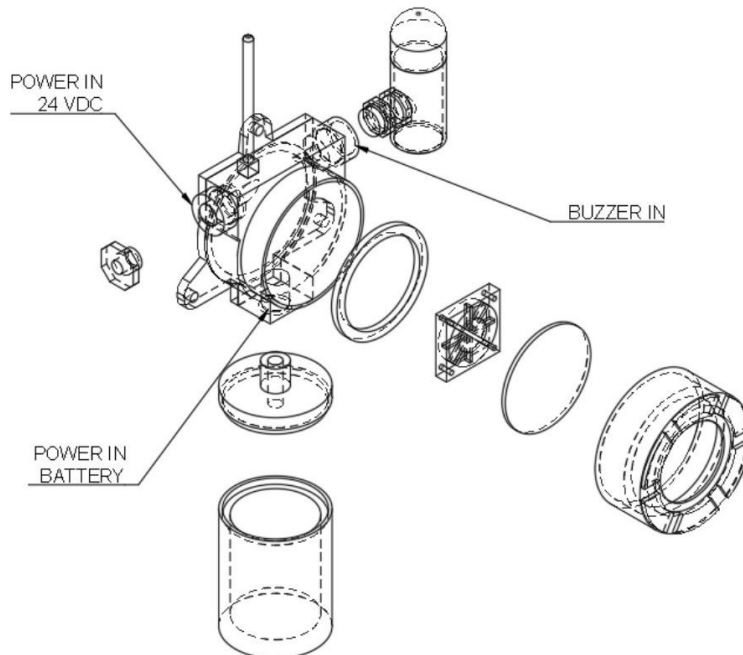


Figure 6-xx GLD V2 – Overall Exploded View III

M-D9. Overall exploded view III

Exploded line drawing, third viewpoint.

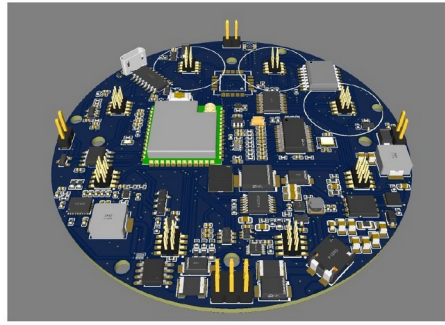


Figure 6-xx GLD V2 – MOTHERBOARD PCB


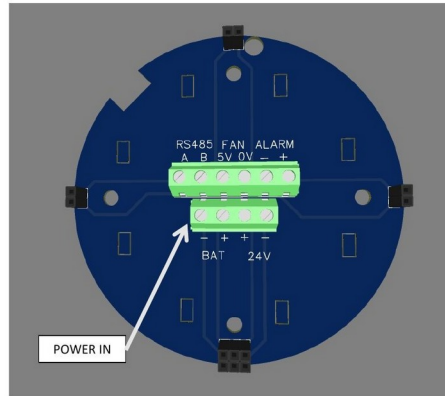


Figure 6-xx GLD V2 – PCB COVER (TERMINAL MODULE)

M-D10. Motherboard PCB power-in and PCB cover (terminal module)

Populated main PCB (3D) and the PCB cover carrying the terminal module with the 24 VDC power-in position marked.

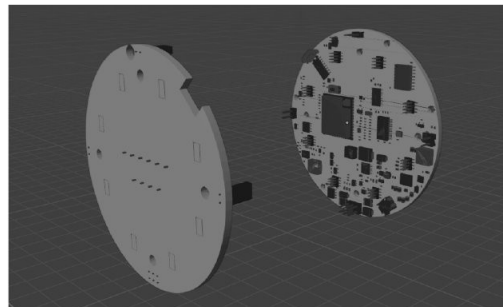

PCB COVER

MOTHERBOARD PCB

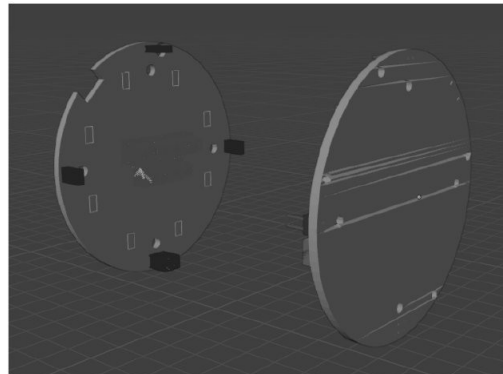


Figure 6-xx GLD V2 – Motherboard & PCB Cover

M-D11. Motherboard and PCB cover

Main PCB and PCB cover shown as separate parts.

Component Drawing




M-D12. Component drawing


Enclosure; PCB + sensors; cover + fan; alarm module; cover + mesh; antenna 3 dBi.

Electrical Schematic

An electrical schematic capture and a corresponding PCB layout exist for the Gas Leak Detector Main board/ Motherboard .

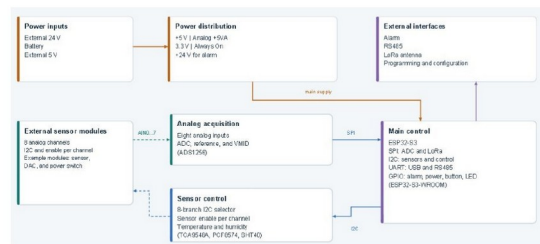


Enclosure Structure

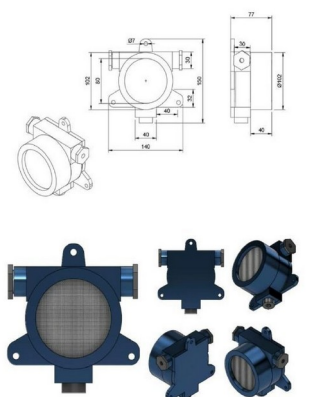

M-D13. Electrical block diagram and enclosure structure

Block diagram of the main board and dimensioned enclosure-structure views.

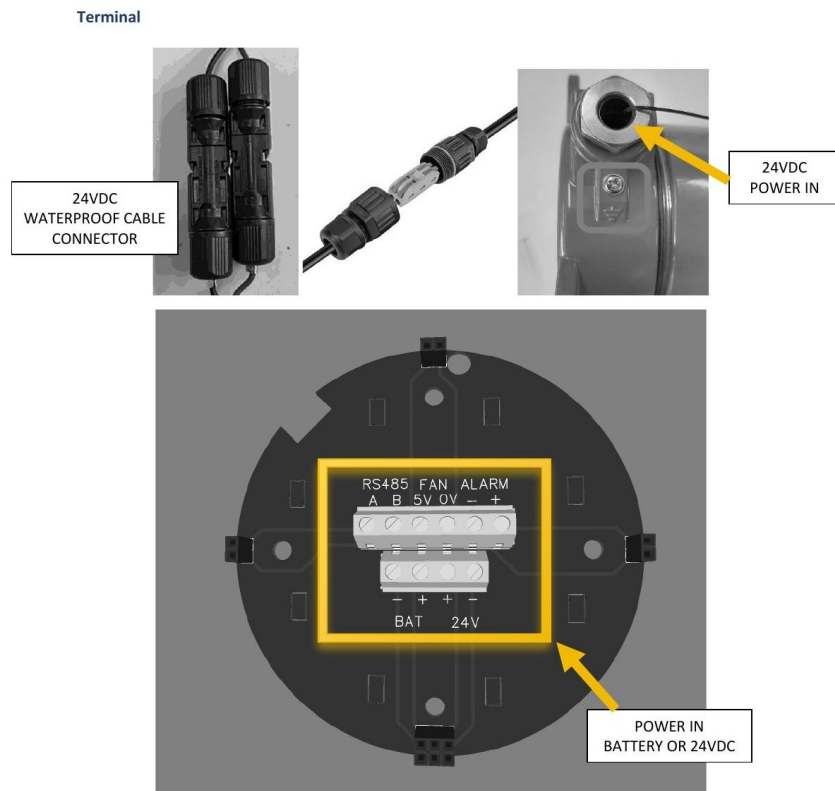

M-D14. Terminal — 24 VDC power in

24 VDC waterproof cable connector and the terminal block on the PCB cover.

Grounding




External grounding stud, marked with the protective earth (ground) symbol, installed on the enclosure body.

M-D15. Grounding

External grounding stud, marked with the protective-earth symbol, installed on the enclosure body.


E. Assembly sequence

Assembly Drawing

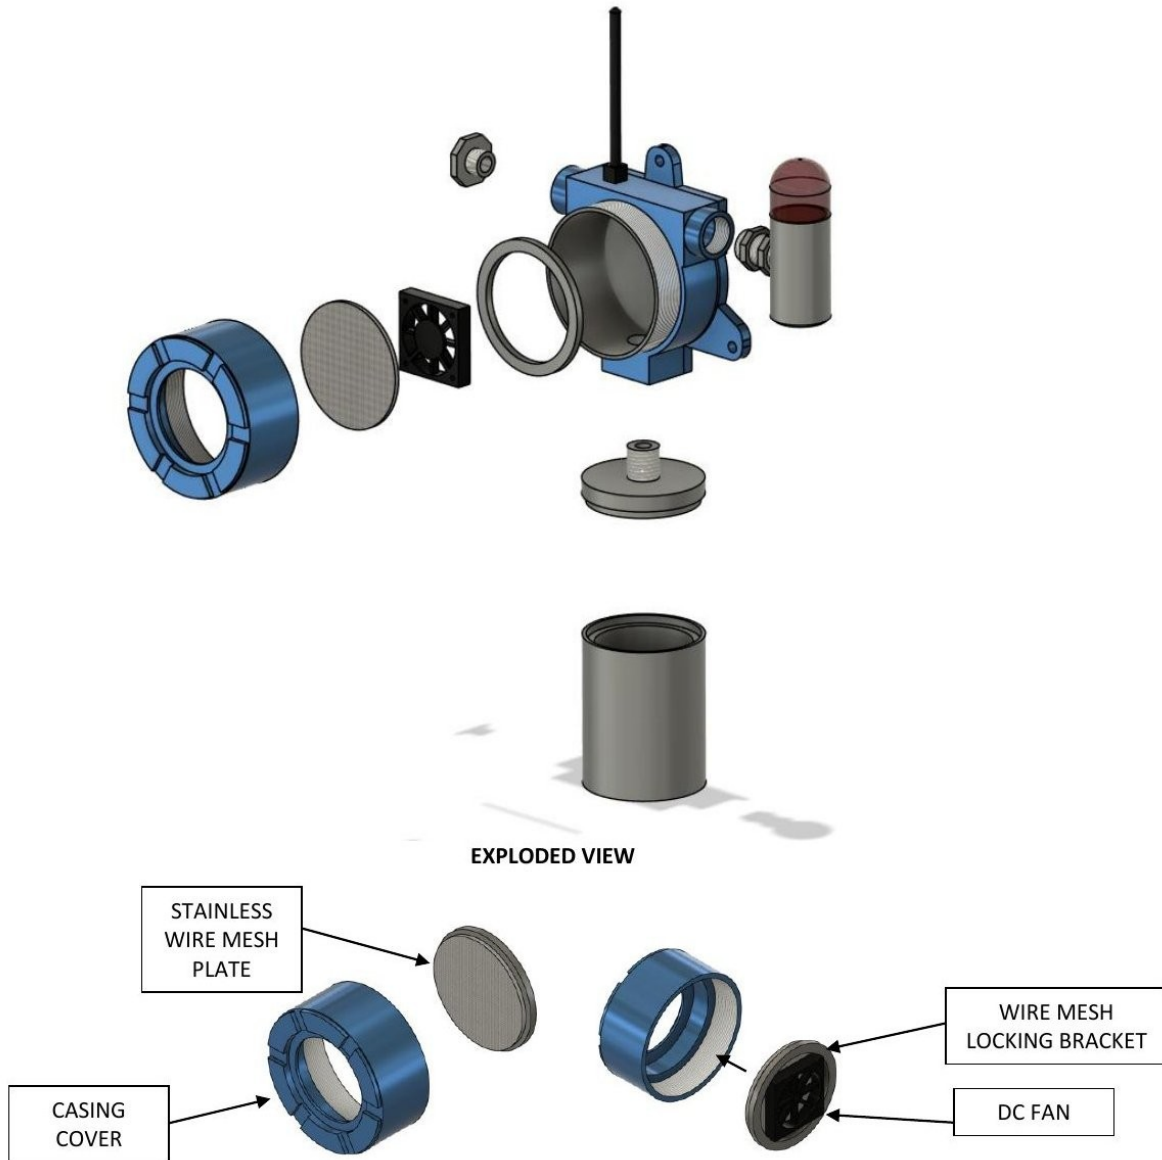

M-E1. Assembly drawing — exploded view

Casing cover, stainless wire-mesh plate, wire-mesh locking bracket and DC fan.


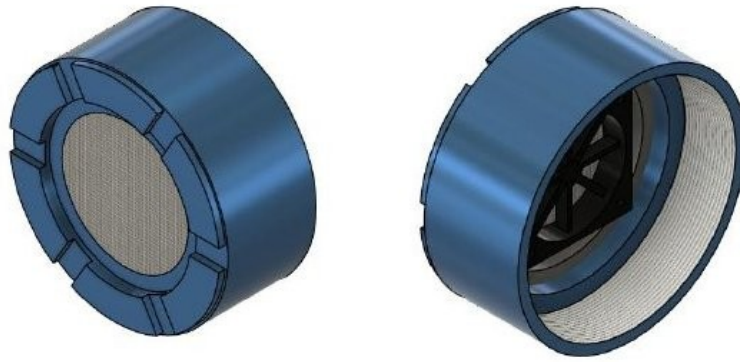


CASING COVER




M-E2. Assembly step — casing cover

Casing cover parts.

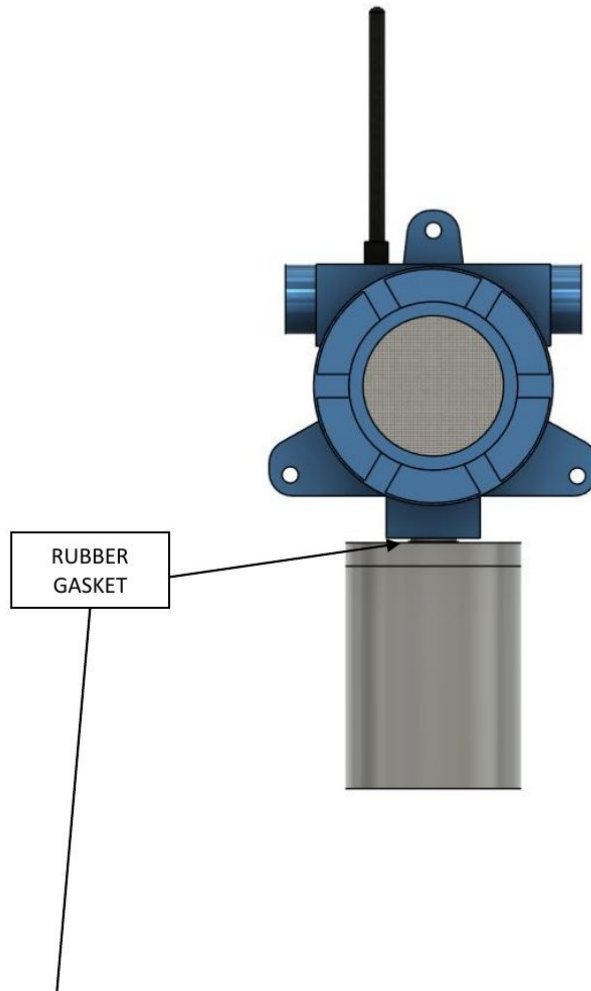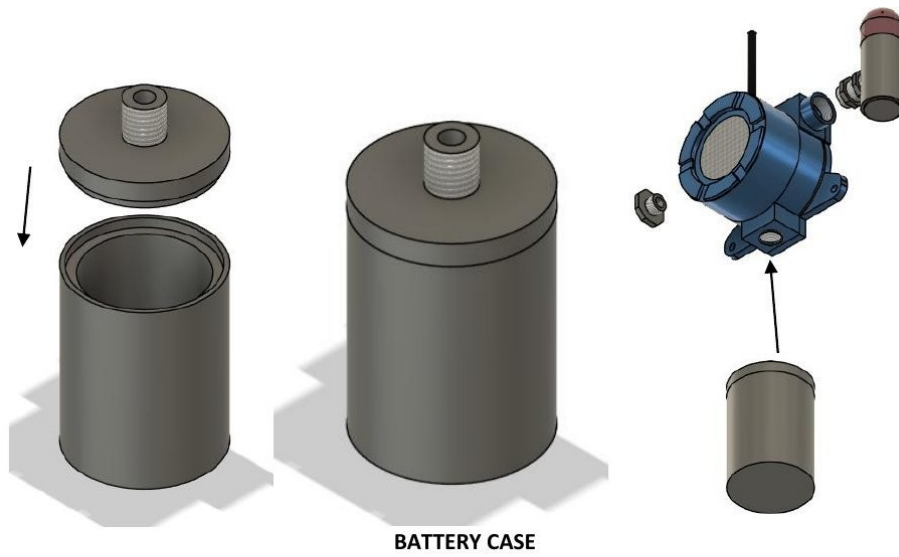


M-E3. Assembly step — sensor case and rubber gasket

Sensor case with rubber gasket (drawing also labels a battery case — see note).

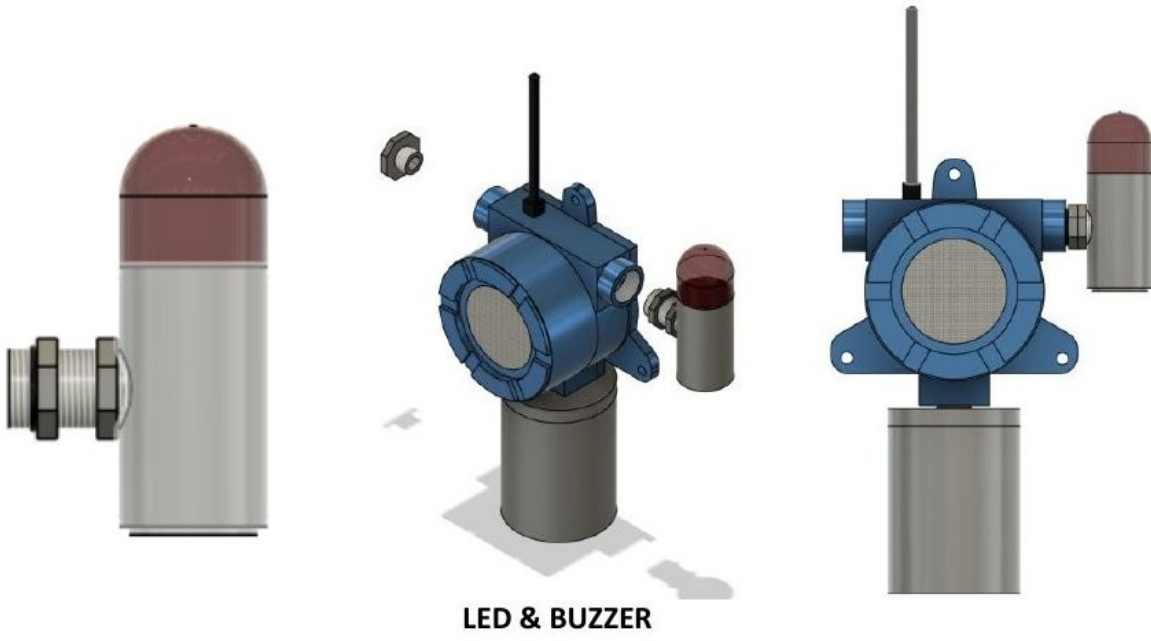

M-E4. Assembly step — LED & buzzer

Alarm beacon fitted to the base.

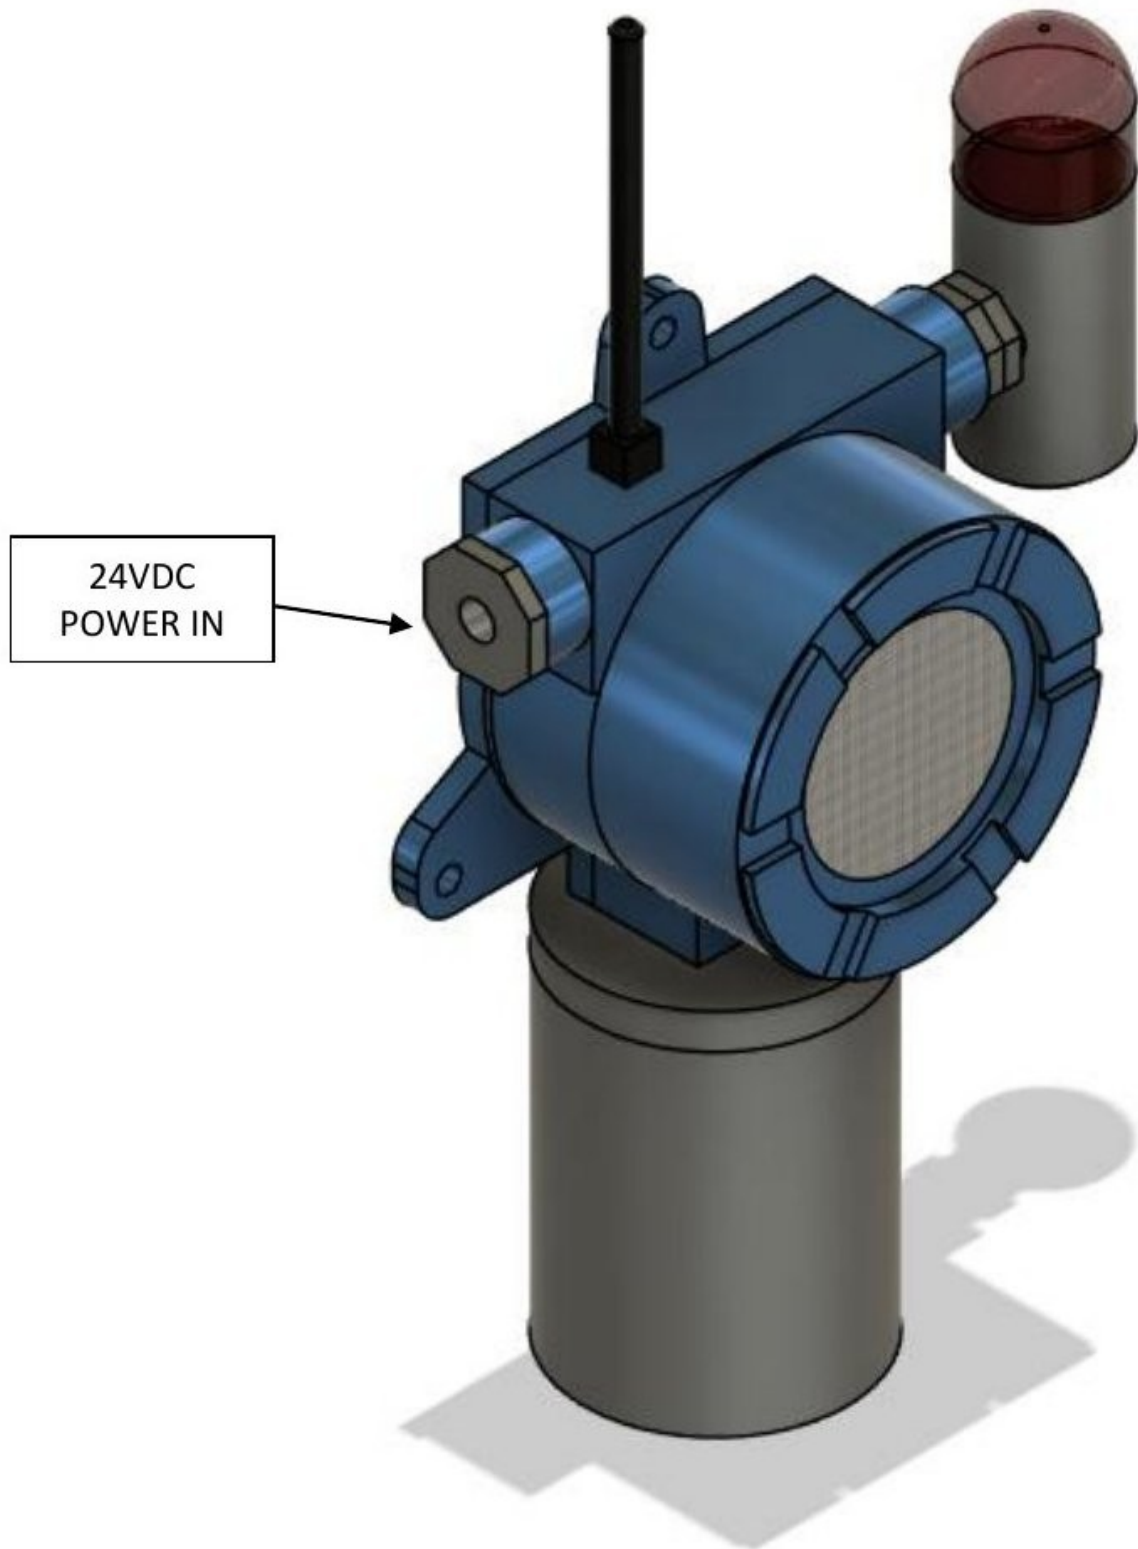

M-E5. Assembly step — 24 VDC power in
Cable entry for the 24 VDC supply.



BASE CASING



PUT MOTHERBOARD TO BASE CASE

M-E6. Assembly step — put motherboard into base casing

Base casing and motherboard placement.



SECURE THE MOTHERBOARD TO THE BASE ENCLOSURE USING THE DESIGNATED MOUNTING SCREWS.




INSTALL LORA ANTENNA CABLE.

Note: In the latest version, the LoRa antenna is positioned above the base enclosure rather than on the side. The version currently shown reflects the previous design.

M-E7. Assembly step — secure motherboard; install LoRa antenna cable

Secure the motherboard with the designated mounting screws and install the antenna cable.

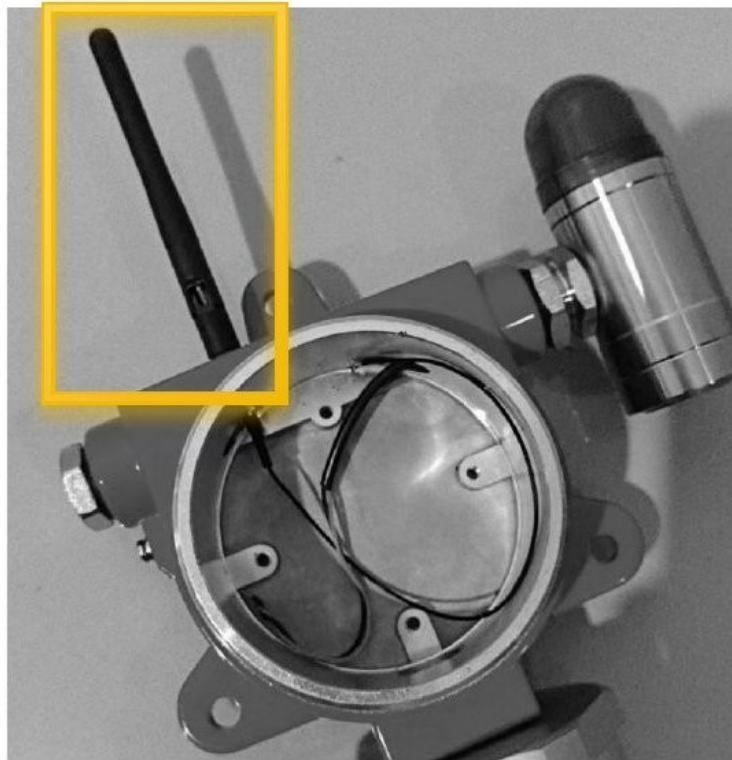

the latest version, the LoRa antenna is positioned above the base enclosure



M-E8. Assembly step — antenna position

In the current version the LoRa antenna is positioned above the base enclosure (earlier side position superseded).

CONNECT LED AND BUZZER CABLES.



**ATTACH DC FAN TO THE ENCLOSURE COVER,
BEHIND STAINLESS-STEEL WIRE-MESH PLATE.
CONNECT DC FAN POWER CABLE TO MOTHERBOARD.**



CLOSE THE ENCLOSURE COVER BY TURNING IT CLOCKWISE.

M-E9. Assembly step — alarm cables, DC fan and cover closure


Connect LED/buzzer cables; attach DC fan to the cover behind the stainless-steel mesh plate; connect the fan cable; close the cover by turning it clockwise.

F. MQ sensor dimension drawings

MQ Sensor Technical Parameters


MQ-2

Model			MQ-2
Sensor Type			Semiconductor
Standard Encapsulation			Bakelite, Metal cap
Target Gas			Flammable gas, smoke
Detection range			300~1000ppm(flammable gas)
Standard Circuit Conditions	Loop Voltage	V_L	5.0V±0.1V DC
	Heater Voltage	V_H	5.0V±0.1V AC or DC
	Load Resistance	R_L	Adjustable
Sensor character under standard test conditions	Heater Resistance	R_H	30Ω±3Ω (room temp.)
	Heater consumption	P_H	≤950mW
	Sensitivity	S	$R_s(\text{in air})/R_s(2000\text{ppm C}_3\text{H}_8) \geq 5$
	Output Voltage	V_s	2.5V~4.0V (in 2000ppm C ₃ H ₈)
	Concentration Slope	α	$\leq 0.6(R_{300\text{ppm}}/R_{1000\text{ppm C}_3\text{H}_8})$
Standard test conditions	Tem. Humidity		20℃±2℃; 55%±5%RH
	Standard test circuit		$V_L: 5.0\text{V} \pm 0.1\text{V};$ $V_H: 5.0\text{V} \pm 0.1\text{V}$
	Preheat time		Not less than 48 hours
	O ₂ content		21% (not less than 18%) O ₂ concentration effects initial value, sensitivity and repeatability.
Lifespan			10 years

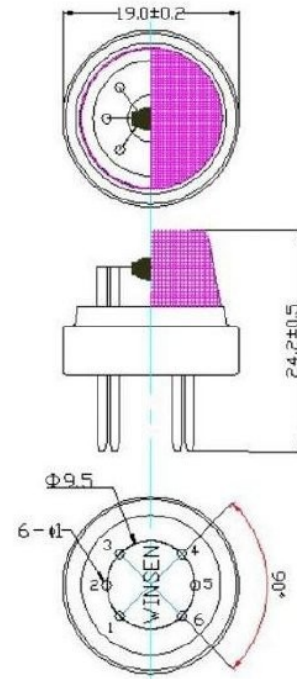

MQ-3

Model			MQ-3
Sensor Type			Semiconductor
Standard Encapsulation			Plastic cap
Target Gas			Alcohol gas
Detection range			25~500ppm alcohol
Standard Circuit Conditions	Loop Voltage	V_L	≤24V DC
	Heater Voltage	V_H	5.0V±0.1V AC or DC
	Load Resistance	R_L	Adjustable
Sensor character under standard test conditions	Heater Resistance	R_H	29Ω±3Ω (room tem.)
	Heater consumption	P_H	≤900mW
	Sensitivity	S	$R_o(\text{in air})/R_s(125\text{ppm C}_2\text{H}_5\text{OH}) \geq 5$
	Output Voltage	V_s	2.5V~4.0V (in 125ppm C ₂ H ₅ OH)
	Concentration Slope	α	$\leq 0.6(R_{300\text{ppm}}/R_{50\text{ppm C}_2\text{H}_5\text{OH}})$
Standard test conditions	Tem. Humidity		20℃±2℃; 55%±5%RH
	Standard test circuit		$V_L: 5.0\text{V} \pm 0.1\text{V}$ $V_H: 5.0\text{V} \pm 0.1\text{V}$
	Preheat time		Over 48 hours

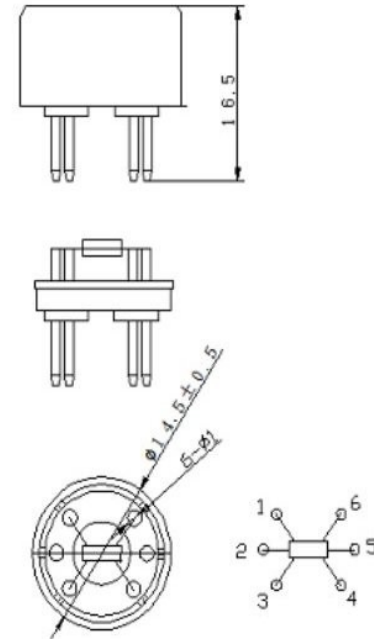

M-F1. MQ-2 and MQ-3 — sensor parameters and dimension drawings

MQ-4

Model			MQ-4
Sensor Type			Semiconductor
Standard Encapsulation			Bakelite, Metal cap
Target Gas			Methane
Detection range			300~10000ppm(CH ₄)
Standard Circuit Conditions	Loop Voltage	V _c	5.0V ± 0.1V DC
	Heater Voltage	V _H	5.0V±0.1V AC or DC
	Load Resistance	R _L	Adjustable
Sensor character under standard test conditions	Heater Resistance	R _H	28 Ω ± 3 Ω (room temp.)
	Heater consumption	P _H	≤ 1W
	Sensitivity	S	Rs(in air)/Rs(in 5000ppmCH ₄)≥5
	Output Voltage	V _s	2.5V~4.0V (in 5000ppm CH ₄)
	Concentration Slope	α	≤ 0.6(R _{s5000ppm} /R _{s1000ppm} CH ₄)
Standard test conditions	Temp. Humidity	20°C±2°C; 55%±5%RH	
	Standard test circuit	V _c :5.0V±0.1V V _H :5.0V±0.1V	
	Preheat time	Not less than 48 hours	
	O ₂ content	21% (not less than 18%) O ₂ concentration effects initial value, sensitivity and repeatability.	
	Lifespan	10 years	

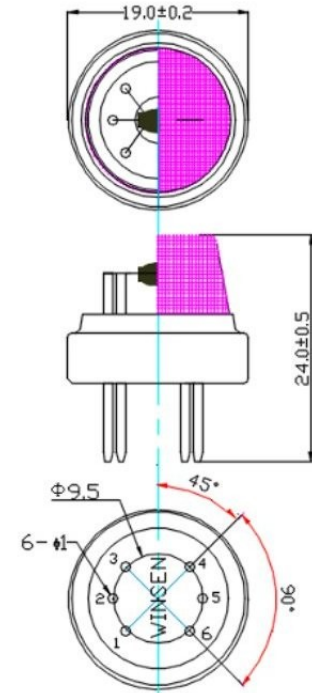


Fig1.Sensor Structure
Unit: mm Tolerance: ±0.1mm

MQ-5

Model			MQ-5
Sensor Type			Semiconductor
Standard Encapsulation			Bakelite, Metal cap
Target Gas			LPG, CH ₄
Detection range			300~10000ppm (CH ₄ , C ₃ H ₈)
Standard Circuit Conditions	Loop Voltage	V _c	≤ 24V DC
	Heater Voltage	V _H	5.0V±0.1V AC or DC
	Load Resistance	R _L	Adjustable
Sensor character under standard test conditions	Heater Resistance	R _H	26Ω±3Ω (room temp.)
	Heater consumption	P _H	≤ 950mW
	Sensitivity	S	Rs(in air)/Rs(in 2000ppm C ₃ H ₈)≥5
	Output Voltage	V _s	2.5V~4.0V (in 2000ppm C ₃ H ₈)
	Concentration Slope	α	≤ 0.6(R _{s3000ppm} /R _{s1000ppm} C ₃ H ₈)
Standard test conditions	Tem. Humidity	20°C±2°C; 55%±5%RH	
	Standard test circuit	V _c :5.0V±0.1V V _H :5.0V±0.1V	
	Preheat time	Not less than 48 hours	
	O ₂ content	21% (not less than 18%) O ₂ concentration effects initial value, sensitivity and repeatability.	
	Lifespan	10 years	

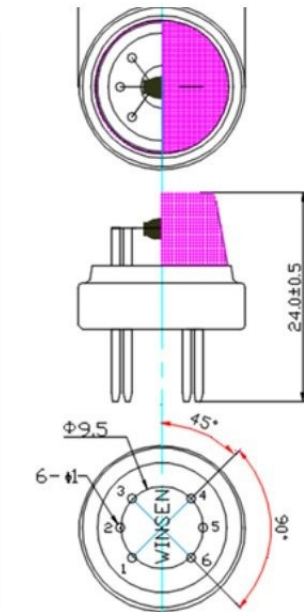
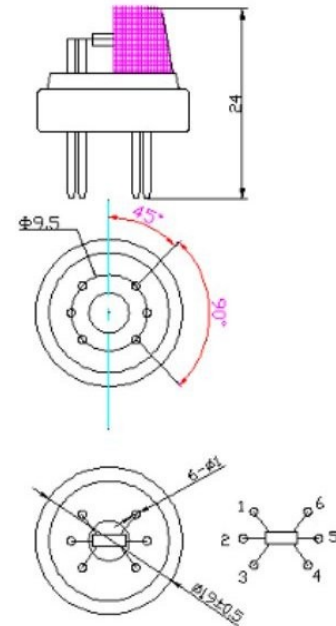


Fig1.Sensor Structure
Unit: mm Tolerance: ±0.1mm


M-F2. MQ-4 and MQ-5 — sensor parameters and dimension drawings

MQ-6

Model			MQ-6
Sensor Type			Semiconductor
Standard Encapsulation			Bakelite, Metal cap
Target Gas			LPG
Detection range			300~10000ppm (Propane)
Standard Circuit Conditions	Loop Voltage	V_c	$\leq 24V$ DC
	Heater Voltage	V_H	$5.0V \pm 0.1V$ AC or DC
	Load Resistance	R_L	Adjustable
Sensor character under standard test conditions	Heater Resistance	R_H	$26\Omega \pm 3\Omega$ (room tem.)
	Heater consumption	P_H	$\leq 950mW$
	Sensitivity	S	$R_s(\text{in air})/R_s(\text{in } 2000ppm \text{ } C_3H_8) \geq 5$
	Output Voltage	V_s	$2.5V \sim 4.0V$ (in 2000ppm C_3H_8)
	Concentration Slope	α	$\leq 0.6(R_{300ppm}/R_{1000ppm} \text{ } C_3H_8)$
Standard test conditions	Tem. Humidity		$20^\circ C \pm 2^\circ C$; $55\% \pm 5\% RH$
	Standard test circuit		$V_c: 5.0V \pm 0.1V$; $V_H: 5.0V \pm 0.1V$
	Preheat time		Over 48 hours


**Fig1. Sensor Structure****MQ-7**

Model			MQ-7
Sensor Type			Semiconductor
Standard Encapsulation			Plastic cap
Target Gas			carbon monoxide
Detection range			10~500ppm CO
Standard Circuit Conditions	Loop Voltage	V_c	$\leq 10V$ DC
	Heater Voltage	V_H	$5.0V \pm 0.1V$ AC or DC (High tem.) $1.5V \pm 0.1V$ AC or DC (Low tem.)
	Heater Time	T_L	$60 S \pm 1S$ (High tem.), $90 S \pm 1S$ (Low tem.)
	Load Resistance	R_L	Adjustable
Sensor character under standard test conditions	Heater Resistance	R_H	$29\Omega \pm 3\Omega$ (room tem.)
	Heater consumption	P_H	$\leq 900mW$
	Sensitivity	S	$R_s(\text{in air})/R_s(\text{in } 150ppm \text{ CO}) \geq 5$
	Output Voltage	V_s	$2.5V \sim 4.3V$ (in 150ppm CO)
Standard test conditions	Concentration Slope	α	$\leq 0.6(R_{300ppm}/R_{50ppm} \text{ CO})$
	Tem. Humidity		$20^\circ C \pm 2^\circ C$; $55\% \pm 5\% RH$
	Standard test circuit		$V_c: 5.0V \pm 0.1V$; V_H (High tem.): $5.0V \pm 0.1V$; V_H (Low tem.): $1.5V \pm 0.1V$
	Preheat time		Over 48 hours

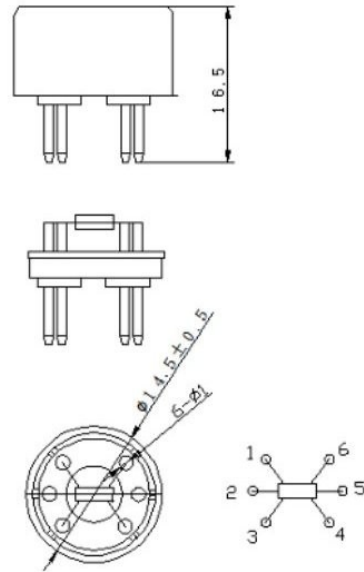
**Fig1. Sensor Structure**
Unit: mm**M-F3. MQ-6 and MQ-7 — sensor parameters and dimension drawings**

MQ-8

Model			MQ-8
Sensor Type			Semiconductor
Standard Encapsulation			Bakelite, Metal cap
Target Gas			Hydrogen
Detection range			100~1000ppm(H ₂ gas)
Standard Circuit Conditions	Loop Voltage	V_L	≤24V DC
	Heater Voltage	V_H	5.0V±0.1V AC or DC
	Load Resistance	R_L	Adjustable
Sensor character under standard test conditions	Heater Resistance	R_H	29Ω±3Ω(room tem.)
	Heater consumption	P_H	≤900mW
	Sensitivity	S	$R_s(\text{in air})/R_s(\text{in } 1000\text{ppm H}_2) \geq 5$
	Output Voltage	V_s	2.5V~4.0V (in 1000ppm H ₂)
	Concentration Slope	α	$\leq 0.6(R_{1000\text{ppm}}/R_{400\text{ppm H}_2})$
Standard test conditions	Tem. Humidity		20℃±2℃; 55%±5%RH
	Standard test circuit		V_L : 5.0V±0.1V; V_H : 5.0V±0.1V
	Preheat time		Over 48 hours

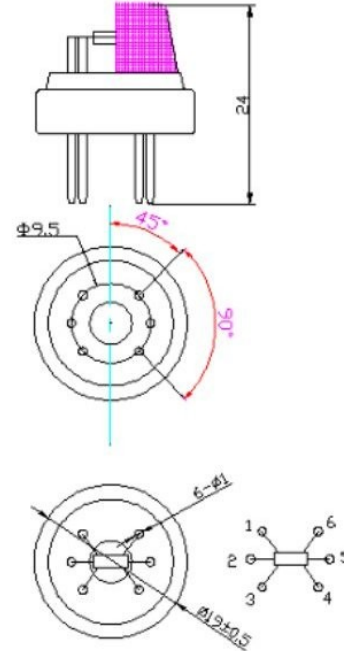NOTE: Output voltage (V_s) is V_{RL} in test environment.**Fig1.Sensor Structure**
Unit: mm**MQ-135**

Model			MQ135
Sensor Type			Semiconductor
Standard Encapsulation			Bakelite, Metal cap
Target Gas			ammonia gas, sulfide, benzene series steam
Detection range			10~1000ppm(ammonia gas, toluene, hydrogen, smoke)
Standard Circuit Conditions	Loop Voltage	V_L	≤24V DC
	Heater Voltage	V_H	5.0V±0.1V AC or DC
	Load Resistance	R_L	Adjustable
Sensor character under standard test conditions	Heater Resistance	R_H	29Ω±3Ω (room tem.)
	Heater consumption	P_H	≤950mW
	Sensitivity	S	$R_s(\text{in air})/R_s(\text{in } 400\text{ppm H}_2) \geq 5$
	Output Voltage	V_s	2.0V~4.0V (in 400ppm H ₂)
	Concentration Slope	α	$\leq 0.6(R_{400\text{ppm}}/R_{100\text{ppm H}_2})$
Standard test conditions	Tem. Humidity		20℃±2℃; 55%±5%RH
	Standard test circuit		V_L : 5.0V±0.1V; V_H : 5.0V±0.1V
	Preheat time		Over 48 hours

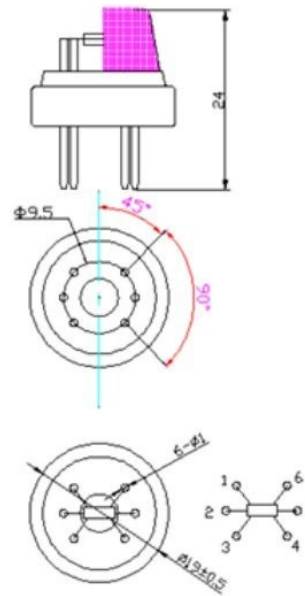**Fig1.Sensor Structure**
Unit: mm**M-F4. MQ-8 and MQ-135 — sensor parameters and dimension drawings**

2.6.a.7 Main PCB schematic

The electrical schematic of the GLD main board is provided as the actual circuit schematic (not a block diagram). It is presented as 26 figures, each cut from the original EasyEDA schematic around one functional block. Every component in a figure is enclosed in a numbered boundary box, and the same number is used in the description table printed with that figure. Each figure carries a sheet information table with the drawing/document number, revision, date, title and sheet number (n of 26).

Sheet register

Drawing no.	Title	Requirement covered
PGLD-GLD-V4-MB-SCH-01	24 VDC input, input protection and 24 V to 5 V buck (U36)	24 VDC input; input protection
PGLD-GLD-V4-MB-SCH-02	Power connector J1, battery input and external 5 V	24 VDC input
PGLD-GLD-V4-MB-SCH-03	Battery load switch (U14)	Input protection
PGLD-GLD-V4-MB-SCH-04	5 V power-path mux (U13)	5 V rail
PGLD-GLD-V4-MB-SCH-05	Battery boost to about 24 V (U1, TPS61175)	5 V rail / +24 V backup
PGLD-GLD-V4-MB-SCH-06	Battery boost to 5 V (U41, TPS61088)	5 V rail
PGLD-GLD-V4-MB-SCH-07	5 V to 3.3 V buck (U43)	3.3 V rail
PGLD-GLD-V4-MB-SCH-08	Always-on 3.3 V LDO and its source selection (U42)	3.3 V rail
PGLD-GLD-V4-MB-SCH-09	TPL5010 timer/watchdog (U46)	3.3 V rail
PGLD-GLD-V4-MB-SCH-10	ENA latch (U51) and open-drain inverter (U15)	3.3 V rail
PGLD-GLD-V4-MB-SCH-11	3V3AON voltage supervisor (U16)	3.3 V rail
PGLD-GLD-V4-MB-SCH-12	Sensor module connector H2 (one connector as example)	MQ heater supply
PGLD-GLD-V4-MB-SCH-13	Sensor module connectors H1–H8	MQ heater supply; sensor interface
PGLD-GLD-V4-MB-SCH-14	Sensor module enable I/O expander (U12)	MQ heater supply (module enable)
PGLD-GLD-V4-MB-SCH-15	VMID bias of about 2.5 V (U3)	MQ sensor analog circuitry
PGLD-GLD-V4-MB-SCH-16	Analog +5VA supply filter (L6)	MQ sensor analog circuitry
PGLD-GLD-V4-MB-SCH-17	Sensor module I2C multiplexer (U33)	MQ sensor analog circuitry
PGLD-GLD-V4-MB-SCH-18	Temperature and humidity sensor (U44, SHT40)	Analog circuitry (environment)
PGLD-GLD-V4-MB-SCH-19	ADS1256 ADC with input filters (AIN), clock and decoupling	ADC; analog circuitry
PGLD-GLD-V4-MB-SCH-20	2.5 V voltage reference and VREF buffer	ADC
PGLD-GLD-V4-MB-SCH-21	ESP32-S3-WROOM-1U-N16R8 with support parts (incl. status LED)	ESP32-S3; LED
PGLD-GLD-V4-MB-SCH-22	USB, CH340C and auto-reset	ESP32-S3 (programming)
PGLD-GLD-V4-MB-SCH-23	E22-900MM22S LoRa module and antenna connector	LoRa
PGLD-GLD-V4-MB-SCH-24	5 V fan driver (Q5, J3)	Fan driver
PGLD-GLD-V4-MB-SCH-25	24 V alarm output driver (Q4, J2)	LED / buzzer (alarm) driver
PGLD-GLD-V4-MB-SCH-26	RS-485 transceiver (U47)	RS-485 / Modbus

All sheets: revision 1.0, date 2026-07-19.

Coverage of the required schematic content

Required content (2.6.a.7)	Where shown	Status
24 VDC input	Sheets 01, 02	Provided

Required content (2.6.a.7)	Where shown	Status
Input protection	Sheets 01–03; protection-device table below	Provided — see findings 1–2
5 V rail	Sheets 01 (buck U36), 04–06	Provided
3.3 V rail	Sheets 07–11	Provided
MQ heater supply	Sheets 12–14 (+5 V and enable to each sensor module)	Partly — heater switch is on the sensor module (finding 4)
MQ sensor bridge / analog circuitry	Sheets 15–18; AIN filters on sheet 19	Partly — load resistor is on the sensor module (finding 4)
ADC	Sheets 19, 20	Provided
ESP32-S3	Sheets 21, 22	Provided
LoRa	Sheet 23	Provided
Fan driver	Sheet 24	Provided
LED / buzzer driver	Sheet 25 (24 V alarm output J2); status LED on sheet 21	Provided
RS-485 / Modbus	Sheet 26	Provided
Protection devices	Table below	Provided
Grounding	Text below	Provided — PE point not drawn (finding 5)
Title block per sheet	Sheet information table on every figure	Provided

Protection devices

Designator	Part	Location	Function	Sheet
F1	MINISMDC260F/16-2	Series with 24V+ after J1	Overcurrent on 24 V line (PTC)	01
D1	SMBJ33A	After F1, to 24V–	Surge / transient clamp on 24 V line (TVS)	01
L1	ACM7060-301-2PL	Series with 24V+ and return	Common-mode noise	01
L4	MPZ2012S101AT000	Series with +24V	High-frequency noise (ferrite)	01
D2 / R26	LBZT52C12T1G / 100k	Gate of Q3	12 V gate-source limit for Q3	01
Q3	SI7465DP-T1-GE3	+24V to buck input	High-side switch	01
F2	MINISMDC260F/16-2	Series with battery input J1.2	Battery overcurrent (PTC)	02
Q2 / R1	AO4407 / 100k	Battery to VBAT_IN	High-side switch	02
D7 / D13	SS54	5VEXT to +5V; boost to +24V	Reverse-current blocking (OR-ing)	02, 05
D3 / D10	BAT54C	Source of U42 (3V3AON)	OR-ing of supply sources	08
D8 / D9	SS14	Loads J2 and J3	Flyback for inductive loads	24, 25
D4 / D5 / D11	LES5D5.0CT1G	USB D–, D+, VBUS	USB ESD	22
D6	SM712	RS-485 A/B	RS-485 line TVS	26
L6	GZ1005D600TF	+5V to +5VA	Analog supply noise isolation	16

Grounding

- The circuit uses a single GND net; there is no separate AGND or chassis-ground net. The AGND/PGND/DGND pins of all ICs are connected to GND.
- The 24 V return (J1 pin 5, 24V–) enters GND through one winding of common-mode choke L1 (pin 2 to pin 3). J1 pins 1 and 3 are connected directly to GND.
- The analog supply +5VA is separated from +5V by ferrite bead L6; analog and digital ground are joined at GND.
- The shell/EP pads of USB1 and the GND pads of the LoRa module/antenna connector are connected to GND.

- A connection point from circuit GND to the enclosure / protective earth is not drawn on the schematic; it is defined by the enclosure grounding/bonding drawing.

Findings to be resolved before the dossier is finalised


#	Finding (from the schematic)	Action
1	F1 and F2 are MINISMD C260F/16-2; the "/16" suffix normally means a 16 V rating, while F1 is on the 24 V line.	Confirm the PTC voltage rating from the datasheet or change the part.
2	Q3 (24 V) and Q2 (battery) have the source on the input side and the gate pulled to GND; with this orientation the body diode does not block reverse polarity.	Confirm the intended function. Any description of "P-channel MOSFET reverse-polarity protection" must match the actual circuit.
3	Battery input, battery boost to 24 V (TPS61175) and to 5 V (TPS61088), battery load switch and power-path mux are populated on the main board.	Decide whether the battery path is excluded (depopulated / not fitted) or included in the certified configuration; the production configuration is stated as 24 VDC only.
4	Each sensor connector H1–H8 carries only +5 V, VMID, enable, I2C and AIN. The per-channel heater switch and the sensor load resistor are not on the main board.	Provide the sensor-module schematic and layout as a separate drawing set.
5	Single GND net; no chassis/PE connection point on the board.	Show the GND-to-enclosure/PE arrangement in the grounding/bonding drawing.
6	RS-485 has TVS D6 only; no 120 Ω termination or A/B bias resistors.	Confirm termination/bias is provided externally (installation note) or is not required.
7	Converter output voltages (≈ 5.0 V, ≈ 24 V, ≈ 5.3 V) are calculated from feedback resistors, not measured.	Record measured rail voltages in the routine/functional test.
8	The load type on alarm output J2 (24 V siren/beacon) is not defined on the schematic.	Identify the alarm module (manufacturer/model, current) in the BOM (6.b).

Schematic figures (sheets 01–26)

The pages below reproduce the schematic figures exactly as issued, including the per-figure sheet information table and component description table.

24 VDC input


Figure 1 - 24 VDC input, input protection and 24 V to 5 V buck (U36)

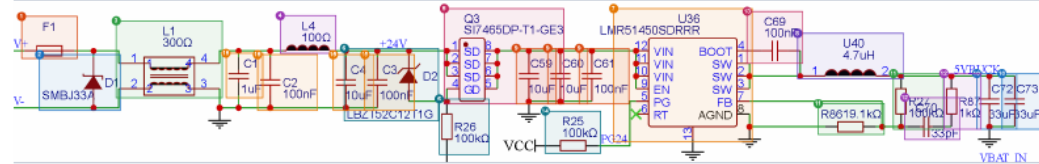

Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-01	1.0	2026-07-19	24 VDC input, input protection and 24 V to 5 V buck (U36)	1 of 26

Block function: The 24 VDC path from the connector to the 24 V to 5 V buck (U36). **Requirement covered:** 24 VDC input and input protection

No	Component	What it is	What it does
1	F1	Resettable PTC fuse MINISMDC260F/16-2 (2.6 Ahold).	Opens on a short circuit or overload on the 24 V line and recovers by itself. Note: the /16 suffix in the part number usually means a 16 V voltage rating - to be confirmed against the datasheet because this line is 24 V.
2	D1	TVS diode SMBJ33A(33 V standoff).	Clips voltage surges/transients between the 24 V line after F1 and 24V-, so the circuitry behind it is not damaged.
3	L1	Common-mode choke ACM7060-301-2PL (4 pins).	Suppresses common-mode noise on the 24V+ / 24V- pair. Winding 1-4 carries 24V+, winding 2-3 carries the return side (24V- to GND).
4	L4	Ferrite bead MPZ2012S101A(100 ohm @ 100 MHz).	High-frequency noise filter in series with the +24V line before it enters the internal rail.
5	Q3	P-channel MOSFET SI7465DP (source on +24V, drain toward the buck input).	Passes +24V to the 5 V converter. Its source is on the +24V side and its drain on the load side; this orientation should be verified if the part is meant to provide reverse-polarity protection.
6	D2, R26	12 V zener (LBZT52C12) and a 100k resistor to GND.	R26 pulls the gate to GND so Q3 turns on. D2 limits the gate-source voltage of Q3 to 12 V so the gate is not damaged by 24 V.
7	U36	Synchronous buck IC LMR51450 (VIN up to 36 V).	Step-down converter from 24 V to 5VBUCK. EN is tied to VIN (always on); the PG (power good) pin goes to the ESP32 as signal PG24.
8	U40	4.7 uH inductor (GSSM06304R7M2AU).	Buck energy-storage inductor between the SW node and 5VBUCK.
9	C59, C60, C61	Input capacitors 10 uF/50 V x2 + 100 nF.	Supply the pulsed input current of the buck.
10	C72, C73	Output capacitors 33 uF x2 + 10 uF.	Smooth the 5VBUCK output voltage.
11	R27, R86	FB voltage divider 100k / 19.1k.	Sets the output: $0.8 \text{ V} \times (1 + 100/19.1) = \text{about } 5.0 \text{ V}$ (calculated from the resistor values).
12	R87, C70	1k resistor in series with a 33 pF capacitor on FB.	Feed-forward network for stability / transient response.
13	C69	100 nF BOOT-SW capacitor.	Bootstrap for the internal high-side MOSFET driver.
14	R25	100k pull-up to VCC on PG24.	Gives a 3.3 V logic level for the power-good signal read by the ESP32 (IO47).
15	C1, C2, C3, C4	Decoupling capacitors 1 uF, 100 nF, 100 nF, 10 uF/50 V.	Filter ripple/noise and hold up small transients on the +24V rail (paired with L1/L4).

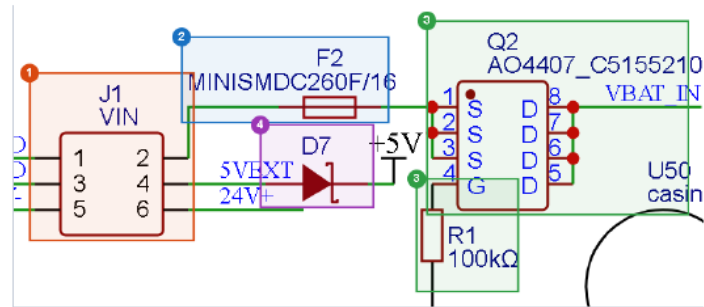Figure 2 - Power connector J1, battery input and external 5 V


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-02	1.0	2026-07-19	Power connector J1, battery input and external 5 V	2 of 26

Block function: Power connector, battery input protection and switch, and the external 5 V path. **Requirement covered:** 24 VDC input and input protection

No	Component	What it is	What it does
1	J1	Power connector, 2x3 pins (J1).	The only power entry from outside: pin 6 = 24V+, pin 5 = 24V-, pin 4 = 5VEXT (external 5 V), pins 3 and 1 = GND, pin 2 = battery input (goes to F2).
2	F2	PTC fuse MINISMDC260F/16-2.	Overcurrent protection for the battery input at J1 pin 2.
3	Q2, R1	P-MOSFET AO4407 with a 100k gate resistor to GND.	Passes the battery to net VBAT_IN. R1 turns Q2 on through the gate to GND. The source-on-battery orientation should be verified if the part is meant to provide reverse-polarity protection.
4	D7	SS54 Schottky diode from 5VEXT to +5V.	Lets external 5 V (J1 pin 4) supply the +5V rail without back-feeding.

Input protection

Figure 3 - Battery load switch (U14)

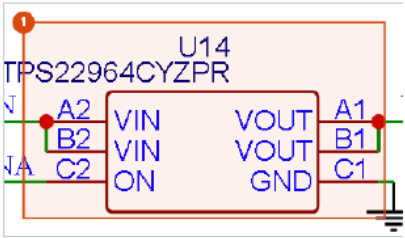


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-03	1.0	2026-07-19	Battery load switch (U14)	3 of 26

Block function: Battery load switch to the VBAT rail. **Requirement covered:** Input protection

No	Component	What it is	What it does
1	U14	Load switch TPS22964C (VIN = VBAT_IN, VOUT = VBAT, ON = ENA).	Connects/disconnects the battery to the whole VBAT rail (boost converters) according to the ENAsignal from the power-latch circuit.

5 V rail


Figure 4 - 5 V power-path mux (U13)

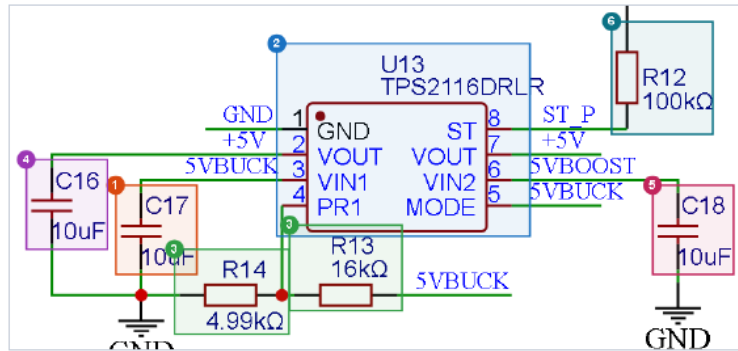

Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-04	1.0	2026-07-19	5 V power-path mux (U13)	4 of 26

Block function: Selects the 5 V source between 5VBUCK and 5VBOOST. **Requirement covered:** 5 V rail


No	Component	What it is	What it does
1	C17	Output capacitors 33 uF x2 + 10 uF.	Smooth the 5VBUCK output voltage.
2	U13	Power mux TPS2116 (VIN1 = 5VBUCK, VIN2 = 5VBOOST, VOUT = +5V).	Automatically selects the 5 V source with priority on 5VBUCK (MODE is tied to 5VBUCK) and switches to 5VBOOST when 5VBUCK is lost. The ST pin goes to the ESP32 as ST_P (source status).
3	R13, R14	16k / 4.99k divider on PR1.	Sets the voltage threshold at which 5VBUCK is considered valid before the mux gives it priority.
4	C16	10 uF and 100 nF capacitors on +5V.	Decoupling of the +5V rail.
5	C18	VBAT input and 5VBOOST output capacitors.	Decoupling on the input and output sides of the boost.
6	R12	100k pull-up to VCC on ST_P.	Gives a 3.3 V logic level for the mux status signal read by the ESP32 (IO18).

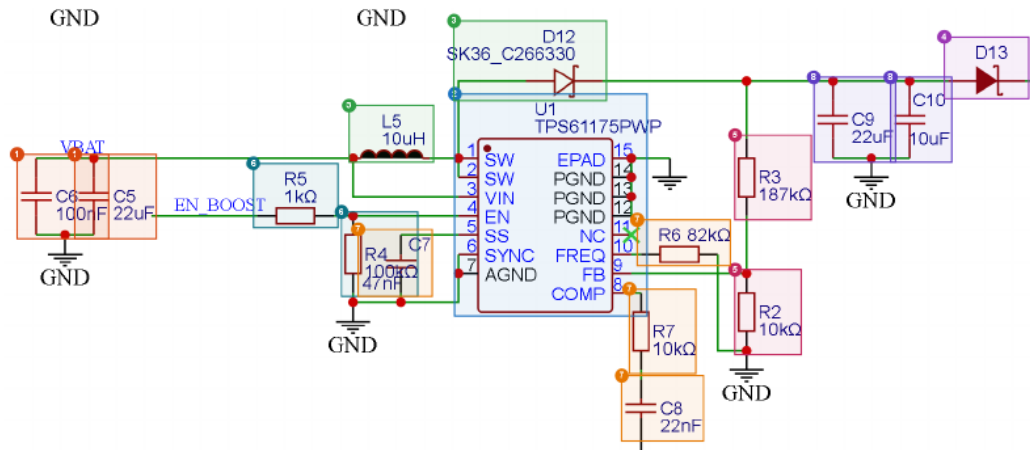Figure 5 - Battery boost to about 24 V (U1, TPS61175)

Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-05	1.0	2026-07-19	Battery boost to about 24 V (U1, TPS61175)	5 of 26

Block function: Boosts the battery to about 24 V as a backup of the +24V rail. **Requirement covered:** 5 V rail / backup of the +24V rail

No	Component	What it is	What it does
1	C5, C6	22 uF and 100 nF capacitors on VBAT.	Decoupling on the load-switch output.
2	U1	Boost converter TPS61175 (VIN = VBAT).	Boosts the battery voltage to about 24 V. Enabled by the EN_BOOST signal from the ESP32 (IO15).
3	L5, D12	10 uH inductor and SK36 Schottky diode.	Boost inductor and rectifier diode from the SW node to the boost output.
4	D13	SS54 Schottky diode from the boost output to +24V.	ORs the boost output onto the +24V rail without back-feeding into the boost converter.
5	R3, R2	FB divider 187k / 10k.	Sets the output to about $1.229 \text{ V} \times (1 + 187/10) = 24 \text{ V}$ (calculated from the resistor values).
6	R4, R5	100k pull-down and 1k series resistor on EN.	Keep the boost off while EN_BOOST is inactive; the 1k limits current from the GPIO.
7	R6, R7, C7, C8	82k FREQ resistor, 10k/22 nF COMP network, 47 nF soft-start.	Set the switching frequency, loop compensation and soft-start.
8	C9, C10	Output capacitors 22 uF/35 V and 10 uF/50 V.	Boost output filter.

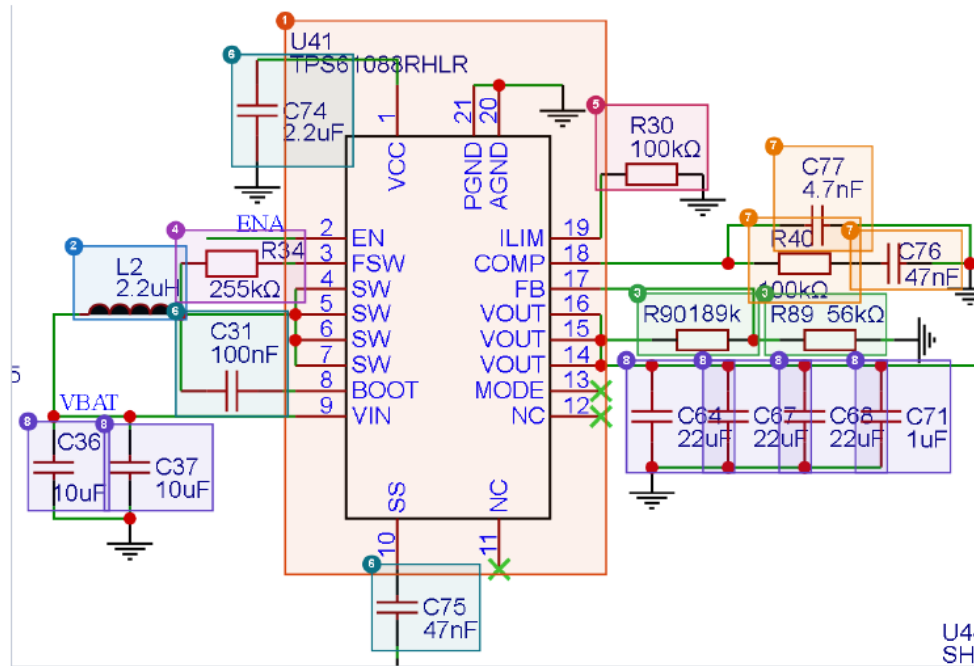Figure 6 - Battery boost to 5 V (U41, TPS61088)


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-06	1.0	2026-07-19	Battery boost to 5 V (U41, TPS61088)	6 of 26

Block function: Boosts the battery to 5VBOOST. **Requirement covered:** 5 V rail

No	Component	What it is	What it does
1	U41	Boost converter TPS61088 (VIN = VBAT, VOUT = 5VBOOST, EN = ENA).	Generates 5 V from the battery. Active when the ENA signal from the power-latch circuit is high.
2	L2	2.2 uH inductor.	Boost inductor between VBAT and the SW node.
3	R90, R89	FB divider 189k / 56k.	Sets the output to about $1.204 \text{ V} \times (1 + 189/56) = 5.3 \text{ V}$ (calculated from the resistor values).
4	R34	255k resistor on FSW.	Sets the switching frequency.
5	R30	100k resistor on ILIM.	Sets the peak current limit.
6	C74, C75, C31	Internal VCC capacitor, soft-start capacitor and bootstrap capacitor.	Support parts for the IC.
7	R40, C76, C77	COMP compensation network.	Stabilizes the boost control loop.
8	C64, C67, C68, C71, C36, C37	VBAT input and 5VBOOST output capacitors.	Decoupling on the input and output sides of the boost.

3.3 V rail

Figure 7 - 5 V to 3.3 V buck (U43)

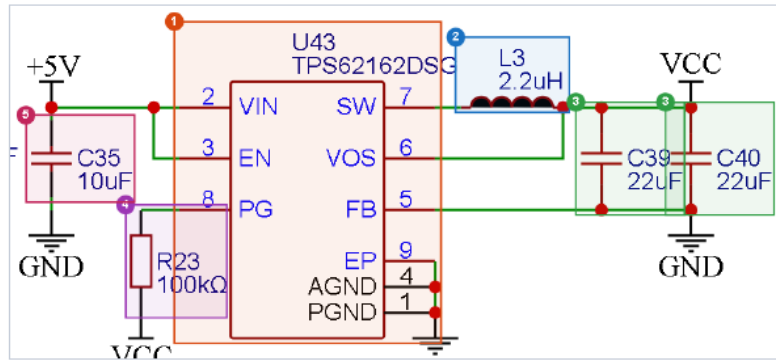


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-07	1.0	2026-07-19	5 V to 3.3 V buck (U43)	7 of 26

Block function: Buck that generates the 3.3 V VCC rail. **Requirement covered:** 3.3 V rail

No	Component	What it is	What it does
1	U43	Buck TPS62162 (VIN = +5V, EN = +5V, VOS = VCC).	Steps +5V down to 3.3 V (fixed-voltage version, FB to GND). Always on because EN is tied to +5V.
2	L3	2.2 uH inductor.	Buck inductor from the SW node to VCC.
3	C39, C40	10 uF / 22 uF capacitors on VCC.	Bulk capacitors of the 3.3 V output.
4	R23	100k pull-up on PG.	PG is not connected to any other component in this netlist (pull-up only).
5	C35	+5V capacitor, PG pull-up and VCC output capacitors.	Decoupling of the input/output of the 3.3 V buck; R23 is the pull-up on the PG pin.

Figure 8 - Always-on 3.3 V LDO and its source selection (U42)

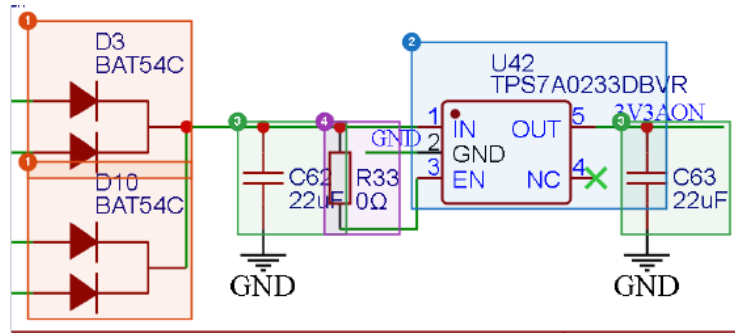


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-08	1.0	2026-07-19	Always-on 3.3 V LDO and its source selection (U42)	8 of 26

Block function: The 3V3AON LDO and its source selection. **Requirement covered:** 3.3 V rail

No	Component	What it is	What it does
①	D3, D10	Dual diode BAT54C (common cathode).	D3 ORs VBAT_IN and 5VBUCK; D10 ORs 5VEXT and VBUS (USB). The result is the net that feeds the LDO input.
②	U42	LDO TPS7A0233 (3.3 V, very low quiescent current).	Converts the available source into 3V3AON. EN is pulled to the input through R33 (0 ohm), so it is always enabled.
③	C62, C63	22 uF and 100 nF input/output capacitors.	Decoupling of the LDO and the 3V3AON rail.
④	R33	0 ohm resistor between the input and the EN pin of U42.	Ties EN to the input so the LDO is always enabled (can be removed if a separate EN is needed).

Figure 9 - TPL5010 timer/watchdog (U46)

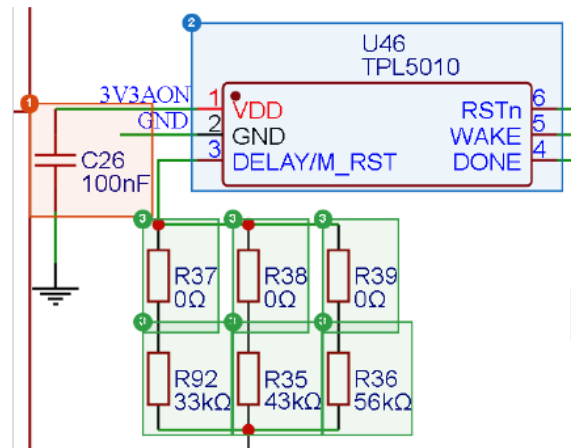


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-09	1.0	2026-07-19	TPL5010 timer/watchdog (U46)	9 of 26

Block function: Nano-power timer/watchdog and its interval selector. **Requirement covered:** 3.3 V rail / power latch

No	Component	What it is	What it does
1	C26	22 uF and 100 nF input/output capacitors.	Decoupling of the LDO and the 3V3AON rail.
2	U46	Nano-power timer TPL5010.	Generates periodic WAKE pulses and works as a watchdog: DONE from the ESP32 (IO17) signals that the firmware is still alive, RSTn goes to RST (ESP32 reset).
3	R35, R36, R92, R37, R38, R39	43k / 56k / 33k resistors to GND with three 0 ohm jumpers.	Select the TPL5010 timer interval through the DELAY/M_RST pin (one 0 ohm jumper is fitted for the chosen interval).

Figure 10 - ENAlatch (U51) and open-drain inverter (U15)

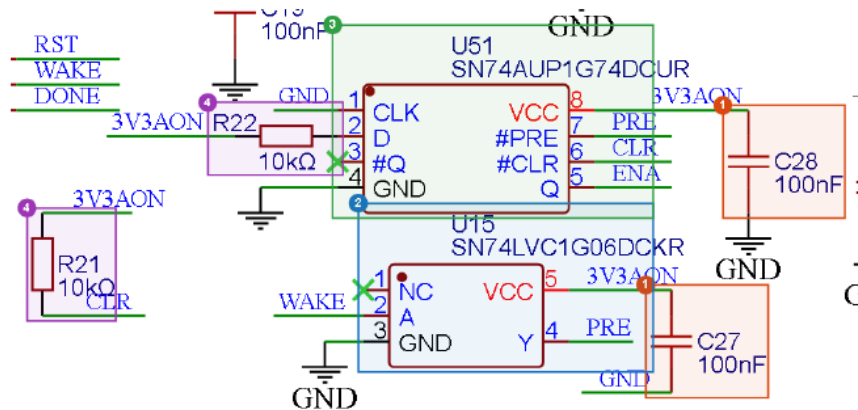


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-10	1.0	2026-07-19	ENAlatch (U51) and open-drain inverter (U15)	10 of 26

Block function: ENAlatch flip-flop and open-drain inverter. **Requirement covered:** 3.3 V rail / power latch

No	Component	What it is	What it does
1	C27, C28	22 uF and 100 nF input/output capacitors.	Decoupling of the LDO and the 3V3AON rail.
2	U15	Open-drain inverter SN74LVC1G06.	Turns WAKE from U46 into a pull-down on net PRE (R15 pull-up to 3V3AON).
3	U51	D flip-flop SN74AUP1G74 (CLK to GND, Q = ENA).	Used as a latch: PRE low sets ENA, CLR low from the ESP32 (IO16) clears ENA. ENA controls U14 (load switch) and U41 (5 V boost).
4	R21, R22	10k pull-ups to 3V3AON on PRE, CLR and the flip-flop D input.	Keep the default logic levels.

Figure 11 - 3V3AON voltage supervisor (U16)

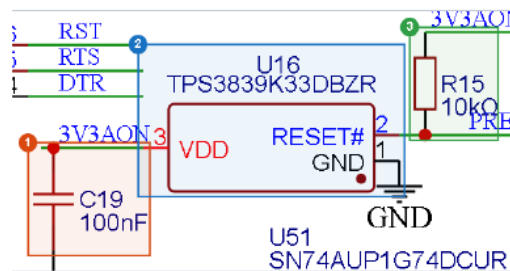


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-11	1.0	2026-07-19	3V3AON voltage supervisor (U16)	11 of 26

Block function: Voltage supervisor of 3V3AON. **Requirement covered:** 3.3 V rail / power latch

No	Component	What it is	What it does
1	C19	22 uF and 100 nF input/output capacitors.	Decoupling of the LDO and the 3V3AON rail.
2	U16	Voltage supervisor TPS3839K33 (threshold variant for a 3.3 V rail).	RESET# output is connected to net PRE; supervises 3V3AON.
3	R15	10k pull-ups to 3V3AON on PRE, CLR and the flip-flop D input.	Keep the default logic levels.

MQ heater supply

Figure 12 - Sensor module connector H2 (one connector as example)

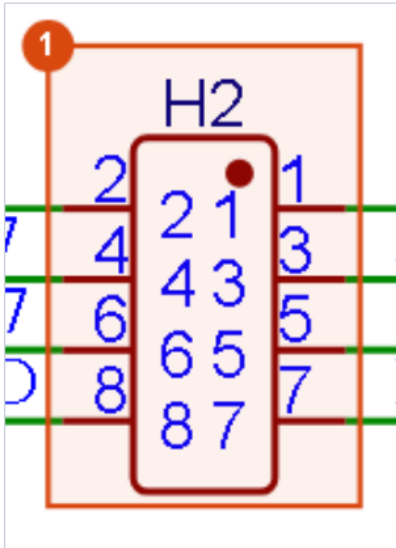


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-12	1.0	2026-07-19	Sensor module connector H2 (one connector as example)	12 of 26

Block function: One sensor module connector as an example of every pin function. **Requirement covered:** MQ heater supply and MQ sensor interface

No	Component	What it is	What it does
1	H2	Sensor module connectors (H1..H8).	Each connector carries: pin 2 = +5V (module/heater supply), pin 8 = VMID (bias), pin 3 = AINx (analog signal to the ADC), pins 4/6 = SCLx/SDAx (I2C channel from the mux), pin 7 = ENx (module enable), pins 1/5 = GND. The heater switch and sensor load resistor are not on this board (assumed to be on the sensor module; to be confirmed).

Figure 13 - Sensor module connectors H1-H8




Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-13	1.0	2026-07-19	Sensor module connectors H1-H8	13 of 26

Block function: The eight sensor module connectors H1-H8. **Requirement covered:** MQ heater supply and MQ sensor interface

No	Component	What it is	What it does
1	H1, H2, H3, H4, H5, H6, H7, H8	Sensor module connectors (H1..H8).	Each connector carries: pin 2 = +5V (module/heater supply), pin 8 = VMID (bias), pin 3 = AINx (analog signal to the ADC), pins 4/6 = SCLx/SDAx (I2C channel from the mux), pin 7 = ENx (module enable), pins 1/5 = GND. The heater switch and sensor load resistor are not on this board (assumed to be on the sensor module; to be confirmed).

Figure 14 - Sensor module enable I/O expander (U12)

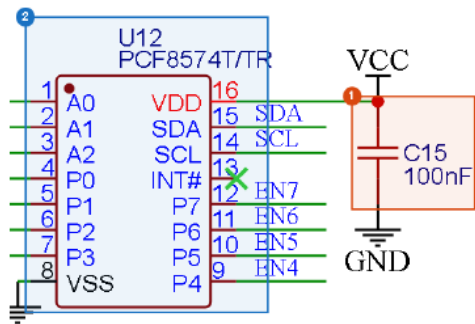


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-14	1.0	2026-07-19	Sensor module enable I/O expander (U12)	14 of 26

Block function: I/O expander that enables the sensor modules. Requirement covered: MQ heater supply (module enable)

No	Component	What it is	What it does
1	C15	100 nF capacitors on VCC.	Decoupling close to each 3.3 V IC.
2	U12	I/O expander PCF8574.	Outputs P0-P7 become EN0-EN7 to enable the sensor modules one by one.

MQ sensor bridge / analog circuitry

Figure 15 - VMID bias of about 2.5 V (U3)

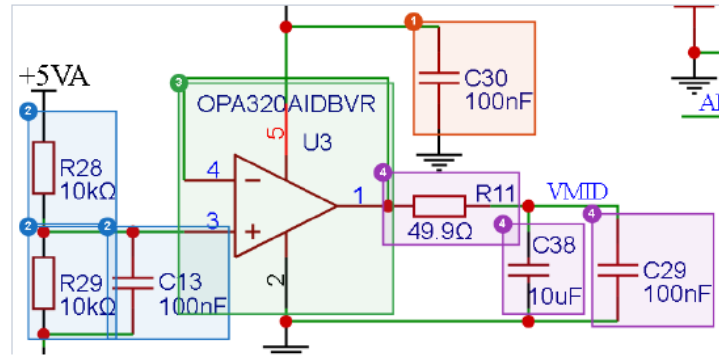


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-15	1.0	2026-07-19	VMID bias of about 2.5 V (U3)	15 of 26

Block function: Generator of the VMID bias of about 2.5 V. **Requirement covered:** MQ sensor bridge / analog circuitry

No	Component	What it is	What it does
1	C30	10 uF and 100 nF capacitors on +5VA.	Decoupling for the ADC, op-amps and reference.
2	R28, R29, C13	10k / 10k divider and 100 nF.	Creates half of +5VA (about 2.5 V).
3	U3	Op-amp OPA320 as a buffer.	Buffers the mid-voltage into a low-impedance VMID source.
4	R11, C29, C38	49.9 ohm resistor and capacitors.	Isolate the buffer output and keep it stable with capacitive loads; VMID goes to pin 8 of every sensor connector.

Figure 16 - Analog +5VAsupply filter (L6)

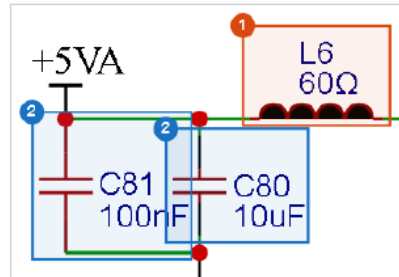


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-16	1.0	2026-07-19	Analog +5VAsupply filter (L6)	16 of 26

Block function: Analog +5VAsupply filter. **Requirement covered:** MQ sensor bridge / analog circuitry

No	Component	What it is	What it does
1	L6	60 ohm ferrite bead.	Separates digital noise from the analog +5VA rail.
2	C80, C81	10 uF and 100 nF capacitors on +5VA.	Decoupling for the ADC, op-amps and reference.

Figure 17 - Sensor module I2C multiplexer (U33)

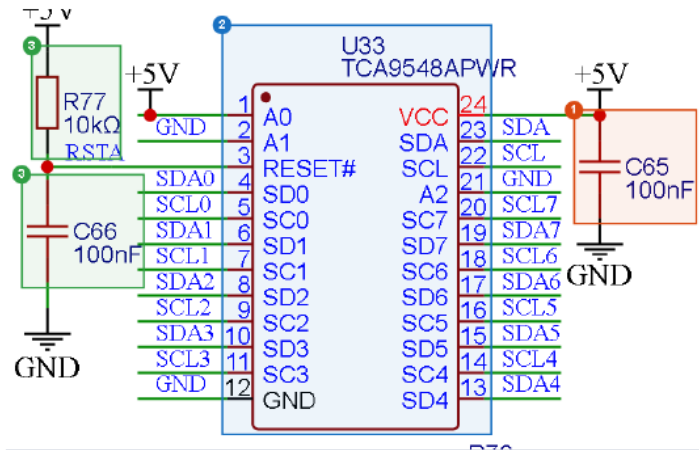


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-17	1.0	2026-07-19	Sensor module I2C multiplexer (U33)	17 of 26

Block function: I2C multiplexer for the eight sensor modules. **Requirement covered:** MQ sensor bridge / analog circuitry

No	Component	What it is	What it does
①	C65	10 uF and 100 nF capacitors on +5V.	Decoupling of the +5V rail.
②	U33	I2C multiplexer TCA9548A(8 channels).	Splits the main I2C bus into eight channels SDA0-7/SCL0-7 toward the modules; RESET# is held high by R77.
③	R77, C66	10k pull-up and 100 nF on RSTA.	Keep the mux from being reset unless intended.

Figure 18 - Temperature and humidity sensor (U44)

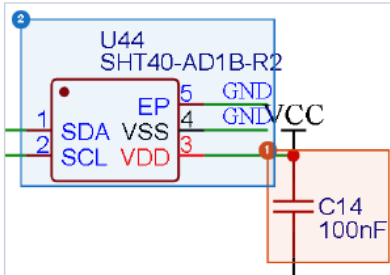


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-18	1.0	2026-07-19	Temperature and humidity sensor (U44)	18 of 26

Block function: Environment sensor inside the board. **Requirement covered:** MQ sensor bridge / analog circuitry (environment compensation)

No	Component	What it is	What it does
①	C14	100 nF capacitors on VCC.	Decoupling close to each 3.3 V IC.
②	U44	Temperature/humidity sensor SHT40.	Measures temperature and humidity inside the board on the main I2C bus.

ADC


Figure 19 - ADS1256 ADC with input filters (AIN), clock and decoupling

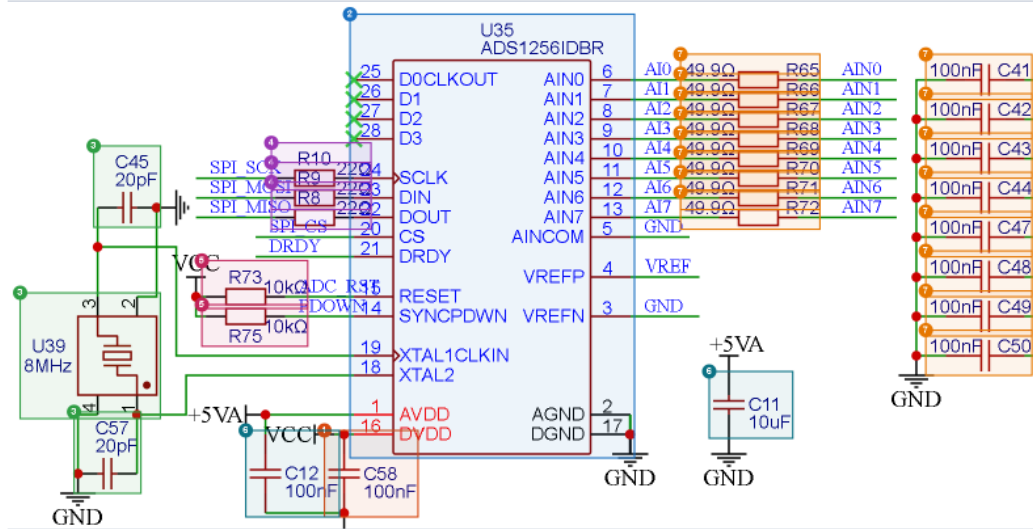

Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-19	1.0	2026-07-19	ADS1256 ADC with input filters (AIN), clock and decoupling	19 of 26

Block function: ADS1256 with its input filters, clock and decoupling. **Requirement covered:** ADC; MQ sensor bridge / analog circuitry


No	Component	What it is	What it does
1	C58	100 nF capacitors on VCC.	Decoupling close to each 3.3 V IC.
2	U35	Delta-sigma ADC ADS1256 (8 channels, 24 bit).	Converts the AI0-AI7 voltages to digital data. AVDD = +5VA, DVDD = VCC, VREFP = VREF, VREFN and AINCOM = GND. Controlled over SPI (CS, SCLK, DIN, DOUT) + DRDY.
3	U39, C45, C57	4-pin SMD crystal with two 20 pF capacitors.	ADC clock source (8 MHz according to the U39 label on the schematic).
4	R8, R9, R10	22 ohm series resistors on MISO, MOSI, SCK.	Damp ringing/EMI on the SPI lines to the ADC.
5	R73, R75	10k pull-ups on RESET and SYNC/PDWN.	Keep the ADC active by default; the ESP32 can pull them low (ADC_RST, PDOWN).
6	C11, C12	10 uF and 100 nF capacitors on +5VA.	Decoupling for the ADC, op-amps and reference.
7	R65, R66, R67, R68, R69, R70, R71, R72, C41, C42, C43, C44, C47, C48, C49, C50	49.9 ohm series resistor and 100 nF capacitor to GND on every channel.	About 32 kHz low-pass (calculated) that suppresses noise and protects the ADC inputs; AINx from the connector becomes AIx at the ADS1256.

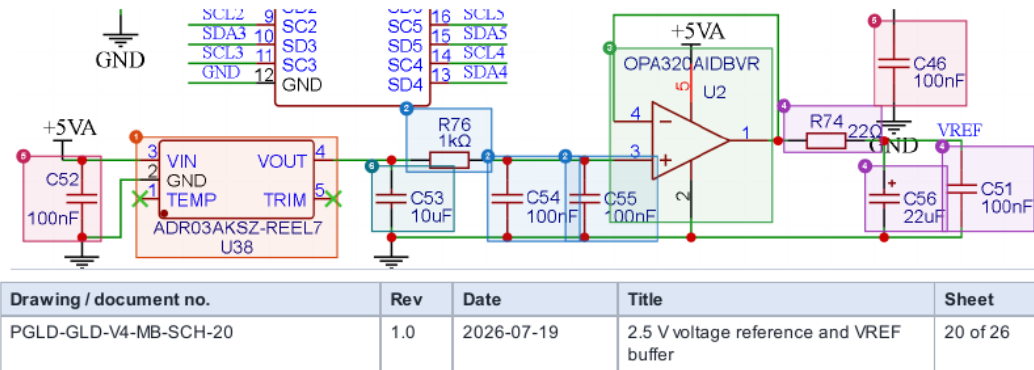Figure 20 - 2.5 V voltage reference and VREF buffer**Block function:** 2.5 V reference and VREF buffer. **Requirement covered:** ADC

No	Component	What it is	What it does
1	U38	Voltage reference ADR03 (2.5 V).	Precision VREF source for the ADC (VIN = +5VA).
2	R76, C54, C55	1k resistor and 2x 100 nF.	Low-pass filter of the reference noise before the buffer.
3	U2	Op-amp OPA320 as a buffer (voltage follower).	Buffers VREF so it is stiff against the load and the switching current of the ADC.
4	R74, C56, C51	22 ohm resistor, 22 uF tantalum, 100 nF.	Isolation and reservoir capacitors on the ADC VREF pin.
5	C46, C52	10 uF and 100 nF capacitors on +5VA.	Decoupling for the ADC, op-amps and reference.
6	C53	10 uF capacitor on VREF_2V5 (output of U38).	Reservoir/filter of the 2.5 V reference output.

ESP32-S3


Figure 21 - ESP32-S3-WROOM-1U-N16R8 with support parts (including status LED)

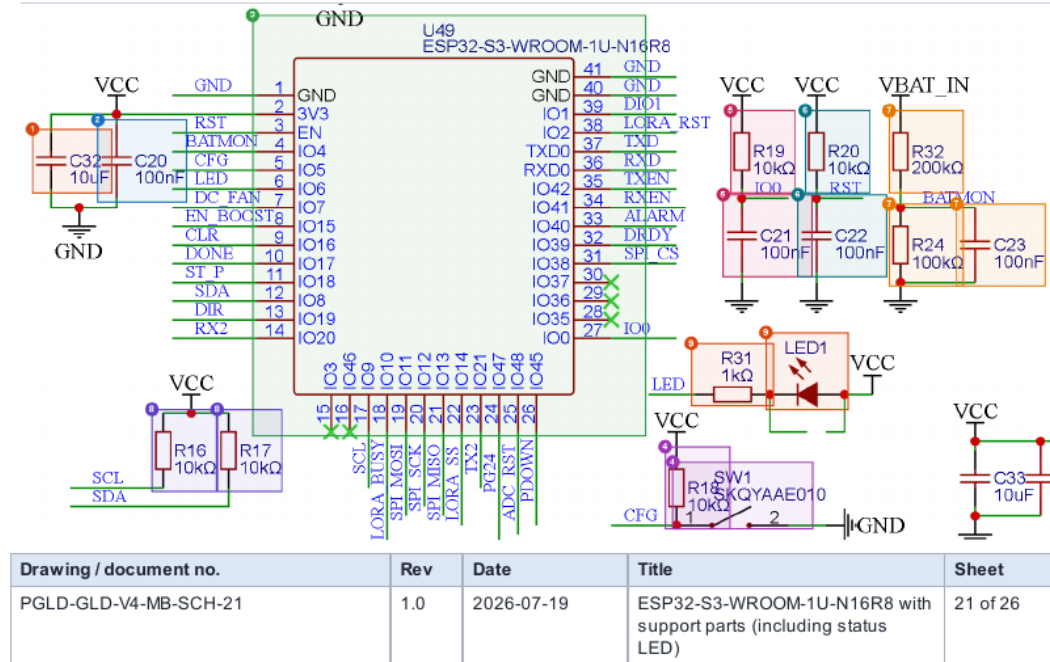

Block function: Main microcontroller with reset, boot, LED and I2C pull-ups. **Requirement covered:** ESP32-S3; LED / buzzer driver (LED)

No	Component	What it is	What it does
1	C32	10 uF / 22 uF capacitors on VCC.	Bulk capacitors of the 3.3 V output.
2	C20	100 nF capacitors on VCC.	Decoupling close to each 3.3 V IC.
3	U49	Module ESP32-S3-WROOM-1U-N16R8 (external antenna, 16 MB flash, 8 MB PSRAM).	The brain of the GLD: reads the ADC (SPI_CS/DRDY/ADC_RST/PDOWN), controls the LoRa radio (LORA_SS/RST/BUSY/DIO1/TXEN/RXEN), I2C (SDA/SCL), RS-485 (TX2/RX2/DIR), alarm, fan, LED and boost, and reads BATMON, PG24, ST_P and CFG.
4	SW1, R18	CFG button with a 10k pull-up.	Configuration button: pulls CFG to GND when pressed.
5	R19, C21	10k pull-up and 100 nF on IO0.	Keep IO0 high (normal boot); Q1 pulls it low in download mode.
6	R20, C22	10k pull-up and 100 nF on EN/RST.	RC reset circuit for the ESP32; also driven by the TPL5010.
7	R32, R24, C23	200k / 100k divider to BATMON with 100 nF.	Scales VBAT_IN down so the ESP32 ADC (IO4) can read it safely; the 1/3 ratio matches the firmware formula 'avg x 3'.
8	R16, R17	10k I2C pull-ups to VCC.	Pull-ups for SDA and SCL.
9	LED1, R31	0603 LED (19-217/BHC-ZL1M2RY/3T) with a 1k resistor.	Lights when the ESP32 pulls the LED pin (IO6) to GND; anode to VCC (active-low).

Figure 22 - USB, CH340C and auto-reset

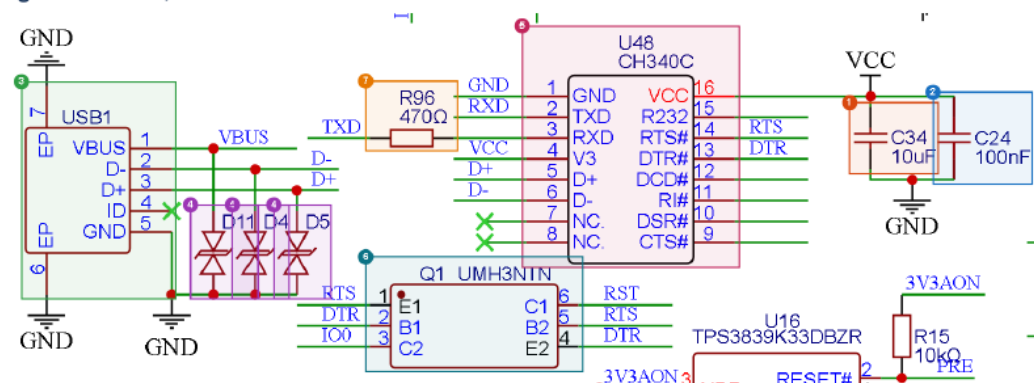


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-22	1.0	2026-07-19	USB, CH340C and auto-reset	22 of 26

Block function: USB connector, ESD protection, CH340C and auto-reset. **Requirement covered:** ESP32-S3 (programming)

No	Component	What it is	What it does
1	C34	10 uF / 22 uF capacitors on VCC.	Bulk capacitors of the 3.3 V output.
2	C24	100 nF capacitors on VCC.	Decoupling close to each 3.3 V IC.
3	USB1	Micro-USB connector.	Programming and serial port to the PC; VBUS also feeds the 3V3AON source OR-ing (3.3 V rail).
4	D4, D5, D11	ESD protection on D-, D+ and VBUS.	Protects the USB lines from electrostatic discharge.
5	U48	USB-UART bridge CH340C (VCC 3.3 V).	Translates USB to the ESP32 UART0 (TXD/RXD).
6	Q1	Dual NPN with resistors, UMH3N.	Classic auto-reset circuit: DTR/RTS from the CH340 drive IO0 and RST of the ESP32 during upload.
7	R96	470 ohm resistor.	Series resistor on the TXD line from the ESP32 to RXD of the CH340C.

LoRa

Figure 23 - E22-900MM22S LoRa module and antenna connector

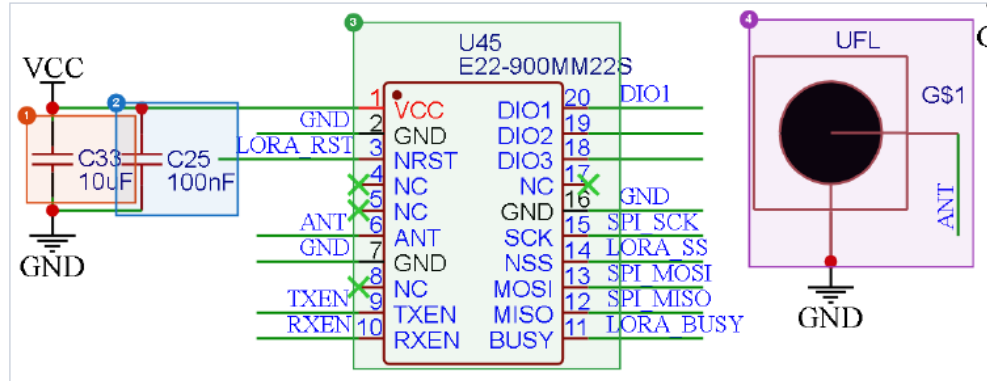


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-23	1.0	2026-07-19	E22-900MM22S LoRa module and antenna connector	23 of 26

Block function: LoRa module and antenna connector. **Requirement covered:** LoRa

No	Component	What it is	What it does
1	C33	10 uF / 22 uF capacitors on VCC.	Bulk capacitors of the 3.3 V output.
2	C25	100 nF capacitors on VCC.	Decoupling close to each 3.3 V IC.
3	U45	LoRa module E22-900MM22S (SX126x class, 900 MHz).	Interface: SPI (SPI_MISO/MOSI/SCK + LORA_SS), LORA_RST, LORA_BUSY, DIO1, and TXEN/RXEN for the TX/RX switch. Supplied from VCC (3.3 V).
4	G1	U.FL antenna connector.	Connection point of the antenna cable to the ANT pin of the LoRa module.

Fan driver

Figure 24 - 5 V fan driver (Q5, J3)

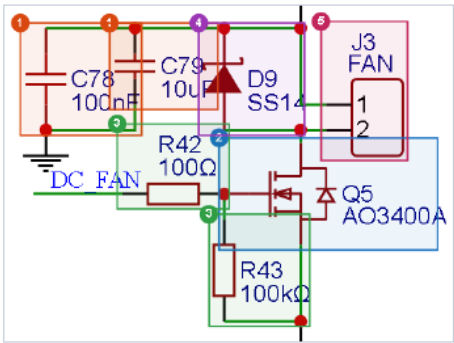


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-24	1.0	2026-07-19	5 V fan driver (Q5, J3)	24 of 26

Block function: 5 V fan driver. Requirement covered: Fan driver

No	Component	What it is	What it does
1	C79, C78	10 uF and 100 nF capacitors on +5V.	Decoupling of the +5V rail.
2	Q5	N-MOSFET AO3400A as a low-side switch.	Turns on the fan at J3 when DC_FAN is high.
3	R42, R43	100 ohm gate resistor and 100k pull-down.	Gate current limiter and default-off holder.
4	D9	SS14 flyback diode.	Clamps the inductive spike of the fan to +5V.
5	J3	Fan connector (pin 1 = +5V, pin 2 = Q5 drain).	Connection point of the 5 V fan.

LED / buzzer driver

Figure 25 - 24 V alarm output driver (Q4, J2)

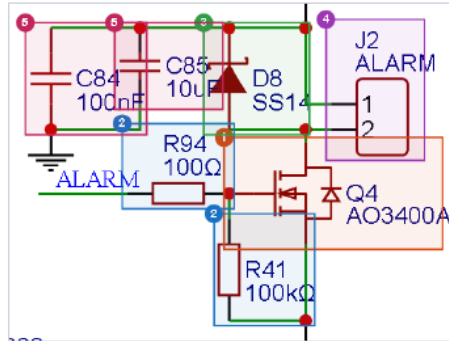


Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-25	1.0	2026-07-19	24 V alarm output driver (Q4, J2)	25 of 26

Block function: 24 V alarm output driver. **Requirement covered:** LED / buzzer driver

No	Component	What it is	What it does
1	Q4	N-MOSFET AO3400A as a low-side switch.	Turns on the load at J2 when ALARM is high; its source goes to GND.
2	R94, R41	100 ohm gate resistor and 100k pull-down.	R94 limits the gate charging current; R41 keeps Q4 off while the GPIO is not yet active.
3	D8	SS14 flyback diode.	Clamps the inductive spike of the load at J2 to +24V.
4	J2	Alarm load connector (pin 1 = +24V, pin 2 = Q4 drain).	Connection point of the 24 V alarm load (load type to be confirmed).
5	C84, C85	100 nF and 10 uF capacitors on +24V.	Decoupling of the +24V rail next to the alarm driver.

RS-485 / Modbus

Figure 26 - RS-485 transceiver (U47)

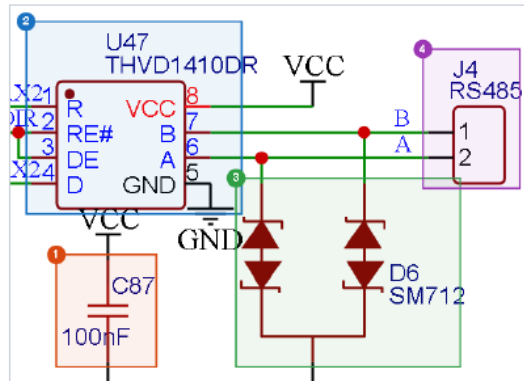

Drawing / document no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-SCH-26	1.0	2026-07-19	RS-485 transceiver (U47)	26 of 26

Block function: RS-485 transceiver, TVS protection and connector. **Requirement covered:** RS-485 / Modbus

No	Component	What it is	What it does
1	C87	100 nF capacitors on VCC.	Decoupling close to each 3.3 V IC.
2	U47	RS-485 transceiver THVD1410 (3.3 V).	Converts the TX2/RX2 UART of the ESP32 into the differential A/B signal; direction is controlled by DIR (drives RE# and DE together).
3	D6	TVS SM712 (asymmetric, made for RS-485).	Protects pins A/B against surges and ESD.
4	J4	RS-485 connector (A, B).	Bus connection terminal. There is no 120 ohm termination or bias resistor on this schematic.

2.6.a.8 PCB layout

The layout of the GLD main board is presented in ten views generated from the EasyEDA PCB file of the same project. Each view highlights one aspect required by item 2.6.a.8; numbered markers on the view correspond to the legend printed below it.

Board data

Parameter	Value	Source / status
Board name	Main Board GLD (MotherBoardGLDVer2)	Layout file
Board outline	Circular, Ø 84.0 mm	Dimension in view 04
Copper layers	Top and bottom (two views of copper)	Views 01, 02
Component side	All SMD parts on top; only through-hole connectors pass to the bottom	View 02
Enclosure fixing holes	4 × Ø 3.2 mm on Ø 64 mm pitch circle, at (0, +32), (+32, 0), (0, -32), (-32, 0) mm from centre	View 05
Additional holes	4 × Ø 3.0 mm near the board edge ($\approx \pm 39$ mm from centre)	View 05 — purpose (casing screw or standoff) to be confirmed against the mechanical drawing
Ground	GND pour on top and bottom; 176 of 400 vias stitch the GND pours	Views 09, 10
Laminate, thickness, copper weight	Not stated in the layout package	To be provided (FR-4 grade, UL 94 rating, Tg, CTI) — see 6.b / 6.c
Layout revision / date	Not stated in the layout package	To be added to the drawing table

Drawing register

Drawing no.	Title	Requirement covered	Rev / date
PGLD-GLD-V4-MB-PCB-01	Top layer	Top layer	TBC
PGLD-GLD-V4-MB-PCB-02	Bottom layer	Bottom layer	TBC
PGLD-GLD-V4-MB-PCB-03	Component placement	Component placement	TBC
PGLD-GLD-V4-MB-PCB-04	Board dimensions	Board dimensions	TBC
PGLD-GLD-V4-MB-PCB-05	Mounting holes	Mounting holes	TBC
PGLD-GLD-V4-MB-PCB-06	Connectors	Connectors	TBC
PGLD-GLD-V4-MB-PCB-07	High-current / power area	High-current / power area	TBC
PGLD-GLD-V4-MB-PCB-08	Sensor interface	Sensor interface	TBC
PGLD-GLD-V4-MB-PCB-09	Grounding arrangement — top	Grounding arrangement	TBC
PGLD-GLD-V4-MB-PCB-10	Grounding arrangement — bottom	Grounding arrangement	TBC

Coverage of the required layout content

Required content (2.6.a.8)	Where shown	Status
Top layer	View 01	Provided
Bottom layer	View 02	Provided
Component placement	View 03	Provided
Board dimensions	View 04	Provided
Mounting holes	View 05	Provided — purpose of 4 × Ø 3.0 mm holes to confirm

Required content (2.6.a.8)	Where shown	Status
Connectors	View 06	Provided
High-current / power area	View 07	Provided
Sensor interface	View 08	Provided
Grounding arrangement	Views 09, 10	Provided
One set per board (Main, Sensor, Alarm, Terminal)	Main board only	Open — sensor-module board layout to be added

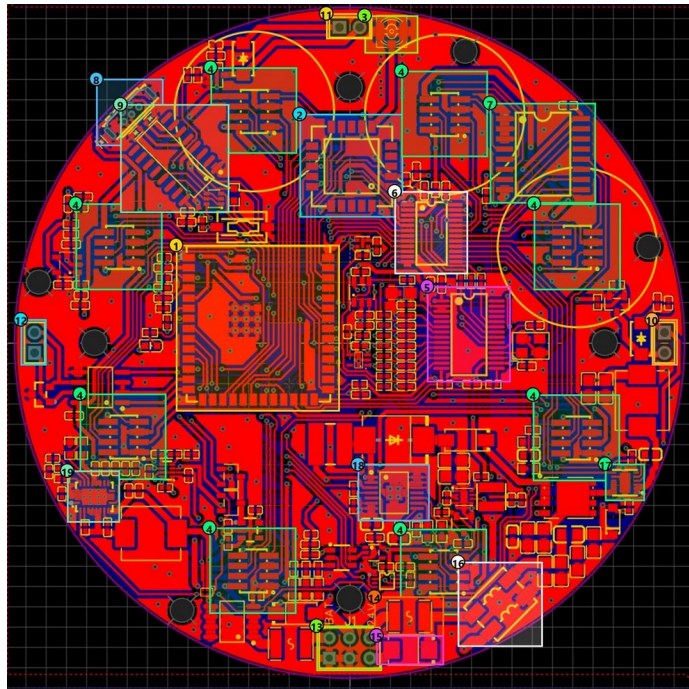


Figure 8-1. Top layer — Main Board GLD

Drawing no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-PCB-01	TBC	TBC	Top layer	1 of 10

No	Item	Description
1	ESP32-S3	Main MCU module: runs the GLD firmware; SPI to LoRa and ADC, I ² C to sensors, GPIO for alarm/fan.
2	LoRa E22-900MM22S	LoRa radio for communication with the cluster head.
3	U.FL antenna connector	Connection to the external LoRa antenna.
4	Sensor ports (8)	Eight 2 × 4 headers around the board, one per sensor module (yellow circle = module outline).
5	ADS1256	24-bit ADC reading the eight analog sensor channels.
6	TCA9548A	8-channel I ² C multiplexer, one channel per sensor port.
7	PCF8574	I/O expander providing the enable signals EN0–EN7 for each sensor.
8	Micro-USB	USB port for firmware flashing and serial debug.
9	CH340C	USB-to-UART converter for programming and serial monitor.
10	ALARM connector	24 V siren/beacon output.
11	FAN connector	5 V fan output.
12	RS-485 connector	RS-485 bus (A/B).
13	VIN connector	Power input: 24V+, 24V–, 5VEXT, GND, BAT (battery).
14	PTC fuse	Limits current on the 24 V line under short circuit.
15	TVS	Clamps voltage surges on the 24 V input.
16	Common-mode filter	Filters common-mode noise on the 24 V input.
17	Buck 24 V → 5 V	LMR51450 regulator stepping 24 V down to 5 V.
18	Battery boost → 24 V	TPS61175 boosting the battery to the +24V rail.
19	Battery boost → 5 V	TPS61088 generating 5 V from the battery.

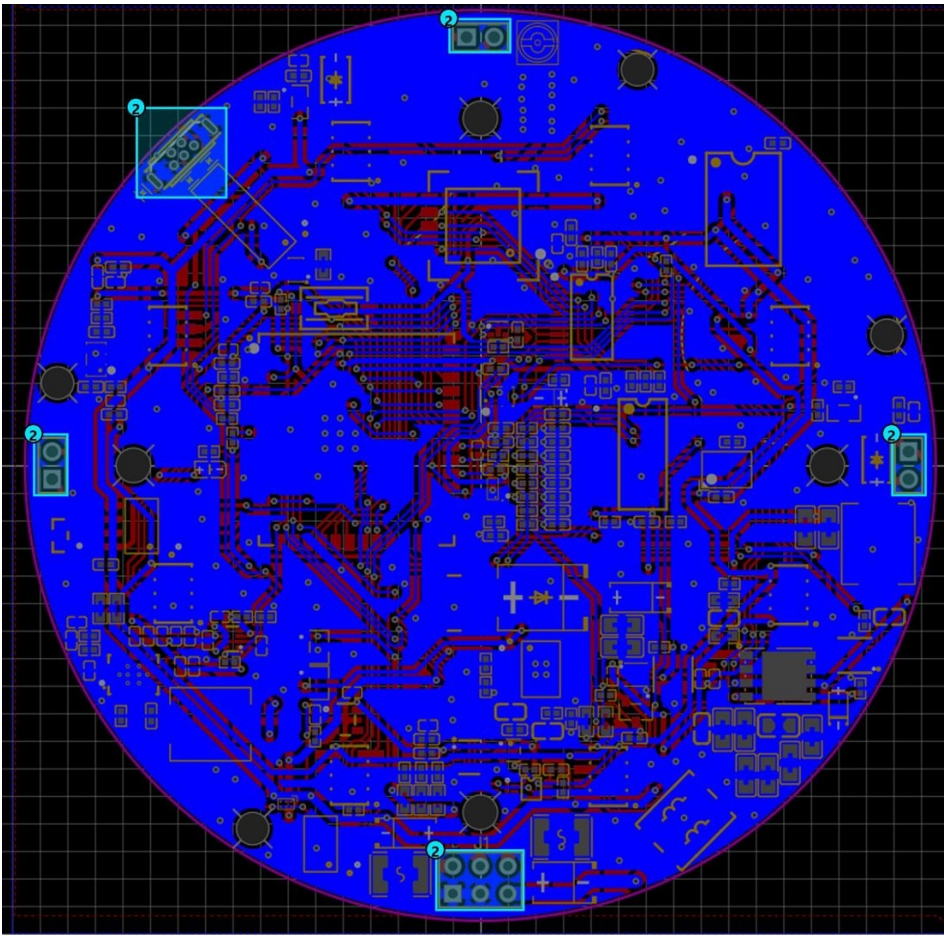


Figure 8-2. Bottom layer — Main Board GLD

Drawing no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-PCB-02	TBC	TBC	Bottom layer	2 of 10

No	Item	Description
1	Bottom GND pour (solid blue area)	GND plane filling almost the whole bottom side; connected to the top pour through vias.
2	Through-hole connectors	The only parts passing through to the bottom; all SMD parts are on the top side.

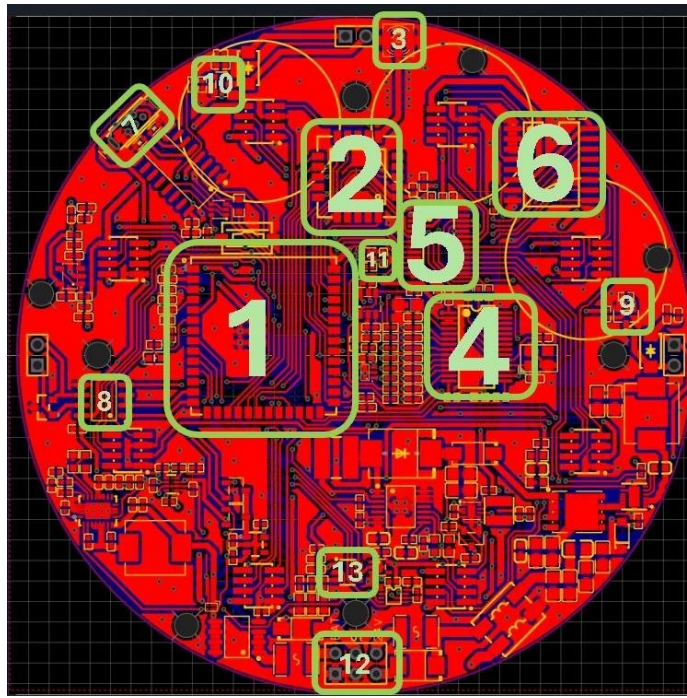


Figure 8-3. Component placement — Main Board GLD

Drawing no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-PCB-03	TBC	TBC	Component placement	3 of 10

No	Item	Description
1	ESP32-S3	Main MCU: runs the firmware and controls all blocks.
2	LoRa (E22-900MM22S)	LoRa radio for communication with the cluster head.
3	Antenna (U.FL)	External LoRa antenna connector.
4	ADS1256	24-bit ADC for the eight analog sensor channels.
5	TCA9548	8-channel I ² C mux, one channel per sensor port.
6	PCF8574	I/O expander for the enable signals EN0–EN7.
7	USB	Micro-USB + CH340C for firmware flashing and serial monitor.
8	RS-485	THVD1410 transceiver for the RS-485 bus.
9	Alarm driver	MOSFET switching the 24 V siren/beacon.
10	Fan driver	MOSFET switching the 5 V fan.
11	SHT40	Temperature and humidity sensor inside the enclosure.
12	Power block	Power input and protection (VIN connector, fuse, TVS, filter).
13	TPL5010	Watchdog timer that wakes the system periodically.

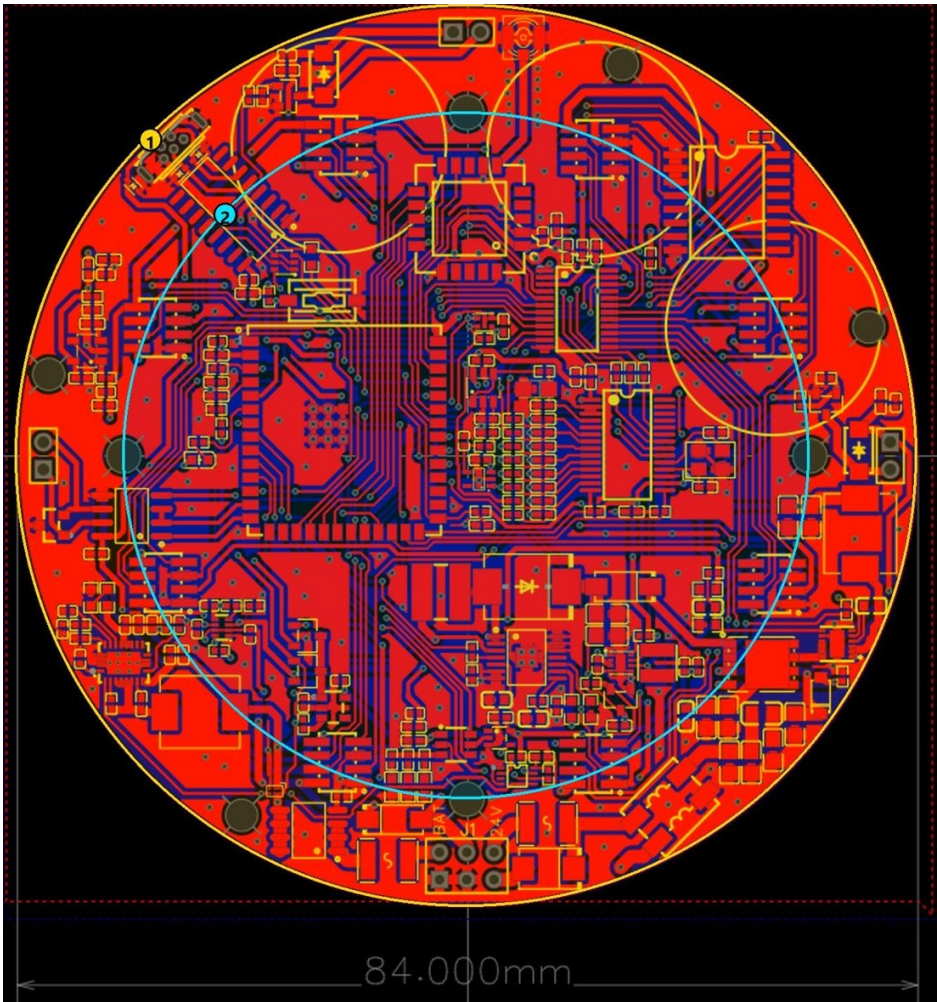


Figure 8-4. Board dimensions — Main Board GLD

Drawing no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-PCB-04	TBC	TBC	Board dimensions	4 of 10

No	Item	Description
1	Board diameter: 84 mm	Circular board (outline) matching the round aluminium enclosure.
2	Enclosure-hole pitch circle: Ø 64 mm	The four enclosure fixing holes lie on this circle, 90° apart.

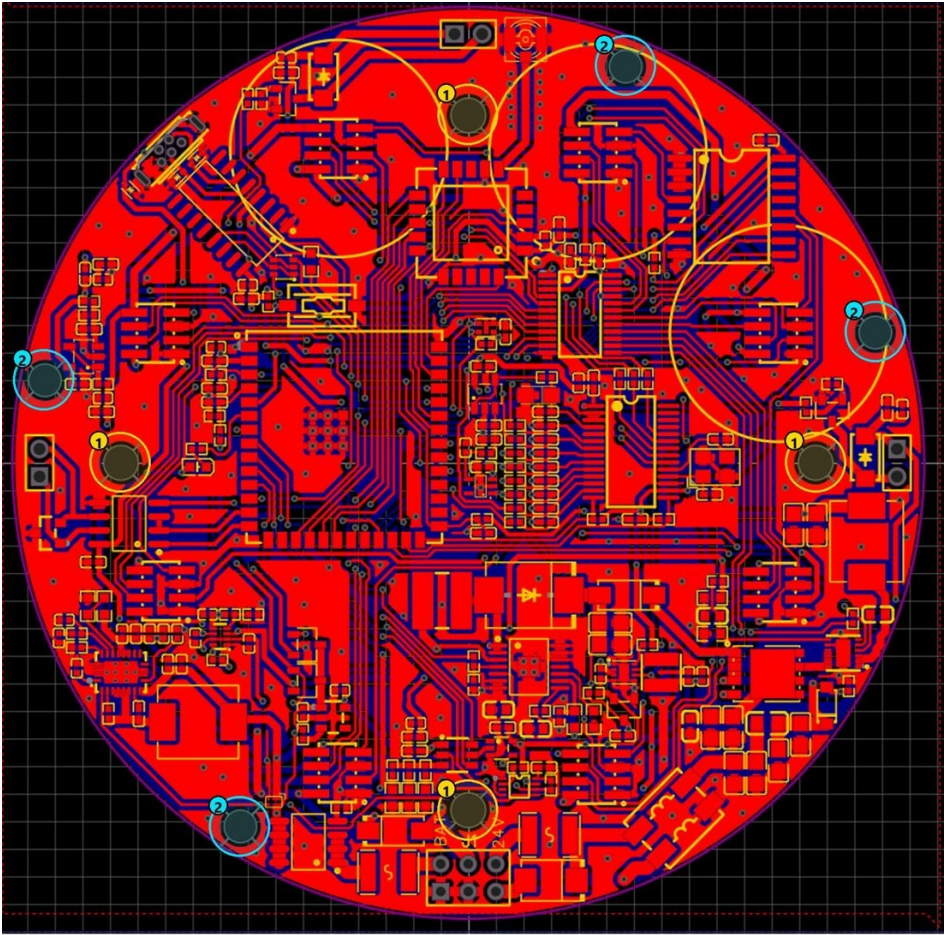


Figure 8-5. Mounting holes — Main Board GLD

Drawing no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-PCB-05	TBC	TBC	Mounting holes	5 of 10

No	Item	Description
1	Enclosure holes (4 × Ø 3.2 mm)	Hole pattern of the enclosure footprint on the Ø 64 mm circle; board-to-enclosure fixing screws. Positions from centre: (0, +32), (+32, 0), (0, -32), (-32, 0) mm.
2	Additional holes (4 × Ø 3.0 mm)	Four further fixing holes near the board edge (≈ ±39 mm from centre). Exact use (enclosure screw or standoff) to be confirmed with the mechanical drawing.

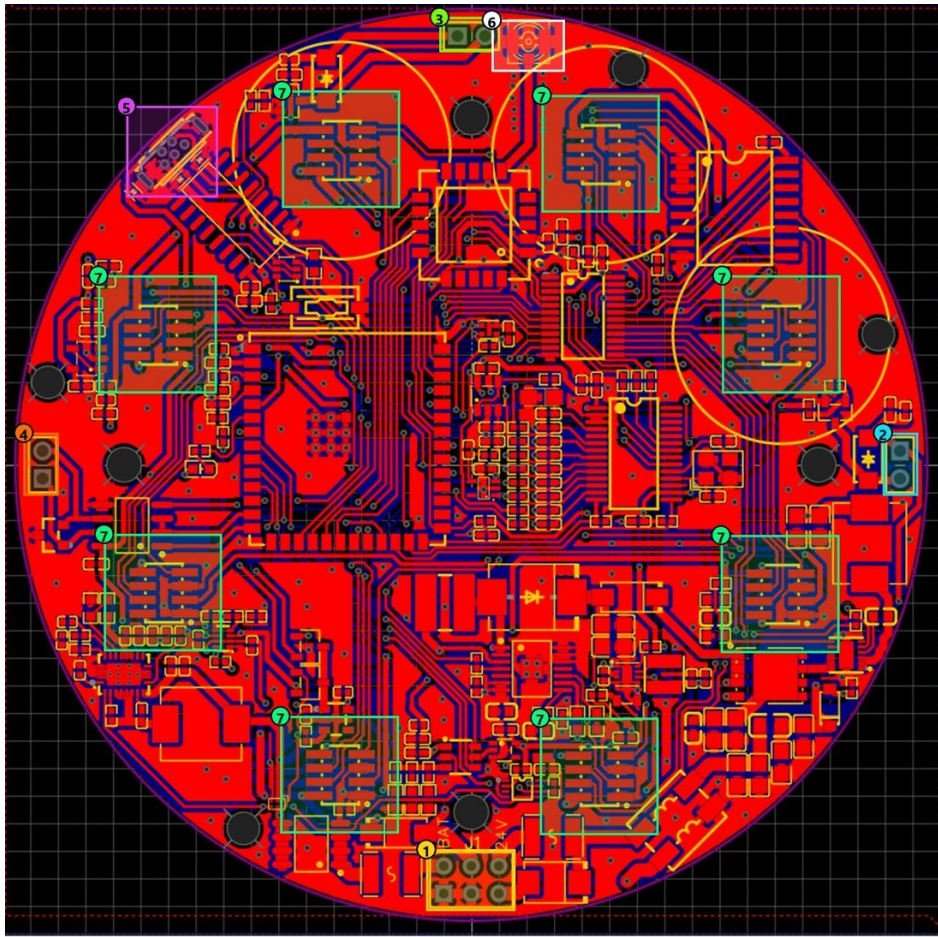


Figure 8-6. Connectors — Main Board GLD

Drawing no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-PCB-06	TBC	TBC	Connectors	6 of 10

No	Item	Description
1	VIN	Power input, 2 × 3 pins: 24V+, 24V-, 5VEXT, GND, BAT (battery).
2	ALARM	24 V siren/beacon output (pin 1 = +24V, pin 2 = MOSFET switch side).
3	FAN	5 V fan output (pin 1 = +5V, pin 2 = MOSFET switch side).
4	RS-485	RS-485 bus: B (pin 1) and A (pin 2).
5	Micro-USB	Firmware flashing and serial debug.
6	U.FL (antenna)	External LoRa antenna connector.
7	Sensor ports (8)	Eight 2 × 4 headers (1.27 mm pitch): GND, +5V, AINx, SCLx, SDAx, ENx, VMID — one sensor module each.

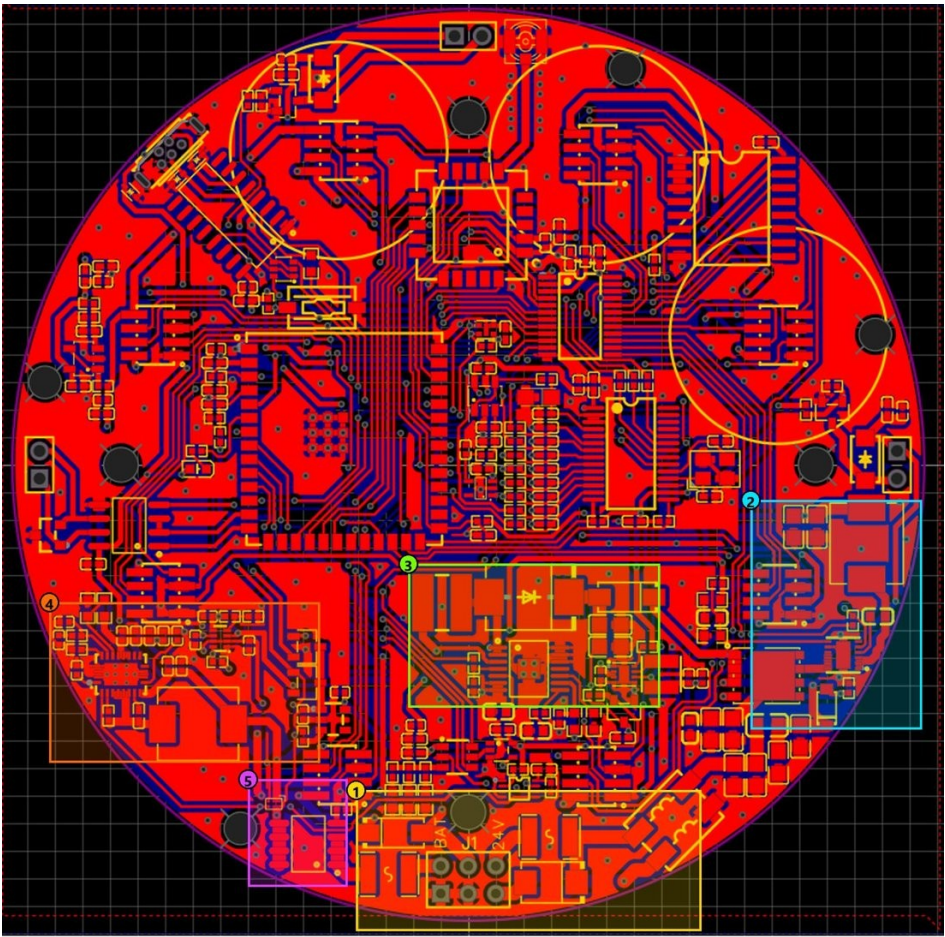


Figure 8-7. High-current / power area — Main Board GLD

Drawing no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-PCB-07	TBC	TBC	High-current / power area	7 of 10

No	Item	Description
1	Power input & protection	VIN connector, fuse, TVS, common-mode filter, ferrite: 24 V entry path.
2	24 V → 5 V converter	LMR51450 buck, 4.7 μH inductor, P-MOSFET switch.
3	Battery → 24 V converter	TPS61175 boost, 10 μH inductor, SK36 diode and OR-ing diode to the +24V rail.
4	Battery → 5 V converter + power mux	TPS61088 boost, 2.2 μH inductor, TPS2116 power mux selecting the 5 V source.
5	Battery protection	Fuse, P-MOSFET, load switch: disconnects the battery when the system sleeps.

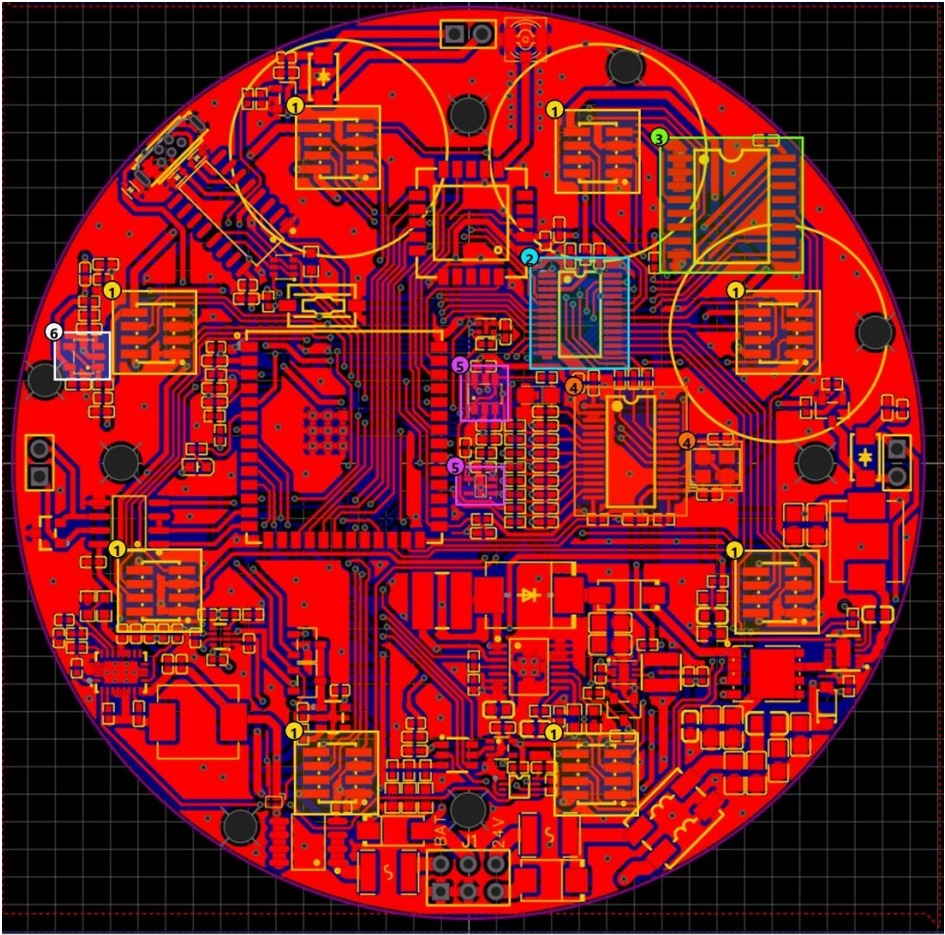


Figure 8-8. Sensor interface — Main Board GLD

Drawing no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-PCB-08	TBC	TBC	Sensor interface	8 of 10

No	Item	Description
1	Sensor ports (8)	Eight headers: +5V, GND, VMID, ENx, SDAx/SCLx (I ² C per channel), AINx (analog to ADC).
2	TCA9548A	I ² C mux splitting the ESP32 I ² C bus into 8 channels for 8 sensors.
3	PCF8574	I/O expander generating EN0-EN7 to switch each sensor module.
4	ADS1256 + 8 MHz crystal	8-channel 24-bit ADC, SPI to ESP32, clocked from an 8 MHz crystal.
5	2.5 V reference + buffer	ADR03 generates VREF, buffered by OPA320 for the ADC.
6	VMID buffer	OPA320 follower generating VMID (analog mid-bias) for the sensor modules.

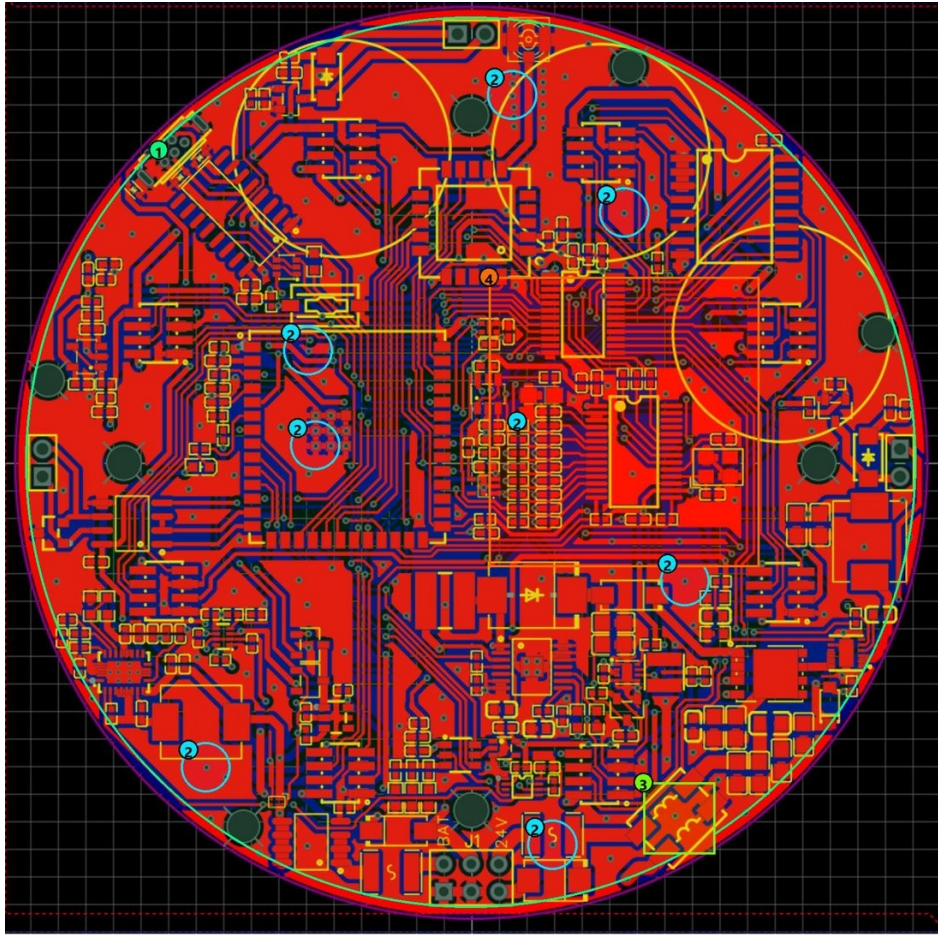


Figure 8-9. Grounding arrangement (top) — Main Board GLD

Drawing no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-PCB-09	TBC	TBC	Grounding arrangement — top	9 of 10

No	Item	Description
1	GND pour	One GND copper area (green line along the board edge) on top and bottom, filling all free area: short return paths and noise shielding.
2	GND vias (examples)	176 of the 400 vias connect the top and bottom GND pours; blue circles mark examples.
3	24V- → GND at the common-mode filter	The 24 V input return (24V-) joins system GND through the return winding of the common-mode choke.
4	Analog area without split ground	Single GND net. The analog area (ADS1256, voltage reference, OPA320) is separated through the +5VA supply (ferrite), not by a split ground.

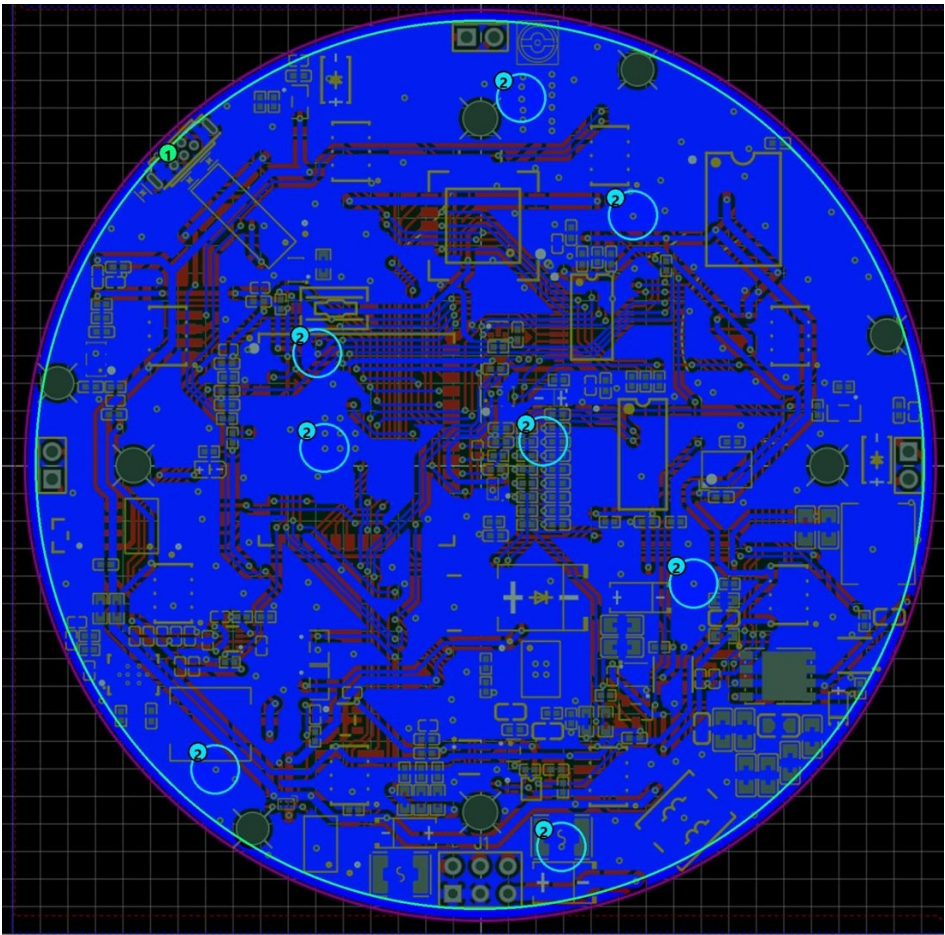


Figure 8-10. Grounding arrangement (bottom) — Main Board GLD

Drawing no.	Rev	Date	Title	Sheet
PGLD-GLD-V4-MB-PCB-10	TBC	TBC	Grounding arrangement — bottom	10 of 10

No	Item	Description
1	GND pour	Bottom GND copper area filling all free area.
2	GND vias (examples)	176 of 400 vias stitch the top and bottom GND pours; blue circles mark examples.

Open items for 2.6.a.8: (a) layout revision and date for the drawing table; (b) PCB laminate grade, UL 94 rating, Tg, CTI, board thickness and copper weight; (c) purpose of the 4 × Ø 3.0 mm holes; (d) layout drawings of the sensor-module board.

2.6.b • Bill of Materials (BOM) for Key Components Affecting Explosion-Proof Safety

A complete, itemized electronic-component BOM exists for both boards, exported directly from the EasyEDA/JLCPCB source project (manufacturer, manufacturer part number, and LCSC supplier part number per line item): 89 line items / 214 placed components on the main board, 14 line items / 24 placed components on the sensor board. Full listing maintained in Dokumen_Teknis_Sertifikasi_GLD_IECEX_ATEX, Section 2.6.b.

Status: *Partially available. The explosion-safety-relevant subset the checklist actually asks for (enclosure, gasket, cable entry device, battery, potting compound, and the gas sensor itself, with material grade and Ex/UL/CCC certification for each) remains not yet compiled — these are mechanical/safety parts, not electronic components, and sit with the Manufacturer, PT Galaksi Megatama Indonesia. The gas sensor itself (MQ2) is sourced outside the LCSC supply chain, without a manufacturer/LCSC part reference; its Ex status is not yet verified.*

2.6.c • Material Specification Sheets / Datasheets (Non-Metallic Materials)

Datasheets or supplier conformity declarations for non-metallic materials (enclosure components, seals, insulators, potting compounds) — covering heat/cold resistance, anti-aging, anti-static, flame retardancy, CTI value, and chemical resistance — have not yet been collected.

Per IEC 60079-0:2017, once GLD's specific non-metallic components are identified the applicable requirements are: a Comparative Tracking Index (CTI) class per Table 5/6 appropriate to the equipment's creepage/clearance design; a glow-wire or needle-flame flame-retardancy result per §26.4–26.5; a glass-transition temperature (T_g) safely outside the confirmed –20°C to +60°C ambient operating range (Section 2.3); and UV/weathering-resistance data for any component exposed outdoors. These thresholds are cited from the standard itself and have not yet been matched against actual component datasheets.

Non-metallic components in the design that this item will need to cover: the cover-to-body sealing gasket providing the IP66 rating (Section 2.3 — identified as a rubber gasket in the casing partner's assembly drawing, specific compound/grade not yet specified); the integral seal of the candidate M20×1.5 cable gland — per project direction, specified together with the gland itself from the BP18-1Z reference (Section 2.3), rather than as a separately sourced component; and the antenna/SMA feedthrough insulator (material not yet specified). The protective mesh cover over the gas-sensing element is now identified as a stainless-steel wire mesh in the same assembly drawing — being metallic, it falls outside this specific non-metallic-materials checklist item.

Status: *Not yet available, pending the enclosure design and material selection with the casing partner — this data has been formally requested from that partner. Partial candidate data: the BP18-1Z reference drawing (Section 2.6.a) specifies a powder-coating surface treatment with electrostatic-safety parameters directly relevant to this item — maximum surface charge transfer <10 nC and maximum surface capacitance <5 pF (coating thickness ≤0.2 mm), consistent with IEC 60079-0 coating requirements — but this describes a supplier's candidate component, not a confirmed datasheet for GLD's own enclosure finish.*

2.6.d • Manufacturing Process Description

A description of manufacturing processes relevant to explosion-protection safety (enclosure machining accuracy control, explosion-proof surface treatment, welding, potting, die-casting, bonding) has not yet been documented.

Status: *Not yet available — this describes the Manufacturer's (PT Galaksi Megatama Indonesia) process, not an internal electronics process.*

2.6.e • Explosion-Protection Calculations and Explanations (if applicable)

Flame-path (joint gap, length) and free-internal-volume calculations specific to Ex d (Section 2.5, team recommendation) have not yet been performed, pending final enclosure geometry and ExCB confirmation.

Status: *Not yet available — pending ExCB confirmation of the Ex d protection concept and final enclosure design.*

2.6.f • Temperature Group Calculation (Hottest-Point Temperature Estimation)

A preliminary internal surface-temperature measurement has been carried out on a GLD V2 unit (eight thermocouple channels plus ambient; normal operation, maximum load, and fan stalled; 180 minutes each at approximately 24–25°C ambient). Maximum values, extrapolated to the +60°C maximum rated ambient:

Condition	MQ sensor body	PCB	External enclosure
Normal operation	44.2 → ≈79°C	52.4 → ≈88°C	32.1 → ≈67°C
Maximum load	55.0 → ≈91°C	58.3 → ≈94°C	34.8 → ≈71°C
Fan stalled (malfunction)	78.4 → ≈114°C	63.4 → ≈99°C	43.9 → ≈79°C

The highest extrapolated value (≈114°C) is below the effective T4 limit of 130°C (135°C less the 5 K margin under IEC 60079-0). Under the recommended Ex d concept, the external enclosure surface (≈79°C) governs the temperature class. Open items: DC/DC converter, power inductor and MOSFET/diode not yet measured; alarm/transmit condition not measured; maximum-load PCB reading not yet at thermal equilibrium; test metadata (date, unit, thermocouple type, supply voltage) not yet recorded; confirmation at maximum ambient requires ExCB type testing. Full detail in the companion technical document.

Status: *Partially available — preliminary internal measurement; indicates T4 is achievable with margin.*

2.6.g • Usage and Installation Instructions (Draft)

Safety warnings:

- Only trained and authorized personnel may install, commission, operate, inspect, or maintain the detector.
- Isolate and verify the 24 VDC supply before opening the enclosure or changing wiring. Apply the site lockout/tagout procedure.
- Use only the approved production power arrangement: 24 VDC.
- Perform alarm tests with appropriate site controls and hearing protection where audible devices are connected.
- Perform sensor nulling only in confirmed clean air. Accept the operation only when all eight sensors report a complete 8/8 result; otherwise correct the cause and repeat.
- Do not drill, weld, enlarge cable entries, bypass protective devices, or modify the enclosure without written engineering and Ex approval.
- Remove the unit from service if there is visible damage, water ingress, an unresolved sensor fault, failed alarm proof, or a loss of protective-earth continuity.

Detailed installation requirements:

Cable entry method: use only cable glands, adaptors, blanking elements, and seals approved for the final protection concept, certificate, thread form, IP rating, cable outer diameter, and installation temperature. Do not create new entries, enlarge an entry, leave unused entries open, or substitute a general-purpose gland. Maintain the manufacturer sealing/clamping sequence and record the installed component part number and certificate reference.

Torque requirements: torque values shall comply with the approved enclosure, terminal, cable-gland, and blanking-plug manufacturer instructions (specific torque figures not yet available, dependent on final hardware selection).

Grounding requirements: connect the enclosure to the approved protective-earth system using the designated grounding terminal; verify continuity before energization.

Cleaning requirements: isolate the equipment per site procedure and use a soft lint-free cloth lightly dampened with clean water or an approved mild cleaner; do not use abrasives, aggressive solvents, dry compressed air, high-pressure spray, or tools that can damage the enclosure, gasket, label, antenna, or cable entries; keep liquid out of all openings.

Operating instructions and maintenance requirements:

Before each operating period, check power, enclosure condition, diagnostic status, communication status, and the absence of active faults. Treat an alarm as a real process-safety event until the site response procedure establishes otherwise. Do not change firmware, model files, alarm thresholds, or calibration parameters from the field without controlled approval and a documented rollback path.

Status: *Partially available (draft) — not yet consolidated into an Ex-specific installation and operation manual for ExCB review; also feeds the standalone Instruction_Manual_GLD deliverable.*

2.6.h • Nameplate Information (must include all ATEX-required marking information)

Nameplate artwork cannot yet be finalized: it depends on the certificate number, protection marking, temperature class, ambient range, IP rating, and serialization scheme, none of which has been assigned yet.

Status: *Not yet available.*

2.6.i • Ex Component Certificates

No components in this design currently hold an Ex component certificate. The processing unit (ESP32-S3-WROOM-1U-N16R8) and the communication module (E22-900MM22S) hold RF/EMC certifications (FCC, TELEC, CE, RoHS) — these are not Ex component certificates and do not satisfy this item.

Status: *Not yet available.*

3. Sample Information

3.1 • Model, Serial Number, and Status of the Sample

No formal sample register or dossier for ExCB submission has been established. Internal engineering and bench testing reference the “GLD V2” board configuration under firmware environment gld_v2; a discrete unit serial-numbering scheme for certification samples has not yet been implemented.

Status: *Not yet available. The product is still being built from scratch at prototype/development stage; no finalized, serialized unit yet exists to register as a submission sample.*

3.2 • Necessary Test Fixtures or Auxiliary Equipment

Equipment anticipated for commissioning and bench-level functional verification:

Equipment	Purpose
Regulated 24 VDC power supply	Provides a stable 24 VDC supply during commissioning and functional testing.
Digital multimeter	Measures actual voltage, verifies polarity and continuity, supports grounding/bonding verification.
Calibrated gas source / gas test kit	Provides the required gas types to verify correct sensor response.
Gas test chamber	Provides a controlled gas-exposure environment for reproducible test conditions.
Alarm load / relay simulator	Verifies that the alarm output and connected electrical load operate correctly.
LoRa peer / gateway	Verifies that data transmitted by the GLD is successfully received by the intended system.
Laptop and approved software	Reviews diagnostic information, configuration, logging, firmware identification; stores commissioning and test evidence.
Calibrated torque screwdriver	Ensures glands, terminals, enclosure fasteners, and grounding connections are tightened to approved torque values.

Status: *Draft plan only — not yet executed, and not evidence of ExCB/laboratory test readiness.*

This is a working document, filled in against the internal working-draft template (IECEX ATEX Certification Information Requirements_Rev18092026.docx) supplied for this purpose. It follows that template's own section order rather than the more exhaustive item-by-item status tracking maintained in Dokumen_Teknis_Sertifikasi_GLD_IECEX_ATEX — the two documents are maintained in parallel and should stay consistent; treat the exhaustive tracking document as authoritative for item-level status where they differ. Data sources: the official product technical datasheet (Revision 4.0), internal technical specification documentation, EMC parameter measurement data, EasyEDA/JLCPCB design exports, and PT Galaksi Megatama Indonesia's legal documents.