


NEON FLEX

Instruction Manual


In-Ground 2260 SV
PL-NS2260 In-ground

Note : The pictures in the Product Specification are for reference only, please refer to the actual product.


Version4.0
www.atslightinc.com




Aluminium Profile




Flexible profile




Silicone cover



Endcap with wire hole



Closed Endcap



Mounting base




Connector

Installation Instructions

Slotting and Installation (have mounting base)


1 As shown in the figure, the slot size is to be cut to the required length of the slot.

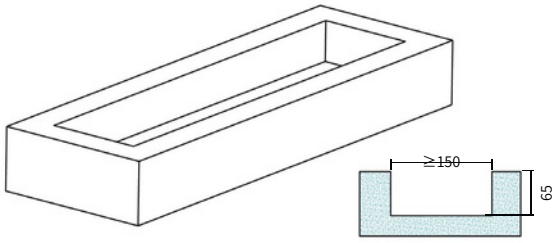

2 Slide the mounting base into the profile from one end.




3 Use a hex wrench to tighten the screws and secure the mounting base.

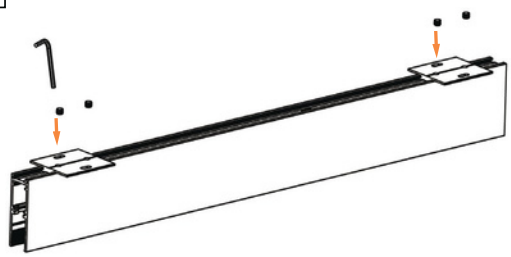


4 Complete the installation of all mounting bases.




5 The distance between the base installation position as shown in the figure.




6 Slide the connector 50mm into the profile from one end and tighten the screws with a hex wrench.

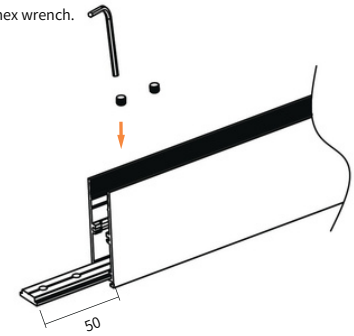


7 Tighten the end cap at one end with a screw.

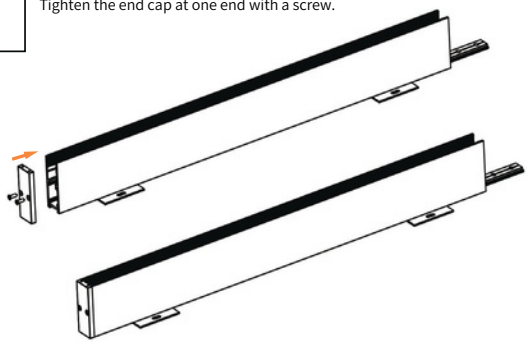


8 As shown in the figure, fix the profile in the slot with screws, ensuring the profile is installed in the center.

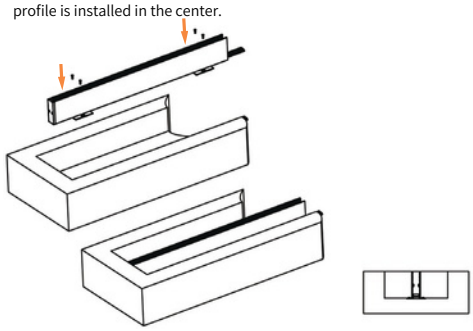


9 As shown in the figure, use connector to connect and fix the next profile.

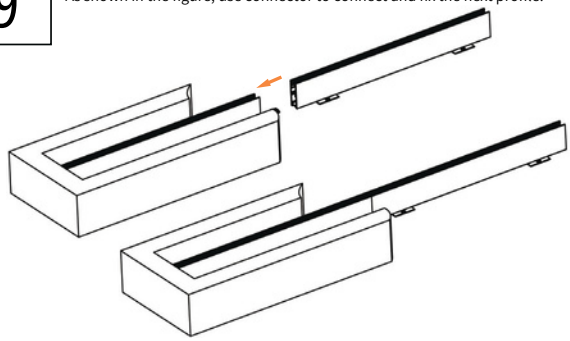


10 As shown in the figure, follow steps 8 to fix the profiles and 9 to connect the profiles until all profiles are installed.

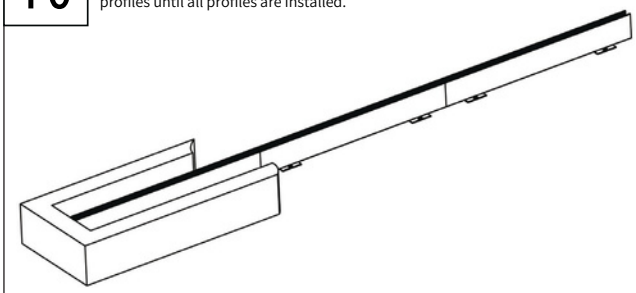


11 As shown in the figure, fix the end cap with a wire hole to the profile and pass the input wire through the end cap, leaving it in the profile.

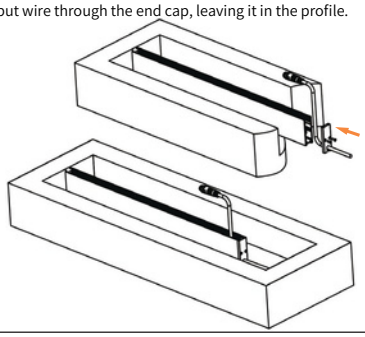


12 As shown in the figure, lead the input wire into the reserved electrical cabinet or indoors, and connect the corresponding switching power supply and controller.

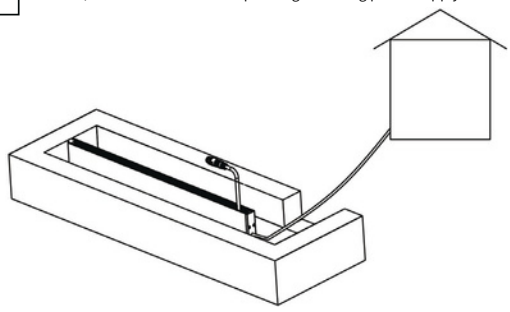


13 As shown in the figure, after connecting the wires and concealing the input wires within the profile, place the cover over the profile and tighten the end cap.

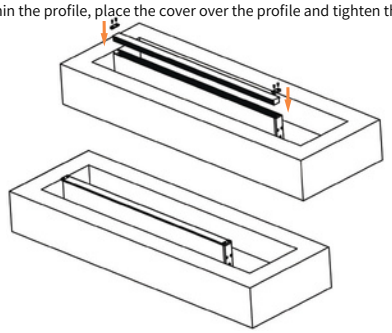


14 As shown in the figure, pour the pre-mixed concrete into the gaps around the profile, making it flush with the surface of the cover, and wait for it to solidify.

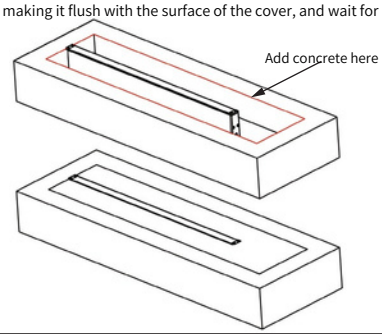

15 As shown in the figure, after the concrete has solidified, remove the surface cover and connect the light strip wire to the input wire pre-installed in the profile.




16 As shown in the figure, insert the light strip into the profile, then insert the cover into the profile, and lock the end cap. After making the light-up test, the installation is complete.



Slotting and Installation (Don't have mounting base)


1

As shown in the figure, the slot size is to be cut to the required length of the slot.

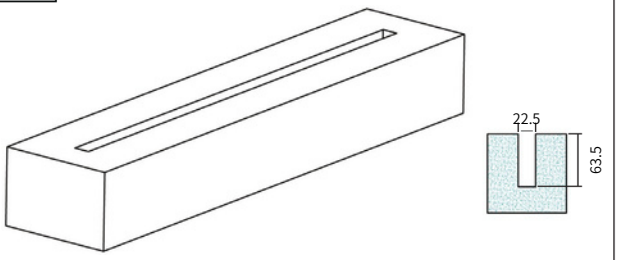


2

Slide the connector 50mm into the profile from one end and tighten the screws with a hex wrench.




3

Tighten the end cap at one end with a screw.

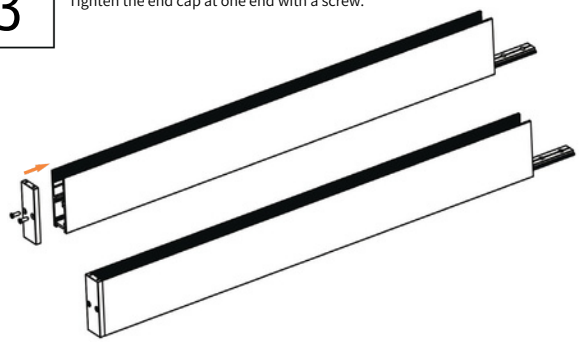


4

As shown in the figure, fix the profile in the slot with screws.

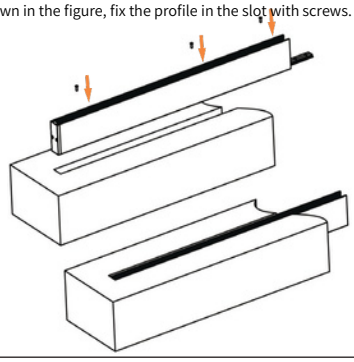


5

As shown in the figure, use connector to connect and fix the next profile.

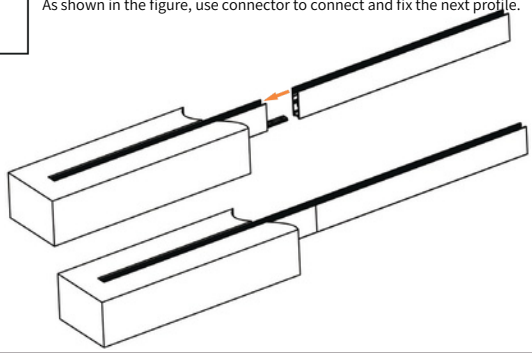


6

As shown in the figure, follow steps 4 to fix the profiles and 5 to connect the profiles until all profiles are installed.

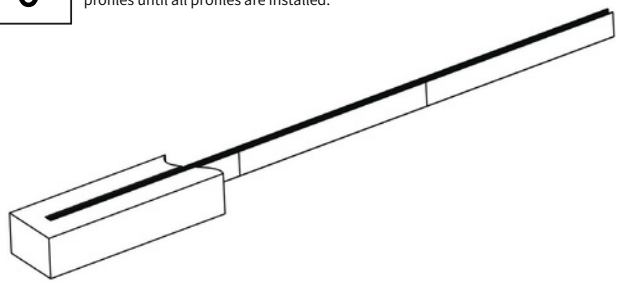


7

As shown in the figure, fix the end cap with a wire hole to the profile and pass the input wire through the end cap, leaving it in the profile.




8


As shown in the figure, lead the input wire into the reserved electrical cabinet or indoors, and connect the corresponding switching power supply and controller.

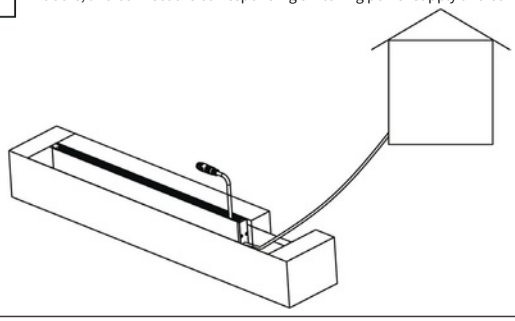


9 Connect the strip wire to the input wire pre-installed in the profile, snap the neon into the profile, and then snap the cover into the profile,then lock the end cap.

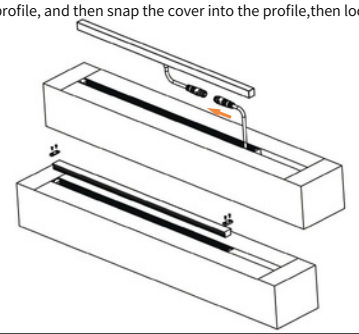

10 Light-up test

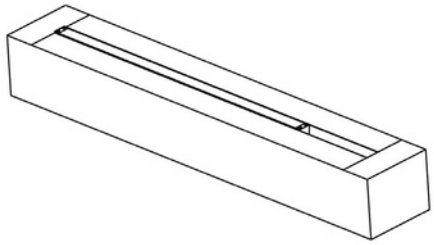


11 As shown in the figure, fill the empty wiring slot to complete the installation.

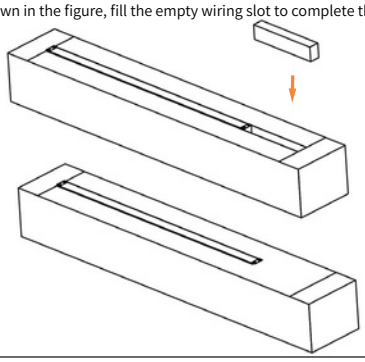


Slotting and installation (Flexible profile, not include mounting base)


1 As shown in the figure, cut the required arc-shaped mounting slot;
Note that the diameter of the slot arc must be greater than the minimum bending diameter of the profile (500mm).

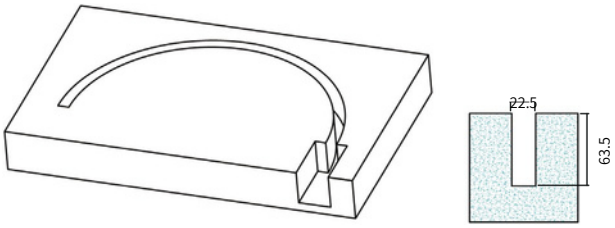


2 As shown in the figure, the profile is initially shaped according to the slot curvature.
Note that the minimum bending diameter of the profile should be ≥500mm.

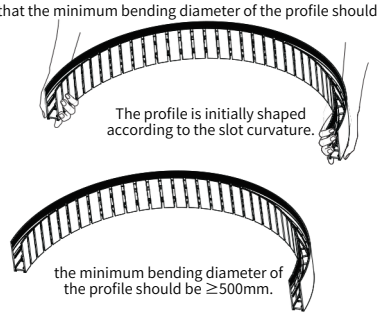


3 Tighten the end cap at one end with screws.

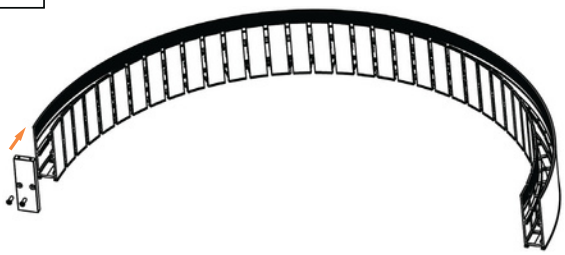


4 As shown in the figure, the profile is fixed in the pre-cut slot with screws, and the shape of the profile is finely adjusted and shaped while fixing it.




5 As shown in the figure, fix the end cap with a wire hole to the profile and pass the input wire through the end cap, leaving it in the profile.

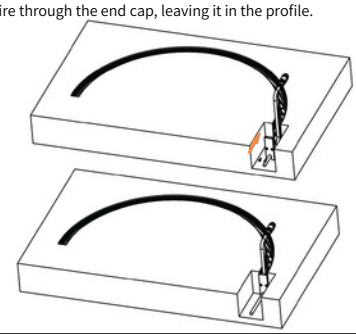


6 As shown in the figure, lead the input wire into the reserved electrical cabinet or indoors, and connect the corresponding switching power supply and controller.

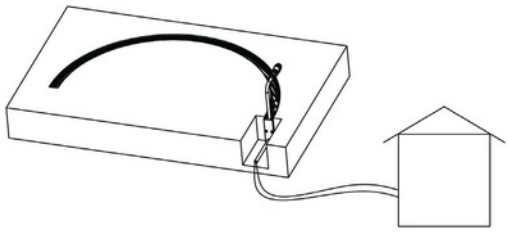


7 As shown in the figure, connect the light strip wire to the input wire pre-installed in the profile.

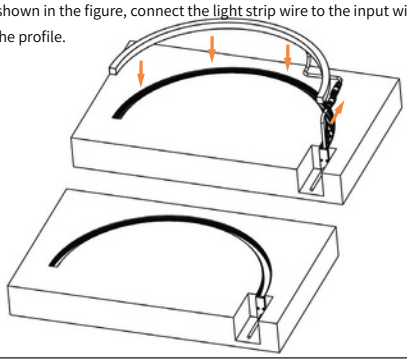

8 As shown in the figure, insert the cover into the profile, and lock the end cap. Then making light-up test.

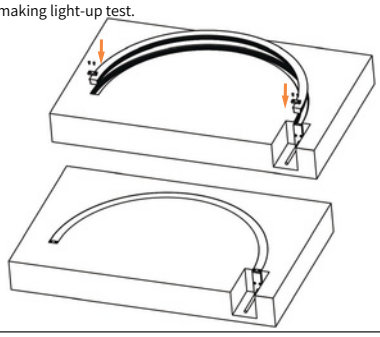


9 As shown in the figure, fill the empty wiring slot to complete the installation.

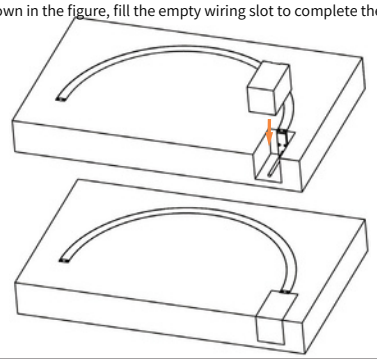


Pre-installed (with a mounting base and bendable profile)


1 Slide the base into the profile from one end

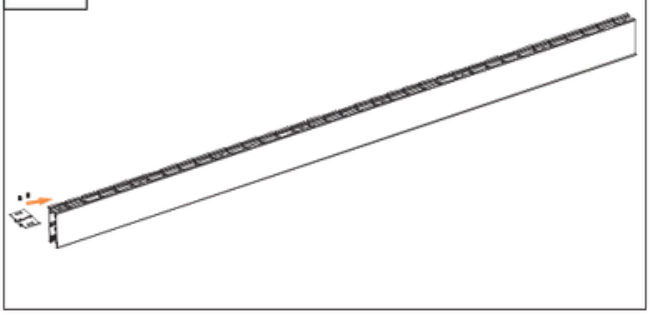


2 Use a hex wrench to tighten the screws and secure the installation base

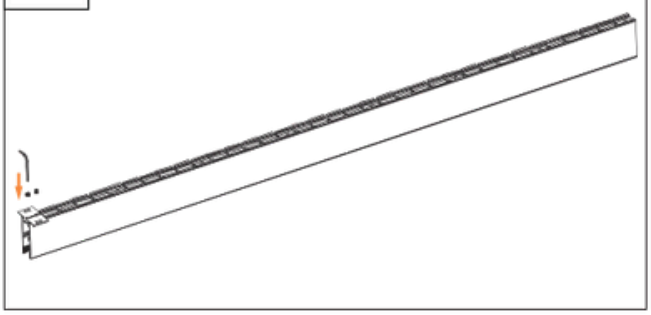


3 Complete other installation bases in sequence
(8 PCS installation bases per meter)

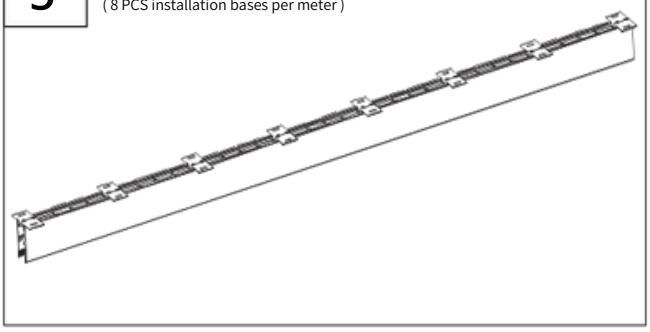


4 Lock the end cap at the non-outlet end with screws

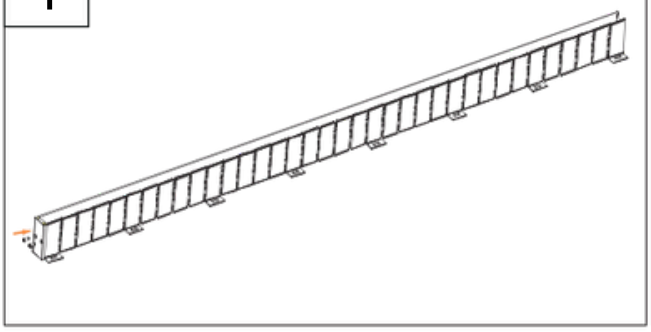


5 Complete the installation of the profile as shown in the figure

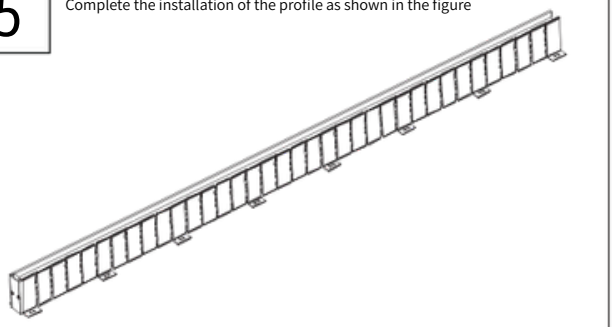


6 Slide the profile connector into the profile from one end

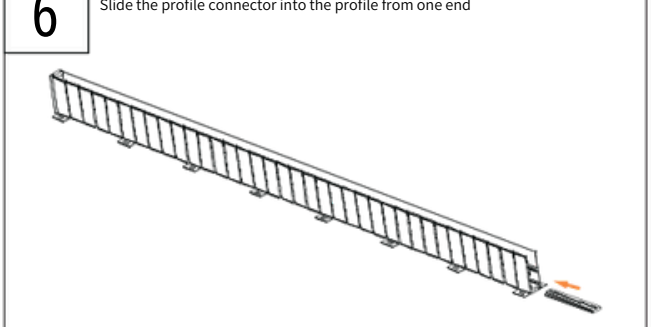


7 The distance between the profile connector and the profile is 50mm

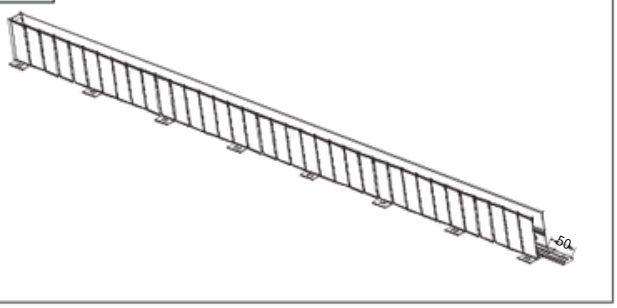


8 Tighten the connector with a hex wrench

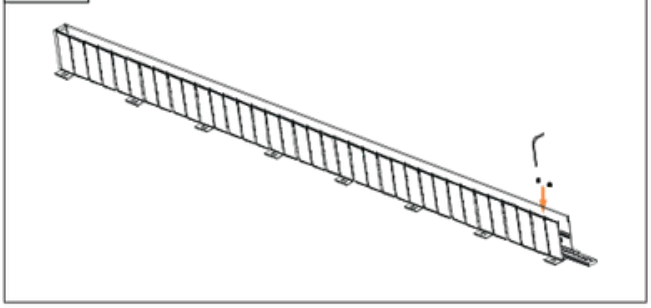


9 Complete the installation of profile connector as shown in the figure

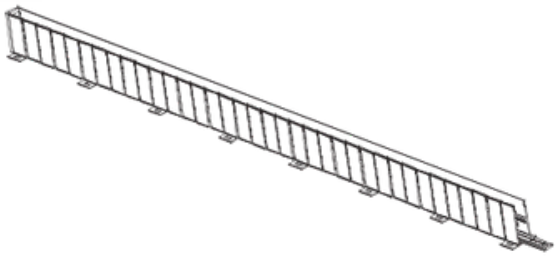


10 As shown in the figure, preliminarily shape the profile according to the installation shape, and note that the minimum bending diameter of the profile should be >500mm

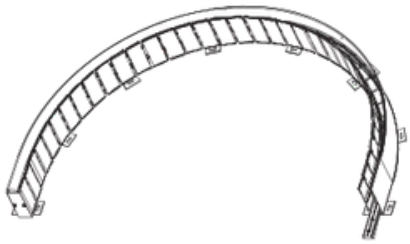


11 For other connected profiles, the initial shaping should also be carried out, and it should be noted that the minimum bending diameter of the profile should be >500mm

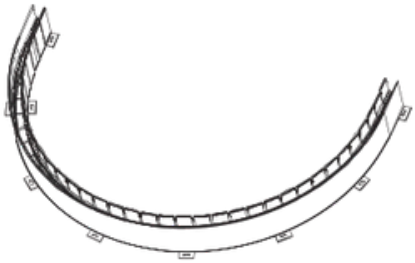


12 Install the first profile that has been preliminarily shaped on the pre leveled ground, and lock the fixed base with screws in sequence

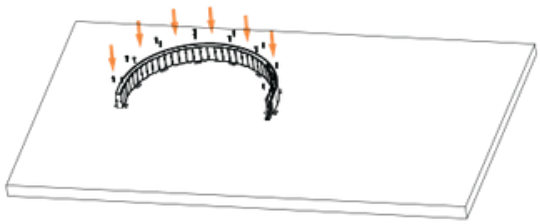


13 Complete the installation of the profile as shown in the figure

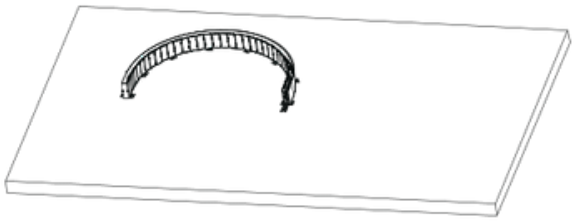


14 As shown in the figure, insert the second profile into the connector and splice it with the first profile

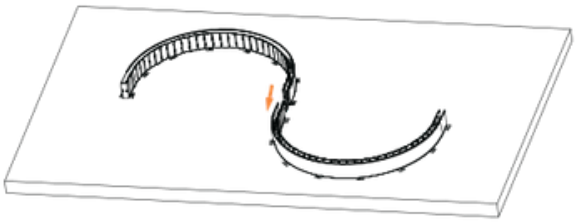


15 Use a hex wrench to tighten the second profile of the connector and complete the splicing of the two profiles

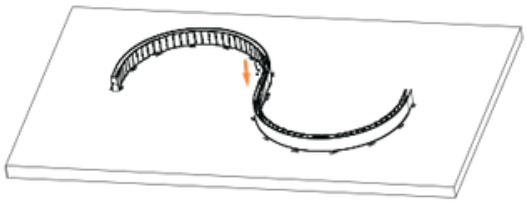


16 Lock the fixed base of the second profile with screws in sequence

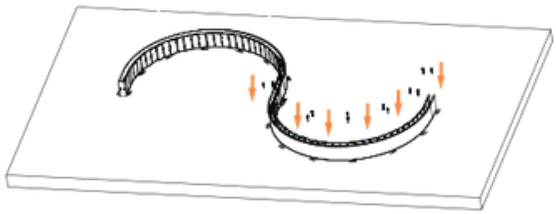


17 Complete profile installation (note that if there are multiple profiles, repeat steps 14-15-16 to complete all profile installations)

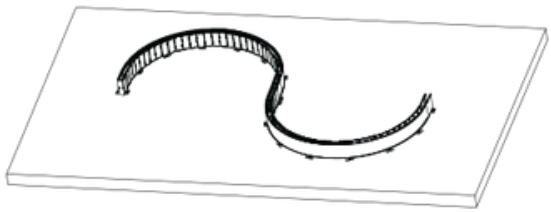


18 Lock the plug at the outlet end with screws, and pre install the waterproof connector at the outlet end in the profile

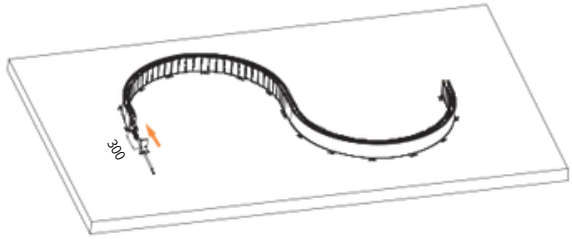


19 Complete the installation of the outlet end cap and waterproof connector as shown in the figure

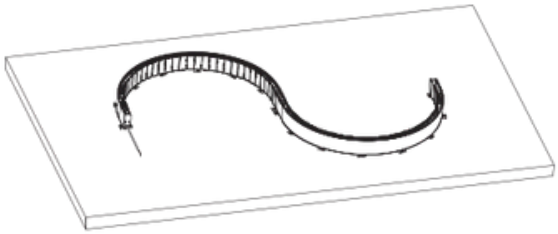


20 Attach a plastic baffle to the profile from the side as shown in the picture, blocking the gap on the side

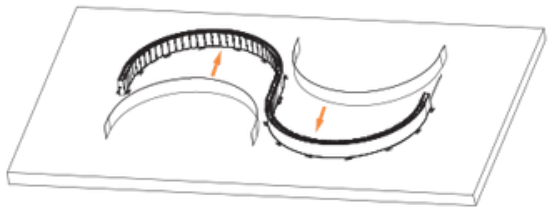


21 Complete the installation of all baffles as shown in the picture

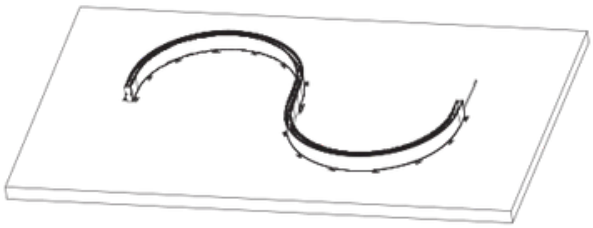


22 Cover the mask on the profile as shown in the picture

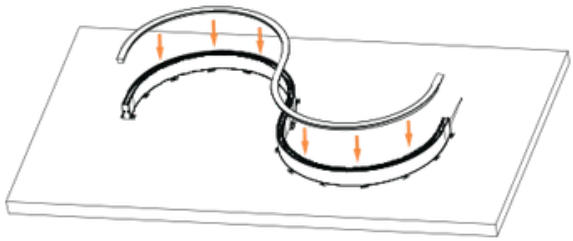


23 The mask has been installed as shown in the picture

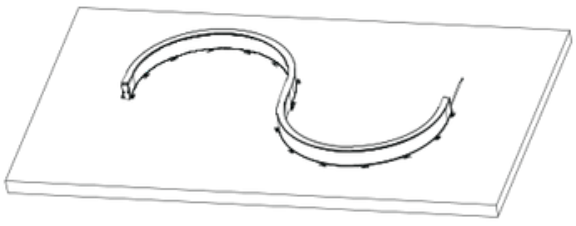


24 As shown in the picture, tighten the cover of the closed end cap with screws and press it against the face mask

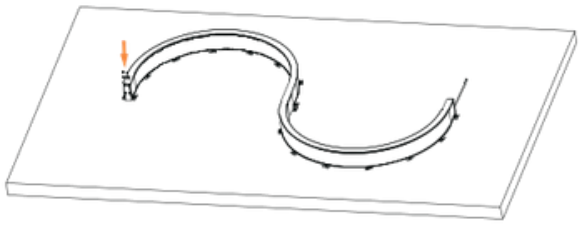


25 Lock the top cover of the end cap at the outlet end with screws as shown in the picture and press it against the face mask

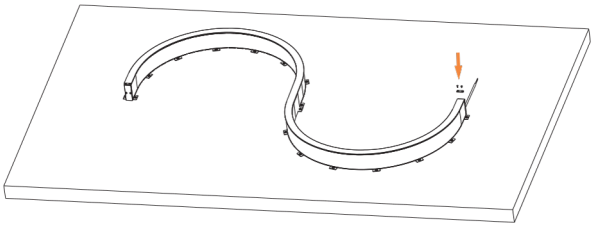


26 Complete the installation of the face mask and the caps on both ends

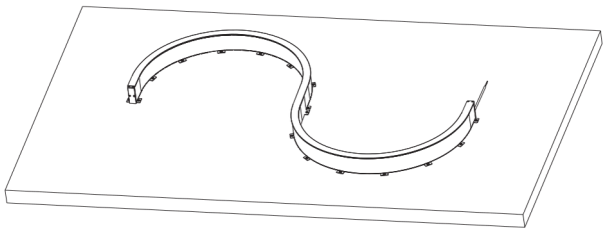


27 As shown in the figure, introduce the input line into the reserved electrical cabinet or indoor area, and connect the corresponding switch power supply and controller

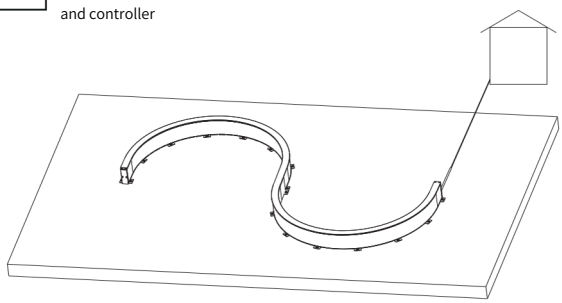


28 As shown in the figure, pour the pre mixed concrete around the profile and level it with the surface of the mask, and wait for it to solidify

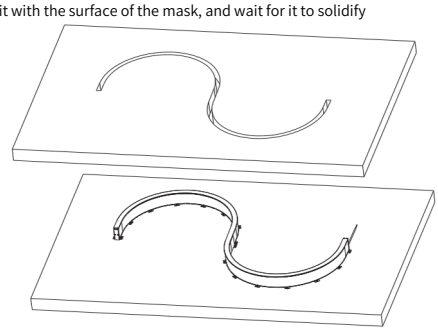


29 Waiting for the concrete to solidify

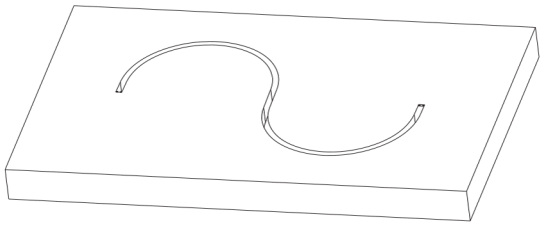


30 After the concrete solidifies, remove the caps on both ends

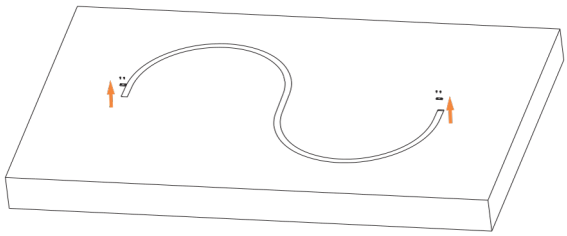


31 Remove the face mask

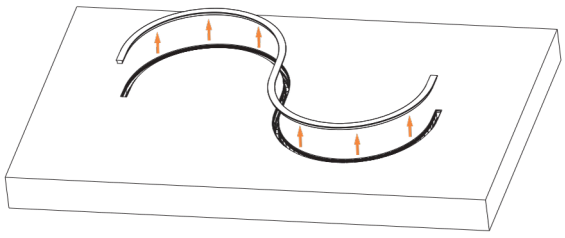


32 Remove the waterproof connector embedded in the profile

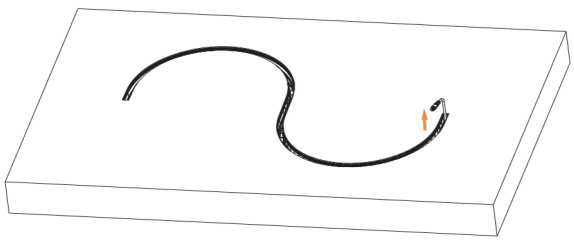


33 Connect and lock the waterproof connector on the light body with the waterproof connector in the profile, and turn on the power to check if it works properly

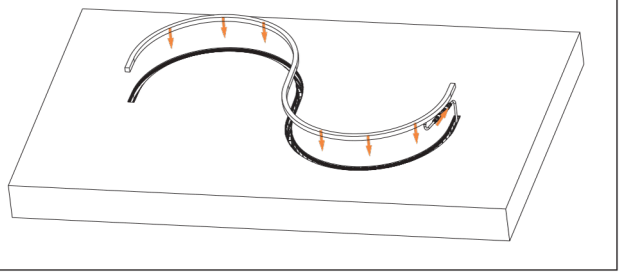


34 After lighting up the test, install the light strip into the profile

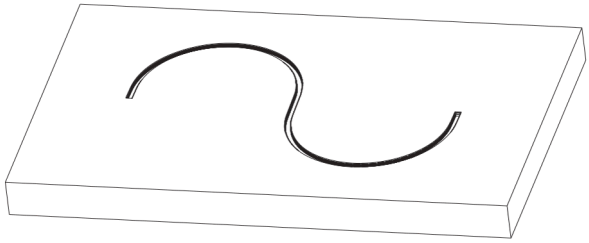


35 Install face mask

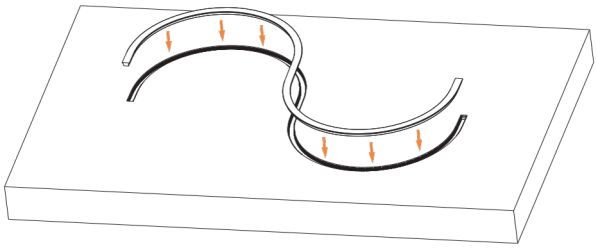

36 Use screws to tighten the covers on both ends of the endcap

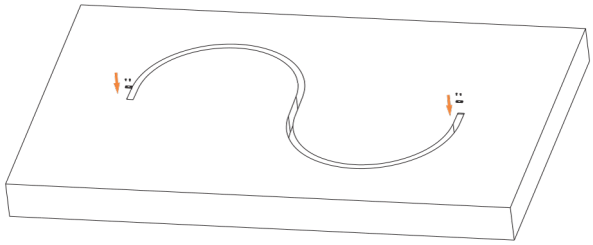

37 Complete installation

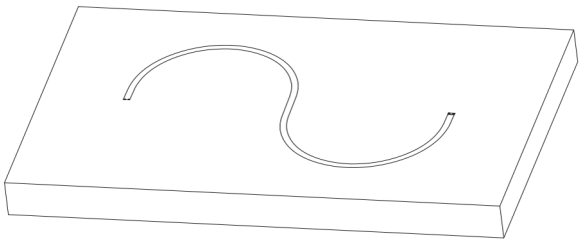

ATS Lighting

Specialized LED strip Manufacturer

A2S TECHNICAL SERVICES

OUR EMAIL
info@a2stechnicalservices.com
Sales@a2stechnicalservices.com

OUR PHONE
UAE: +970 58 627 9497
IND : +91 9100712697
USA : +1 612 643 0990

OUR WEBSITE
www.atslightinc.com