Mating Connector:
Housing: Molex 0436450200
Precrimped 18AWG wire 450mm:
Black: Molex 2147601225
Red: Molex 2147602225

Reverse Polarity Protection

Q13
CSD19534Q5A

J10
POWER
V_IN
V_IN_RTN
Molex
0436500200

D1
SMDJ24CA
24V

C57
10uF-50V-10%-X7R-1210

C55
0.1uF-50V-10%-0603

U7
LM74700QDBVRQ1
VCAP
EN
GND
A
G
C

C47
10uF-50V-10%-X7R-1210

R26
5.1k-1%-0603

R28
5.1k-1%-0603

R23
5.1k-1%-0603

D2
PWR

VIN_PS

File: buck-boost-power-supply.kicad_sch
2/5
+V_IN
-V_IN
15V 3A Buck-Boost Power Supply
+V_OUT
-V_OUT

Power Supply Back
Feed Protection

Q1
CSD19534Q5A

C1
10uF-50V-10%-X7R-1210

C13
0.1uF-50V-10%-0603

U1
LM74700QDBVRQ1
VCAP
EN
GND
A
G
C

C14
10uF-50V-10%-X7R-1210

J4
V_OUT
V_OUT_RTN
15V
Molex
0436500200

Mating Connector:
Housing: Molex 0436450200
Precrimped 18AWG wire 450mm:
Black: Molex 2147601225
Red: Molex 2147602225

Mating Connector:
Housing: Molex 5040510401
Precrimped 24AWG wire 150mm: Molex 0797581003

J7
USB1
Molex
5040500491

File: canable2.kicad_sch
3/5
CANable2.0
USB_DP
USB_DM
3V3_USB
GND_CAN
CAN_HC
CAN_LC

J9
CAN1
MFG P/N: 0705550036
MFG: Molex

J1
Terminal
J2
Terminal
Keystone Electronics
7774

J3
NX CONTROL & UART
3V3_BTN
NX_PC_LED-
NX_PC_LED+
UART2_RXD
UART2_TXD
AC OK
Auto Power On Disable
SYS_RESET
REC
GND
SLEEP/WAKE*
Molex
PH1RB-15-UA
GND1

3V3_BTN
UART2_TXD
UART2_RXD
SYS_RESET
REC
NX_PC_LED+
NX_PC_LED-

D3
PC

SW2
RECOVERY

SW1
RESET

GND1

File: NX-Button-Interface.kicad_sch
4/5
NX-Button Interface

File: usb-serial.kicad_sch
5/5
USB Serial
3V3
RXD
TXD
RESET
FORCE_RECOVERY
UART2_TXD
UART2_RXD

H3
MountingHole
H10
MountingHole
H11
MountingHole
H4
MountingHole
H5
MountingHole
H7
MountingHole
H8
MountingHole

H1
1.152mm ToolingHole
H12
1.152mm ToolingHole
H2
1.152mm ToolingHole
H13
1.152mm ToolingHole

Light Pipe
LP1
Bivar
Bivar-SLP3-150-100-F
LP2
Bivar
Bivar-SLP3-150-100-F
LP3
Bivar
Bivar-SLP3-150-100-F
LP4
Bivar
Bivar-SLP3-150-100-F

SPACE COOKIES LOGO

LEGAL NOTICE
Copyright (C) 2026 SPACE COOKIES FRC TEAM 1868
Licensed under the Solderpad Hardware License v2.1 (the "License");
you may not use this work except in compliance with the License.
You may obtain a copy of the License at:
https://solderpad.org/licenses/SHL-2.1/
SPDX-License-Identifier: Apache-2.0 WITH SHL-2.1

open source hardware

1868 SPACE COOKIES

Sheet: /
File: TVS-Adapter-v1.kicad_sch

Title: The Vision System Adapter

Size: B	Date: 2026-10-14	Rev: 1
KiCad E.D.A. 10.0.7		Id: 1/5

+V_IN
−V_IN
+V_OUT
−V_OUT
GND
C8 47uF 50V
C12 47uF 50V
10uF-50V-10%-X7R-1210
C46
C10
C9
C7
C11
C45
C52
C53
C6
C17
C21
C20
C16
C26
C25
C2
C4
C5
C3
HDRV1
Q12 CSD19534Q5A
Q5 CSD17578Q5A
HDRV2
SW1
L1 2.2uH-19A-5.1mohm-20%
SW2
LDRV1
Q11 CSD19534Q5A
Q8 CSD17578Q5A
LDRV2
RCS
R18 10mOhm-3W-1%-2512
CSG
D9 BAT54KFILM
R27 249K-1%-0603
R24 93.1k-1%-0603
R21 2K-1%-0603
R25 10R0-1%-0603
C41 0.1uF-50V-10%-0603
C40 0.1uF-50V-10%-0603
R5 357K-1%-0603
R7 20K-1%-0603
Texas Instruments
LM5176PWPR
U4
VIN
VISNS
EN/UVLO
SS
COMP
MODE
RT
DITH
SLOPE
CS
CSG
VCC
BIAS
VOSNS
HDRV1
BOOT1
SW1
LDRV1
FB
PGOOD
HDRV2
BOOT2
SW2
LDRV2
ISNS(+)
ISNS(−)
AGND
PGND
EP
Vcc
D8 BAT54KFILM
C39 1uF-50V-10%-0603
C42 0.1uF-50V-10%-0603
D6 BAT54KFILM
C31 0.1uF-50V-10%-0603
R29 0R-1%-0603
R22 0R-1%-0603
R14 0R-1%-0603
R17 0R-1%-0603
15nF-10%-50V-0603 C35
5.6nF-10%-50V-0603 C28
5.9k-1%-0603 R8
5.6nF-10%-50V-0603 C30
270pF-10%-50V-0603 C33
205K-1%-0603 R20
13K-1%-0603 R19
150pF-50V-10%-0603 C37
C29 47pF-50V-10%-0603
100R-1%-0603 R10
100R-1%-0603 R9

VIN(MAX)	24V
VIN(MIN)	5V
VOUT	15V
IOUT(MAX)	3A
FSW	589 kHz
Efficiency	96.7%

15V-3A-Power Supply Analysis

LEGAL NOTICE
Copyright (C) 2026 SPACE COOKIES FRC TEAM 1868
Licensed under the Solderpad Hardware License v2.1 (the "License"):
you may not use this work except in compliance with the License.
You may obtain a copy of the License at:
https://solderpad.org/licenses/SHL-2.1/
SPDX-License-Identifier: Apache-2.0 WITH SHL-2.1

open source hardware

1868 SPACE COOKIES


Sheet: /15V 3A Buck-Boost Power Supply/
File: buck-boost-power-supply.kicad_sch


Title: The Vision System Adapter

Size: B	Date: 2026-10-14	Rev: 1
KiCad E.D.A. 10.0.7		Id: 2/5


5V-250mA-Power Supply Analysis


Reverse Polarity Protection

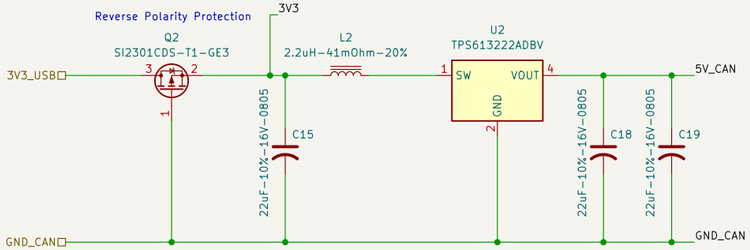


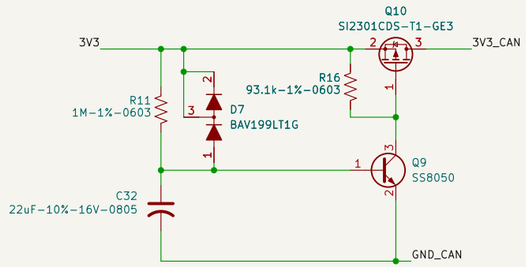


3V3_CAN delays bringing CAN RX (BOOT0) high until NPN turns on. ~10sec.

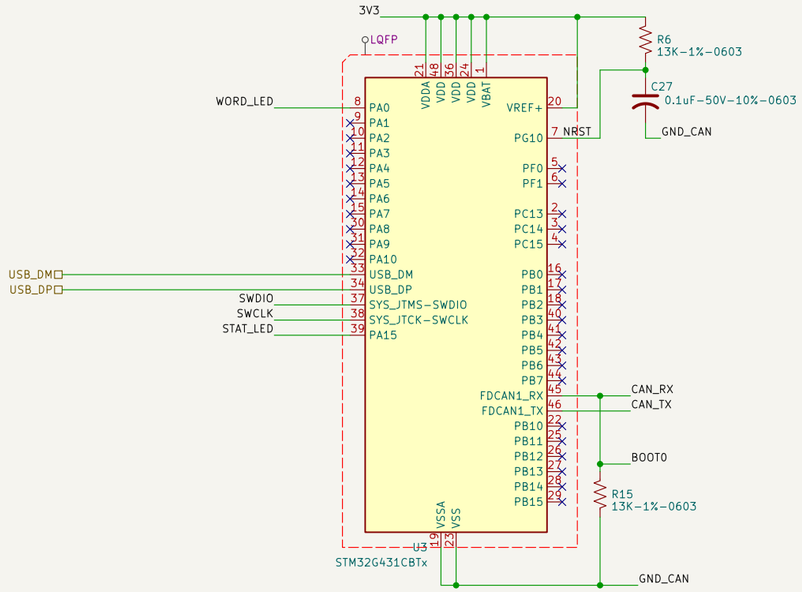

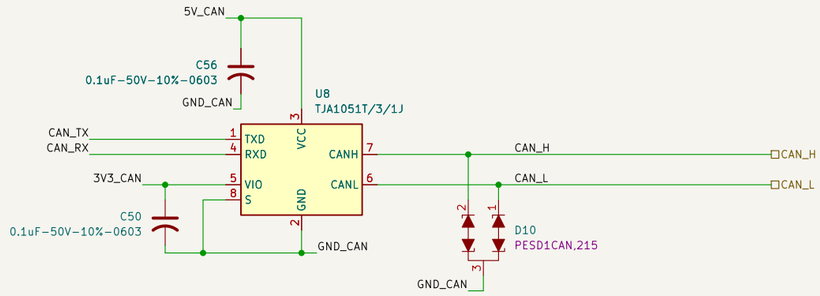





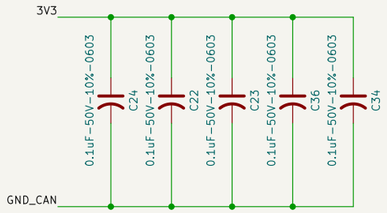

CANable 2.0 Schematic

LEGAL NOTICE
Copyright (C) 2026 SPACE COOKIES FRC TEAM 1868
Licensed under the Solderpad Hardware License v2.1 (the "License"); you may not use this work except in compliance with the License.
You may obtain a copy of the License at:
https://solderpad.org/licenses/SHL-2.1/
SPDX-License-Identifier: Apache-2.0 WITH SHL-2.1


open source hardware

1868 SPACE COOKIES

Sheet: /CANable2.0/
File: canable2.kicad_sch

Title: The Vision System Adapter

Size: B	Date: 2026-10-14	**Rev: 1**
KiCad E.D.A. 10.0.7		Id: 3/5

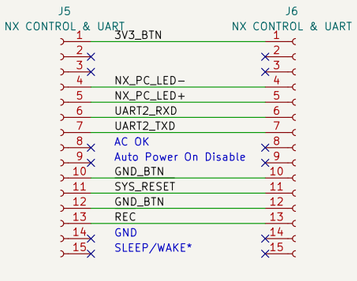

H6
M3.7 MountingHole

H9
M3.7 MountingHole

SPACE COOKIES LOGO

LEGAL NOTICE
Copyright (C) 2026 SPACE COOKIES FRC TEAM 1868
Licensed under the Solderpad Hardware License v2.1 (the "License");
you may not use this work except in compliance with the License.
You may obtain a copy of the License at:
https://solderpad.org/licenses/SHL-2.1/
SPDX-License-Identifier: Apache-2.0 WITH SHL-2.1


open source hardware

1868 SPACE COOKIES

Sheet: /NX-Button Interface/
File: NX-Button-Interface.kicad_sch

Title: The Vision System Adapter

Size: B	Date: 2026-10-14	**Rev: 1**
KiCad E.D.A. 10.0.7		Id: 4/5

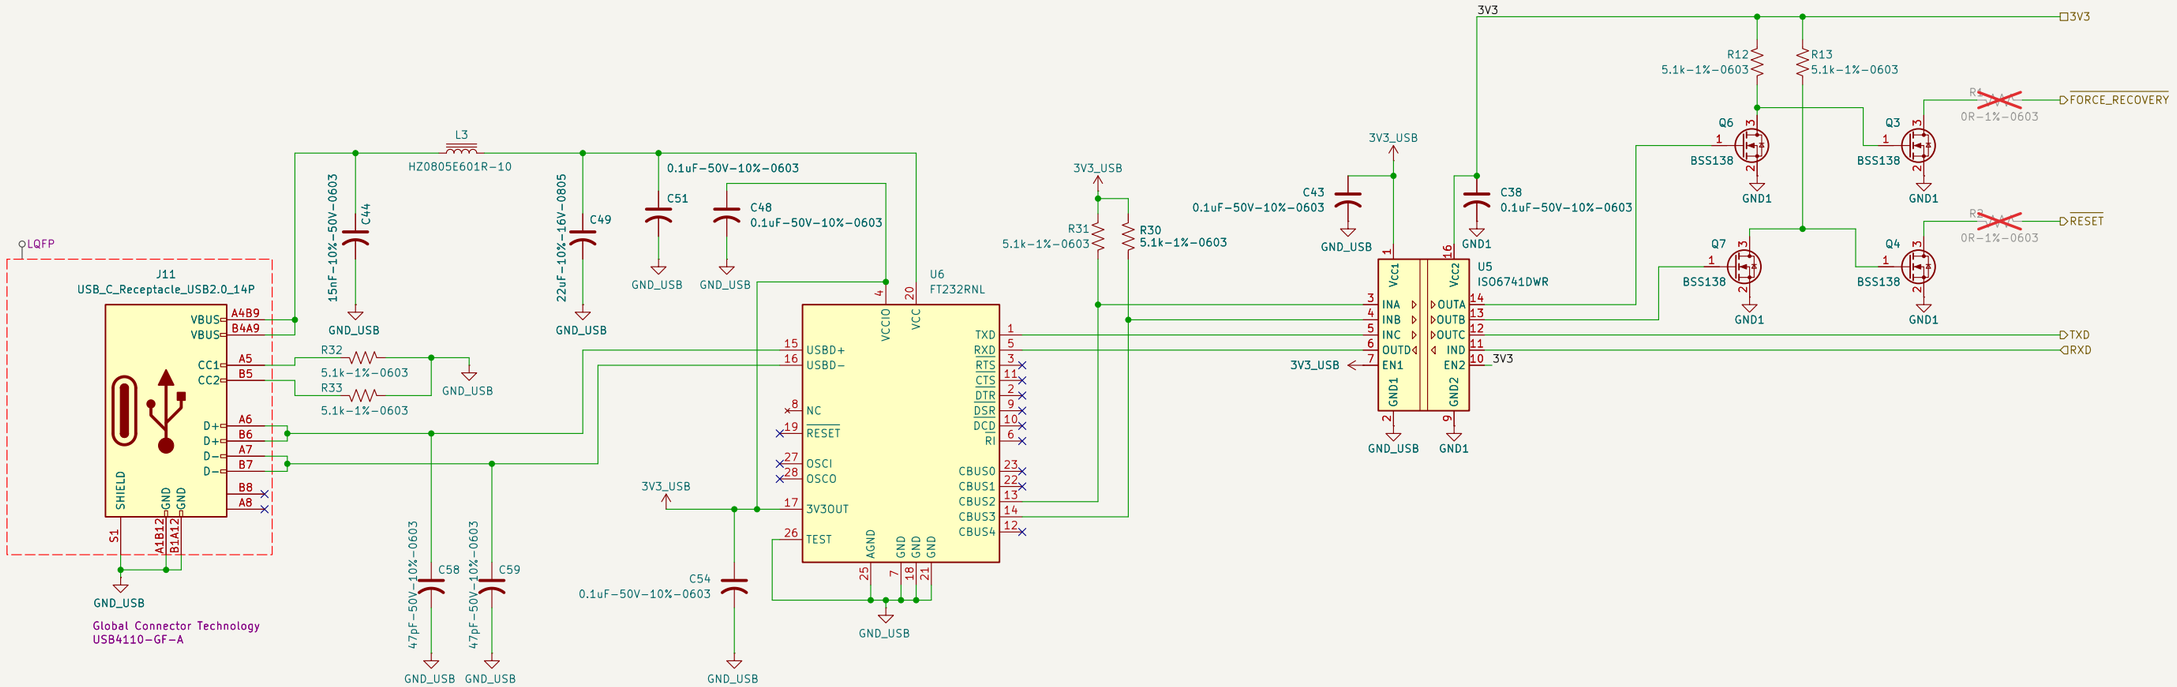

https://hackaday.com/2023/08/07/all-about-usb-c-example-circuits/

LEGAL NOTICE
Copyright (C) 2026 SPACE COOKIES FRC TEAM 1868
Licensed under the Solderpad Hardware License v2.1 (the "License"):
you may not use this work except in compliance with the License.
You may obtain a copy of the License at:
https://solderpad.org/licenses/SHL-2.1/
SPDX-License-Identifier: Apache-2.0 WITH SHL-2.1

1868 SPACE COOKIES

Sheet: /USB Serial/
File: usb-serial.kicad_sch

Title: The Vision System Adapter

Size: B	Date: 2026-10-14	**Rev: 1**
KiCad E.D.A. 10.0.7		Id: 5/5