

This document provides additional assistance with wiring your Extron IP Link Pro Control Processor to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific IP Link Pro Control Processor or the documentation supplied by the manufacturer of the controlled device.

For more information on using Global Scriptor Modules, refer to the "[Guide to Using Scriptor Modules](#)" document.

Device Specifications

Device Type: Matrix Switcher
Manufacturer: Extron
Firmware Version: 1.06
Model(s): DTP CrossPoint 84, DTP CrossPoint 84 IPCP MA, DTP CrossPoint 84 IPCP SA

Tested on the Following Software and Firmware Versions

IP Link Pro Control Processor Firmware	Global Scriptor Version
3.03.0000-b006	2.3.0

Version History

Module Version	Date	Notes
1_5_6_0	5/16/2019	Updated matrix logic
1_5_2_0	10/29/2018	Updated module to Rev. B1
1_5_1_0	3/28/2018	Added commands • EDIDAssignment • AutoImage • ExpansionPremixerGain • ExpansionPremixerMute • InputGain • InputMute

Global Scripter Module Communication Sheet

		• MicLineGain • MicLineMute • OutputAudioSelect • OutputPostmixerTrim • PhantomPower • PrematrixTrim • RefreshMatrix • ScalerPresetrecall • ScalerPresetSave Added status • HDCPInputStatus • HDCPOutputStatus • InputFormat • MicrophoneSignalStatus Renamed commands: • AmpOutput1Level → AmplifierAttenuation • AmpOutput1Mute → AmplifierMute • AnalogOutputLevel → AnalogAttenuation • AnalogOutputMute → AnalogMute • DTPAnalogOutputLevel → DTPAnalogAttenuation • DTPAnalogOutputMute → DTPAnalogMute • DTPOutputLevel → DTPAttenuation • DTPOutputMute → DTPMute • HDCPAuthroization → HDCPInputAuthorization • HDMIOutputLevel → HDMIAttenuation • HDMIOutputMute → HDMIMute • InputSignal → InputSignalStatus • MixPointGain → MixpointGain • MixPointMute → MixpointMute • PreMixerGain → PremixerGain • PreMixerMute → PremixerMute Added Update method for InputTieStatus and OutputTieStatus. Updated Matrix logic. Updated InputSignalStatus state from 'Inactive' to 'Not Active'
1_3_0_0	10/6/2017	Updated module to Rev. B
1_3_0_0	7/13/2017	Combined AmpOutput1LevelSA and AmpOutput1LevelMA into AmOutput1Level. Combined AmpOutput1MuteSA and AmpOutput1MuteMA into AmpOutput1Mute.

Global Scripter Module Communication Sheet

1_2_0_1	4/21/2017	Added missing model in module initialization.
1_2_0_0	8/18/2016	Fixed Output Tie Status and Group Mix Point step interval. Updated Amp Output 1 Level & Mute command support for different models.
1_1_7_1	2/26/2016	Fixed update issue.
1_1_7_0	2/12/2016	Initial Version.


Module Notes

- Unidirectional variable must be set to 'True' if status is not required. Default value is 'False'.
Example: `InterfaceName.Unidirectional = 'True'`
- connectionCounter variable must be set to the number of queries that will be sent to the device before displaying 'Disconnected' if no response is received. Default value is 15.
Example: `InterfaceName.connectionCounter = 5`
- If login credentials are required, devicePassword must be set accordingly.
Example: `InterfaceName.devicePassword = 'extron'`

Supported Classes and Examples

SerialClass
<code>InterfaceName = ModuleName.SerialClass(ProcessorName, 'COM1', Model='DTP CrossPoint 84 IPCP MA')</code>
SerialOverEthernetClass
<code>InterfaceName = ModuleName.SerialOverEthernetClass('192.168.254.254', 2001, Model='DTP CrossPoint 84 IPCP MA')</code>
EthernetClass
<code>InterfaceName = ModuleName.EthernetClass('192.168.254.254', 23, Model='DTP CrossPoint 84 IPCP MA')</code>

DTP CrossPoint 84

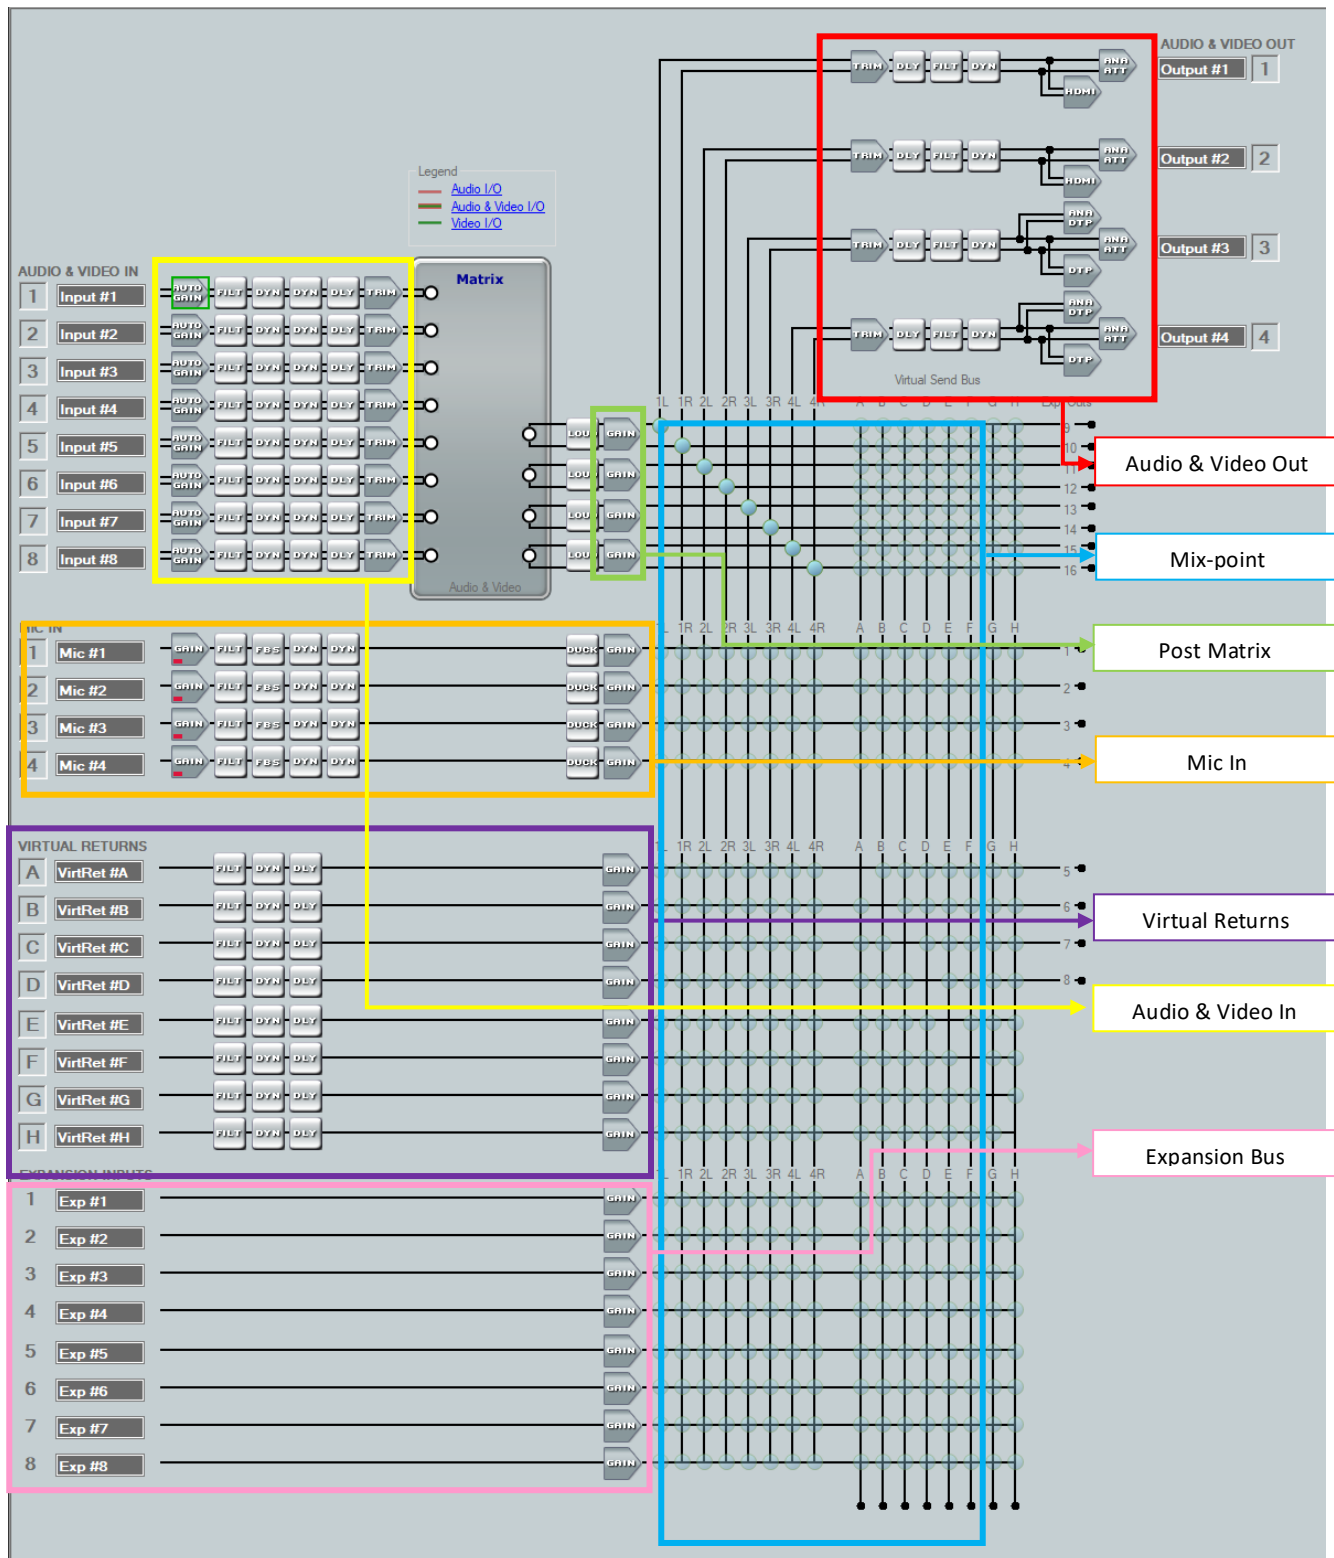


Extron DSP Configurator Labels:


- Audio & Video In




- Audio & Video Out

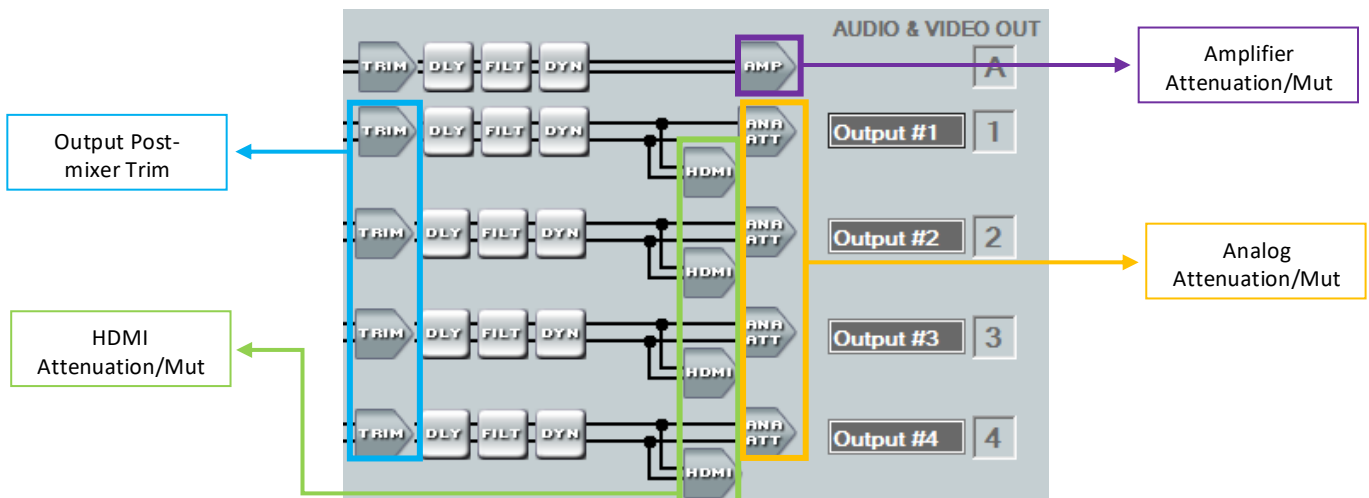


- Mix-point

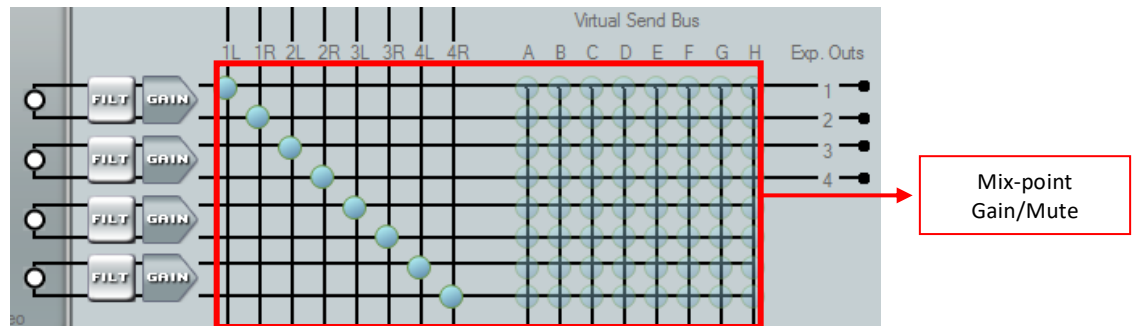


- Post Matrix

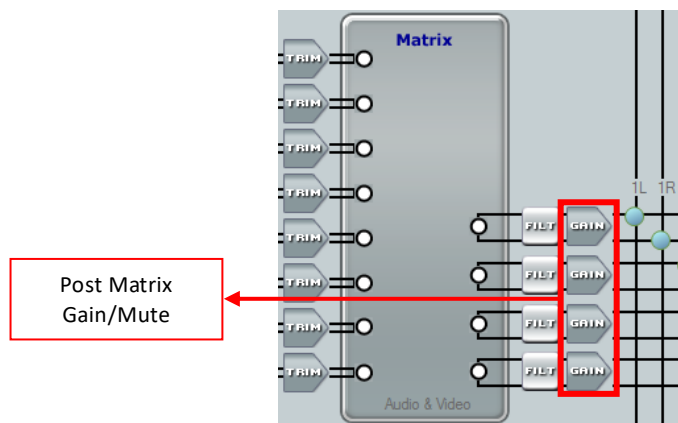


- Mic In

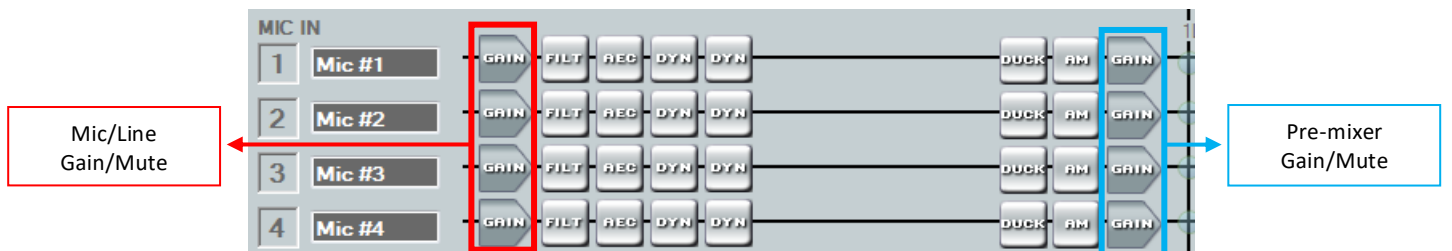

- Virtual Returns

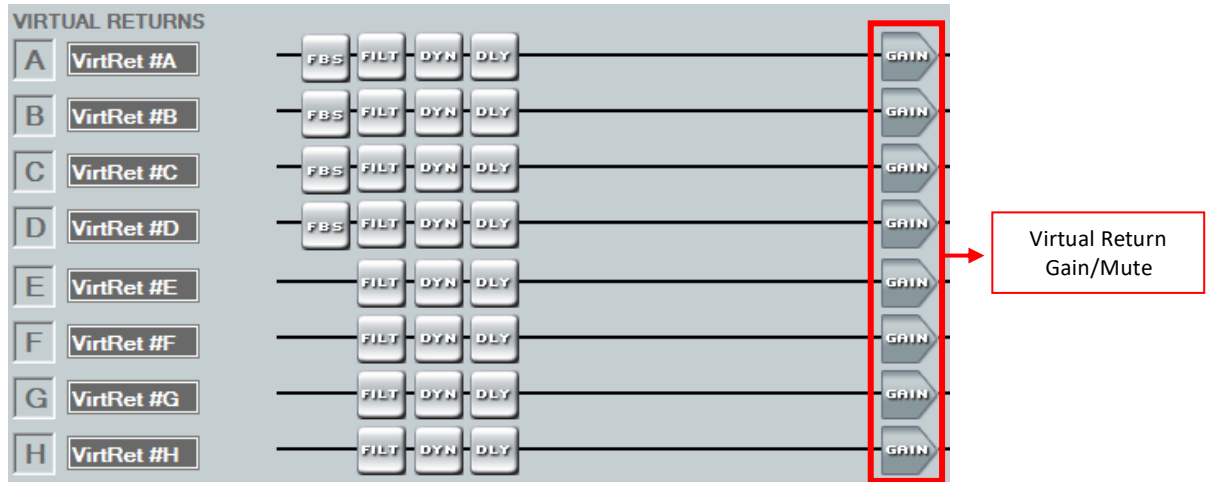

- Expansion Inputs

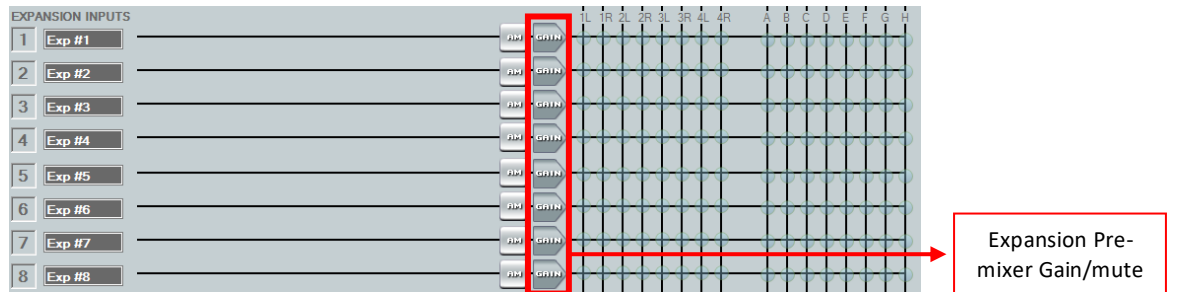

Set Commands

Format with Qualifier:

```
InterfaceName.Set(Command, Value, {'Qualifier Key': 'Qualifier Value'})
```

Format without Qualifier:

```
InterfaceName.Set(Command, Value)
```

Command	Value	
AmplifierAttenuation ¹	-100 to 0 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# AmplifierAttenuation example InterfaceName.Set('AmplifierAttenuation', 0, {'L/R': 'Left'})		
Command	Value	
AmplifierMute ¹	'On' 'Off'	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# AmplifierMute example InterfaceName.Set('AmplifierMute', 'On', {'L/R': 'Left'})		
Command	Value	
AnalogAttenuation	-100 to 0 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Output'	'1' – '4'	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# AnalogAttenuation example InterfaceName.Set('AnalogAttenuation', 0, {'Output': '1', 'L/R': 'Left'})		
Command	Value	
AnalogMute	'On' 'Off'	
Qualifier Key	Qualifier Value	
'Output'	'1' – '4'	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# AnalogMute example InterfaceName.Set('AnalogMute', 'On', {'Output': '1', 'L/R': 'Left'})		
Command	Value	
AspectRatio	'Fill' 'Follow'	
Qualifier Key	Qualifier Value	
'Input'	'1' – '8'	
# AspectRatio example InterfaceName.Set('AspectRatio', 'Fill', {'Input': '1'})		

Global Scripter Module Communication Sheet

Command	Value		
AutoImage	None		
Qualifier Key	Qualifier Value		
'Output'	'3' – '4'		
# AutoImage example InterfaceName.Set('AutoImage', None, {'Output': '3'})			
Command	Value		
DTPAnalogAttenuation	-100 to 0 in steps of 0.1 dB		
Qualifier Key	Qualifier Value		
'Output'	'3' – '4'		
Qualifier Key	Qualifier Value	Qualifier Value	
'L/R'	'Left'	'Right'	
# DTPAnalogAttenuation example InterfaceName.Set('DTPAnalogAttenuation', 0, {'Output': '3', 'L/R': 'Left'})			
Command	Value	Value	
DTPAnalogMute	'On'	'Off'	
Qualifier Key	Qualifier Value		
'Output'	'3' – '4'		
Qualifier Key	Qualifier Value	Qualifier Value	
'L/R'	'Left'	'Right'	
# DTPAnalogMute example InterfaceName.Set('DTPAnalogMute', 'On', {'Output': '3', 'L/R': 'Left'})			
Command	Value		
DTPAttenuation	-100 to 0 in steps of 0.1 dB		
Qualifier Key	Qualifier Value		
'Output'	'3' – '4'		
Qualifier Key	Qualifier Value	Qualifier Value	
'L/R'	'Left'	'Right'	
# DTPAttenuation example InterfaceName.Set('DTPAttenuation', 0, {'Output': '3', 'L/R': 'Left'})			
Command	Value	Value	
DTPMute	'On'	'Off'	
Qualifier Key	Qualifier Value		
'Output'	'3' – '4'		
Qualifier Key	Qualifier Value	Qualifier Value	
'L/R'	'Left'	'Right'	
# DTPMute example InterfaceName.Set('DTPMute', 'On', {'Output': '3', 'L/R': 'Left'})			
Command	Value	Value	Value
ExecutiveMode	'Mode 1'	'Mode 2'	'Off'
# ExecutiveMode example			

Global Scripter Module Communication Sheet

InterfaceName.Set('ExecutiveMode', 'Mode 1')			
Command ExpansionPremixerGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '8'		
# ExpansionPremixerGain example InterfaceName.Set('ExpansionPremixerGain', 12, {'Input': '1'})			
Command ExpansionPremixerMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '8'		
# ExpansionPremixerMute example InterfaceName.Set('ExpansionPremixerMute', 'On', {'Input': '1'})			
Command GlobalVideoMute	Value 'Video'	Value 'Video & Sync'	Value 'Off'
# GlobalVideoMute example InterfaceName.Set('GlobalVideoMute', 'Video')			
Command GroupMicLineInputGain	Value -18 to 80 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupMicLineInputGain example InterfaceName.Set('GroupMicLineInputGain', 80, {'Group': '1'})			
Command GroupMixpoint	Value -35 to 25 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupMixpoint example InterfaceName.Set('GroupMixpoint', 25, {'Group': '1'})			
Command GroupMute	Value 'On'	Value 'Off'	
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupMute example InterfaceName.Set('GroupMute', 'On', {'Group': '1'})			
Command GroupOutputAttenuation	Value -100 to 0 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupOutputAttenuation example InterfaceName.Set('GroupOutputAttenuation', 0, {'Group': '1'})			

Command	Value	
GroupPostmixerTrim	-12 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Group'	'1' – '32'	
# GroupPostmixerTrim example InterfaceName.Set('GroupPostmixerTrim', 12, {'Group': '1'})		
Command	Value	
GroupPrematrixTrim	-12 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Group'	'1' – '32'	
# GroupPrematrixTrim example InterfaceName.Set('GroupPrematrixTrim', 12, {'Group': '1'})		
Command	Value	
GroupPremixerGain	-100 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Group'	'1' – '32'	
# GroupPremixerGain example InterfaceName.Set('GroupPremixerGain', 12, {'Group': '1'})		
Command	Value	Value
HDCPInputAuthorization	'On'	'Off'
Qualifier Key	Qualifier Value	
'Input'	'1' – '8'	
# HDCPInputAuthorization example InterfaceName.Set('HDCPInputAuthorization', 'On', {'Input': '1'})		
Command	Value	
HDMIAttenuation	-100 to 0 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Output'	'1' – '2'	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# HDMIAttenuation example InterfaceName.Set('HDMIAttenuation', 0, {'Output': '1', 'L/R': 'Left'})		
Command	Value	Value
HDMIMute	'On'	'Off'
Qualifier Key	Qualifier Value	
'Output'	'1' – '2'	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# HDMIMute example InterfaceName.Set('HDMIMute', 'On', {'Output': '1', 'L/R': 'Left'})		

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Command	Value	Value	Value
InputAudioSwitchMode	'Auto'	'Digital'	'Analog'
Qualifier Key	Qualifier Value		
'Input'	'1' – '8'		
# InputAudioSwitchMode example InterfaceName.Set('InputAudioSwitchMode', 'Auto', {'Input': '1'})			
Command	Value		
InputGain	-18 to 24 in steps of 0.1 dB		
Qualifier Key	Qualifier Value		
'Input'	'1' – '8'		
Qualifier Key	Qualifier Value	Qualifier Value	
'Format'	'Analog'	'Digital'	
Qualifier Key	Qualifier Value	Qualifier Value	
'L/R'	'Left'	'Right'	
# InputGain example InterfaceName.Set('InputGain', 24, {'Input': '1', 'Format': 'Analog', 'L/R': 'Left'})			
Command	Value	Value	
InputMute	'On'	'Off'	
Qualifier Key	Qualifier Value		
'Input'	'1' – '8'		
Qualifier Key	Qualifier Value	Qualifier Value	
'L/R'	'Left'	'Right'	
# InputMute example InterfaceName.Set('InputMute', 'On', {'Input': '1', 'L/R': 'Left'})			
Command	Value		
MatrixTieCommand	None		
Qualifier Key	Qualifier Value		
'Input'	'0' – '8'		
Qualifier Key	Qualifier Value	Qualifier Value	
'Output'	'1' – '4'	'All'	
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Tie Type'	'Audio'	'Audio/Video'	'Video'
# MatrixTieCommand example InterfaceName.Set('MatrixTieCommand', None, {'Input': '0', 'Output': '1', 'Tie Type': 'Audio'})			
Command	Value		
MicLineGain	-18 to 80 in steps of 0.1 dB		
Qualifier Key	Qualifier Value		
'Input'	'1' – '4'		
# MicLineGain example InterfaceName.Set('MicLineGain', 80, {'Input': '1'})			
Command	Value	Value	

Global Scripter Module Communication Sheet

MicLineMute	'On' 'Off'		
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# MicLineMute example InterfaceName.Set('MicLineMute', 'On', {'Input': '1'})			
Command MixpointGain	Value -35 to 25 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value	Qualifier Value	Qualifier Value
	'Output 1 Left'	'Output 1 Right'	'Output 2 Left'
	'Output 2 Right'	'Output 3 Left'	'Output 3 Right'
	'Output 4 Left'	'Output 4 Right'	'Mic 1'
	'Mic 2'	'Mic 3'	'Mic 4'
	'V. Return A'	'V. Return B'	'V. Return C'
	'V. Return D'	'V. Return E'	'V. Return F'
	'V. Return G'	'V. Return H'	'Exp. 1'
	'Exp. 2'	'Exp. 3'	'Exp. 4'
	'Exp. 5'	'Exp. 6'	'Exp. 7'
'Exp. 8'			
Qualifier Key 'Output'	Qualifier Value	Qualifier Value	Qualifier Value
	'Output 1 Left'	'Output 1 Right'	'Output 2 Left'
	'Output 2 Right'	'Output 3 Left'	'Output 3 Right'
	'Output 4 Left'	'Output 4 Right'	'V. Send A'
	'V. Send B'	'V. Send C'	'V. Send D'
	'V. Send E'	'V. Send F'	'V. Send G'
	'V. Send H'		
# MixpointGain example InterfaceName.Set('MixpointGain', 25, {'Input': 'Output 1 Left', 'Output': 'Output 1 Left'})			
Command MixpointMute	Value 'On' 'Off'		
Qualifier Key 'Input'	Qualifier Value	Qualifier Value	Qualifier Value
	'Output 1 Left'	'Output 1 Right'	'Output 2 Left'
	'Output 2 Right'	'Output 3 Left'	'Output 3 Right'
	'Output 4 Left'	'Output 4 Right'	'Mic 1'
	'Mic 2'	'Mic 3'	'Mic 4'
	'V. Return A'	'V. Return B'	'V. Return C'
	'V. Return D'	'V. Return E'	'V. Return F'
	'V. Return G'	'V. Return H'	'Exp. 1'

Global Scripter Module Communication Sheet

	'Exp. 2'	'Exp. 3'	'Exp. 4'
	'Exp. 5'	'Exp. 6'	'Exp. 7'
	'Exp. 8'		
Qualifier Key 'Output'	Qualifier Value 'Output 1 Left' 'Output 2 Right' 'Output 4 Left' 'V. Send B' 'V. Send E' 'V. Send H'	Qualifier Value 'Output 1 Right' 'Output 3 Left' 'Output 4 Right' 'V. Send C' 'V. Send F'	Qualifier Value 'Output 2 Left' 'Output 3 Right' 'V. Send A' 'V. Send D' 'V. Send G'
# MixpointMute example InterfaceName.Set('MixpointMute', 'On', {'Input': 'Output 1 Left', 'Output': 'Output 1 Left'})			
Command OutputAudioSelect	Value 'Original HDMI'	Value 'Embedded Audio'	Value 'No Audio'
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
# OutputAudioSelect example InterfaceName.Set('OutputAudioSelect', 'Original HDMI', {'Output': '1'})			
Command OutputPostmixerTrim	Value -12 to 12 in steps of 0.1 dB		
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
# OutputPostmixerTrim example InterfaceName.Set('OutputPostmixerTrim', 12, {'Output': '1', 'L/R': 'Left'})			
Command OutputResolution	Value '2048x1080 2K (60Hz)' '1440x900 (60Hz)' '720p (25Hz)' '1080p (23.98Hz)' '2048x1080 2K (24Hz)' '1280x768 (60Hz)' '1600x1200 (60Hz)' '720p (59.94Hz)' '1080p (30Hz)' '2048x1080 2K (50Hz)' '1366x768 (60Hz)'	Value '1024x768 (60Hz)' '1680x1050 (60Hz)' '720p (50Hz)' '1080p (29.97Hz)' '2048x1080 2K (30Hz)' '1360x768 (60Hz)' '480p (60Hz)' '1080i (59.94Hz)' '1080p (60Hz)' '800x600 (60Hz)' '1600x900 (60Hz)'	Value '1280x1024 (60Hz)' '480p (59.94Hz)' '1080i (50Hz)' '1080p (59.94Hz)' '640x480 (60Hz)' '1400x1050 (60Hz)' '720p (29.97Hz)' '1080p (24Hz)' '2048x1080 2K (25Hz)' '1280x800 (60Hz)' '1920x1200 (60Hz)'

Global Scripter Module Communication Sheet

	'576p'	'720p (30Hz)'	'720p (60Hz)'
	'1080i (60Hz)'	'1080p (25Hz)'	'1080p (50Hz)'
	'2048x1080 2K (23.98Hz)'	'2048x1080 2K (29.97Hz)'	'2048x1080 2K (59.94Hz)'
Qualifier Key 'Output'	Qualifier Value '3' – '4'		
# OutputResolution example InterfaceName.Set('OutputResolution', '2048x1080 2K (60Hz)', {'Output': '3'})			
Command PhantomPower	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# PhantomPower example InterfaceName.Set('PhantomPower', 'On', {'Input': '1'})			
Command PostMatrixGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
# PostMatrixGain example InterfaceName.Set('PostMatrixGain', 12, {'Output': '1', 'L/R': 'Left'})			
Command PostMatrixMute	Value 'On'	Value 'Off'	
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
# PostMatrixMute example InterfaceName.Set('PostMatrixMute', 'On', {'Output': '1', 'L/R': 'Left'})			
Command PrematrixTrim	Value -12 to 12 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '8'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
# PrematrixTrim example InterfaceName.Set('PrematrixTrim', 12, {'Input': '1', 'L/R': 'Left'})			
Command PremixerGain	Value -100 to 12 in steps of 0.1 dB		

Global Scripter Module Communication Sheet

Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# PremixerGain example InterfaceName.Set('PremixerGain', 12, {'Input': '1'})			
Command PremixerMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# PremixerMute example InterfaceName.Set('PremixerMute', 'On', {'Input': '1'})			
Command PresetRecall	Value '1' – '32'		
# PresetRecall example InterfaceName.Set('PresetRecall', '1')			
Command RefreshMatrix	Value None		
# RefreshMatrix example InterfaceName.Set('RefreshMatrix', None)			
Command ScalerPresetRecall	Value '1' – '128'		
Qualifier Key 'Output'	Qualifier Value '3' – '4'		
# ScalerPresetRecall example InterfaceName.Set('ScalerPresetRecall', '1', {'Output': '3'})			
Command ScalerPresetSave	Value '1' – '128'		
Qualifier Key 'Output'	Qualifier Value '3' – '4'		
# ScalerPresetSave example InterfaceName.Set('ScalerPresetSave', '1', {'Output': '3'})			
Command TestPattern	Value 'Off'	Value 'Crop'	Value 'Alternating Pixels'
	'Crosshatch'	'Color Bars'	'Grayscale'
	'Blue Mode'	'Crop and Pink Noise'	
Qualifier Key 'Output'	Qualifier Value '3' – '4'		
# TestPattern example InterfaceName.Set('TestPattern', 'Off', {'Output': '3'})			
Command VideoMute	Value 'Video'	Value 'Video & Sync'	Value 'Off'
Qualifier Key	Qualifier Value		

'Output'	'1' – '4'		
# VideoMute example InterfaceName.Set('VideoMute', 'Video', {'Output': '1'})			
Command VirtualReturnGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value 'A' 'D' 'G'	Qualifier Value 'B' 'E' 'H'	Qualifier Value 'C' 'F'
# VirtualReturnGain example InterfaceName.Set('VirtualReturnGain', 12, {'Input': 'A'})			
Command VirtualReturnMute	Value 'On' 'Off'		
Qualifier Key 'Input'	Qualifier Value 'A' 'D' 'G'	Qualifier Value 'B' 'E' 'H'	Qualifier Value 'C' 'F'
# VirtualReturnMute example InterfaceName.Set('VirtualReturnMute', 'On', {'Input': 'A'})			

¹This command is only supported for DTP CrossPoint 84 IPCP SA and DTP CrossPoint 84 IPCP MA models

Status Available

For all commands except for HDCPInputStatus, HDCPOutputStatus, InputFormat, InputSignalStatus, MicrophoneSignalStatus, and Temperature, Update should be called only once since the command's status will be updated automatically as the device's status changes. ConnectionStatus does not support the Update function and is triggered by the device providing a successful response to other Update function calls.

Format with Qualifier:

```
InterfaceName.Update(Command, {'Qualifier Key': 'Qualifier Value'})
Value = InterfaceName.ReadStatus(Command, {'Qualifier Key': 'Qualifier Value'})
InterfaceName.SubscribeStatus(Command, {'Qualifier Key': 'Qualifier Value'}, FeedbackHandler)
FeedbackHandler will be called only when the specified qualifier gets a new status.
```

Format without Qualifier:

```
InterfaceName.Update(Command)
Value = InterfaceName.ReadStatus(Command)
InterfaceName.SubscribeStatus(Command, None, FeedbackHandler)
FeedbackHandler will be called when any qualifier gets a new status.
```

Command	Value	
AmplifierAttenuation ¹	-100 to 0 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# AmplifierAttenuation examples InterfaceName.Update('AmplifierAttenuation', {'L/R': 'Left'}) Value = InterfaceName.ReadStatus('AmplifierAttenuation', {'L/R': 'Left'}) InterfaceName.SubscribeStatus('AmplifierAttenuation', None, FeedbackHandler)		
Command	Value	
AmplifierMute ¹	'On' 'Off'	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# AmplifierMute examples InterfaceName.Update('AmplifierMute', {'L/R': 'Left'}) Value = InterfaceName.ReadStatus('AmplifierMute', {'L/R': 'Left'}) InterfaceName.SubscribeStatus('AmplifierMute', None, FeedbackHandler)		
Command	Value	
AnalogAttenuation	-100 to 0 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Output'	'1' – '4'	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# AnalogAttenuation examples InterfaceName.Update('AnalogAttenuation', {'Output': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('AnalogAttenuation', {'Output': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('AnalogAttenuation', None, FeedbackHandler)		

Global Scripter Module Communication Sheet

Command	Value	Value
AnalogMute	'On'	'Off'
Qualifier Key	Qualifier Value	
'Output'	'1' – '4'	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# AnalogMute examples InterfaceName.Update('AnalogMute', {'Output': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('AnalogMute', {'Output': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('AnalogMute', None, FeedbackHandler)		
Command	Value	Value
AspectRatio	'Fill'	'Follow'
Qualifier Key	Qualifier Value	
'Input'	'1' – '8'	
# AspectRatio examples InterfaceName.Update('AspectRatio', {'Input': '1'}) Value = InterfaceName.ReadStatus('AspectRatio', {'Input': '1'}) InterfaceName.SubscribeStatus('AspectRatio', None, FeedbackHandler)		
Command	Value	Value
ConnectionStatus	'Connected'	'Disconnected'
# ConnectionStatus examples Value = InterfaceName.ReadStatus('ConnectionStatus') InterfaceName.SubscribeStatus('ConnectionStatus', None, FeedbackHandler)		
Command	Value	
DTPAnalogAttenuation	-100 to 0 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Output'	'3' – '4'	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# DTPAnalogAttenuation examples InterfaceName.Update('DTPAnalogAttenuation', {'Output': '3', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('DTPAnalogAttenuation', {'Output': '3', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('DTPAnalogAttenuation', None, FeedbackHandler)		
Command	Value	Value
DTPAnalogMute	'On'	'Off'
Qualifier Key	Qualifier Value	
'Output'	'3' – '4'	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# DTPAnalogMute examples InterfaceName.Update('DTPAnalogMute', {'Output': '3', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('DTPAnalogMute', {'Output': '3', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('DTPAnalogMute', None, FeedbackHandler)		

Global Scripter Module Communication Sheet

Command	Value		
DTPAttenuation	-100 to 0 in steps of 0.1 dB		
Qualifier Key	Qualifier Value		
'Output'	'3' – '4'		
Qualifier Key	Qualifier Value	Qualifier Value	
'L/R'	'Left'	'Right'	
# DTPAttenuation examples InterfaceName.Update('DTPAttenuation', {'Output': '3', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('DTPAttenuation', {'Output': '3', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('DTPAttenuation', None, FeedbackHandler)			
Command	Value		Value
DTPMute	'On'		'Off'
Qualifier Key	Qualifier Value		
'Output'	'3' – '4'		
Qualifier Key	Qualifier Value	Qualifier Value	
'L/R'	'Left'	'Right'	
# DTPMute examples InterfaceName.Update('DTPMute', {'Output': '3', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('DTPMute', {'Output': '3', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('DTPMute', None, FeedbackHandler)			
Command	Value	Value	Value
EDIDAssignment	'Output 1'	'Output 2'	'Output 3'
	'Output 4'	'1024x768 @ 50Hz (DVI)'	'1024x768 @ 60Hz (DVI)'
	'1280x720 @ 50Hz (DVI)'	'1280x720 @ 60Hz (DVI)'	'1280x768 @ 50Hz (DVI)'
	'1280x768 @ 60Hz (DVI)'	'1280x800 @ 50Hz (DVI)'	'1280x800 @ 60Hz (DVI)'
	'1280x1024 @ 50Hz (DVI)'	'1280x1024 @ 60Hz (DVI)'	'1360x768 @ 50Hz (DVI)'
	'1360x768 @ 60Hz (DVI)'	'1366x768 @ 50Hz (DVI)'	'1366x768 @ 60Hz (DVI)'
	'1400x1050 @ 50Hz (DVI)'	'1400x1050 @ 60Hz (DVI)'	'1440x900 @ 50Hz (DVI)'
	'1440x900 @ 60Hz (DVI)'	'1600x900 @ 50Hz (DVI)'	'1600x900 @ 60Hz (DVI)'
	'1600x1200 @ 50Hz (DVI)'	'1600x1200 @ 60Hz (DVI)'	'1680x1050 @ 50Hz (DVI)'
	'1680x1050 @ 60Hz (DVI)'	'1920x1080 @ 50Hz (DVI)'	'1920x1080 @ 60Hz (DVI)'
	'1920x1200 @ 50Hz (DVI)'	'1920x1200 @ 60Hz (DVI)'	'2048x1080 @ 50Hz (DVI)'
	'2048x1080 @ 60Hz (DVI)'	'480p 2_Ch Audio @ 60Hz'	'576p 2_Ch Audio @ 50Hz'
	'720p 2_Ch Audio @ 50Hz'	'720p 2_Ch Audio @ 60Hz'	'720p Multi_Ch Audio @ 50Hz'
	'720p Multi_Ch Audio @ 60Hz'	'1080i 2_Ch Audio @ 50Hz'	'1080i 2_Ch Audio @ 60Hz'
	'1080i Multi_Ch Audio @ 50Hz'	'1080i Multi_Ch Audio @ 60Hz'	'1080p 2_Ch Audio @ 50Hz'

Global Scriptor Module Communication Sheet

	'1080p 2_Ch Audio @ 60Hz'	'1080p Multi_Ch Audio @ 50Hz'	'1080p Multi_Ch Audio @ 60Hz'
	'User Assigned 1'	'User Assigned 2'	'User Assigned 3'
	'User Assigned 4'	'User Assigned 5'	'User Assigned 6'
	'User Assigned 7'	'User Assigned 8'	'1024x768 @ 50Hz (HDMI)'
	'1024x768 @ 60Hz (HDMI)'	'1280x768 @ 50Hz (HDMI)'	'1280x768 @ 60Hz (HDMI)'
	'1280x800 @ 50Hz (HDMI)'	'1280x800 @ 60Hz (HDMI)'	'1280x1024 @ 50Hz (HDMI)'
	'1280x1024 @ 60Hz (HDMI)'	'1360x768 @ 50Hz (HDMI)'	'1360x768 @ 60Hz (HDMI)'
	'1366x768 @ 50Hz (HDMI)'	'1366x768 @ 60Hz (HDMI)'	'1400x1050 @ 50Hz (HDMI)'
	'1400x1050 @ 60Hz (HDMI)'	'1440x900 @ 50Hz (HDMI)'	'1440x900 @ 60Hz (HDMI)'
	'1600x900 @ 50Hz (HDMI)'	'1600x900 @ 60Hz (HDMI)'	'1600x1200 @ 50Hz (HDMI)'
	'1600x1200 @ 60Hz (HDMI)'	'1680x1050 @ 50Hz (HDMI)'	'1680x1050 @ 60Hz (HDMI)'
	'1920x1200 @ 50Hz (HDMI)'	'1920x1200 @ 60Hz (HDMI)'	'2048x1080 @ 50Hz (HDMI)'
	'2048x1080 @ 60Hz (HDMI)'		
Qualifier Key 'Input'	Qualifier Value '1' – '8'		
# EDIDAssignment examples InterfaceName.Update('EDIDAssignment', {'Input': '1'}) Value = InterfaceName.ReadStatus('EDIDAssignment', {'Input': '1'}) InterfaceName.SubscribeStatus('EDIDAssignment', None, FeedbackHandler)			
Command ExecutiveMode	Value 'Mode 1'	Value 'Mode 2'	Value 'Off'
# ExecutiveMode examples InterfaceName.Update('ExecutiveMode') Value = InterfaceName.ReadStatus('ExecutiveMode') InterfaceName.SubscribeStatus('ExecutiveMode', None, FeedbackHandler)			
Command ExpansionPremixerGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '8'		
# ExpansionPremixerGain examples InterfaceName.Update('ExpansionPremixerGain', {'Input': '1'})			

Global Scripter Module Communication Sheet

<pre>Value = InterfaceName.ReadStatus('ExpansionPremixerGain', {'Input': '1'}) InterfaceName.SubscribeStatus('ExpansionPremixerGain', None, FeedbackHandler)</pre>		
Command ExpansionPremixerMute	Value 'On'	Value 'Off'
Qualifier Key 'Input'	Qualifier Value '1' – '8'	
<pre># ExpansionPremixerMute examples InterfaceName.Update('ExpansionPremixerMute', {'Input': '1'}) Value = InterfaceName.ReadStatus('ExpansionPremixerMute', {'Input': '1'}) InterfaceName.SubscribeStatus('ExpansionPremixerMute', None, FeedbackHandler)</pre>		
Command GroupMicLineInputGain	Value -18 to 80 in steps of 0.1 dB	
Qualifier Key 'Group'	Qualifier Value '1' – '32'	
<pre># GroupMicLineInputGain examples InterfaceName.Update('GroupMicLineInputGain', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupMicLineInputGain', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupMicLineInputGain', None, FeedbackHandler)</pre>		
Command GroupMixpoint	Value -35 to 25 in steps of 0.1 dB	
Qualifier Key 'Group'	Qualifier Value '1' – '32'	
<pre># GroupMixpoint examples InterfaceName.Update('GroupMixpoint', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupMixpoint', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupMixpoint', None, FeedbackHandler)</pre>		
Command GroupMute	Value 'On'	Value 'Off'
Qualifier Key 'Group'	Qualifier Value '1' – '32'	
<pre># GroupMute examples InterfaceName.Update('GroupMute', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupMute', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupMute', None, FeedbackHandler)</pre>		
Command GroupOutputAttenuation	Value -100 to 0 in steps of 0.1 dB	
Qualifier Key 'Group'	Qualifier Value '1' – '32'	
<pre># GroupOutputAttenuation examples InterfaceName.Update('GroupOutputAttenuation', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupOutputAttenuation', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupOutputAttenuation', None, FeedbackHandler)</pre>		
Command GroupPostmixerTrim	Value -12 to 12 in steps of 0.1 dB	

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupPostmixerTrim examples InterfaceName.Update('GroupPostmixerTrim', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupPostmixerTrim', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupPostmixerTrim', None, FeedbackHandler)			
Command GroupPrematrixTrim	Value -12 to 12 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupPrematrixTrim examples InterfaceName.Update('GroupPrematrixTrim', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupPrematrixTrim', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupPrematrixTrim', None, FeedbackHandler)			
Command GroupPremixerGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupPremixerGain examples InterfaceName.Update('GroupPremixerGain', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupPremixerGain', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupPremixerGain', None, FeedbackHandler)			
Command HDCPInputAuthorization	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '8'		
# HDCPInputAuthorization examples InterfaceName.Update('HDCPInputAuthorization', {'Input': '1'}) Value = InterfaceName.ReadStatus('HDCPInputAuthorization', {'Input': '1'}) InterfaceName.SubscribeStatus('HDCPInputAuthorization', None, FeedbackHandler)			
Command HDCPInputStatus	Value 'No Source Connected'	Value 'No HDCP Content'	Value 'HDCP Content'
Qualifier Key 'Input'	Qualifier Value '1' – '8'		
# HDCPInputStatus examples InterfaceName.Update('HDCPInputStatus', {'Input': '1'}) Value = InterfaceName.ReadStatus('HDCPInputStatus', {'Input': '1'}) InterfaceName.SubscribeStatus('HDCPInputStatus', None, FeedbackHandler)			
Command HDCPOutputStatus	Value 'No monitor connected'	Value 'Monitor connected, HDCP not supported'	Value 'Monitor connected, not encrypted'
	'Monitor connected, currently encrypted'		

Global Scripter Module Communication Sheet

Qualifier Key 'Output'	Qualifier Value '1' – '4'		
# HDCPOutputStatus examples InterfaceName.Update('HDCPOutputStatus', {'Output': '1'}) Value = InterfaceName.ReadStatus('HDCPOutputStatus', {'Output': '1'}) InterfaceName.SubscribeStatus('HDCPOutputStatus', None, FeedbackHandler)			
Command HDMIAttenuation	Value -100 to 0 in steps of 0.1 dB		
Qualifier Key 'Output'	Qualifier Value '1' – '2'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
# HDMIAttenuation examples InterfaceName.Update('HDMIAttenuation', {'Output': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('HDMIAttenuation', {'Output': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('HDMIAttenuation', None, FeedbackHandler)			
Command HDMIMute	Value 'On'	Value 'Off'	
Qualifier Key 'Output'	Qualifier Value '1' – '2'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
# HDMIMute examples InterfaceName.Update('HDMIMute', {'Output': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('HDMIMute', {'Output': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('HDMIMute', None, FeedbackHandler)			
Command InputAudioSwitchMode	Value 'Auto'	Value 'Digital'	Value 'Analog'
Qualifier Key 'Input'	Qualifier Value '1' – '8'		
# InputAudioSwitchMode examples InterfaceName.Update('InputAudioSwitchMode', {'Input': '1'}) Value = InterfaceName.ReadStatus('InputAudioSwitchMode', {'Input': '1'}) InterfaceName.SubscribeStatus('InputAudioSwitchMode', None, FeedbackHandler)			
Command InputFormat	Value 'No signal detected'	Value 'DVI RGB 444'	Value 'HDMI RGB 444 Full'
	'HDMI RGB 444 Limited'	'HDMI YUV 444 Full'	'HDMI YUV 444 Limited'
	'HDMI YUV 422 Full'	'HDMI YUV 422 Limited'	
Qualifier Key 'Input'	Qualifier Value '1' – '8'		
# InputFormat examples InterfaceName.Update('InputFormat', {'Input': '1'}) Value = InterfaceName.ReadStatus('InputFormat', {'Input': '1'}) InterfaceName.SubscribeStatus('InputFormat', None, FeedbackHandler)			

Global Scripter Module Communication Sheet

Command	Value		
InputGain	-18 to 24 in steps of 0.1 dB		
Qualifier Key	Qualifier Value		
'Input'	'1' – '8'		
Qualifier Key	Qualifier Value	Qualifier Value	
'Format'	'Analog'	'Digital'	
Qualifier Key	Qualifier Value	Qualifier Value	
'L/R'	'Left'	'Right'	
# InputGain examples InterfaceName.Update('InputGain', {'Input': '1', 'Format': 'Analog', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('InputGain', {'Input': '1', 'Format': 'Analog', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('InputGain', None, FeedbackHandler)			
Command	Value	Value	
InputMute	'On'	'Off'	
Qualifier Key	Qualifier Value		
'Input'	'1' – '8'		
Qualifier Key	Qualifier Value	Qualifier Value	
'L/R'	'Left'	'Right'	
# InputMute examples InterfaceName.Update('InputMute', {'Input': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('InputMute', {'Input': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('InputMute', None, FeedbackHandler)			
Command	Value	Value	
InputSignalStatus ²	'Active'	'Not Active'	
Qualifier Key	Qualifier Value		
'Input'	'1' – '8'		
# InputSignalStatus examples InterfaceName.Update('InputSignalStatus') Value = InterfaceName.ReadStatus('InputSignalStatus', {'Input': '1'}) InterfaceName.SubscribeStatus('InputSignalStatus', None, FeedbackHandler)			
Command	Value	Value	Value
InputTieStatus ²	'Video'	'Audio'	'Audio/Video'
	'Untied'		
Qualifier Key	Qualifier Value		
'Input'	'1' – '8'		
Qualifier Key	Qualifier Value		
'Output'	'1' – '4'		
# InputTieStatus examples InterfaceName.Update('InputTieStatus') Value = InterfaceName.ReadStatus('InputTieStatus', {'Input': '1', 'Output': '1'}) InterfaceName.SubscribeStatus('InputTieStatus', None, FeedbackHandler)			
Command	Value		
MicLineGain	-18 to 80 in steps of 0.1 dB		

Global Scripter Module Communication Sheet

Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# MicLineGain examples InterfaceName.Update('MicLineGain', {'Input': '1'}) Value = InterfaceName.ReadStatus('MicLineGain', {'Input': '1'}) InterfaceName.SubscribeStatus('MicLineGain', None, FeedbackHandler)			
Command MicLineMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# MicLineMute examples InterfaceName.Update('MicLineMute', {'Input': '1'}) Value = InterfaceName.ReadStatus('MicLineMute', {'Input': '1'}) InterfaceName.SubscribeStatus('MicLineMute', None, FeedbackHandler)			
Command MicrophoneSignalStatus	Value -150 to 0 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
# MicrophoneSignalStatus examples InterfaceName.Update('MicrophoneSignalStatus', {'Input': '1'}) Value = InterfaceName.ReadStatus('MicrophoneSignalStatus', {'Input': '1'}) InterfaceName.SubscribeStatus('MicrophoneSignalStatus', None, FeedbackHandler)			
Command MixpointGain	Value -35 to 25 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value	Qualifier Value	Qualifier Value
	'Output 1 Left'	'Output 1 Right'	'Output 2 Left'
	'Output 2 Right'	'Output 3 Left'	'Output 3 Right'
	'Output 4 Left'	'Output 4 Right'	'Mic 1'
	'Mic 2'	'Mic 3'	'Mic 4'
	'V. Return A'	'V. Return B'	'V. Return C'
	'V. Return D'	'V. Return E'	'V. Return F'
	'V. Return G'	'V. Return H'	'Exp. 1'
	'Exp. 2'	'Exp. 3'	'Exp. 4'
'Exp. 5'	'Exp. 6'	'Exp. 7'	
'Exp. 8'			
Qualifier Key 'Output'	Qualifier Value	Qualifier Value	Qualifier Value
	'Output 1 Left'	'Output 1 Right'	'Output 2 Left'
	'Output 2 Right'	'Output 3 Left'	'Output 3 Right'
	'Output 4 Left'	'Output 4 Right'	'V. Send A'
	'V. Send B'	'V. Send C'	'V. Send D'
'V. Send E'	'V. Send F'	'V. Send G'	

	'V. Send H'		
# MixpointGain examples InterfaceName.Update('MixpointGain', {'Input': 'Output 1 Left', 'Output': 'Output 1 Left'}) Value = InterfaceName.ReadStatus('MixpointGain', {'Input': 'Output 1 Left', 'Output': 'Output 1 Left'}) InterfaceName.SubscribeStatus('MixpointGain', None, FeedbackHandler)			
Command MixpointMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value 'Output 1 Left'	Qualifier Value 'Output 1 Right'	Qualifier Value 'Output 2 Left'
	'Output 2 Right'	'Output 3 Left'	'Output 3 Right'
	'Output 4 Left'	'Output 4 Right'	'Mic 1'
	'Mic 2'	'Mic 3'	'Mic 4'
	'V. Return A'	'V. Return B'	'V. Return C'
	'V. Return D'	'V. Return E'	'V. Return F'
	'V. Return G'	'V. Return H'	'Exp. 1'
	'Exp. 2'	'Exp. 3'	'Exp. 4'
	'Exp. 5'	'Exp. 6'	'Exp. 7'
	'Exp. 8'		
Qualifier Key 'Output'	Qualifier Value 'Output 1 Left'	Qualifier Value 'Output 1 Right'	Qualifier Value 'Output 2 Left'
	'Output 2 Right'	'Output 3 Left'	'Output 3 Right'
	'Output 4 Left'	'Output 4 Right'	'V. Send A'
	'V. Send B'	'V. Send C'	'V. Send D'
	'V. Send E'	'V. Send F'	'V. Send G'
	'V. Send H'		
# MixpointMute examples InterfaceName.Update('MixpointMute', {'Input': 'Output 1 Left', 'Output': 'Output 1 Left'}) Value = InterfaceName.ReadStatus('MixpointMute', {'Input': 'Output 1 Left', 'Output': 'Output 1 Left'}) InterfaceName.SubscribeStatus('MixpointMute', None, FeedbackHandler)			
Command OutputAudioSelect ²	Value 'Original HDMI'	Value 'Embedded Audio'	Value 'No Audio'
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
# OutputAudioSelect examples InterfaceName.Update('OutputAudioSelect') Value = InterfaceName.ReadStatus('OutputAudioSelect', {'Output': '1'}) InterfaceName.SubscribeStatus('OutputAudioSelect', None, FeedbackHandler)			
Command OutputPostmixerTrim	Value -12 to 12 in steps of 0.1 dB		

Global Scripter Module Communication Sheet

Qualifier Key 'Output'	Qualifier Value '1' – '4'		
Qualifier Key 'L/R'	Qualifier Value 'Left'	Qualifier Value 'Right'	
# OutputPostmixerTrim examples InterfaceName.Update('OutputPostmixerTrim', {'Output': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('OutputPostmixerTrim', {'Output': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('OutputPostmixerTrim', None, FeedbackHandler)			
Command OutputResolution	Value '2048x1080 2K (60Hz)' '1440x900 (60Hz)' '720p (25Hz)' '1080p (23.98Hz)' '2048x1080 2K (24Hz)' '1280x768 (60Hz)' '1600x1200 (60Hz)' '720p (59.94Hz)' '1080p (30Hz)' '2048x1080 2K (50Hz)' '1366x768 (60Hz)' '576p' '1080i (60Hz)' '2048x1080 2K (23.98Hz)'	Value '1024x768 (60Hz)' '1680x1050 (60Hz)' '720p (50Hz)' '1080p (29.97Hz)' '2048x1080 2K (30Hz)' '1360x768 (60Hz)' '480p (60Hz)' '1080i (59.94Hz)' '1080p (60Hz)' '800x600 (60Hz)' '1600x900 (60Hz)' '720p (30Hz)' '1080p (25Hz)' '2048x1080 2K (29.97Hz)'	Value '1280x1024 (60Hz)' '480p (59.94Hz)' '1080i (50Hz)' '1080p (59.94Hz)' '640x480 (60Hz)' '1400x1050 (60Hz)' '720p (29.97Hz)' '1080p (24Hz)' '2048x1080 2K (25Hz)' '1280x800 (60Hz)' '1920x1200 (60Hz)' '720p (60Hz)' '1080p (50Hz)' '2048x1080 2K (59.94Hz)'
Qualifier Key 'Output'	Qualifier Value '3' – '4'		
# OutputResolution examples InterfaceName.Update('OutputResolution', {'Output': '3'}) Value = InterfaceName.ReadStatus('OutputResolution', {'Output': '3'}) InterfaceName.SubscribeStatus('OutputResolution', None, FeedbackHandler)			
Command OutputTieStatus²	Value '0' – '8'		
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
Qualifier Key 'Tie Type'	Qualifier Value 'Audio'	Qualifier Value 'Video'	Qualifier Value 'Audio/Video'
# OutputTieStatus examples InterfaceName.Update('OutputTieStatus') Value = InterfaceName.ReadStatus('OutputTieStatus', {'Output': '1', 'Tie Type': 'Audio'}) InterfaceName.SubscribeStatus('OutputTieStatus', None, FeedbackHandler)			
Command	Value	Value	

Global Scripter Module Communication Sheet

PhantomPower	'On' 'Off'	
Qualifier Key	Qualifier Value	
'Input'	'1' – '4'	
# PhantomPower examples InterfaceName.Update('PhantomPower', {'Input': '1'}) Value = InterfaceName.ReadStatus('PhantomPower', {'Input': '1'}) InterfaceName.SubscribeStatus('PhantomPower', None, FeedbackHandler)		
Command	Value	
PostMatrixGain	-100 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Output'	'1' – '4'	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# PostMatrixGain examples InterfaceName.Update('PostMatrixGain', {'Output': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('PostMatrixGain', {'Output': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('PostMatrixGain', None, FeedbackHandler)		
Command	Value	Value
PostMatrixMute	'On'	'Off'
Qualifier Key	Qualifier Value	
'Output'	'1' – '4'	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# PostMatrixMute examples InterfaceName.Update('PostMatrixMute', {'Output': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('PostMatrixMute', {'Output': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('PostMatrixMute', None, FeedbackHandler)		
Command	Value	
PrematrixTrim	-12 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Input'	'1' – '8'	
Qualifier Key	Qualifier Value	Qualifier Value
'L/R'	'Left'	'Right'
# PrematrixTrim examples InterfaceName.Update('PrematrixTrim', {'Input': '1', 'L/R': 'Left'}) Value = InterfaceName.ReadStatus('PrematrixTrim', {'Input': '1', 'L/R': 'Left'}) InterfaceName.SubscribeStatus('PrematrixTrim', None, FeedbackHandler)		
Command	Value	
PremixerGain	-100 to 12 in steps of 0.1 dB	
Qualifier Key	Qualifier Value	
'Input'	'1' – '4'	

Global Scripter Module Communication Sheet

<pre># PremixerGain examples InterfaceName.Update('PremixerGain', {'Input': '1'}) Value = InterfaceName.ReadStatus('PremixerGain', {'Input': '1'}) InterfaceName.SubscribeStatus('PremixerGain', None, FeedbackHandler)</pre>			
Command PremixerMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '4'		
<pre># PremixerMute examples InterfaceName.Update('PremixerMute', {'Input': '1'}) Value = InterfaceName.ReadStatus('PremixerMute', {'Input': '1'}) InterfaceName.SubscribeStatus('PremixerMute', None, FeedbackHandler)</pre>			
Command Temperature	Value 0 to 100 in steps of 1 Degree Celsius		
<pre># Temperature examples InterfaceName.Update('Temperature') Value = InterfaceName.ReadStatus('Temperature') InterfaceName.SubscribeStatus('Temperature', None, FeedbackHandler)</pre>			
Command TestPattern	Value 'Off' 'Crosshatch' 'Blue Mode'	Value 'Crop' 'Color Bars' 'Crop and Pink Noise'	Value 'Alternating Pixels' 'Grayscale'
Qualifier Key 'Output'	Qualifier Value '3' – '4'		
<pre># TestPattern examples InterfaceName.Update('TestPattern', {'Output': '3'}) Value = InterfaceName.ReadStatus('TestPattern', {'Output': '3'}) InterfaceName.SubscribeStatus('TestPattern', None, FeedbackHandler)</pre>			
Command VideoMute	Value 'Video'	Value 'Video & Sync'	Value 'Off'
Qualifier Key 'Output'	Qualifier Value '1' – '4'		
<pre># VideoMute examples InterfaceName.Update('VideoMute', {'Output': '1'}) Value = InterfaceName.ReadStatus('VideoMute', {'Output': '1'}) InterfaceName.SubscribeStatus('VideoMute', None, FeedbackHandler)</pre>			
Command VirtualReturnGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value 'A' 'D'	Qualifier Value 'B' 'E'	Qualifier Value 'C' 'F'

	'G'	'H'	
<pre># VirtualReturnGain examples InterfaceName.Update('VirtualReturnGain', {'Input': 'A'}) Value = InterfaceName.ReadStatus('VirtualReturnGain', {'Input': 'A'}) InterfaceName.SubscribeStatus('VirtualReturnGain', None, FeedbackHandler)</pre>			
Command VirtualReturnMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value 'A' 'D' 'G'	Qualifier Value 'B' 'E' 'H'	Qualifier Value 'C' 'F'
<pre># VirtualReturnMute examples InterfaceName.Update('VirtualReturnMute', {'Input': 'A'}) Value = InterfaceName.ReadStatus('VirtualReturnMute', {'Input': 'A'}) InterfaceName.SubscribeStatus('VirtualReturnMute', None, FeedbackHandler)</pre>			

¹ This command is only supported for DTP CrossPoint 84 IPCP SA and DTP CrossPoint 84 IPCP MA models

² Qualifier parameters is not required when calling the Update method with this command because the response returns statuses for all qualifier states.

Cable and Adapter Requirements

Captive Screw to Captive Screw Serial Cable

Notes for the Device

Serial communication

Port Type: RS-232

Baud Rate: 9600


Data Bits: 8

Parity: None


Stop Bits: One

Flow Control: None

Pin Assignments Diagram



Signal	Main Cable	Signal
TxD	→	RxD
RxD	←	TxD
GND		GND



Network communication

When configuring the Ethernet module, be sure device settings match those of the Global Scripter ethernet interface

Port Type:	Ethernet
Default Port:	23
Logon Credentials Supported:	Yes
Multi-Connection Capabilities:	Yes
Port Changeability:	Yes

Ethernet Module Configuration Description

Please refer to user manual for settings and changes to the network communication

Notes for the Device

Appendix A. Set Commands

Amplifier Attenuation -100 L/R Left	WG60300*-1000AU\x0D
Amplifier Attenuation 0 L/R Left	WG60300*0AU\x0D
Amplifier Attenuation -100 L/R Right	WG60301*-1000AU\x0D
Amplifier Attenuation 0 L/R Right	WG60301*0AU\x0D
Amplifier Mute Off L/R Left	WM60300*0AU\x0D
Amplifier Mute On L/R Left	WM60300*1AU\x0D
Amplifier Mute Off L/R Right	WM60301*0AU\x0D
Amplifier Mute On L/R Right	WM60301*1AU\x0D
Analog Attenuation -100 Output 1 L/R Left	WG60000*-1000AU\x0D
Analog Attenuation 0 Output 1 L/R Left	WG60000*0AU\x0D
Analog Attenuation -100 Output 1 L/R Right	WG60001*-1000AU\x0D
Analog Attenuation 0 Output 1 L/R Right	WG60001*0AU\x0D
Analog Attenuation -100 Output 4 L/R Left	WG60006*-1000AU\x0D
Analog Attenuation 0 Output 4 L/R Left	WG60006*0AU\x0D
Analog Attenuation -100 Output 4 L/R Right	WG60007*-1000AU\x0D
Analog Attenuation 0 Output 4 L/R Right	WG60007*0AU\x0D
Analog Mute Off Output 1 L/R Left	WM60000*0AU\x0D
Analog Mute On Output 1 L/R Left	WM60000*1AU\x0D
Analog Mute Off Output 1 L/R Right	WM60001*0AU\x0D
Analog Mute On Output 1 L/R Right	WM60001*1AU\x0D
Analog Mute Off Output 4 L/R Left	WM60006*0AU\x0D
Analog Mute On Output 4 L/R Left	WM60006*1AU\x0D
Analog Mute Off Output 4 L/R Right	WM60007*0AU\x0D
Analog Mute On Output 4 L/R Right	WM60007*1AU\x0D
Aspect Ratio Fill Input 1	W1*1ASPR\x0D
Aspect Ratio Follow Input 1	W1*2ASPR\x0D
Aspect Ratio Fill Input 8	W8*1ASPR\x0D
Aspect Ratio Follow Input 8	W8*2ASPR\x0D
Auto Image None Output 3	3*A
Auto Image None Output 4	4*A
DTP Analog Attenuation -100 Output 3 L/R Left	WG60304*-1000AU\x0D
DTP Analog Attenuation 0 Output 3 L/R Left	WG60304*0AU\x0D
DTP Analog Attenuation -100 Output 3 L/R Right	WG60305*-1000AU\x0D
DTP Analog Attenuation 0 Output 3 L/R Right	WG60305*0AU\x0D
DTP Analog Attenuation -100 Output 4 L/R Left	WG60306*-1000AU\x0D
DTP Analog Attenuation 0 Output 4 L/R Left	WG60306*0AU\x0D

Global Scriptor Module Communication Sheet

Revision: 5/16/2019

DTP Analog Attenuation -100 Output 4 L/R Right	WG60307*-1000AU\x0D
DTP Analog Attenuation 0 Output 4 L/R Right	WG60307*0AU\x0D
DTP Analog Mute Off Output 3 L/R Left	WM60304*0AU\x0D
DTP Analog Mute On Output 3 L/R Left	WM60304*1AU\x0D
DTP Analog Mute Off Output 3 L/R Right	WM60305*0AU\x0D
DTP Analog Mute On Output 3 L/R Right	WM60305*1AU\x0D
DTP Analog Mute Off Output 4 L/R Left	WM60306*0AU\x0D
DTP Analog Mute On Output 4 L/R Left	WM60306*1AU\x0D
DTP Analog Mute Off Output 4 L/R Right	WM60307*0AU\x0D
DTP Analog Mute On Output 4 L/R Right	WM60307*1AU\x0D
DTP Attenuation -100 Output 3 L/R Left	WG60204*-1000AU\x0D
DTP Attenuation 0 Output 3 L/R Left	WG60204*0AU\x0D
DTP Attenuation -100 Output 3 L/R Right	WG60205*-1000AU\x0D
DTP Attenuation 0 Output 3 L/R Right	WG60205*0AU\x0D
DTP Attenuation -100 Output 4 L/R Left	WG60206*-1000AU\x0D
DTP Attenuation 0 Output 4 L/R Left	WG60206*0AU\x0D
DTP Attenuation -100 Output 4 L/R Right	WG60207*-1000AU\x0D
DTP Attenuation 0 Output 4 L/R Right	WG60207*0AU\x0D
DTP Mute Off Output 3 L/R Left	WM60204*0AU\x0D
DTP Mute On Output 3 L/R Left	WM60204*1AU\x0D
DTP Mute Off Output 3 L/R Right	WM60205*0AU\x0D
DTP Mute On Output 3 L/R Right	WM60205*1AU\x0D
DTP Mute Off Output 4 L/R Left	WM60206*0AU\x0D
DTP Mute On Output 4 L/R Left	WM60206*1AU\x0D
DTP Mute Off Output 4 L/R Right	WM60207*0AU\x0D
DTP Mute On Output 4 L/R Right	WM60207*1AU\x0D
Executive Mode Mode 1	1x
Executive Mode Mode 2	2x
Executive Mode Off	0x
Expansion Pre-mixer Gain -100 Input 1	wG50200*-1000AU\x0D
Expansion Pre-mixer Gain 12 Input 1	wG50200*00120AU\x0D
Expansion Pre-mixer Gain -100 Input 8	wG50207*-1000AU\x0D
Expansion Pre-mixer Gain 12 Input 8	wG50207*00120AU\x0D
Expansion Pre-mixer Mute Off Input 1	wM50200*0AU\x0D
Expansion Pre-mixer Mute On Input 1	wM50200*1AU\x0D
Expansion Pre-mixer Mute Off Input 8	wM50207*0AU\x0D
Expansion Pre-mixer Mute On Input 8	wM50207*1AU\x0D
Global Video Mute Off	0*B
Global Video Mute Video	1*B

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Global Video Mute Video & Sync	2*B
Group Mic/Line Input Gain -18 Group 1	WD1*-180GRPM\x0D
Group Mic/Line Input Gain 80 Group 1	WD1*800GRPM\x0D
Group Mic/Line Input Gain -18 Group 32	WD32*-180GRPM\x0D
Group Mic/Line Input Gain 80 Group 32	WD32*800GRPM\x0D
Group Mix-point -35 Group 1	WD1*-350GRPM\x0D
Group Mix-point 25 Group 1	WD1*250GRPM\x0D
Group Mix-point -35 Group 32	WD32*-350GRPM\x0D
Group Mix-point 25 Group 32	WD32*250GRPM\x0D
Group Mute Off Group 1	WD1*0GRPM\x0D
Group Mute On Group 1	WD1*1GRPM\x0D
Group Mute Off Group 32	WD32*0GRPM\x0D
Group Mute On Group 32	WD32*1GRPM\x0D
Group Output Attenuation -100 Group 1	WD1*-1000GRPM\x0D
Group Output Attenuation 0 Group 1	WD1*0GRPM\x0D
Group Output Attenuation -100 Group 32	WD32*-1000GRPM\x0D
Group Output Attenuation 0 Group 32	WD32*0GRPM\x0D
Group Post-mixer Trim -12 Group 1	WD1*-120GRPM\x0D
Group Post-mixer Trim 12 Group 1	WD1*120GRPM\x0D
Group Post-mixer Trim -12 Group 32	WD32*-120GRPM\x0D
Group Post-mixer Trim 12 Group 32	WD32*120GRPM\x0D
Group Pre-matrix Trim -12 Group 1	WD1*-120GRPM\x0D
Group Pre-matrix Trim 12 Group 1	WD1*120GRPM\x0D
Group Pre-matrix Trim -12 Group 32	WD32*-120GRPM\x0D
Group Pre-matrix Trim 12 Group 32	WD32*120GRPM\x0D
Group Pre-mixer Gain -100 Group 1	WD1*-1000GRPM\x0D
Group Pre-mixer Gain 12 Group 1	WD1*120GRPM\x0D
Group Pre-mixer Gain -100 Group 32	WD32*-1000GRPM\x0D
Group Pre-mixer Gain 12 Group 32	WD32*120GRPM\x0D
HDCP Input Authorization Off Input 1	wE1*0HDCP\x0D\x0A
HDCP Input Authorization On Input 1	wE1*1HDCP\x0D\x0A
HDCP Input Authorization Off Input 8	wE8*0HDCP\x0D\x0A
HDCP Input Authorization On Input 8	wE8*1HDCP\x0D\x0A
HDMI Attenuation -100 Output 1 L/R Left	WG60200*-1000AU\x0D
HDMI Attenuation 0 Output 1 L/R Left	WG60200*0AU\x0D
HDMI Attenuation -100 Output 1 L/R Right	WG60201*-1000AU\x0D
HDMI Attenuation 0 Output 1 L/R Right	WG60201*0AU\x0D
HDMI Attenuation -100 Output 2 L/R Left	WG60202*-1000AU\x0D
HDMI Attenuation 0 Output 2 L/R Left	WG60202*0AU\x0D

Global Scriptor Module Communication Sheet

Revision: 5/16/2019

HDMI Attenuation -100 Output 2 L/R Right	WG60203*-1000AU\x0D
HDMI Attenuation 0 Output 2 L/R Right	WG60203*0AU\x0D
HDMI Mute Off Output 1 L/R Left	WM60200*0AU\x0D
HDMI Mute On Output 1 L/R Left	WM60200*1AU\x0D
HDMI Mute Off Output 1 L/R Right	WM60201*0AU\x0D
HDMI Mute On Output 1 L/R Right	WM60201*1AU\x0D
HDMI Mute Off Output 2 L/R Left	WM60202*0AU\x0D
HDMI Mute On Output 2 L/R Left	WM60202*1AU\x0D
HDMI Mute Off Output 2 L/R Right	WM60203*0AU\x0D
HDMI Mute On Output 2 L/R Right	WM60203*1AU\x0D
Input Audio Switch Mode Analog Input 1	WI1*2AFMT\x0D
Input Audio Switch Mode Auto Input 1	WI1*0AFMT\x0D
Input Audio Switch Mode Digital Input 1	WI1*1AFMT\x0D
Input Audio Switch Mode Analog Input 8	WI8*2AFMT\x0D
Input Audio Switch Mode Auto Input 8	WI8*0AFMT\x0D
Input Audio Switch Mode Digital Input 8	WI8*1AFMT\x0D
Input Gain -18 Input 1 Format Analog L/R Left	wG30000*-0180AU\x0D
Input Gain 24 Input 1 Format Analog L/R Left	wG30000*00240AU\x0D
Input Gain -18 Input 1 Format Analog L/R Right	wG30001*-0180AU\x0D
Input Gain 24 Input 1 Format Analog L/R Right	wG30001*00240AU\x0D
Input Gain -18 Input 1 Format Digital L/R Left	wH30000*-0180AU\x0D
Input Gain 24 Input 1 Format Digital L/R Left	wH30000*00240AU\x0D
Input Gain -18 Input 1 Format Digital L/R Right	wH30001*-0180AU\x0D
Input Gain 24 Input 1 Format Digital L/R Right	wH30001*00240AU\x0D
Input Gain -18 Input 8 Format Analog L/R Left	wG30014*-0180AU\x0D
Input Gain 24 Input 8 Format Analog L/R Left	wG30014*00240AU\x0D
Input Gain -18 Input 8 Format Analog L/R Right	wG30015*-0180AU\x0D
Input Gain 24 Input 8 Format Analog L/R Right	wG30015*00240AU\x0D
Input Gain -18 Input 8 Format Digital L/R Left	wH30014*-0180AU\x0D
Input Gain 24 Input 8 Format Digital L/R Left	wH30014*00240AU\x0D
Input Gain -18 Input 8 Format Digital L/R Right	wH30015*-0180AU\x0D
Input Gain 24 Input 8 Format Digital L/R Right	wH30015*00240AU\x0D
Input Mute Off Input 1 L/R Left	wM30000*0AU\x0D
Input Mute On Input 1 L/R Left	wM30000*1AU\x0D
Input Mute Off Input 1 L/R Right	wM30001*0AU\x0D
Input Mute On Input 1 L/R Right	wM30001*1AU\x0D
Input Mute Off Input 8 L/R Left	wM30014*0AU\x0D
Input Mute On Input 8 L/R Left	wM30014*1AU\x0D
Input Mute Off Input 8 L/R Right	wM30015*0AU\x0D

Global Scripter Module Communication Sheet

Input Mute On Input 8 L/R Right	wM30015*1AU\x0D
Matrix Tie Command None Input 0 Output 1 Tie Type Audio	0*1\$
Matrix Tie Command None Input 0 Output 1 Tie Type Audio/Video	0*1!
Matrix Tie Command None Input 0 Output 1 Tie Type Video	0*1%
Matrix Tie Command None Input 0 Output 4 Tie Type Audio	0*4\$
Matrix Tie Command None Input 0 Output 4 Tie Type Audio/Video	0*4!
Matrix Tie Command None Input 0 Output 4 Tie Type Video	0*4%
Matrix Tie Command None Input 0 Output All Tie Type Audio	0*All\$
Matrix Tie Command None Input 0 Output All Tie Type Audio/Video	0*All!
Matrix Tie Command None Input 0 Output All Tie Type Video	0*All%
Matrix Tie Command None Input 8 Output 1 Tie Type Audio	8*1\$
Matrix Tie Command None Input 8 Output 1 Tie Type Audio/Video	8*1!
Matrix Tie Command None Input 8 Output 1 Tie Type Video	8*1%
Matrix Tie Command None Input 8 Output 4 Tie Type Audio	8*4\$
Matrix Tie Command None Input 8 Output 4 Tie Type Audio/Video	8*4!
Matrix Tie Command None Input 8 Output 4 Tie Type Video	8*4%
Matrix Tie Command None Input 8 Output All Tie Type Audio	8*All\$
Matrix Tie Command None Input 8 Output All Tie Type Audio/Video	8*All!
Matrix Tie Command None Input 8 Output All Tie Type Video	8*All%
Mic/Line Gain -18 Input 1	wG40000*-0180AU\x0D\x0A
Mic/Line Gain 80 Input 1	wG40000*00800AU\x0D\x0A
Mic/Line Gain -18 Input 4	wG40003*-0180AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 5/16/2019

Mic/Line Gain 80 Input 4	WG40003*00800AU\x0D\x0A
Mic/Line Mute Off Input 1	WM40000*0AU\x0D
Mic/Line Mute On Input 1	WM40000*1AU\x0D
Mic/Line Mute Off Input 4	WM40003*0AU\x0D
Mic/Line Mute On Input 4	WM40003*1AU\x0D
Mix-point Gain -35 Input Exp. 1 Output Output 1 Left	WG22000*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output Output 1 Left	WG22000*250AU\x0D
Mix-point Gain -35 Input Exp. 1 Output Output 1 Right	WG22001*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output Output 1 Right	WG22001*250AU\x0D
Mix-point Gain -35 Input Exp. 1 Output Output 2 Left	WG22002*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output Output 2 Left	WG22002*250AU\x0D
Mix-point Gain -35 Input Exp. 1 Output Output 2 Right	WG22003*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output Output 2 Right	WG22003*250AU\x0D
Mix-point Gain -35 Input Exp. 1 Output Output 3 Left	WG22004*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output Output 3 Left	WG22004*250AU\x0D
Mix-point Gain -35 Input Exp. 1 Output Output 3 Right	WG22005*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output Output 3 Right	WG22005*250AU\x0D
Mix-point Gain -35 Input Exp. 1 Output Output 4 Left	WG22006*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output Output 4 Left	WG22006*250AU\x0D
Mix-point Gain -35 Input Exp. 1 Output Output 4 Right	WG22007*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output Output 4 Right	WG22007*250AU\x0D
Mix-point Gain -35 Input Exp. 1 Output V. Send A	WG22008*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output V. Send A	WG22008*250AU\x0D
Mix-point Gain -35 Input Exp. 1 Output V. Send B	WG22009*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output V. Send B	WG22009*250AU\x0D
Mix-point Gain -35 Input Exp. 1 Output V. Send C	WG22010*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output V. Send C	WG22010*250AU\x0D
Mix-point Gain -35 Input Exp. 1 Output V. Send D	WG22011*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output V. Send D	WG22011*250AU\x0D
Mix-point Gain -35 Input Exp. 1 Output V. Send E	WG22012*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output V. Send E	WG22012*250AU\x0D
Mix-point Gain -35 Input Exp. 1 Output V. Send F	WG22013*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output V. Send F	WG22013*250AU\x0D
Mix-point Gain -35 Input Exp. 1 Output V. Send G	WG22014*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output V. Send G	WG22014*250AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain -35 Input Exp. 1 Output V. Send H	WG22015*-350AU\x0D
Mix-point Gain 25 Input Exp. 1 Output V. Send H	WG22015*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output Output 1 Left	WG22100*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output Output 1 Left	WG22100*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output Output 1 Right	WG22101*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output Output 1 Right	WG22101*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output Output 2 Left	WG22102*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output Output 2 Left	WG22102*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output Output 2 Right	WG22103*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output Output 2 Right	WG22103*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output Output 3 Left	WG22104*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output Output 3 Left	WG22104*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output Output 3 Right	WG22105*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output Output 3 Right	WG22105*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output Output 4 Left	WG22106*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output Output 4 Left	WG22106*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output Output 4 Right	WG22107*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output Output 4 Right	WG22107*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output V. Send A	WG22108*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output V. Send A	WG22108*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output V. Send B	WG22109*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output V. Send B	WG22109*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output V. Send C	WG22110*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output V. Send C	WG22110*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output V. Send D	WG22111*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output V. Send D	WG22111*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output V. Send E	WG22112*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output V. Send E	WG22112*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output V. Send F	WG22113*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output V. Send F	WG22113*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output V. Send G	WG22114*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output V. Send G	WG22114*250AU\x0D
Mix-point Gain -35 Input Exp. 2 Output V. Send H	WG22115*-350AU\x0D
Mix-point Gain 25 Input Exp. 2 Output V. Send H	WG22115*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output Output 1 Left	WG22200*-350AU\x0D

Global Scriptor Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain 25 Input Exp. 3 Output Output 1 Left	WG22200*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output Output 1 Right	WG22201*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output Output 1 Right	WG22201*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output Output 2 Left	WG22202*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output Output 2 Left	WG22202*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output Output 2 Right	WG22203*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output Output 2 Right	WG22203*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output Output 3 Left	WG22204*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output Output 3 Left	WG22204*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output Output 3 Right	WG22205*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output Output 3 Right	WG22205*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output Output 4 Left	WG22206*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output Output 4 Left	WG22206*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output Output 4 Right	WG22207*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output Output 4 Right	WG22207*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output V. Send A	WG22208*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output V. Send A	WG22208*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output V. Send B	WG22209*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output V. Send B	WG22209*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output V. Send C	WG22210*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output V. Send C	WG22210*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output V. Send D	WG22211*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output V. Send D	WG22211*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output V. Send E	WG22212*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output V. Send E	WG22212*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output V. Send F	WG22213*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output V. Send F	WG22213*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output V. Send G	WG22214*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output V. Send G	WG22214*250AU\x0D
Mix-point Gain -35 Input Exp. 3 Output V. Send H	WG22215*-350AU\x0D
Mix-point Gain 25 Input Exp. 3 Output V. Send H	WG22215*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output Output 1 Left	WG22300*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output Output 1 Left	WG22300*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output Output 1 Right	WG22301*-350AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain 25 Input Exp. 4 Output Output 1 Right	WG22301*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output Output 2 Left	WG22302*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output Output 2 Left	WG22302*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output Output 2 Right	WG22303*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output Output 2 Right	WG22303*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output Output 3 Left	WG22304*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output Output 3 Left	WG22304*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output Output 3 Right	WG22305*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output Output 3 Right	WG22305*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output Output 4 Left	WG22306*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output Output 4 Left	WG22306*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output Output 4 Right	WG22307*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output Output 4 Right	WG22307*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output V. Send A	WG22308*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output V. Send A	WG22308*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output V. Send B	WG22309*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output V. Send B	WG22309*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output V. Send C	WG22310*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output V. Send C	WG22310*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output V. Send D	WG22311*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output V. Send D	WG22311*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output V. Send E	WG22312*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output V. Send E	WG22312*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output V. Send F	WG22313*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output V. Send F	WG22313*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output V. Send G	WG22314*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output V. Send G	WG22314*250AU\x0D
Mix-point Gain -35 Input Exp. 4 Output V. Send H	WG22315*-350AU\x0D
Mix-point Gain 25 Input Exp. 4 Output V. Send H	WG22315*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output Output 1 Left	WG22400*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output Output 1 Left	WG22400*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output Output 1 Right	WG22401*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output Output 1 Right	WG22401*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output Output 2 Left	WG22402*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output Output 2 Left	WG22402*250AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain -35 Input Exp. 5 Output Output 2 Right	WG22403*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output Output 2 Right	WG22403*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output Output 3 Left	WG22404*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output Output 3 Left	WG22404*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output Output 3 Right	WG22405*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output Output 3 Right	WG22405*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output Output 4 Left	WG22406*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output Output 4 Left	WG22406*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output Output 4 Right	WG22407*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output Output 4 Right	WG22407*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output V. Send A	WG22408*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output V. Send A	WG22408*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output V. Send B	WG22409*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output V. Send B	WG22409*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output V. Send C	WG22410*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output V. Send C	WG22410*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output V. Send D	WG22411*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output V. Send D	WG22411*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output V. Send E	WG22412*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output V. Send E	WG22412*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output V. Send F	WG22413*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output V. Send F	WG22413*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output V. Send G	WG22414*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output V. Send G	WG22414*250AU\x0D
Mix-point Gain -35 Input Exp. 5 Output V. Send H	WG22415*-350AU\x0D
Mix-point Gain 25 Input Exp. 5 Output V. Send H	WG22415*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output Output 1 Left	WG22500*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output Output 1 Left	WG22500*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output Output 1 Right	WG22501*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output Output 1 Right	WG22501*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output Output 2 Left	WG22502*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output Output 2 Left	WG22502*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output Output 2 Right	WG22503*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output Output 2 Right	WG22503*250AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain -35 Input Exp. 6 Output Output 3 Left	WG22504*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output Output 3 Left	WG22504*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output Output 3 Right	WG22505*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output Output 3 Right	WG22505*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output Output 4 Left	WG22506*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output Output 4 Left	WG22506*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output Output 4 Right	WG22507*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output Output 4 Right	WG22507*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output V. Send A	WG22508*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output V. Send A	WG22508*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output V. Send B	WG22509*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output V. Send B	WG22509*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output V. Send C	WG22510*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output V. Send C	WG22510*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output V. Send D	WG22511*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output V. Send D	WG22511*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output V. Send E	WG22512*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output V. Send E	WG22512*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output V. Send F	WG22513*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output V. Send F	WG22513*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output V. Send G	WG22514*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output V. Send G	WG22514*250AU\x0D
Mix-point Gain -35 Input Exp. 6 Output V. Send H	WG22515*-350AU\x0D
Mix-point Gain 25 Input Exp. 6 Output V. Send H	WG22515*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output Output 1 Left	WG22600*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output Output 1 Left	WG22600*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output Output 1 Right	WG22601*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output Output 1 Right	WG22601*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output Output 2 Left	WG22602*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output Output 2 Left	WG22602*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output Output 2 Right	WG22603*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output Output 2 Right	WG22603*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output Output 3 Left	WG22604*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output Output 3 Left	WG22604*250AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain -35 Input Exp. 7 Output Output 3 Right	WG22605*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output Output 3 Right	WG22605*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output Output 4 Left	WG22606*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output Output 4 Left	WG22606*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output Output 4 Right	WG22607*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output Output 4 Right	WG22607*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output V. Send A	WG22608*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output V. Send A	WG22608*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output V. Send B	WG22609*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output V. Send B	WG22609*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output V. Send C	WG22610*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output V. Send C	WG22610*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output V. Send D	WG22611*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output V. Send D	WG22611*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output V. Send E	WG22612*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output V. Send E	WG22612*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output V. Send F	WG22613*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output V. Send F	WG22613*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output V. Send G	WG22614*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output V. Send G	WG22614*250AU\x0D
Mix-point Gain -35 Input Exp. 7 Output V. Send H	WG22615*-350AU\x0D
Mix-point Gain 25 Input Exp. 7 Output V. Send H	WG22615*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output Output 1 Left	WG22700*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output Output 1 Left	WG22700*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output Output 1 Right	WG22701*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output Output 1 Right	WG22701*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output Output 2 Left	WG22702*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output Output 2 Left	WG22702*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output Output 2 Right	WG22703*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output Output 2 Right	WG22703*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output Output 3 Left	WG22704*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output Output 3 Left	WG22704*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output Output 3 Right	WG22705*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output Output 3 Right	WG22705*250AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain -35 Input Exp. 8 Output Output 4 Left	WG22706*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output Output 4 Left	WG22706*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output Output 4 Right	WG22707*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output Output 4 Right	WG22707*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output V. Send A	WG22708*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output V. Send A	WG22708*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output V. Send B	WG22709*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output V. Send B	WG22709*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output V. Send C	WG22710*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output V. Send C	WG22710*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output V. Send D	WG22711*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output V. Send D	WG22711*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output V. Send E	WG22712*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output V. Send E	WG22712*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output V. Send F	WG22713*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output V. Send F	WG22713*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output V. Send G	WG22714*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output V. Send G	WG22714*250AU\x0D
Mix-point Gain -35 Input Exp. 8 Output V. Send H	WG22715*-350AU\x0D
Mix-point Gain 25 Input Exp. 8 Output V. Send H	WG22715*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output Output 1 Left	WG20800*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output Output 1 Left	WG20800*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output Output 1 Right	WG20801*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output Output 1 Right	WG20801*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output Output 2 Left	WG20802*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output Output 2 Left	WG20802*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output Output 2 Right	WG20803*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output Output 2 Right	WG20803*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output Output 3 Left	WG20804*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output Output 3 Left	WG20804*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output Output 3 Right	WG20805*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output Output 3 Right	WG20805*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output Output 4 Left	WG20806*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output Output 4 Left	WG20806*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output Output 4 Right	WG20807*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output Output 4 Right	WG20807*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output V. Send A	WG20808*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output V. Send A	WG20808*250AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain -35 Input Mic 1 Output V. Send B	WG20809*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output V. Send B	WG20809*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output V. Send C	WG20810*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output V. Send C	WG20810*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output V. Send D	WG20811*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output V. Send D	WG20811*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output V. Send E	WG20812*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output V. Send E	WG20812*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output V. Send F	WG20813*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output V. Send F	WG20813*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output V. Send G	WG20814*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output V. Send G	WG20814*250AU\x0D
Mix-point Gain -35 Input Mic 1 Output V. Send H	WG20815*-350AU\x0D
Mix-point Gain 25 Input Mic 1 Output V. Send H	WG20815*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output Output 1 Left	WG20900*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output Output 1 Left	WG20900*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output Output 1 Right	WG20901*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output Output 1 Right	WG20901*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output Output 2 Left	WG20902*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output Output 2 Left	WG20902*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output Output 2 Right	WG20903*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output Output 2 Right	WG20903*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output Output 3 Left	WG20904*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output Output 3 Left	WG20904*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output Output 3 Right	WG20905*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output Output 3 Right	WG20905*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output Output 4 Left	WG20906*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output Output 4 Left	WG20906*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output Output 4 Right	WG20907*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output Output 4 Right	WG20907*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output V. Send A	WG20908*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output V. Send A	WG20908*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output V. Send B	WG20909*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output V. Send B	WG20909*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output V. Send C	WG20910*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output V. Send C	WG20910*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output V. Send D	WG20911*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output V. Send D	WG20911*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output V. Send E	WG20912*-350AU\x0D

Global Scriptor Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain 25 Input Mic 2 Output V. Send E	WG20912*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output V. Send F	WG20913*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output V. Send F	WG20913*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output V. Send G	WG20914*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output V. Send G	WG20914*250AU\x0D
Mix-point Gain -35 Input Mic 2 Output V. Send H	WG20915*-350AU\x0D
Mix-point Gain 25 Input Mic 2 Output V. Send H	WG20915*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output Output 1 Left	WG21000*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output Output 1 Left	WG21000*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output Output 1 Right	WG21001*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output Output 1 Right	WG21001*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output Output 2 Left	WG21002*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output Output 2 Left	WG21002*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output Output 2 Right	WG21003*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output Output 2 Right	WG21003*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output Output 3 Left	WG21004*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output Output 3 Left	WG21004*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output Output 3 Right	WG21005*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output Output 3 Right	WG21005*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output Output 4 Left	WG21006*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output Output 4 Left	WG21006*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output Output 4 Right	WG21007*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output Output 4 Right	WG21007*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output V. Send A	WG21008*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output V. Send A	WG21008*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output V. Send B	WG21009*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output V. Send B	WG21009*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output V. Send C	WG21010*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output V. Send C	WG21010*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output V. Send D	WG21011*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output V. Send D	WG21011*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output V. Send E	WG21012*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output V. Send E	WG21012*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output V. Send F	WG21013*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output V. Send F	WG21013*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output V. Send G	WG21014*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output V. Send G	WG21014*250AU\x0D
Mix-point Gain -35 Input Mic 3 Output V. Send H	WG21015*-350AU\x0D
Mix-point Gain 25 Input Mic 3 Output V. Send H	WG21015*250AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain -35 Input Mic 4 Output Output 1 Left	WG21100*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output Output 1 Left	WG21100*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output Output 1 Right	WG21101*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output Output 1 Right	WG21101*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output Output 2 Left	WG21102*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output Output 2 Left	WG21102*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output Output 2 Right	WG21103*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output Output 2 Right	WG21103*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output Output 3 Left	WG21104*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output Output 3 Left	WG21104*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output Output 3 Right	WG21105*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output Output 3 Right	WG21105*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output Output 4 Left	WG21106*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output Output 4 Left	WG21106*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output Output 4 Right	WG21107*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output Output 4 Right	WG21107*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output V. Send A	WG21108*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output V. Send A	WG21108*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output V. Send B	WG21109*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output V. Send B	WG21109*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output V. Send C	WG21110*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output V. Send C	WG21110*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output V. Send D	WG21111*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output V. Send D	WG21111*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output V. Send E	WG21112*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output V. Send E	WG21112*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output V. Send F	WG21113*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output V. Send F	WG21113*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output V. Send G	WG21114*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output V. Send G	WG21114*250AU\x0D
Mix-point Gain -35 Input Mic 4 Output V. Send H	WG21115*-350AU\x0D
Mix-point Gain 25 Input Mic 4 Output V. Send H	WG21115*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output Output 1 Left	WG20000*-350AU\x0D
Mix-point Gain 25 Input Output 1 Left Output Output 1 Left	WG20000*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output Output 1 Right	WG20001*-350AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain 25 Input Output 1 Left Output Output 1 Right	WG20001*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output Output 2 Left	WG20002*-350AU\x0D
Mix-point Gain 25 Input Output 1 Left Output Output 2 Left	WG20002*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output Output 2 Right	WG20003*-350AU\x0D
Mix-point Gain 25 Input Output 1 Left Output Output 2 Right	WG20003*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output Output 3 Left	WG20004*-350AU\x0D
Mix-point Gain 25 Input Output 1 Left Output Output 3 Left	WG20004*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output Output 3 Right	WG20005*-350AU\x0D
Mix-point Gain 25 Input Output 1 Left Output Output 3 Right	WG20005*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output Output 4 Left	WG20006*-350AU\x0D
Mix-point Gain 25 Input Output 1 Left Output Output 4 Left	WG20006*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output Output 4 Right	WG20007*-350AU\x0D
Mix-point Gain 25 Input Output 1 Left Output Output 4 Right	WG20007*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output V. Send A	WG20008*-350AU\x0D
Mix-point Gain 25 Input Output 1 Left Output V. Send A	WG20008*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output V. Send B	WG20009*-350AU\x0D
Mix-point Gain 25 Input Output 1 Left Output V. Send B	WG20009*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output V. Send C	WG20010*-350AU\x0D
Mix-point Gain 25 Input Output 1 Left Output V. Send C	WG20010*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output V. Send D	WG20011*-350AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain 25 Input Output 1 Left Output V. Send D	WG20011*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output V. Send E	WG20012*-350AU\x0D
Mix-point Gain 25 Input Output 1 Left Output V. Send E	WG20012*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output V. Send F	WG20013*-350AU\x0D
Mix-point Gain 25 Input Output 1 Left Output V. Send F	WG20013*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output V. Send G	WG20014*-350AU\x0D
Mix-point Gain 25 Input Output 1 Left Output V. Send G	WG20014*250AU\x0D
Mix-point Gain -35 Input Output 1 Left Output V. Send H	WG20015*-350AU\x0D
Mix-point Gain 25 Input Output 1 Left Output V. Send H	WG20015*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output Output 1 Left	WG20100*-350AU\x0D
Mix-point Gain 25 Input Output 1 Right Output Output 1 Left	WG20100*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output Output 1 Right	WG20101*-350AU\x0D
Mix-point Gain 25 Input Output 1 Right Output Output 1 Right	WG20101*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output Output 2 Left	WG20102*-350AU\x0D
Mix-point Gain 25 Input Output 1 Right Output Output 2 Left	WG20102*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output Output 2 Right	WG20103*-350AU\x0D
Mix-point Gain 25 Input Output 1 Right Output Output 2 Right	WG20103*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output Output 3 Left	WG20104*-350AU\x0D
Mix-point Gain 25 Input Output 1 Right Output Output 3 Left	WG20104*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output Output 3 Right	WG20105*-350AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain 25 Input Output 1 Right Output Output 3 Right	WG20105*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output Output 4 Left	WG20106*-350AU\x0D
Mix-point Gain 25 Input Output 1 Right Output Output 4 Left	WG20106*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output Output 4 Right	WG20107*-350AU\x0D
Mix-point Gain 25 Input Output 1 Right Output Output 4 Right	WG20107*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output V. Send A	WG20108*-350AU\x0D
Mix-point Gain 25 Input Output 1 Right Output V. Send A	WG20108*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output V. Send B	WG20109*-350AU\x0D
Mix-point Gain 25 Input Output 1 Right Output V. Send B	WG20109*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output V. Send C	WG20110*-350AU\x0D
Mix-point Gain 25 Input Output 1 Right Output V. Send C	WG20110*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output V. Send D	WG20111*-350AU\x0D
Mix-point Gain 25 Input Output 1 Right Output V. Send D	WG20111*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output V. Send E	WG20112*-350AU\x0D
Mix-point Gain 25 Input Output 1 Right Output V. Send E	WG20112*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output V. Send F	WG20113*-350AU\x0D
Mix-point Gain 25 Input Output 1 Right Output V. Send F	WG20113*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output V. Send G	WG20114*-350AU\x0D
Mix-point Gain 25 Input Output 1 Right Output V. Send G	WG20114*250AU\x0D
Mix-point Gain -35 Input Output 1 Right Output V. Send H	WG20115*-350AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain 25 Input Output 1 Right Output V. Send H	WG20115*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output Output 1 Left	WG20200*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output Output 1 Left	WG20200*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output Output 1 Right	WG20201*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output Output 1 Right	WG20201*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output Output 2 Left	WG20202*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output Output 2 Left	WG20202*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output Output 2 Right	WG20203*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output Output 2 Right	WG20203*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output Output 3 Left	WG20204*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output Output 3 Left	WG20204*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output Output 3 Right	WG20205*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output Output 3 Right	WG20205*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output Output 4 Left	WG20206*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output Output 4 Left	WG20206*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output Output 4 Right	WG20207*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output Output 4 Right	WG20207*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output V. Send A	WG20208*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output V. Send A	WG20208*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output V. Send B	WG20209*-350AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain 25 Input Output 2 Left Output V. Send B	WG20209*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output V. Send C	WG20210*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output V. Send C	WG20210*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output V. Send D	WG20211*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output V. Send D	WG20211*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output V. Send E	WG20212*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output V. Send E	WG20212*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output V. Send F	WG20213*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output V. Send F	WG20213*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output V. Send G	WG20214*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output V. Send G	WG20214*250AU\x0D
Mix-point Gain -35 Input Output 2 Left Output V. Send H	WG20215*-350AU\x0D
Mix-point Gain 25 Input Output 2 Left Output V. Send H	WG20215*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output Output 1 Left	WG20300*-350AU\x0D
Mix-point Gain 25 Input Output 2 Right Output Output 1 Left	WG20300*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output Output 1 Right	WG20301*-350AU\x0D
Mix-point Gain 25 Input Output 2 Right Output Output 1 Right	WG20301*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output Output 2 Left	WG20302*-350AU\x0D
Mix-point Gain 25 Input Output 2 Right Output Output 2 Left	WG20302*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output Output 2 Right	WG20303*-350AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain 25 Input Output 2 Right Output Output 2 Right	WG20303*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output Output 3 Left	WG20304*-350AU\x0D
Mix-point Gain 25 Input Output 2 Right Output Output 3 Left	WG20304*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output Output 3 Right	WG20305*-350AU\x0D
Mix-point Gain 25 Input Output 2 Right Output Output 3 Right	WG20305*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output Output 4 Left	WG20306*-350AU\x0D
Mix-point Gain 25 Input Output 2 Right Output Output 4 Left	WG20306*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output Output 4 Right	WG20307*-350AU\x0D
Mix-point Gain 25 Input Output 2 Right Output Output 4 Right	WG20307*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output V. Send A	WG20308*-350AU\x0D
Mix-point Gain 25 Input Output 2 Right Output V. Send A	WG20308*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output V. Send B	WG20309*-350AU\x0D
Mix-point Gain 25 Input Output 2 Right Output V. Send B	WG20309*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output V. Send C	WG20310*-350AU\x0D
Mix-point Gain 25 Input Output 2 Right Output V. Send C	WG20310*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output V. Send D	WG20311*-350AU\x0D
Mix-point Gain 25 Input Output 2 Right Output V. Send D	WG20311*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output V. Send E	WG20312*-350AU\x0D
Mix-point Gain 25 Input Output 2 Right Output V. Send E	WG20312*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output V. Send F	WG20313*-350AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain 25 Input Output 2 Right Output V. Send F	WG20313*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output V. Send G	WG20314*-350AU\x0D
Mix-point Gain 25 Input Output 2 Right Output V. Send G	WG20314*250AU\x0D
Mix-point Gain -35 Input Output 2 Right Output V. Send H	WG20315*-350AU\x0D
Mix-point Gain 25 Input Output 2 Right Output V. Send H	WG20315*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output Output 1 Left	WG20400*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output Output 1 Left	WG20400*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output Output 1 Right	WG20401*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output Output 1 Right	WG20401*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output Output 2 Left	WG20402*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output Output 2 Left	WG20402*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output Output 2 Right	WG20403*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output Output 2 Right	WG20403*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output Output 3 Left	WG20404*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output Output 3 Left	WG20404*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output Output 3 Right	WG20405*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output Output 3 Right	WG20405*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output Output 4 Left	WG20406*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output Output 4 Left	WG20406*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output Output 4 Right	WG20407*-350AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain 25 Input Output 3 Left Output Output 4 Right	WG20407*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output V. Send A	WG20408*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output V. Send A	WG20408*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output V. Send B	WG20409*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output V. Send B	WG20409*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output V. Send C	WG20410*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output V. Send C	WG20410*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output V. Send D	WG20411*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output V. Send D	WG20411*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output V. Send E	WG20412*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output V. Send E	WG20412*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output V. Send F	WG20413*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output V. Send F	WG20413*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output V. Send G	WG20414*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output V. Send G	WG20414*250AU\x0D
Mix-point Gain -35 Input Output 3 Left Output V. Send H	WG20415*-350AU\x0D
Mix-point Gain 25 Input Output 3 Left Output V. Send H	WG20415*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output Output 1 Left	WG20500*-350AU\x0D
Mix-point Gain 25 Input Output 3 Right Output Output 1 Left	WG20500*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output Output 1 Right	WG20501*-350AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain 25 Input Output 3 Right Output Output 1 Right	WG20501*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output Output 2 Left	WG20502*-350AU\x0D
Mix-point Gain 25 Input Output 3 Right Output Output 2 Left	WG20502*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output Output 2 Right	WG20503*-350AU\x0D
Mix-point Gain 25 Input Output 3 Right Output Output 2 Right	WG20503*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output Output 3 Left	WG20504*-350AU\x0D
Mix-point Gain 25 Input Output 3 Right Output Output 3 Left	WG20504*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output Output 3 Right	WG20505*-350AU\x0D
Mix-point Gain 25 Input Output 3 Right Output Output 3 Right	WG20505*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output Output 4 Left	WG20506*-350AU\x0D
Mix-point Gain 25 Input Output 3 Right Output Output 4 Left	WG20506*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output Output 4 Right	WG20507*-350AU\x0D
Mix-point Gain 25 Input Output 3 Right Output Output 4 Right	WG20507*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output V. Send A	WG20508*-350AU\x0D
Mix-point Gain 25 Input Output 3 Right Output V. Send A	WG20508*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output V. Send B	WG20509*-350AU\x0D
Mix-point Gain 25 Input Output 3 Right Output V. Send B	WG20509*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output V. Send C	WG20510*-350AU\x0D
Mix-point Gain 25 Input Output 3 Right Output V. Send C	WG20510*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output V. Send D	WG20511*-350AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain 25 Input Output 3 Right Output V. Send D	WG20511*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output V. Send E	WG20512*-350AU\x0D
Mix-point Gain 25 Input Output 3 Right Output V. Send E	WG20512*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output V. Send F	WG20513*-350AU\x0D
Mix-point Gain 25 Input Output 3 Right Output V. Send F	WG20513*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output V. Send G	WG20514*-350AU\x0D
Mix-point Gain 25 Input Output 3 Right Output V. Send G	WG20514*250AU\x0D
Mix-point Gain -35 Input Output 3 Right Output V. Send H	WG20515*-350AU\x0D
Mix-point Gain 25 Input Output 3 Right Output V. Send H	WG20515*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output Output 1 Left	WG20600*-350AU\x0D
Mix-point Gain 25 Input Output 4 Left Output Output 1 Left	WG20600*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output Output 1 Right	WG20601*-350AU\x0D
Mix-point Gain 25 Input Output 4 Left Output Output 1 Right	WG20601*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output Output 2 Left	WG20602*-350AU\x0D
Mix-point Gain 25 Input Output 4 Left Output Output 2 Left	WG20602*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output Output 2 Right	WG20603*-350AU\x0D
Mix-point Gain 25 Input Output 4 Left Output Output 2 Right	WG20603*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output Output 3 Left	WG20604*-350AU\x0D
Mix-point Gain 25 Input Output 4 Left Output Output 3 Left	WG20604*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output Output 3 Right	WG20605*-350AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain 25 Input Output 4 Left Output Output 3 Right	WG20605*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output Output 4 Left	WG20606*-350AU\x0D
Mix-point Gain 25 Input Output 4 Left Output Output 4 Left	WG20606*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output Output 4 Right	WG20607*-350AU\x0D
Mix-point Gain 25 Input Output 4 Left Output Output 4 Right	WG20607*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output V. Send A	WG20608*-350AU\x0D
Mix-point Gain 25 Input Output 4 Left Output V. Send A	WG20608*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output V. Send B	WG20609*-350AU\x0D
Mix-point Gain 25 Input Output 4 Left Output V. Send B	WG20609*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output V. Send C	WG20610*-350AU\x0D
Mix-point Gain 25 Input Output 4 Left Output V. Send C	WG20610*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output V. Send D	WG20611*-350AU\x0D
Mix-point Gain 25 Input Output 4 Left Output V. Send D	WG20611*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output V. Send E	WG20612*-350AU\x0D
Mix-point Gain 25 Input Output 4 Left Output V. Send E	WG20612*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output V. Send F	WG20613*-350AU\x0D
Mix-point Gain 25 Input Output 4 Left Output V. Send F	WG20613*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output V. Send G	WG20614*-350AU\x0D
Mix-point Gain 25 Input Output 4 Left Output V. Send G	WG20614*250AU\x0D
Mix-point Gain -35 Input Output 4 Left Output V. Send H	WG20615*-350AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain 25 Input Output 4 Left Output V. Send H	WG20615*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output Output 1 Left	WG20700*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output Output 1 Left	WG20700*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output Output 1 Right	WG20701*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output Output 1 Right	WG20701*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output Output 2 Left	WG20702*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output Output 2 Left	WG20702*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output Output 2 Right	WG20703*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output Output 2 Right	WG20703*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output Output 3 Left	WG20704*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output Output 3 Left	WG20704*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output Output 3 Right	WG20705*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output Output 3 Right	WG20705*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output Output 4 Left	WG20706*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output Output 4 Left	WG20706*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output Output 4 Right	WG20707*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output Output 4 Right	WG20707*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output V. Send A	WG20708*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output V. Send A	WG20708*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output V. Send B	WG20709*-350AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain 25 Input Output 4 Right Output V. Send B	WG20709*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output V. Send C	WG20710*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output V. Send C	WG20710*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output V. Send D	WG20711*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output V. Send D	WG20711*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output V. Send E	WG20712*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output V. Send E	WG20712*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output V. Send F	WG20713*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output V. Send F	WG20713*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output V. Send G	WG20714*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output V. Send G	WG20714*250AU\x0D
Mix-point Gain -35 Input Output 4 Right Output V. Send H	WG20715*-350AU\x0D
Mix-point Gain 25 Input Output 4 Right Output V. Send H	WG20715*250AU\x0D
Mix-point Gain -35 Input V. Return A Output Output 1 Left	WG21200*-350AU\x0D
Mix-point Gain 25 Input V. Return A Output Output 1 Left	WG21200*250AU\x0D
Mix-point Gain -35 Input V. Return A Output Output 1 Right	WG21201*-350AU\x0D
Mix-point Gain 25 Input V. Return A Output Output 1 Right	WG21201*250AU\x0D
Mix-point Gain -35 Input V. Return A Output Output 2 Left	WG21202*-350AU\x0D
Mix-point Gain 25 Input V. Return A Output Output 2 Left	WG21202*250AU\x0D
Mix-point Gain -35 Input V. Return A Output Output 2 Right	WG21203*-350AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain 25 Input V. Return A Output Output 2 Right	WG21203*250AU\x0D
Mix-point Gain -35 Input V. Return A Output Output 3 Left	WG21204*-350AU\x0D
Mix-point Gain 25 Input V. Return A Output Output 3 Left	WG21204*250AU\x0D
Mix-point Gain -35 Input V. Return A Output Output 3 Right	WG21205*-350AU\x0D
Mix-point Gain 25 Input V. Return A Output Output 3 Right	WG21205*250AU\x0D
Mix-point Gain -35 Input V. Return A Output Output 4 Left	WG21206*-350AU\x0D
Mix-point Gain 25 Input V. Return A Output Output 4 Left	WG21206*250AU\x0D
Mix-point Gain -35 Input V. Return A Output Output 4 Right	WG21207*-350AU\x0D
Mix-point Gain 25 Input V. Return A Output Output 4 Right	WG21207*250AU\x0D
Mix-point Gain -35 Input V. Return A Output V. Send A	WG21208*-350AU\x0D
Mix-point Gain 25 Input V. Return A Output V. Send A	WG21208*250AU\x0D
Mix-point Gain -35 Input V. Return A Output V. Send B	WG21209*-350AU\x0D
Mix-point Gain 25 Input V. Return A Output V. Send B	WG21209*250AU\x0D
Mix-point Gain -35 Input V. Return A Output V. Send C	WG21210*-350AU\x0D
Mix-point Gain 25 Input V. Return A Output V. Send C	WG21210*250AU\x0D
Mix-point Gain -35 Input V. Return A Output V. Send D	WG21211*-350AU\x0D
Mix-point Gain 25 Input V. Return A Output V. Send D	WG21211*250AU\x0D
Mix-point Gain -35 Input V. Return A Output V. Send E	WG21212*-350AU\x0D
Mix-point Gain 25 Input V. Return A Output V. Send E	WG21212*250AU\x0D
Mix-point Gain -35 Input V. Return A Output V. Send F	WG21213*-350AU\x0D
Mix-point Gain 25 Input V. Return A Output V. Send F	WG21213*250AU\x0D
Mix-point Gain -35 Input V. Return A Output V. Send G	WG21214*-350AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain 25 Input V. Return A Output V. Send G	WG21214*250AU\x0D
Mix-point Gain -35 Input V. Return A Output V. Send H	WG21215*-350AU\x0D
Mix-point Gain 25 Input V. Return A Output V. Send H	WG21215*250AU\x0D
Mix-point Gain -35 Input V. Return B Output Output 1 Left	WG21300*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output Output 1 Left	WG21300*250AU\x0D
Mix-point Gain -35 Input V. Return B Output Output 1 Right	WG21301*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output Output 1 Right	WG21301*250AU\x0D
Mix-point Gain -35 Input V. Return B Output Output 2 Left	WG21302*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output Output 2 Left	WG21302*250AU\x0D
Mix-point Gain -35 Input V. Return B Output Output 2 Right	WG21303*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output Output 2 Right	WG21303*250AU\x0D
Mix-point Gain -35 Input V. Return B Output Output 3 Left	WG21304*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output Output 3 Left	WG21304*250AU\x0D
Mix-point Gain -35 Input V. Return B Output Output 3 Right	WG21305*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output Output 3 Right	WG21305*250AU\x0D
Mix-point Gain -35 Input V. Return B Output Output 4 Left	WG21306*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output Output 4 Left	WG21306*250AU\x0D
Mix-point Gain -35 Input V. Return B Output Output 4 Right	WG21307*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output Output 4 Right	WG21307*250AU\x0D
Mix-point Gain -35 Input V. Return B Output V. Send A	WG21308*-350AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain 25 Input V. Return B Output V. Send A	WG21308*250AU\x0D
Mix-point Gain -35 Input V. Return B Output V. Send B	WG21309*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output V. Send B	WG21309*250AU\x0D
Mix-point Gain -35 Input V. Return B Output V. Send C	WG21310*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output V. Send C	WG21310*250AU\x0D
Mix-point Gain -35 Input V. Return B Output V. Send D	WG21311*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output V. Send D	WG21311*250AU\x0D
Mix-point Gain -35 Input V. Return B Output V. Send E	WG21312*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output V. Send E	WG21312*250AU\x0D
Mix-point Gain -35 Input V. Return B Output V. Send F	WG21313*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output V. Send F	WG21313*250AU\x0D
Mix-point Gain -35 Input V. Return B Output V. Send G	WG21314*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output V. Send G	WG21314*250AU\x0D
Mix-point Gain -35 Input V. Return B Output V. Send H	WG21315*-350AU\x0D
Mix-point Gain 25 Input V. Return B Output V. Send H	WG21315*250AU\x0D
Mix-point Gain -35 Input V. Return C Output Output 1 Left	WG21400*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output Output 1 Left	WG21400*250AU\x0D
Mix-point Gain -35 Input V. Return C Output Output 1 Right	WG21401*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output Output 1 Right	WG21401*250AU\x0D
Mix-point Gain -35 Input V. Return C Output Output 2 Left	WG21402*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output Output 2 Left	WG21402*250AU\x0D
Mix-point Gain -35 Input V. Return C Output Output 2 Right	WG21403*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output Output 2 Right	WG21403*250AU\x0D
Mix-point Gain -35 Input V. Return C Output Output 3 Left	WG21404*-350AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain 25 Input V. Return C Output Output 3 Left	WG21404*250AU\x0D
Mix-point Gain -35 Input V. Return C Output Output 3 Right	WG21405*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output Output 3 Right	WG21405*250AU\x0D
Mix-point Gain -35 Input V. Return C Output Output 4 Left	WG21406*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output Output 4 Left	WG21406*250AU\x0D
Mix-point Gain -35 Input V. Return C Output Output 4 Right	WG21407*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output Output 4 Right	WG21407*250AU\x0D
Mix-point Gain -35 Input V. Return C Output V. Send A	WG21408*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output V. Send A	WG21408*250AU\x0D
Mix-point Gain -35 Input V. Return C Output V. Send B	WG21409*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output V. Send B	WG21409*250AU\x0D
Mix-point Gain -35 Input V. Return C Output V. Send C	WG21410*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output V. Send C	WG21410*250AU\x0D
Mix-point Gain -35 Input V. Return C Output V. Send D	WG21411*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output V. Send D	WG21411*250AU\x0D
Mix-point Gain -35 Input V. Return C Output V. Send E	WG21412*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output V. Send E	WG21412*250AU\x0D
Mix-point Gain -35 Input V. Return C Output V. Send F	WG21413*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output V. Send F	WG21413*250AU\x0D
Mix-point Gain -35 Input V. Return C Output V. Send G	WG21414*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output V. Send G	WG21414*250AU\x0D
Mix-point Gain -35 Input V. Return C Output V. Send H	WG21415*-350AU\x0D
Mix-point Gain 25 Input V. Return C Output V. Send H	WG21415*250AU\x0D
Mix-point Gain -35 Input V. Return D Output Output 1 Left	WG21500*-350AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain 25 Input V. Return D Output Output 1 Left	WG21500*250AU\x0D
Mix-point Gain -35 Input V. Return D Output Output 1 Right	WG21501*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output Output 1 Right	WG21501*250AU\x0D
Mix-point Gain -35 Input V. Return D Output Output 2 Left	WG21502*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output Output 2 Left	WG21502*250AU\x0D
Mix-point Gain -35 Input V. Return D Output Output 2 Right	WG21503*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output Output 2 Right	WG21503*250AU\x0D
Mix-point Gain -35 Input V. Return D Output Output 3 Left	WG21504*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output Output 3 Left	WG21504*250AU\x0D
Mix-point Gain -35 Input V. Return D Output Output 3 Right	WG21505*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output Output 3 Right	WG21505*250AU\x0D
Mix-point Gain -35 Input V. Return D Output Output 4 Left	WG21506*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output Output 4 Left	WG21506*250AU\x0D
Mix-point Gain -35 Input V. Return D Output Output 4 Right	WG21507*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output Output 4 Right	WG21507*250AU\x0D
Mix-point Gain -35 Input V. Return D Output V. Send A	WG21508*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output V. Send A	WG21508*250AU\x0D
Mix-point Gain -35 Input V. Return D Output V. Send B	WG21509*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output V. Send B	WG21509*250AU\x0D
Mix-point Gain -35 Input V. Return D Output V. Send C	WG21510*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output V. Send C	WG21510*250AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain -35 Input V. Return D Output V. Send D	WG21511*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output V. Send D	WG21511*250AU\x0D
Mix-point Gain -35 Input V. Return D Output V. Send E	WG21512*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output V. Send E	WG21512*250AU\x0D
Mix-point Gain -35 Input V. Return D Output V. Send F	WG21513*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output V. Send F	WG21513*250AU\x0D
Mix-point Gain -35 Input V. Return D Output V. Send G	WG21514*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output V. Send G	WG21514*250AU\x0D
Mix-point Gain -35 Input V. Return D Output V. Send H	WG21515*-350AU\x0D
Mix-point Gain 25 Input V. Return D Output V. Send H	WG21515*250AU\x0D
Mix-point Gain -35 Input V. Return E Output Output 1 Left	WG21600*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output Output 1 Left	WG21600*250AU\x0D
Mix-point Gain -35 Input V. Return E Output Output 1 Right	WG21601*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output Output 1 Right	WG21601*250AU\x0D
Mix-point Gain -35 Input V. Return E Output Output 2 Left	WG21602*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output Output 2 Left	WG21602*250AU\x0D
Mix-point Gain -35 Input V. Return E Output Output 2 Right	WG21603*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output Output 2 Right	WG21603*250AU\x0D
Mix-point Gain -35 Input V. Return E Output Output 3 Left	WG21604*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output Output 3 Left	WG21604*250AU\x0D
Mix-point Gain -35 Input V. Return E Output Output 3 Right	WG21605*-350AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain 25 Input V. Return E Output Output 3 Right	WG21605*250AU\x0D
Mix-point Gain -35 Input V. Return E Output Output 4 Left	WG21606*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output Output 4 Left	WG21606*250AU\x0D
Mix-point Gain -35 Input V. Return E Output Output 4 Right	WG21607*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output Output 4 Right	WG21607*250AU\x0D
Mix-point Gain -35 Input V. Return E Output V. Send A	WG21608*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output V. Send A	WG21608*250AU\x0D
Mix-point Gain -35 Input V. Return E Output V. Send B	WG21609*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output V. Send B	WG21609*250AU\x0D
Mix-point Gain -35 Input V. Return E Output V. Send C	WG21610*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output V. Send C	WG21610*250AU\x0D
Mix-point Gain -35 Input V. Return E Output V. Send D	WG21611*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output V. Send D	WG21611*250AU\x0D
Mix-point Gain -35 Input V. Return E Output V. Send E	WG21612*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output V. Send E	WG21612*250AU\x0D
Mix-point Gain -35 Input V. Return E Output V. Send F	WG21613*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output V. Send F	WG21613*250AU\x0D
Mix-point Gain -35 Input V. Return E Output V. Send G	WG21614*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output V. Send G	WG21614*250AU\x0D
Mix-point Gain -35 Input V. Return E Output V. Send H	WG21615*-350AU\x0D
Mix-point Gain 25 Input V. Return E Output V. Send H	WG21615*250AU\x0D
Mix-point Gain -35 Input V. Return F Output Output 1 Left	WG21700*-350AU\x0D
Mix-point Gain 25 Input V. Return F Output Output 1 Left	WG21700*250AU\x0D
Mix-point Gain -35 Input V. Return F Output Output 1 Right	WG21701*-350AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain 25 Input V. Return F Output Output 1 Right	WG21701*250AU\x0D
Mix-point Gain -35 Input V. Return F Output Output 2 Left	WG21702*-350AU\x0D
Mix-point Gain 25 Input V. Return F Output Output 2 Left	WG21702*250AU\x0D
Mix-point Gain -35 Input V. Return F Output Output 2 Right	WG21703*-350AU\x0D
Mix-point Gain 25 Input V. Return F Output Output 2 Right	WG21703*250AU\x0D
Mix-point Gain -35 Input V. Return F Output Output 3 Left	WG21704*-350AU\x0D
Mix-point Gain 25 Input V. Return F Output Output 3 Left	WG21704*250AU\x0D
Mix-point Gain -35 Input V. Return F Output Output 3 Right	WG21705*-350AU\x0D
Mix-point Gain 25 Input V. Return F Output Output 3 Right	WG21705*250AU\x0D
Mix-point Gain -35 Input V. Return F Output Output 4 Left	WG21706*-350AU\x0D
Mix-point Gain 25 Input V. Return F Output Output 4 Left	WG21706*250AU\x0D
Mix-point Gain -35 Input V. Return F Output Output 4 Right	WG21707*-350AU\x0D
Mix-point Gain 25 Input V. Return F Output Output 4 Right	WG21707*250AU\x0D
Mix-point Gain -35 Input V. Return F Output V. Send A	WG21708*-350AU\x0D
Mix-point Gain 25 Input V. Return F Output V. Send A	WG21708*250AU\x0D
Mix-point Gain -35 Input V. Return F Output V. Send B	WG21709*-350AU\x0D
Mix-point Gain 25 Input V. Return F Output V. Send B	WG21709*250AU\x0D
Mix-point Gain -35 Input V. Return F Output V. Send C	WG21710*-350AU\x0D
Mix-point Gain 25 Input V. Return F Output V. Send C	WG21710*250AU\x0D
Mix-point Gain -35 Input V. Return F Output V. Send D	WG21711*-350AU\x0D
Mix-point Gain 25 Input V. Return F Output V. Send D	WG21711*250AU\x0D
Mix-point Gain -35 Input V. Return F Output V. Send E	WG21712*-350AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain 25 Input V. Return F Output V. Send E	WG21712*250AU\x0D
Mix-point Gain -35 Input V. Return F Output V. Send F	WG21713*-350AU\x0D
Mix-point Gain 25 Input V. Return F Output V. Send F	WG21713*250AU\x0D
Mix-point Gain -35 Input V. Return F Output V. Send G	WG21714*-350AU\x0D
Mix-point Gain 25 Input V. Return F Output V. Send G	WG21714*250AU\x0D
Mix-point Gain -35 Input V. Return F Output V. Send H	WG21715*-350AU\x0D
Mix-point Gain 25 Input V. Return F Output V. Send H	WG21715*250AU\x0D
Mix-point Gain -35 Input V. Return G Output Output 1 Left	WG21800*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output Output 1 Left	WG21800*250AU\x0D
Mix-point Gain -35 Input V. Return G Output Output 1 Right	WG21801*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output Output 1 Right	WG21801*250AU\x0D
Mix-point Gain -35 Input V. Return G Output Output 2 Left	WG21802*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output Output 2 Left	WG21802*250AU\x0D
Mix-point Gain -35 Input V. Return G Output Output 2 Right	WG21803*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output Output 2 Right	WG21803*250AU\x0D
Mix-point Gain -35 Input V. Return G Output Output 3 Left	WG21804*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output Output 3 Left	WG21804*250AU\x0D
Mix-point Gain -35 Input V. Return G Output Output 3 Right	WG21805*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output Output 3 Right	WG21805*250AU\x0D
Mix-point Gain -35 Input V. Return G Output Output 4 Left	WG21806*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output Output 4 Left	WG21806*250AU\x0D
Mix-point Gain -35 Input V. Return G Output Output 4 Right	WG21807*-350AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain 25 Input V. Return G Output Output 4 Right	WG21807*250AU\x0D
Mix-point Gain -35 Input V. Return G Output V. Send A	WG21808*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output V. Send A	WG21808*250AU\x0D
Mix-point Gain -35 Input V. Return G Output V. Send B	WG21809*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output V. Send B	WG21809*250AU\x0D
Mix-point Gain -35 Input V. Return G Output V. Send C	WG21810*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output V. Send C	WG21810*250AU\x0D
Mix-point Gain -35 Input V. Return G Output V. Send D	WG21811*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output V. Send D	WG21811*250AU\x0D
Mix-point Gain -35 Input V. Return G Output V. Send E	WG21812*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output V. Send E	WG21812*250AU\x0D
Mix-point Gain -35 Input V. Return G Output V. Send F	WG21813*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output V. Send F	WG21813*250AU\x0D
Mix-point Gain -35 Input V. Return G Output V. Send G	WG21814*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output V. Send G	WG21814*250AU\x0D
Mix-point Gain -35 Input V. Return G Output V. Send H	WG21815*-350AU\x0D
Mix-point Gain 25 Input V. Return G Output V. Send H	WG21815*250AU\x0D
Mix-point Gain -35 Input V. Return H Output Output 1 Left	WG21900*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output Output 1 Left	WG21900*250AU\x0D
Mix-point Gain -35 Input V. Return H Output Output 1 Right	WG21901*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output Output 1 Right	WG21901*250AU\x0D
Mix-point Gain -35 Input V. Return H Output Output 2 Left	WG21902*-350AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain 25 Input V. Return H Output Output 2 Left	WG21902*250AU\x0D
Mix-point Gain -35 Input V. Return H Output Output 2 Right	WG21903*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output Output 2 Right	WG21903*250AU\x0D
Mix-point Gain -35 Input V. Return H Output Output 3 Left	WG21904*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output Output 3 Left	WG21904*250AU\x0D
Mix-point Gain -35 Input V. Return H Output Output 3 Right	WG21905*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output Output 3 Right	WG21905*250AU\x0D
Mix-point Gain -35 Input V. Return H Output Output 4 Left	WG21906*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output Output 4 Left	WG21906*250AU\x0D
Mix-point Gain -35 Input V. Return H Output Output 4 Right	WG21907*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output Output 4 Right	WG21907*250AU\x0D
Mix-point Gain -35 Input V. Return H Output V. Send A	WG21908*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output V. Send A	WG21908*250AU\x0D
Mix-point Gain -35 Input V. Return H Output V. Send B	WG21909*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output V. Send B	WG21909*250AU\x0D
Mix-point Gain -35 Input V. Return H Output V. Send C	WG21910*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output V. Send C	WG21910*250AU\x0D
Mix-point Gain -35 Input V. Return H Output V. Send D	WG21911*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output V. Send D	WG21911*250AU\x0D
Mix-point Gain -35 Input V. Return H Output V. Send E	WG21912*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output V. Send E	WG21912*250AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain -35 Input V. Return H Output V. Send F	WG21913*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output V. Send F	WG21913*250AU\x0D
Mix-point Gain -35 Input V. Return H Output V. Send G	WG21914*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output V. Send G	WG21914*250AU\x0D
Mix-point Gain -35 Input V. Return H Output V. Send H	WG21915*-350AU\x0D
Mix-point Gain 25 Input V. Return H Output V. Send H	WG21915*250AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 1 Left	WM22000*0AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 1 Left	WM22000*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 1 Right	WM22001*0AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 1 Right	WM22001*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 2 Left	WM22002*0AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 2 Left	WM22002*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 2 Right	WM22003*0AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 2 Right	WM22003*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 3 Left	WM22004*0AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 3 Left	WM22004*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 3 Right	WM22005*0AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 3 Right	WM22005*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 4 Left	WM22006*0AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 4 Left	WM22006*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output Output 4 Right	WM22007*0AU\x0D
Mix-point Mute On Input Exp. 1 Output Output 4 Right	WM22007*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send A	WM22008*0AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send A	WM22008*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send B	WM22009*0AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send B	WM22009*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send C	WM22010*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input Exp. 1 Output V. Send C	WM22010*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send D	WM22011*0AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send D	WM22011*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send E	WM22012*0AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send E	WM22012*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send F	WM22013*0AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send F	WM22013*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send G	WM22014*0AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send G	WM22014*1AU\x0D
Mix-point Mute Off Input Exp. 1 Output V. Send H	WM22015*0AU\x0D
Mix-point Mute On Input Exp. 1 Output V. Send H	WM22015*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 1 Left	WM22100*0AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 1 Left	WM22100*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 1 Right	WM22101*0AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 1 Right	WM22101*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 2 Left	WM22102*0AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 2 Left	WM22102*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 2 Right	WM22103*0AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 2 Right	WM22103*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 3 Left	WM22104*0AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 3 Left	WM22104*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 3 Right	WM22105*0AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 3 Right	WM22105*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 4 Left	WM22106*0AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 4 Left	WM22106*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output Output 4 Right	WM22107*0AU\x0D
Mix-point Mute On Input Exp. 2 Output Output 4 Right	WM22107*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send A	WM22108*0AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send A	WM22108*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send B	WM22109*0AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send B	WM22109*1AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Off Input Exp. 2 Output V. Send C	WM22110*0AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send C	WM22110*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send D	WM22111*0AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send D	WM22111*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send E	WM22112*0AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send E	WM22112*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send F	WM22113*0AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send F	WM22113*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send G	WM22114*0AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send G	WM22114*1AU\x0D
Mix-point Mute Off Input Exp. 2 Output V. Send H	WM22115*0AU\x0D
Mix-point Mute On Input Exp. 2 Output V. Send H	WM22115*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 1 Left	WM22200*0AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 1 Left	WM22200*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 1 Right	WM22201*0AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 1 Right	WM22201*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 2 Left	WM22202*0AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 2 Left	WM22202*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 2 Right	WM22203*0AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 2 Right	WM22203*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 3 Left	WM22204*0AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 3 Left	WM22204*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 3 Right	WM22205*0AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 3 Right	WM22205*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 4 Left	WM22206*0AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 4 Left	WM22206*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output Output 4 Right	WM22207*0AU\x0D
Mix-point Mute On Input Exp. 3 Output Output 4 Right	WM22207*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send A	WM22208*0AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send A	WM22208*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send B	WM22209*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input Exp. 3 Output V. Send B	WM22209*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send C	WM22210*0AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send C	WM22210*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send D	WM22211*0AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send D	WM22211*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send E	WM22212*0AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send E	WM22212*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send F	WM22213*0AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send F	WM22213*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send G	WM22214*0AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send G	WM22214*1AU\x0D
Mix-point Mute Off Input Exp. 3 Output V. Send H	WM22215*0AU\x0D
Mix-point Mute On Input Exp. 3 Output V. Send H	WM22215*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 1 Left	WM22300*0AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 1 Left	WM22300*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 1 Right	WM22301*0AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 1 Right	WM22301*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 2 Left	WM22302*0AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 2 Left	WM22302*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 2 Right	WM22303*0AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 2 Right	WM22303*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 3 Left	WM22304*0AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 3 Left	WM22304*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 3 Right	WM22305*0AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 3 Right	WM22305*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 4 Left	WM22306*0AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 4 Left	WM22306*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output Output 4 Right	WM22307*0AU\x0D
Mix-point Mute On Input Exp. 4 Output Output 4 Right	WM22307*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send A	WM22308*0AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send A	WM22308*1AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Off Input Exp. 4 Output V. Send B	WM22309*0AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send B	WM22309*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send C	WM22310*0AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send C	WM22310*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send D	WM22311*0AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send D	WM22311*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send E	WM22312*0AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send E	WM22312*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send F	WM22313*0AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send F	WM22313*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send G	WM22314*0AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send G	WM22314*1AU\x0D
Mix-point Mute Off Input Exp. 4 Output V. Send H	WM22315*0AU\x0D
Mix-point Mute On Input Exp. 4 Output V. Send H	WM22315*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 1 Left	WM22400*0AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 1 Left	WM22400*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 1 Right	WM22401*0AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 1 Right	WM22401*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 2 Left	WM22402*0AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 2 Left	WM22402*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 2 Right	WM22403*0AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 2 Right	WM22403*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 3 Left	WM22404*0AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 3 Left	WM22404*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 3 Right	WM22405*0AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 3 Right	WM22405*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 4 Left	WM22406*0AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 4 Left	WM22406*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output Output 4 Right	WM22407*0AU\x0D
Mix-point Mute On Input Exp. 5 Output Output 4 Right	WM22407*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send A	WM22408*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input Exp. 5 Output V. Send A	WM22408*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send B	WM22409*0AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send B	WM22409*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send C	WM22410*0AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send C	WM22410*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send D	WM22411*0AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send D	WM22411*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send E	WM22412*0AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send E	WM22412*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send F	WM22413*0AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send F	WM22413*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send G	WM22414*0AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send G	WM22414*1AU\x0D
Mix-point Mute Off Input Exp. 5 Output V. Send H	WM22415*0AU\x0D
Mix-point Mute On Input Exp. 5 Output V. Send H	WM22415*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 1 Left	WM22500*0AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 1 Left	WM22500*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 1 Right	WM22501*0AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 1 Right	WM22501*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 2 Left	WM22502*0AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 2 Left	WM22502*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 2 Right	WM22503*0AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 2 Right	WM22503*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 3 Left	WM22504*0AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 3 Left	WM22504*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 3 Right	WM22505*0AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 3 Right	WM22505*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 4 Left	WM22506*0AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 4 Left	WM22506*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output Output 4 Right	WM22507*0AU\x0D
Mix-point Mute On Input Exp. 6 Output Output 4 Right	WM22507*1AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Off Input Exp. 6 Output V. Send A	WM22508*0AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send A	WM22508*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output V. Send B	WM22509*0AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send B	WM22509*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output V. Send C	WM22510*0AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send C	WM22510*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output V. Send D	WM22511*0AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send D	WM22511*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output V. Send E	WM22512*0AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send E	WM22512*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output V. Send F	WM22513*0AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send F	WM22513*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output V. Send G	WM22514*0AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send G	WM22514*1AU\x0D
Mix-point Mute Off Input Exp. 6 Output V. Send H	WM22515*0AU\x0D
Mix-point Mute On Input Exp. 6 Output V. Send H	WM22515*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 1 Left	WM22600*0AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 1 Left	WM22600*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 1 Right	WM22601*0AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 1 Right	WM22601*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 2 Left	WM22602*0AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 2 Left	WM22602*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 2 Right	WM22603*0AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 2 Right	WM22603*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 3 Left	WM22604*0AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 3 Left	WM22604*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 3 Right	WM22605*0AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 3 Right	WM22605*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 4 Left	WM22606*0AU\x0D
Mix-point Mute On Input Exp. 7 Output Output 4 Left	WM22606*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output Output 4 Right	WM22607*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input Exp. 7 Output Output 4 Right	WM22607*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send A	WM22608*0AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send A	WM22608*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send B	WM22609*0AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send B	WM22609*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send C	WM22610*0AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send C	WM22610*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send D	WM22611*0AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send D	WM22611*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send E	WM22612*0AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send E	WM22612*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send F	WM22613*0AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send F	WM22613*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send G	WM22614*0AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send G	WM22614*1AU\x0D
Mix-point Mute Off Input Exp. 7 Output V. Send H	WM22615*0AU\x0D
Mix-point Mute On Input Exp. 7 Output V. Send H	WM22615*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 1 Left	WM22700*0AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 1 Left	WM22700*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 1 Right	WM22701*0AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 1 Right	WM22701*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 2 Left	WM22702*0AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 2 Left	WM22702*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 2 Right	WM22703*0AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 2 Right	WM22703*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 3 Left	WM22704*0AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 3 Left	WM22704*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 3 Right	WM22705*0AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 3 Right	WM22705*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output Output 4 Left	WM22706*0AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 4 Left	WM22706*1AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Off Input Exp. 8 Output Output 4 Right	WM22707*0AU\x0D
Mix-point Mute On Input Exp. 8 Output Output 4 Right	WM22707*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send A	WM22708*0AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send A	WM22708*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send B	WM22709*0AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send B	WM22709*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send C	WM22710*0AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send C	WM22710*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send D	WM22711*0AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send D	WM22711*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send E	WM22712*0AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send E	WM22712*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send F	WM22713*0AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send F	WM22713*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send G	WM22714*0AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send G	WM22714*1AU\x0D
Mix-point Mute Off Input Exp. 8 Output V. Send H	WM22715*0AU\x0D
Mix-point Mute On Input Exp. 8 Output V. Send H	WM22715*1AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 1 Left	WM20800*0AU\x0D
Mix-point Mute On Input Mic 1 Output Output 1 Left	WM20800*1AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 1 Right	WM20801*0AU\x0D
Mix-point Mute On Input Mic 1 Output Output 1 Right	WM20801*1AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 2 Left	WM20802*0AU\x0D
Mix-point Mute On Input Mic 1 Output Output 2 Left	WM20802*1AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 2 Right	WM20803*0AU\x0D
Mix-point Mute On Input Mic 1 Output Output 2 Right	WM20803*1AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 3 Left	WM20804*0AU\x0D
Mix-point Mute On Input Mic 1 Output Output 3 Left	WM20804*1AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 3 Right	WM20805*0AU\x0D
Mix-point Mute On Input Mic 1 Output Output 3 Right	WM20805*1AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 4 Left	WM20806*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Mute On Input Mic 1 Output Output 4 Left	WM20806*1AU\x0D
Mix-point Mute Off Input Mic 1 Output Output 4 Right	WM20807*0AU\x0D
Mix-point Mute On Input Mic 1 Output Output 4 Right	WM20807*1AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send A	WM20808*0AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send A	WM20808*1AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send B	WM20809*0AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send B	WM20809*1AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send C	WM20810*0AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send C	WM20810*1AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send D	WM20811*0AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send D	WM20811*1AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send E	WM20812*0AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send E	WM20812*1AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send F	WM20813*0AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send F	WM20813*1AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send G	WM20814*0AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send G	WM20814*1AU\x0D
Mix-point Mute Off Input Mic 1 Output V. Send H	WM20815*0AU\x0D
Mix-point Mute On Input Mic 1 Output V. Send H	WM20815*1AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 1 Left	WM20900*0AU\x0D
Mix-point Mute On Input Mic 2 Output Output 1 Left	WM20900*1AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 1 Right	WM20901*0AU\x0D
Mix-point Mute On Input Mic 2 Output Output 1 Right	WM20901*1AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 2 Left	WM20902*0AU\x0D
Mix-point Mute On Input Mic 2 Output Output 2 Left	WM20902*1AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 2 Right	WM20903*0AU\x0D
Mix-point Mute On Input Mic 2 Output Output 2 Right	WM20903*1AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 3 Left	WM20904*0AU\x0D
Mix-point Mute On Input Mic 2 Output Output 3 Left	WM20904*1AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 3 Right	WM20905*0AU\x0D
Mix-point Mute On Input Mic 2 Output Output 3 Right	WM20905*1AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Mute Off Input Mic 2 Output Output 4 Left	WM20906*0AU\x0D
Mix-point Mute On Input Mic 2 Output Output 4 Left	WM20906*1AU\x0D
Mix-point Mute Off Input Mic 2 Output Output 4 Right	WM20907*0AU\x0D
Mix-point Mute On Input Mic 2 Output Output 4 Right	WM20907*1AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send A	WM20908*0AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send A	WM20908*1AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send B	WM20909*0AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send B	WM20909*1AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send C	WM20910*0AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send C	WM20910*1AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send D	WM20911*0AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send D	WM20911*1AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send E	WM20912*0AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send E	WM20912*1AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send F	WM20913*0AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send F	WM20913*1AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send G	WM20914*0AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send G	WM20914*1AU\x0D
Mix-point Mute Off Input Mic 2 Output V. Send H	WM20915*0AU\x0D
Mix-point Mute On Input Mic 2 Output V. Send H	WM20915*1AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 1 Left	WM21000*0AU\x0D
Mix-point Mute On Input Mic 3 Output Output 1 Left	WM21000*1AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 1 Right	WM21001*0AU\x0D
Mix-point Mute On Input Mic 3 Output Output 1 Right	WM21001*1AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 2 Left	WM21002*0AU\x0D
Mix-point Mute On Input Mic 3 Output Output 2 Left	WM21002*1AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 2 Right	WM21003*0AU\x0D
Mix-point Mute On Input Mic 3 Output Output 2 Right	WM21003*1AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 3 Left	WM21004*0AU\x0D
Mix-point Mute On Input Mic 3 Output Output 3 Left	WM21004*1AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 3 Right	WM21005*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Mute On Input Mic 3 Output Output 3 Right	WM21005*1AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 4 Left	WM21006*0AU\x0D
Mix-point Mute On Input Mic 3 Output Output 4 Left	WM21006*1AU\x0D
Mix-point Mute Off Input Mic 3 Output Output 4 Right	WM21007*0AU\x0D
Mix-point Mute On Input Mic 3 Output Output 4 Right	WM21007*1AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send A	WM21008*0AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send A	WM21008*1AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send B	WM21009*0AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send B	WM21009*1AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send C	WM21010*0AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send C	WM21010*1AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send D	WM21011*0AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send D	WM21011*1AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send E	WM21012*0AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send E	WM21012*1AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send F	WM21013*0AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send F	WM21013*1AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send G	WM21014*0AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send G	WM21014*1AU\x0D
Mix-point Mute Off Input Mic 3 Output V. Send H	WM21015*0AU\x0D
Mix-point Mute On Input Mic 3 Output V. Send H	WM21015*1AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 1 Left	WM21100*0AU\x0D
Mix-point Mute On Input Mic 4 Output Output 1 Left	WM21100*1AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 1 Right	WM21101*0AU\x0D
Mix-point Mute On Input Mic 4 Output Output 1 Right	WM21101*1AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 2 Left	WM21102*0AU\x0D
Mix-point Mute On Input Mic 4 Output Output 2 Left	WM21102*1AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 2 Right	WM21103*0AU\x0D
Mix-point Mute On Input Mic 4 Output Output 2 Right	WM21103*1AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 3 Left	WM21104*0AU\x0D
Mix-point Mute On Input Mic 4 Output Output 3 Left	WM21104*1AU\x0D

Global Scriptor Module Communication Sheet

Revision: 5/16/2019

Mix-point Mute Off Input Mic 4 Output Output 3 Right	WM21105*0AU\x0D
Mix-point Mute On Input Mic 4 Output Output 3 Right	WM21105*1AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 4 Left	WM21106*0AU\x0D
Mix-point Mute On Input Mic 4 Output Output 4 Left	WM21106*1AU\x0D
Mix-point Mute Off Input Mic 4 Output Output 4 Right	WM21107*0AU\x0D
Mix-point Mute On Input Mic 4 Output Output 4 Right	WM21107*1AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send A	WM21108*0AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send A	WM21108*1AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send B	WM21109*0AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send B	WM21109*1AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send C	WM21110*0AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send C	WM21110*1AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send D	WM21111*0AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send D	WM21111*1AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send E	WM21112*0AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send E	WM21112*1AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send F	WM21113*0AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send F	WM21113*1AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send G	WM21114*0AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send G	WM21114*1AU\x0D
Mix-point Mute Off Input Mic 4 Output V. Send H	WM21115*0AU\x0D
Mix-point Mute On Input Mic 4 Output V. Send H	WM21115*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 1 Left	WM20000*0AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 1 Left	WM20000*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 1 Right	WM20001*0AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 1 Right	WM20001*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 2 Left	WM20002*0AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 2 Left	WM20002*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 2 Right	WM20003*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Mute On Input Output 1 Left Output Output 2 Right	WM20003*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 3 Left	WM20004*0AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 3 Left	WM20004*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 3 Right	WM20005*0AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 3 Right	WM20005*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 4 Left	WM20006*0AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 4 Left	WM20006*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output Output 4 Right	WM20007*0AU\x0D
Mix-point Mute On Input Output 1 Left Output Output 4 Right	WM20007*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send A	WM20008*0AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send A	WM20008*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send B	WM20009*0AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send B	WM20009*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send C	WM20010*0AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send C	WM20010*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send D	WM20011*0AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send D	WM20011*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send E	WM20012*0AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send E	WM20012*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send F	WM20013*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input Output 1 Left Output V. Send F	WM20013*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send G	WM20014*0AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send G	WM20014*1AU\x0D
Mix-point Mute Off Input Output 1 Left Output V. Send H	WM20015*0AU\x0D
Mix-point Mute On Input Output 1 Left Output V. Send H	WM20015*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 1 Left	WM20100*0AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 1 Left	WM20100*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 1 Right	WM20101*0AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 1 Right	WM20101*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 2 Left	WM20102*0AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 2 Left	WM20102*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 2 Right	WM20103*0AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 2 Right	WM20103*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 3 Left	WM20104*0AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 3 Left	WM20104*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 3 Right	WM20105*0AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 3 Right	WM20105*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 4 Left	WM20106*0AU\x0D
Mix-point Mute On Input Output 1 Right Output Output 4 Left	WM20106*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output Output 4 Right	WM20107*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input Output 1 Right Output Output 4 Right	WM20107*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send A	WM20108*0AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send A	WM20108*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send B	WM20109*0AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send B	WM20109*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send C	WM20110*0AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send C	WM20110*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send D	WM20111*0AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send D	WM20111*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send E	WM20112*0AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send E	WM20112*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send F	WM20113*0AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send F	WM20113*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send G	WM20114*0AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send G	WM20114*1AU\x0D
Mix-point Mute Off Input Output 1 Right Output V. Send H	WM20115*0AU\x0D
Mix-point Mute On Input Output 1 Right Output V. Send H	WM20115*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 1 Left	WM20200*0AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 1 Left	WM20200*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 1 Right	WM20201*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Mute On Input Output 2 Left Output Output 1 Right	WM20201*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 2 Left	WM20202*0AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 2 Left	WM20202*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 2 Right	WM20203*0AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 2 Right	WM20203*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 3 Left	WM20204*0AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 3 Left	WM20204*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 3 Right	WM20205*0AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 3 Right	WM20205*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 4 Left	WM20206*0AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 4 Left	WM20206*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output Output 4 Right	WM20207*0AU\x0D
Mix-point Mute On Input Output 2 Left Output Output 4 Right	WM20207*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send A	WM20208*0AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send A	WM20208*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send B	WM20209*0AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send B	WM20209*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send C	WM20210*0AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send C	WM20210*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send D	WM20211*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Mute On Input Output 2 Left Output V. Send D	WM20211*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send E	WM20212*0AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send E	WM20212*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send F	WM20213*0AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send F	WM20213*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send G	WM20214*0AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send G	WM20214*1AU\x0D
Mix-point Mute Off Input Output 2 Left Output V. Send H	WM20215*0AU\x0D
Mix-point Mute On Input Output 2 Left Output V. Send H	WM20215*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 1 Left	WM20300*0AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 1 Left	WM20300*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 1 Right	WM20301*0AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 1 Right	WM20301*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 2 Left	WM20302*0AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 2 Left	WM20302*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 2 Right	WM20303*0AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 2 Right	WM20303*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 3 Left	WM20304*0AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 3 Left	WM20304*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 3 Right	WM20305*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input Output 2 Right Output Output 3 Right	WM20305*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 4 Left	WM20306*0AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 4 Left	WM20306*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output Output 4 Right	WM20307*0AU\x0D
Mix-point Mute On Input Output 2 Right Output Output 4 Right	WM20307*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send A	WM20308*0AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send A	WM20308*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send B	WM20309*0AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send B	WM20309*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send C	WM20310*0AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send C	WM20310*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send D	WM20311*0AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send D	WM20311*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send E	WM20312*0AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send E	WM20312*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send F	WM20313*0AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send F	WM20313*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send G	WM20314*0AU\x0D
Mix-point Mute On Input Output 2 Right Output V. Send G	WM20314*1AU\x0D
Mix-point Mute Off Input Output 2 Right Output V. Send H	WM20315*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Mute On Input Output 2 Right Output V. Send H	WM20315*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 1 Left	WM20400*0AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 1 Left	WM20400*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 1 Right	WM20401*0AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 1 Right	WM20401*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 2 Left	WM20402*0AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 2 Left	WM20402*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 2 Right	WM20403*0AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 2 Right	WM20403*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 3 Left	WM20404*0AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 3 Left	WM20404*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 3 Right	WM20405*0AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 3 Right	WM20405*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 4 Left	WM20406*0AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 4 Left	WM20406*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output Output 4 Right	WM20407*0AU\x0D
Mix-point Mute On Input Output 3 Left Output Output 4 Right	WM20407*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send A	WM20408*0AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send A	WM20408*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send B	WM20409*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input Output 3 Left Output V. Send B	WM20409*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send C	WM20410*0AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send C	WM20410*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send D	WM20411*0AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send D	WM20411*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send E	WM20412*0AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send E	WM20412*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send F	WM20413*0AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send F	WM20413*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send G	WM20414*0AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send G	WM20414*1AU\x0D
Mix-point Mute Off Input Output 3 Left Output V. Send H	WM20415*0AU\x0D
Mix-point Mute On Input Output 3 Left Output V. Send H	WM20415*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 1 Left	WM20500*0AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 1 Left	WM20500*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 1 Right	WM20501*0AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 1 Right	WM20501*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 2 Left	WM20502*0AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 2 Left	WM20502*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 2 Right	WM20503*0AU\x0D

Global Scriptor Module Communication Sheet

Mix-point Mute On Input Output 3 Right Output Output 2 Right	WM20503*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 3 Left	WM20504*0AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 3 Left	WM20504*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 3 Right	WM20505*0AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 3 Right	WM20505*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 4 Left	WM20506*0AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 4 Left	WM20506*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output Output 4 Right	WM20507*0AU\x0D
Mix-point Mute On Input Output 3 Right Output Output 4 Right	WM20507*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send A	WM20508*0AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send A	WM20508*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send B	WM20509*0AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send B	WM20509*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send C	WM20510*0AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send C	WM20510*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send D	WM20511*0AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send D	WM20511*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send E	WM20512*0AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send E	WM20512*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send F	WM20513*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input Output 3 Right Output V. Send F	WM20513*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send G	WM20514*0AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send G	WM20514*1AU\x0D
Mix-point Mute Off Input Output 3 Right Output V. Send H	WM20515*0AU\x0D
Mix-point Mute On Input Output 3 Right Output V. Send H	WM20515*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 1 Left	WM20600*0AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 1 Left	WM20600*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 1 Right	WM20601*0AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 1 Right	WM20601*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 2 Left	WM20602*0AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 2 Left	WM20602*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 2 Right	WM20603*0AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 2 Right	WM20603*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 3 Left	WM20604*0AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 3 Left	WM20604*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 3 Right	WM20605*0AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 3 Right	WM20605*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 4 Left	WM20606*0AU\x0D
Mix-point Mute On Input Output 4 Left Output Output 4 Left	WM20606*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output Output 4 Right	WM20607*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input Output 4 Left Output Output 4 Right	WM20607*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send A	WM20608*0AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send A	WM20608*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send B	WM20609*0AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send B	WM20609*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send C	WM20610*0AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send C	WM20610*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send D	WM20611*0AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send D	WM20611*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send E	WM20612*0AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send E	WM20612*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send F	WM20613*0AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send F	WM20613*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send G	WM20614*0AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send G	WM20614*1AU\x0D
Mix-point Mute Off Input Output 4 Left Output V. Send H	WM20615*0AU\x0D
Mix-point Mute On Input Output 4 Left Output V. Send H	WM20615*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 1 Left	WM20700*0AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 1 Left	WM20700*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 1 Right	WM20701*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input Output 4 Right Output Output 1 Right	WM20701*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 2 Left	WM20702*0AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 2 Left	WM20702*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 2 Right	WM20703*0AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 2 Right	WM20703*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 3 Left	WM20704*0AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 3 Left	WM20704*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 3 Right	WM20705*0AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 3 Right	WM20705*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 4 Left	WM20706*0AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 4 Left	WM20706*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output Output 4 Right	WM20707*0AU\x0D
Mix-point Mute On Input Output 4 Right Output Output 4 Right	WM20707*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send A	WM20708*0AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send A	WM20708*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send B	WM20709*0AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send B	WM20709*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send C	WM20710*0AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send C	WM20710*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send D	WM20711*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input Output 4 Right Output V. Send D	WM20711*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send E	WM20712*0AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send E	WM20712*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send F	WM20713*0AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send F	WM20713*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send G	WM20714*0AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send G	WM20714*1AU\x0D
Mix-point Mute Off Input Output 4 Right Output V. Send H	WM20715*0AU\x0D
Mix-point Mute On Input Output 4 Right Output V. Send H	WM20715*1AU\x0D
Mix-point Mute Off Input V. Return A Output Output 1 Left	WM21200*0AU\x0D
Mix-point Mute On Input V. Return A Output Output 1 Left	WM21200*1AU\x0D
Mix-point Mute Off Input V. Return A Output Output 1 Right	WM21201*0AU\x0D
Mix-point Mute On Input V. Return A Output Output 1 Right	WM21201*1AU\x0D
Mix-point Mute Off Input V. Return A Output Output 2 Left	WM21202*0AU\x0D
Mix-point Mute On Input V. Return A Output Output 2 Left	WM21202*1AU\x0D
Mix-point Mute Off Input V. Return A Output Output 2 Right	WM21203*0AU\x0D
Mix-point Mute On Input V. Return A Output Output 2 Right	WM21203*1AU\x0D
Mix-point Mute Off Input V. Return A Output Output 3 Left	WM21204*0AU\x0D
Mix-point Mute On Input V. Return A Output Output 3 Left	WM21204*1AU\x0D
Mix-point Mute Off Input V. Return A Output Output 3 Right	WM21205*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input V. Return A Output Output 3 Right	WM21205*1AU\x0D
Mix-point Mute Off Input V. Return A Output Output 4 Left	WM21206*0AU\x0D
Mix-point Mute On Input V. Return A Output Output 4 Left	WM21206*1AU\x0D
Mix-point Mute Off Input V. Return A Output Output 4 Right	WM21207*0AU\x0D
Mix-point Mute On Input V. Return A Output Output 4 Right	WM21207*1AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send A	WM21208*0AU\x0D
Mix-point Mute On Input V. Return A Output V. Send A	WM21208*1AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send B	WM21209*0AU\x0D
Mix-point Mute On Input V. Return A Output V. Send B	WM21209*1AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send C	WM21210*0AU\x0D
Mix-point Mute On Input V. Return A Output V. Send C	WM21210*1AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send D	WM21211*0AU\x0D
Mix-point Mute On Input V. Return A Output V. Send D	WM21211*1AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send E	WM21212*0AU\x0D
Mix-point Mute On Input V. Return A Output V. Send E	WM21212*1AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send F	WM21213*0AU\x0D
Mix-point Mute On Input V. Return A Output V. Send F	WM21213*1AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send G	WM21214*0AU\x0D
Mix-point Mute On Input V. Return A Output V. Send G	WM21214*1AU\x0D
Mix-point Mute Off Input V. Return A Output V. Send H	WM21215*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input V. Return A Output V. Send H	WM21215*1AU\x0D
Mix-point Mute Off Input V. Return B Output Output 1 Left	WM21300*0AU\x0D
Mix-point Mute On Input V. Return B Output Output 1 Left	WM21300*1AU\x0D
Mix-point Mute Off Input V. Return B Output Output 1 Right	WM21301*0AU\x0D
Mix-point Mute On Input V. Return B Output Output 1 Right	WM21301*1AU\x0D
Mix-point Mute Off Input V. Return B Output Output 2 Left	WM21302*0AU\x0D
Mix-point Mute On Input V. Return B Output Output 2 Left	WM21302*1AU\x0D
Mix-point Mute Off Input V. Return B Output Output 2 Right	WM21303*0AU\x0D
Mix-point Mute On Input V. Return B Output Output 2 Right	WM21303*1AU\x0D
Mix-point Mute Off Input V. Return B Output Output 3 Left	WM21304*0AU\x0D
Mix-point Mute On Input V. Return B Output Output 3 Left	WM21304*1AU\x0D
Mix-point Mute Off Input V. Return B Output Output 3 Right	WM21305*0AU\x0D
Mix-point Mute On Input V. Return B Output Output 3 Right	WM21305*1AU\x0D
Mix-point Mute Off Input V. Return B Output Output 4 Left	WM21306*0AU\x0D
Mix-point Mute On Input V. Return B Output Output 4 Left	WM21306*1AU\x0D
Mix-point Mute Off Input V. Return B Output Output 4 Right	WM21307*0AU\x0D
Mix-point Mute On Input V. Return B Output Output 4 Right	WM21307*1AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send A	WM21308*0AU\x0D
Mix-point Mute On Input V. Return B Output V. Send A	WM21308*1AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send B	WM21309*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input V. Return B Output V. Send B	WM21309*1AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send C	WM21310*0AU\x0D
Mix-point Mute On Input V. Return B Output V. Send C	WM21310*1AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send D	WM21311*0AU\x0D
Mix-point Mute On Input V. Return B Output V. Send D	WM21311*1AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send E	WM21312*0AU\x0D
Mix-point Mute On Input V. Return B Output V. Send E	WM21312*1AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send F	WM21313*0AU\x0D
Mix-point Mute On Input V. Return B Output V. Send F	WM21313*1AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send G	WM21314*0AU\x0D
Mix-point Mute On Input V. Return B Output V. Send G	WM21314*1AU\x0D
Mix-point Mute Off Input V. Return B Output V. Send H	WM21315*0AU\x0D
Mix-point Mute On Input V. Return B Output V. Send H	WM21315*1AU\x0D
Mix-point Mute Off Input V. Return C Output Output 1 Left	WM21400*0AU\x0D
Mix-point Mute On Input V. Return C Output Output 1 Left	WM21400*1AU\x0D
Mix-point Mute Off Input V. Return C Output Output 1 Right	WM21401*0AU\x0D
Mix-point Mute On Input V. Return C Output Output 1 Right	WM21401*1AU\x0D
Mix-point Mute Off Input V. Return C Output Output 2 Left	WM21402*0AU\x0D
Mix-point Mute On Input V. Return C Output Output 2 Left	WM21402*1AU\x0D
Mix-point Mute Off Input V. Return C Output Output 2 Right	WM21403*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input V. Return C Output Output 2 Right	WM21403*1AU\x0D
Mix-point Mute Off Input V. Return C Output Output 3 Left	WM21404*0AU\x0D
Mix-point Mute On Input V. Return C Output Output 3 Left	WM21404*1AU\x0D
Mix-point Mute Off Input V. Return C Output Output 3 Right	WM21405*0AU\x0D
Mix-point Mute On Input V. Return C Output Output 3 Right	WM21405*1AU\x0D
Mix-point Mute Off Input V. Return C Output Output 4 Left	WM21406*0AU\x0D
Mix-point Mute On Input V. Return C Output Output 4 Left	WM21406*1AU\x0D
Mix-point Mute Off Input V. Return C Output Output 4 Right	WM21407*0AU\x0D
Mix-point Mute On Input V. Return C Output Output 4 Right	WM21407*1AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send A	WM21408*0AU\x0D
Mix-point Mute On Input V. Return C Output V. Send A	WM21408*1AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send B	WM21409*0AU\x0D
Mix-point Mute On Input V. Return C Output V. Send B	WM21409*1AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send C	WM21410*0AU\x0D
Mix-point Mute On Input V. Return C Output V. Send C	WM21410*1AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send D	WM21411*0AU\x0D
Mix-point Mute On Input V. Return C Output V. Send D	WM21411*1AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send E	WM21412*0AU\x0D
Mix-point Mute On Input V. Return C Output V. Send E	WM21412*1AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send F	WM21413*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input V. Return C Output V. Send F	WM21413*1AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send G	WM21414*0AU\x0D
Mix-point Mute On Input V. Return C Output V. Send G	WM21414*1AU\x0D
Mix-point Mute Off Input V. Return C Output V. Send H	WM21415*0AU\x0D
Mix-point Mute On Input V. Return C Output V. Send H	WM21415*1AU\x0D
Mix-point Mute Off Input V. Return D Output Output 1 Left	WM21500*0AU\x0D
Mix-point Mute On Input V. Return D Output Output 1 Left	WM21500*1AU\x0D
Mix-point Mute Off Input V. Return D Output Output 1 Right	WM21501*0AU\x0D
Mix-point Mute On Input V. Return D Output Output 1 Right	WM21501*1AU\x0D
Mix-point Mute Off Input V. Return D Output Output 2 Left	WM21502*0AU\x0D
Mix-point Mute On Input V. Return D Output Output 2 Left	WM21502*1AU\x0D
Mix-point Mute Off Input V. Return D Output Output 2 Right	WM21503*0AU\x0D
Mix-point Mute On Input V. Return D Output Output 2 Right	WM21503*1AU\x0D
Mix-point Mute Off Input V. Return D Output Output 3 Left	WM21504*0AU\x0D
Mix-point Mute On Input V. Return D Output Output 3 Left	WM21504*1AU\x0D
Mix-point Mute Off Input V. Return D Output Output 3 Right	WM21505*0AU\x0D
Mix-point Mute On Input V. Return D Output Output 3 Right	WM21505*1AU\x0D
Mix-point Mute Off Input V. Return D Output Output 4 Left	WM21506*0AU\x0D
Mix-point Mute On Input V. Return D Output Output 4 Left	WM21506*1AU\x0D
Mix-point Mute Off Input V. Return D Output Output 4 Right	WM21507*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input V. Return D Output Output 4 Right	WM21507*1AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send A	WM21508*0AU\x0D
Mix-point Mute On Input V. Return D Output V. Send A	WM21508*1AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send B	WM21509*0AU\x0D
Mix-point Mute On Input V. Return D Output V. Send B	WM21509*1AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send C	WM21510*0AU\x0D
Mix-point Mute On Input V. Return D Output V. Send C	WM21510*1AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send D	WM21511*0AU\x0D
Mix-point Mute On Input V. Return D Output V. Send D	WM21511*1AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send E	WM21512*0AU\x0D
Mix-point Mute On Input V. Return D Output V. Send E	WM21512*1AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send F	WM21513*0AU\x0D
Mix-point Mute On Input V. Return D Output V. Send F	WM21513*1AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send G	WM21514*0AU\x0D
Mix-point Mute On Input V. Return D Output V. Send G	WM21514*1AU\x0D
Mix-point Mute Off Input V. Return D Output V. Send H	WM21515*0AU\x0D
Mix-point Mute On Input V. Return D Output V. Send H	WM21515*1AU\x0D
Mix-point Mute Off Input V. Return E Output Output 1 Left	WM21600*0AU\x0D
Mix-point Mute On Input V. Return E Output Output 1 Left	WM21600*1AU\x0D
Mix-point Mute Off Input V. Return E Output Output 1 Right	WM21601*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input V. Return E Output Output 1 Right	WM21601*1AU\x0D
Mix-point Mute Off Input V. Return E Output Output 2 Left	WM21602*0AU\x0D
Mix-point Mute On Input V. Return E Output Output 2 Left	WM21602*1AU\x0D
Mix-point Mute Off Input V. Return E Output Output 2 Right	WM21603*0AU\x0D
Mix-point Mute On Input V. Return E Output Output 2 Right	WM21603*1AU\x0D
Mix-point Mute Off Input V. Return E Output Output 3 Left	WM21604*0AU\x0D
Mix-point Mute On Input V. Return E Output Output 3 Left	WM21604*1AU\x0D
Mix-point Mute Off Input V. Return E Output Output 3 Right	WM21605*0AU\x0D
Mix-point Mute On Input V. Return E Output Output 3 Right	WM21605*1AU\x0D
Mix-point Mute Off Input V. Return E Output Output 4 Left	WM21606*0AU\x0D
Mix-point Mute On Input V. Return E Output Output 4 Left	WM21606*1AU\x0D
Mix-point Mute Off Input V. Return E Output Output 4 Right	WM21607*0AU\x0D
Mix-point Mute On Input V. Return E Output Output 4 Right	WM21607*1AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send A	WM21608*0AU\x0D
Mix-point Mute On Input V. Return E Output V. Send A	WM21608*1AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send B	WM21609*0AU\x0D
Mix-point Mute On Input V. Return E Output V. Send B	WM21609*1AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send C	WM21610*0AU\x0D
Mix-point Mute On Input V. Return E Output V. Send C	WM21610*1AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send D	WM21611*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input V. Return E Output V. Send D	WM21611*1AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send E	WM21612*0AU\x0D
Mix-point Mute On Input V. Return E Output V. Send E	WM21612*1AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send F	WM21613*0AU\x0D
Mix-point Mute On Input V. Return E Output V. Send F	WM21613*1AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send G	WM21614*0AU\x0D
Mix-point Mute On Input V. Return E Output V. Send G	WM21614*1AU\x0D
Mix-point Mute Off Input V. Return E Output V. Send H	WM21615*0AU\x0D
Mix-point Mute On Input V. Return E Output V. Send H	WM21615*1AU\x0D
Mix-point Mute Off Input V. Return F Output Output 1 Left	WM21700*0AU\x0D
Mix-point Mute On Input V. Return F Output Output 1 Left	WM21700*1AU\x0D
Mix-point Mute Off Input V. Return F Output Output 1 Right	WM21701*0AU\x0D
Mix-point Mute On Input V. Return F Output Output 1 Right	WM21701*1AU\x0D
Mix-point Mute Off Input V. Return F Output Output 2 Left	WM21702*0AU\x0D
Mix-point Mute On Input V. Return F Output Output 2 Left	WM21702*1AU\x0D
Mix-point Mute Off Input V. Return F Output Output 2 Right	WM21703*0AU\x0D
Mix-point Mute On Input V. Return F Output Output 2 Right	WM21703*1AU\x0D
Mix-point Mute Off Input V. Return F Output Output 3 Left	WM21704*0AU\x0D
Mix-point Mute On Input V. Return F Output Output 3 Left	WM21704*1AU\x0D
Mix-point Mute Off Input V. Return F Output Output 3 Right	WM21705*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input V. Return F Output Output 3 Right	WM21705*1AU\x0D
Mix-point Mute Off Input V. Return F Output Output 4 Left	WM21706*0AU\x0D
Mix-point Mute On Input V. Return F Output Output 4 Left	WM21706*1AU\x0D
Mix-point Mute Off Input V. Return F Output Output 4 Right	WM21707*0AU\x0D
Mix-point Mute On Input V. Return F Output Output 4 Right	WM21707*1AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send A	WM21708*0AU\x0D
Mix-point Mute On Input V. Return F Output V. Send A	WM21708*1AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send B	WM21709*0AU\x0D
Mix-point Mute On Input V. Return F Output V. Send B	WM21709*1AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send C	WM21710*0AU\x0D
Mix-point Mute On Input V. Return F Output V. Send C	WM21710*1AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send D	WM21711*0AU\x0D
Mix-point Mute On Input V. Return F Output V. Send D	WM21711*1AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send E	WM21712*0AU\x0D
Mix-point Mute On Input V. Return F Output V. Send E	WM21712*1AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send F	WM21713*0AU\x0D
Mix-point Mute On Input V. Return F Output V. Send F	WM21713*1AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send G	WM21714*0AU\x0D
Mix-point Mute On Input V. Return F Output V. Send G	WM21714*1AU\x0D
Mix-point Mute Off Input V. Return F Output V. Send H	WM21715*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input V. Return F Output V. Send H	WM21715*1AU\x0D
Mix-point Mute Off Input V. Return G Output Output 1 Left	WM21800*0AU\x0D
Mix-point Mute On Input V. Return G Output Output 1 Left	WM21800*1AU\x0D
Mix-point Mute Off Input V. Return G Output Output 1 Right	WM21801*0AU\x0D
Mix-point Mute On Input V. Return G Output Output 1 Right	WM21801*1AU\x0D
Mix-point Mute Off Input V. Return G Output Output 2 Left	WM21802*0AU\x0D
Mix-point Mute On Input V. Return G Output Output 2 Left	WM21802*1AU\x0D
Mix-point Mute Off Input V. Return G Output Output 2 Right	WM21803*0AU\x0D
Mix-point Mute On Input V. Return G Output Output 2 Right	WM21803*1AU\x0D
Mix-point Mute Off Input V. Return G Output Output 3 Left	WM21804*0AU\x0D
Mix-point Mute On Input V. Return G Output Output 3 Left	WM21804*1AU\x0D
Mix-point Mute Off Input V. Return G Output Output 3 Right	WM21805*0AU\x0D
Mix-point Mute On Input V. Return G Output Output 3 Right	WM21805*1AU\x0D
Mix-point Mute Off Input V. Return G Output Output 4 Left	WM21806*0AU\x0D
Mix-point Mute On Input V. Return G Output Output 4 Left	WM21806*1AU\x0D
Mix-point Mute Off Input V. Return G Output Output 4 Right	WM21807*0AU\x0D
Mix-point Mute On Input V. Return G Output Output 4 Right	WM21807*1AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send A	WM21808*0AU\x0D
Mix-point Mute On Input V. Return G Output V. Send A	WM21808*1AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send B	WM21809*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input V. Return G Output V. Send B	WM21809*1AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send C	WM21810*0AU\x0D
Mix-point Mute On Input V. Return G Output V. Send C	WM21810*1AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send D	WM21811*0AU\x0D
Mix-point Mute On Input V. Return G Output V. Send D	WM21811*1AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send E	WM21812*0AU\x0D
Mix-point Mute On Input V. Return G Output V. Send E	WM21812*1AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send F	WM21813*0AU\x0D
Mix-point Mute On Input V. Return G Output V. Send F	WM21813*1AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send G	WM21814*0AU\x0D
Mix-point Mute On Input V. Return G Output V. Send G	WM21814*1AU\x0D
Mix-point Mute Off Input V. Return G Output V. Send H	WM21815*0AU\x0D
Mix-point Mute On Input V. Return G Output V. Send H	WM21815*1AU\x0D
Mix-point Mute Off Input V. Return H Output Output 1 Left	WM21900*0AU\x0D
Mix-point Mute On Input V. Return H Output Output 1 Left	WM21900*1AU\x0D
Mix-point Mute Off Input V. Return H Output Output 1 Right	WM21901*0AU\x0D
Mix-point Mute On Input V. Return H Output Output 1 Right	WM21901*1AU\x0D
Mix-point Mute Off Input V. Return H Output Output 2 Left	WM21902*0AU\x0D
Mix-point Mute On Input V. Return H Output Output 2 Left	WM21902*1AU\x0D
Mix-point Mute Off Input V. Return H Output Output 2 Right	WM21903*0AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute On Input V. Return H Output Output 2 Right	WM21903*1AU\x0D
Mix-point Mute Off Input V. Return H Output Output 3 Left	WM21904*0AU\x0D
Mix-point Mute On Input V. Return H Output Output 3 Left	WM21904*1AU\x0D
Mix-point Mute Off Input V. Return H Output Output 3 Right	WM21905*0AU\x0D
Mix-point Mute On Input V. Return H Output Output 3 Right	WM21905*1AU\x0D
Mix-point Mute Off Input V. Return H Output Output 4 Left	WM21906*0AU\x0D
Mix-point Mute On Input V. Return H Output Output 4 Left	WM21906*1AU\x0D
Mix-point Mute Off Input V. Return H Output Output 4 Right	WM21907*0AU\x0D
Mix-point Mute On Input V. Return H Output Output 4 Right	WM21907*1AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send A	WM21908*0AU\x0D
Mix-point Mute On Input V. Return H Output V. Send A	WM21908*1AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send B	WM21909*0AU\x0D
Mix-point Mute On Input V. Return H Output V. Send B	WM21909*1AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send C	WM21910*0AU\x0D
Mix-point Mute On Input V. Return H Output V. Send C	WM21910*1AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send D	WM21911*0AU\x0D
Mix-point Mute On Input V. Return H Output V. Send D	WM21911*1AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send E	WM21912*0AU\x0D
Mix-point Mute On Input V. Return H Output V. Send E	WM21912*1AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send F	WM21913*0AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Mute On Input V. Return H Output V. Send F	WM21913*1AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send G	WM21914*0AU\x0D
Mix-point Mute On Input V. Return H Output V. Send G	WM21914*1AU\x0D
Mix-point Mute Off Input V. Return H Output V. Send H	WM21915*0AU\x0D
Mix-point Mute On Input V. Return H Output V. Send H	WM21915*1AU\x0D
Output Audio Select Embedded Audio Output 1	w01*1AFMT\x0D\x0A
Output Audio Select No Audio Output 1	w01*2AFMT\x0D\x0A
Output Audio Select Original HDMI Output 1	w01*0AFMT\x0D\x0A
Output Audio Select Embedded Audio Output 4	w04*1AFMT\x0D\x0A
Output Audio Select No Audio Output 4	w04*2AFMT\x0D\x0A
Output Audio Select Original HDMI Output 4	w04*0AFMT\x0D\x0A
Output Post-mixer Trim -12 Output 1 L/R Left	wG60100*-120AU\x0D
Output Post-mixer Trim 12 Output 1 L/R Left	wG60100*120AU\x0D
Output Post-mixer Trim -12 Output 1 L/R Right	wG60101*-120AU\x0D
Output Post-mixer Trim 12 Output 1 L/R Right	wG60101*120AU\x0D
Output Post-mixer Trim -12 Output 4 L/R Left	wG60106*-120AU\x0D
Output Post-mixer Trim 12 Output 4 L/R Left	wG60106*120AU\x0D
Output Post-mixer Trim -12 Output 4 L/R Right	wG60107*-120AU\x0D
Output Post-mixer Trim 12 Output 4 L/R Right	wG60107*120AU\x0D
Output Resolution 1024x768 (60Hz) Output 3	W3*20RATE\x0D
Output Resolution 1080i (50Hz) Output 3	W3*74RATE\x0D
Output Resolution 1080i (59.94Hz) Output 3	W3*75RATE\x0D
Output Resolution 1080i (60Hz) Output 3	W3*76RATE\x0D
Output Resolution 1080p (23.98Hz) Output 3	W3*77RATE\x0D
Output Resolution 1080p (24Hz) Output 3	W3*78RATE\x0D
Output Resolution 1080p (25Hz) Output 3	W3*79RATE\x0D
Output Resolution 1080p (29.97Hz) Output 3	W3*80RATE\x0D
Output Resolution 1080p (30Hz) Output 3	W3*81RATE\x0D
Output Resolution 1080p (50Hz) Output 3	W3*82RATE\x0D
Output Resolution 1080p (59.94Hz) Output 3	W3*83RATE\x0D
Output Resolution 1080p (60Hz) Output 3	W3*84RATE\x0D
Output Resolution 1280x1024 (60Hz) Output 3	W3*35RATE\x0D
Output Resolution 1280x768 (60Hz) Output 3	W3*29RATE\x0D
Output Resolution 1280x800 (60Hz) Output 3	W3*32RATE\x0D

Global Scriptor Module Communication Sheet

Output Resolution 1360x768 (60Hz) Output 3	W3*41RATE\X0D
Output Resolution 1366x768 (60Hz) Output 3	W3*47RATE\X0D
Output Resolution 1400x1050 (60Hz) Output 3	W3*56RATE\X0D
Output Resolution 1440x900 (60Hz) Output 3	W3*53RATE\X0D
Output Resolution 1600x1200 (60Hz) Output 3	W3*62RATE\X0D
Output Resolution 1600x900 (60Hz) Output 3	W3*58RATE\X0D
Output Resolution 1680x1050 (60Hz) Output 3	W3*60RATE\X0D
Output Resolution 1920x1200 (60Hz) Output 3	W3*64RATE\X0D
Output Resolution 2048x1080 2K (23.98Hz) Output 3	W3*85RATE\X0D
Output Resolution 2048x1080 2K (24Hz) Output 3	W3*86RATE\X0D
Output Resolution 2048x1080 2K (25Hz) Output 3	W3*87RATE\X0D
Output Resolution 2048x1080 2K (29.97Hz) Output 3	W3*88RATE\X0D
Output Resolution 2048x1080 2K (30Hz) Output 3	W3*89RATE\X0D
Output Resolution 2048x1080 2K (50Hz) Output 3	W3*90RATE\X0D
Output Resolution 2048x1080 2K (59.94Hz) Output 3	W3*91RATE\X0D
Output Resolution 2048x1080 2K (60Hz) Output 3	W3*92RATE\X0D
Output Resolution 480p (59.94Hz) Output 3	W3*65RATE\X0D
Output Resolution 480p (60Hz) Output 3	W3*66RATE\X0D
Output Resolution 576p Output 3	W3*67RATE\X0D
Output Resolution 640x480 (60Hz) Output 3	W3*11RATE\X0D
Output Resolution 720p (25Hz) Output 3	W3*68RATE\X0D
Output Resolution 720p (29.97Hz) Output 3	W3*69RATE\X0D
Output Resolution 720p (30Hz) Output 3	W3*70RATE\X0D
Output Resolution 720p (50Hz) Output 3	W3*71RATE\X0D
Output Resolution 720p (59.94Hz) Output 3	W3*72RATE\X0D
Output Resolution 720p (60Hz) Output 3	W3*73RATE\X0D
Output Resolution 800x600 (60Hz) Output 3	W3*14RATE\X0D
Output Resolution 1024x768 (60Hz) Output 4	W4*20RATE\X0D
Output Resolution 1080i (50Hz) Output 4	W4*74RATE\X0D
Output Resolution 1080i (59.94Hz) Output 4	W4*75RATE\X0D
Output Resolution 1080i (60Hz) Output 4	W4*76RATE\X0D
Output Resolution 1080p (23.98Hz) Output 4	W4*77RATE\X0D
Output Resolution 1080p (24Hz) Output 4	W4*78RATE\X0D
Output Resolution 1080p (25Hz) Output 4	W4*79RATE\X0D
Output Resolution 1080p (29.97Hz) Output 4	W4*80RATE\X0D
Output Resolution 1080p (30Hz) Output 4	W4*81RATE\X0D
Output Resolution 1080p (50Hz) Output 4	W4*82RATE\X0D
Output Resolution 1080p (59.94Hz) Output 4	W4*83RATE\X0D
Output Resolution 1080p (60Hz) Output 4	W4*84RATE\X0D

Global Scriptor Module Communication Sheet

Revision: 5/16/2019

Output Resolution 1280x1024 (60Hz) Output 4	W4*35RATE\X0D
Output Resolution 1280x768 (60Hz) Output 4	W4*29RATE\X0D
Output Resolution 1280x800 (60Hz) Output 4	W4*32RATE\X0D
Output Resolution 1360x768 (60Hz) Output 4	W4*41RATE\X0D
Output Resolution 1366x768 (60Hz) Output 4	W4*47RATE\X0D
Output Resolution 1400x1050 (60Hz) Output 4	W4*56RATE\X0D
Output Resolution 1440x900 (60Hz) Output 4	W4*53RATE\X0D
Output Resolution 1600x1200 (60Hz) Output 4	W4*62RATE\X0D
Output Resolution 1600x900 (60Hz) Output 4	W4*58RATE\X0D
Output Resolution 1680x1050 (60Hz) Output 4	W4*60RATE\X0D
Output Resolution 1920x1200 (60Hz) Output 4	W4*64RATE\X0D
Output Resolution 2048x1080 2K (23.98Hz) Output 4	W4*85RATE\X0D
Output Resolution 2048x1080 2K (24Hz) Output 4	W4*86RATE\X0D
Output Resolution 2048x1080 2K (25Hz) Output 4	W4*87RATE\X0D
Output Resolution 2048x1080 2K (29.97Hz) Output 4	W4*88RATE\X0D
Output Resolution 2048x1080 2K (30Hz) Output 4	W4*89RATE\X0D
Output Resolution 2048x1080 2K (50Hz) Output 4	W4*90RATE\X0D
Output Resolution 2048x1080 2K (59.94Hz) Output 4	W4*91RATE\X0D
Output Resolution 2048x1080 2K (60Hz) Output 4	W4*92RATE\X0D
Output Resolution 480p (59.94Hz) Output 4	W4*65RATE\X0D
Output Resolution 480p (60Hz) Output 4	W4*66RATE\X0D
Output Resolution 576p Output 4	W4*67RATE\X0D
Output Resolution 640x480 (60Hz) Output 4	W4*11RATE\X0D
Output Resolution 720p (25Hz) Output 4	W4*68RATE\X0D
Output Resolution 720p (29.97Hz) Output 4	W4*69RATE\X0D
Output Resolution 720p (30Hz) Output 4	W4*70RATE\X0D
Output Resolution 720p (50Hz) Output 4	W4*71RATE\X0D
Output Resolution 720p (59.94Hz) Output 4	W4*72RATE\X0D
Output Resolution 720p (60Hz) Output 4	W4*73RATE\X0D
Output Resolution 800x600 (60Hz) Output 4	W4*14RATE\X0D
Phantom Power Off Input 1	wZ40000*0AU\X0D
Phantom Power On Input 1	wZ40000*1AU\X0D
Phantom Power Off Input 4	wZ40003*0AU\X0D
Phantom Power On Input 4	wZ40003*1AU\X0D
Post Matrix Gain -100 Output 1 L/R Left	WG50000*-1000AU\X0D
Post Matrix Gain 12 Output 1 L/R Left	WG50000*120AU\X0D
Post Matrix Gain -100 Output 1 L/R Right	WG50001*-1000AU\X0D
Post Matrix Gain 12 Output 1 L/R Right	WG50001*120AU\X0D
Post Matrix Gain -100 Output 4 L/R Left	WG50006*-1000AU\X0D

Global Scriptor Module Communication Sheet

Revision: 5/16/2019

Post Matrix Gain 12 Output 4 L/R Left	WG50006*120AU\x0D
Post Matrix Gain -100 Output 4 L/R Right	WG50007*-1000AU\x0D
Post Matrix Gain 12 Output 4 L/R Right	WG50007*120AU\x0D
Post Matrix Mute Off Output 1 L/R Left	WM50000*0AU\x0D
Post Matrix Mute On Output 1 L/R Left	WM50000*1AU\x0D
Post Matrix Mute Off Output 1 L/R Right	WM50001*0AU\x0D
Post Matrix Mute On Output 1 L/R Right	WM50001*1AU\x0D
Post Matrix Mute Off Output 4 L/R Left	WM50006*0AU\x0D
Post Matrix Mute On Output 4 L/R Left	WM50006*1AU\x0D
Post Matrix Mute Off Output 4 L/R Right	WM50007*0AU\x0D
Post Matrix Mute On Output 4 L/R Right	WM50007*1AU\x0D
Pre-matrix Trim -12 Input 1 L/R Left	wG30100*-120AU\x0D
Pre-matrix Trim 12 Input 1 L/R Left	wG30100*120AU\x0D
Pre-matrix Trim -12 Input 1 L/R Right	wG30101*-120AU\x0D
Pre-matrix Trim 12 Input 1 L/R Right	wG30101*120AU\x0D
Pre-matrix Trim -12 Input 8 L/R Left	wG30114*-120AU\x0D
Pre-matrix Trim 12 Input 8 L/R Left	wG30114*120AU\x0D
Pre-matrix Trim -12 Input 8 L/R Right	wG30115*-120AU\x0D
Pre-matrix Trim 12 Input 8 L/R Right	wG30115*120AU\x0D
Pre-mixer Gain -100 Input 1	WG40100*-1000AU\x0D
Pre-mixer Gain 12 Input 1	WG40100*120AU\x0D
Pre-mixer Gain -100 Input 4	WG40103*-1000AU\x0D
Pre-mixer Gain 12 Input 4	WG40103*120AU\x0D
Pre-mixer Mute Off Input 1	WM40100*0AU\x0D\x0A
Pre-mixer Mute On Input 1	WM40100*1AU\x0D\x0A
Pre-mixer Mute Off Input 4	WM40103*0AU\x0D\x0A
Pre-mixer Mute On Input 4	WM40103*1AU\x0D\x0A
Preset Recall 1	1.
Preset Recall 32	32.
Scaler Preset Recall 1 Output 3	2*3*1.\x0D\x0A
Scaler Preset Recall 128 Output 3	2*3*128.\x0D\x0A
Scaler Preset Recall 1 Output 4	2*4*1.\x0D\x0A
Scaler Preset Recall 128 Output 4	2*4*128.\x0D\x0A
Scaler Preset Save 1 Output 3	2*3*1,\x0D\x0A
Scaler Preset Save 128 Output 3	2*3*128,\x0D\x0A
Scaler Preset Save 1 Output 4	2*4*1,\x0D\x0A
Scaler Preset Save 128 Output 4	2*4*128,\x0D\x0A
Test Pattern Alternating Pixels Output 3	W3*2TEST\x0D
Test Pattern Blue Mode Output 3	W3*6TEST\x0D

Global Scripter Module Communication Sheet

Test Pattern Color Bars Output 3	W3*4TEST\x0D
Test Pattern Crop Output 3	W3*1TEST\x0D
Test Pattern Crop and Pink Noise Output 3	W3*7TEST\x0D
Test Pattern Crosshatch Output 3	W3*3TEST\x0D
Test Pattern Grayscale Output 3	W3*5TEST\x0D
Test Pattern Off Output 3	W3*0TEST\x0D
Test Pattern Alternating Pixels Output 4	W4*2TEST\x0D
Test Pattern Blue Mode Output 4	W4*6TEST\x0D
Test Pattern Color Bars Output 4	W4*4TEST\x0D
Test Pattern Crop Output 4	W4*1TEST\x0D
Test Pattern Crop and Pink Noise Output 4	W4*7TEST\x0D
Test Pattern Crosshatch Output 4	W4*3TEST\x0D
Test Pattern Grayscale Output 4	W4*5TEST\x0D
Test Pattern Off Output 4	W4*0TEST\x0D
Video Mute Off Output 1	1*0B\x0D
Video Mute Video Output 1	1*1B\x0D
Video Mute Video & Sync Output 1	1*2B\x0D
Video Mute Off Output 4	4*0B\x0D
Video Mute Video Output 4	4*1B\x0D
Video Mute Video & Sync Output 4	4*2B\x0D
Virtual Return Gain -100 Input A	WG50100*-1000AU\x0D\x0A
Virtual Return Gain 12 Input A	WG50100*120AU\x0D\x0A
Virtual Return Gain -100 Input B	WG50101*-1000AU\x0D\x0A
Virtual Return Gain 12 Input B	WG50101*120AU\x0D\x0A
Virtual Return Gain -100 Input C	WG50102*-1000AU\x0D\x0A
Virtual Return Gain 12 Input C	WG50102*120AU\x0D\x0A
Virtual Return Gain -100 Input D	WG50103*-1000AU\x0D\x0A
Virtual Return Gain 12 Input D	WG50103*120AU\x0D\x0A
Virtual Return Gain -100 Input E	WG50104*-1000AU\x0D\x0A
Virtual Return Gain 12 Input E	WG50104*120AU\x0D\x0A
Virtual Return Gain -100 Input F	WG50105*-1000AU\x0D\x0A
Virtual Return Gain 12 Input F	WG50105*120AU\x0D\x0A
Virtual Return Gain -100 Input G	WG50106*-1000AU\x0D\x0A
Virtual Return Gain 12 Input G	WG50106*120AU\x0D\x0A
Virtual Return Gain -100 Input H	WG50107*-1000AU\x0D\x0A
Virtual Return Gain 12 Input H	WG50107*120AU\x0D\x0A
Virtual Return Mute Off Input A	WM50100*0AU\x0D\x0A
Virtual Return Mute On Input A	WM50100*1AU\x0D\x0A
Virtual Return Mute Off Input B	WM50101*0AU\x0D\x0A

Global Scripter Module Communication Sheet

Virtual Return Mute On Input B	WM50101*1AU\x0D\x0A
Virtual Return Mute Off Input C	WM50102*0AU\x0D\x0A
Virtual Return Mute On Input C	WM50102*1AU\x0D\x0A
Virtual Return Mute Off Input D	WM50103*0AU\x0D\x0A
Virtual Return Mute On Input D	WM50103*1AU\x0D\x0A
Virtual Return Mute Off Input E	WM50104*0AU\x0D\x0A
Virtual Return Mute On Input E	WM50104*1AU\x0D\x0A
Virtual Return Mute Off Input F	WM50105*0AU\x0D\x0A
Virtual Return Mute On Input F	WM50105*1AU\x0D\x0A
Virtual Return Mute Off Input G	WM50106*0AU\x0D\x0A
Virtual Return Mute On Input G	WM50106*1AU\x0D\x0A
Virtual Return Mute Off Input H	WM50107*0AU\x0D\x0A
Virtual Return Mute On Input H	WM50107*1AU\x0D\x0A

Appendix B. Update Commands

Amplifier Attenuation L/R Left	WG60300AU\x0D
Amplifier Attenuation L/R Right	WG60301AU\x0D
Amplifier Mute L/R Left	WM60300AU\x0D
Amplifier Mute L/R Right	WM60301AU\x0D
Analog Attenuation Output 1 L/R Left	WG60000AU\x0D
Analog Attenuation Output 1 L/R Right	WG60001AU\x0D
Analog Attenuation Output 4 L/R Left	WG60006AU\x0D
Analog Attenuation Output 4 L/R Right	WG60007AU\x0D
Analog Mute Output 1 L/R Left	WM60000AU\x0D
Analog Mute Output 1 L/R Right	WM60001AU\x0D
Analog Mute Output 4 L/R Left	WM60006AU\x0D
Analog Mute Output 4 L/R Right	WM60007AU\x0D
Aspect Ratio Input 1	W1ASPR\x0D
Aspect Ratio Input 8	W8ASPR\x0D
DTP Analog Attenuation Output 3 L/R Left	WG60304AU\x0D
DTP Analog Attenuation Output 3 L/R Right	WG60305AU\x0D
DTP Analog Attenuation Output 4 L/R Left	WG60306AU\x0D
DTP Analog Attenuation Output 4 L/R Right	WG60307AU\x0D
DTP Analog Mute Output 3 L/R Left	WM60304AU\x0D
DTP Analog Mute Output 3 L/R Right	WM60305AU\x0D
DTP Analog Mute Output 4 L/R Left	WM60306AU\x0D
DTP Analog Mute Output 4 L/R Right	WM60307AU\x0D
DTP Attenuation Output 3 L/R Left	WG60204AU\x0D
DTP Attenuation Output 3 L/R Right	WG60205AU\x0D
DTP Attenuation Output 4 L/R Left	WG60206AU\x0D
DTP Attenuation Output 4 L/R Right	WG60207AU\x0D
DTP Mute Output 3 L/R Left	WM60204AU\x0D
DTP Mute Output 3 L/R Right	WM60205AU\x0D
DTP Mute Output 4 L/R Left	WM60206AU\x0D
DTP Mute Output 4 L/R Right	WM60207AU\x0D
EDID Assignment Input 1	wA1EDID\x0D
EDID Assignment Input 8	wA8EDID\x0D
Executive Mode	x
Expansion Pre-mixer Gain Input 1	wG50200AU\x0D
Expansion Pre-mixer Gain Input 8	wG50207AU\x0D
Expansion Pre-mixer Mute Input 1	wM50200AU\x0D

Global Scriptor Module Communication Sheet

Expansion Pre-mixer Mute Input 8	wM50207AU\x0D
Group Mic/Line Input Gain Group 1	WD1GRPM\x0D
Group Mic/Line Input Gain Group 32	WD32GRPM\x0D
Group Mix-point Group 1	WD1GRPM\x0D
Group Mix-point Group 32	WD32GRPM\x0D
Group Mute Group 1	WD1GRPM\x0D
Group Mute Group 32	WD32GRPM\x0D
Group Output Attenuation Group 1	WD1GRPM\x0D
Group Output Attenuation Group 32	WD32GRPM\x0D
Group Post-mixer Trim Group 1	WD1GRPM\x0D
Group Post-mixer Trim Group 32	WD32GRPM\x0D
Group Pre-matrix Trim Group 1	WD1GRPM\x0D
Group Pre-matrix Trim Group 32	WD32GRPM\x0D
Group Pre-mixer Gain Group 1	WD1GRPM\x0D
Group Pre-mixer Gain Group 32	WD32GRPM\x0D
HDCP Input Authorization Input 1	wE1HDCP\x0D\x0A
HDCP Input Authorization Input 8	wE8HDCP\x0D\x0A
HDCP Input Status Input 1	wI1HDCP\x0D
HDCP Input Status Input 8	wI8HDCP\x0D
HDCP Output Status Output 1	wO1HDCP\x0D
HDCP Output Status Output 4	wO4HDCP\x0D
HDMI Attenuation Output 1 L/R Left	WG60200AU\x0D
HDMI Attenuation Output 1 L/R Right	WG60201AU\x0D
HDMI Attenuation Output 2 L/R Left	WG60202AU\x0D
HDMI Attenuation Output 2 L/R Right	WG60203AU\x0D
HDMI Mute Output 1 L/R Left	WM60200AU\x0D
HDMI Mute Output 1 L/R Right	WM60201AU\x0D
HDMI Mute Output 2 L/R Left	WM60202AU\x0D
HDMI Mute Output 2 L/R Right	WM60203AU\x0D
Input Audio Switch Mode Input 1	WI1AFMT\x0D
Input Audio Switch Mode Input 8	WI8AFMT\x0D
Input Format Input 1	1*\x0D
Input Format Input 8	8*\x0D
Input Gain Input 1 Format Analog L/R Left	wG30000AU\x0D
Input Gain Input 1 Format Analog L/R Right	wG30001AU\x0D
Input Gain Input 1 Format Digital L/R Left	wH30000AU\x0D
Input Gain Input 1 Format Digital L/R Right	wH30001AU\x0D
Input Gain Input 8 Format Analog L/R Left	wG30014AU\x0D
Input Gain Input 8 Format Analog L/R Right	wG30015AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Input Gain Input 8 Format Digital L/R Left	wH30014AU\x0D
Input Gain Input 8 Format Digital L/R Right	wH30015AU\x0D
Input Mute Input 1 L/R Left	wM30000AU\x0D
Input Mute Input 1 L/R Right	wM30001AU\x0D
Input Mute Input 8 L/R Left	wM30014AU\x0D
Input Mute Input 8 L/R Right	wM30015AU\x0D
Input Signal Status Input 1	0LS
Input Signal Status Input 8	0LS
InputTieStatus	1%2%3%4%1\$2\$3\$4\$
Mic/Line Gain Input 1	wG40000AU\x0D
Mic/Line Gain Input 4	wG40003AU\x0D
Mic/Line Mute Input 1	wM40000AU\x0D
Mic/Line Mute Input 4	wM40003AU\x0D
Microphone Signal Status Input 1	wv40000*1AU\x0Dwv40000AU\x0D
Microphone Signal Status Input 4	wv40003*1AU\x0Dwv40003AU\x0D
Mix-point Gain Input Exp. 1 Output Output 1 Left	WG22000AU\x0D
Mix-point Gain Input Exp. 1 Output Output 1 Right	WG22001AU\x0D
Mix-point Gain Input Exp. 1 Output Output 2 Left	WG22002AU\x0D
Mix-point Gain Input Exp. 1 Output Output 2 Right	WG22003AU\x0D
Mix-point Gain Input Exp. 1 Output Output 3 Left	WG22004AU\x0D
Mix-point Gain Input Exp. 1 Output Output 3 Right	WG22005AU\x0D
Mix-point Gain Input Exp. 1 Output Output 4 Left	WG22006AU\x0D
Mix-point Gain Input Exp. 1 Output Output 4 Right	WG22007AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send A	WG22008AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send B	WG22009AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send C	WG22010AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send D	WG22011AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send E	WG22012AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send F	WG22013AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send G	WG22014AU\x0D
Mix-point Gain Input Exp. 1 Output V. Send H	WG22015AU\x0D
Mix-point Gain Input Exp. 2 Output Output 1 Left	WG22100AU\x0D
Mix-point Gain Input Exp. 2 Output Output 1 Right	WG22101AU\x0D
Mix-point Gain Input Exp. 2 Output Output 2 Left	WG22102AU\x0D
Mix-point Gain Input Exp. 2 Output Output 2 Right	WG22103AU\x0D
Mix-point Gain Input Exp. 2 Output Output 3 Left	WG22104AU\x0D
Mix-point Gain Input Exp. 2 Output Output 3 Right	WG22105AU\x0D
Mix-point Gain Input Exp. 2 Output Output 4 Left	WG22106AU\x0D
Mix-point Gain Input Exp. 2 Output Output 4 Right	WG22107AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain Input Exp. 2 Output V. Send A	WG22108AU\x0D
Mix-point Gain Input Exp. 2 Output V. Send B	WG22109AU\x0D
Mix-point Gain Input Exp. 2 Output V. Send C	WG22110AU\x0D
Mix-point Gain Input Exp. 2 Output V. Send D	WG22111AU\x0D
Mix-point Gain Input Exp. 2 Output V. Send E	WG22112AU\x0D
Mix-point Gain Input Exp. 2 Output V. Send F	WG22113AU\x0D
Mix-point Gain Input Exp. 2 Output V. Send G	WG22114AU\x0D
Mix-point Gain Input Exp. 2 Output V. Send H	WG22115AU\x0D
Mix-point Gain Input Exp. 3 Output Output 1 Left	WG22200AU\x0D
Mix-point Gain Input Exp. 3 Output Output 1 Right	WG22201AU\x0D
Mix-point Gain Input Exp. 3 Output Output 2 Left	WG22202AU\x0D
Mix-point Gain Input Exp. 3 Output Output 2 Right	WG22203AU\x0D
Mix-point Gain Input Exp. 3 Output Output 3 Left	WG22204AU\x0D
Mix-point Gain Input Exp. 3 Output Output 3 Right	WG22205AU\x0D
Mix-point Gain Input Exp. 3 Output Output 4 Left	WG22206AU\x0D
Mix-point Gain Input Exp. 3 Output Output 4 Right	WG22207AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send A	WG22208AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send B	WG22209AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send C	WG22210AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send D	WG22211AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send E	WG22212AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send F	WG22213AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send G	WG22214AU\x0D
Mix-point Gain Input Exp. 3 Output V. Send H	WG22215AU\x0D
Mix-point Gain Input Exp. 4 Output Output 1 Left	WG22300AU\x0D
Mix-point Gain Input Exp. 4 Output Output 1 Right	WG22301AU\x0D
Mix-point Gain Input Exp. 4 Output Output 2 Left	WG22302AU\x0D
Mix-point Gain Input Exp. 4 Output Output 2 Right	WG22303AU\x0D
Mix-point Gain Input Exp. 4 Output Output 3 Left	WG22304AU\x0D
Mix-point Gain Input Exp. 4 Output Output 3 Right	WG22305AU\x0D
Mix-point Gain Input Exp. 4 Output Output 4 Left	WG22306AU\x0D
Mix-point Gain Input Exp. 4 Output Output 4 Right	WG22307AU\x0D
Mix-point Gain Input Exp. 4 Output V. Send A	WG22308AU\x0D
Mix-point Gain Input Exp. 4 Output V. Send B	WG22309AU\x0D
Mix-point Gain Input Exp. 4 Output V. Send C	WG22310AU\x0D
Mix-point Gain Input Exp. 4 Output V. Send D	WG22311AU\x0D
Mix-point Gain Input Exp. 4 Output V. Send E	WG22312AU\x0D
Mix-point Gain Input Exp. 4 Output V. Send F	WG22313AU\x0D
Mix-point Gain Input Exp. 4 Output V. Send G	WG22314AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain Input Exp. 4 Output V. Send H	WG22315AU\x0D
Mix-point Gain Input Exp. 5 Output Output 1 Left	WG22400AU\x0D
Mix-point Gain Input Exp. 5 Output Output 1 Right	WG22401AU\x0D
Mix-point Gain Input Exp. 5 Output Output 2 Left	WG22402AU\x0D
Mix-point Gain Input Exp. 5 Output Output 2 Right	WG22403AU\x0D
Mix-point Gain Input Exp. 5 Output Output 3 Left	WG22404AU\x0D
Mix-point Gain Input Exp. 5 Output Output 3 Right	WG22405AU\x0D
Mix-point Gain Input Exp. 5 Output Output 4 Left	WG22406AU\x0D
Mix-point Gain Input Exp. 5 Output Output 4 Right	WG22407AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send A	WG22408AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send B	WG22409AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send C	WG22410AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send D	WG22411AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send E	WG22412AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send F	WG22413AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send G	WG22414AU\x0D
Mix-point Gain Input Exp. 5 Output V. Send H	WG22415AU\x0D
Mix-point Gain Input Exp. 6 Output Output 1 Left	WG22500AU\x0D
Mix-point Gain Input Exp. 6 Output Output 1 Right	WG22501AU\x0D
Mix-point Gain Input Exp. 6 Output Output 2 Left	WG22502AU\x0D
Mix-point Gain Input Exp. 6 Output Output 2 Right	WG22503AU\x0D
Mix-point Gain Input Exp. 6 Output Output 3 Left	WG22504AU\x0D
Mix-point Gain Input Exp. 6 Output Output 3 Right	WG22505AU\x0D
Mix-point Gain Input Exp. 6 Output Output 4 Left	WG22506AU\x0D
Mix-point Gain Input Exp. 6 Output Output 4 Right	WG22507AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send A	WG22508AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send B	WG22509AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send C	WG22510AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send D	WG22511AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send E	WG22512AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send F	WG22513AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send G	WG22514AU\x0D
Mix-point Gain Input Exp. 6 Output V. Send H	WG22515AU\x0D
Mix-point Gain Input Exp. 7 Output Output 1 Left	WG22600AU\x0D
Mix-point Gain Input Exp. 7 Output Output 1 Right	WG22601AU\x0D
Mix-point Gain Input Exp. 7 Output Output 2 Left	WG22602AU\x0D
Mix-point Gain Input Exp. 7 Output Output 2 Right	WG22603AU\x0D
Mix-point Gain Input Exp. 7 Output Output 3 Left	WG22604AU\x0D
Mix-point Gain Input Exp. 7 Output Output 3 Right	WG22605AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain Input Exp. 7 Output Output 4 Left	WG22606AU\x0D
Mix-point Gain Input Exp. 7 Output Output 4 Right	WG22607AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send A	WG22608AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send B	WG22609AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send C	WG22610AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send D	WG22611AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send E	WG22612AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send F	WG22613AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send G	WG22614AU\x0D
Mix-point Gain Input Exp. 7 Output V. Send H	WG22615AU\x0D
Mix-point Gain Input Exp. 8 Output Output 1 Left	WG22700AU\x0D
Mix-point Gain Input Exp. 8 Output Output 1 Right	WG22701AU\x0D
Mix-point Gain Input Exp. 8 Output Output 2 Left	WG22702AU\x0D
Mix-point Gain Input Exp. 8 Output Output 2 Right	WG22703AU\x0D
Mix-point Gain Input Exp. 8 Output Output 3 Left	WG22704AU\x0D
Mix-point Gain Input Exp. 8 Output Output 3 Right	WG22705AU\x0D
Mix-point Gain Input Exp. 8 Output Output 4 Left	WG22706AU\x0D
Mix-point Gain Input Exp. 8 Output Output 4 Right	WG22707AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send A	WG22708AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send B	WG22709AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send C	WG22710AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send D	WG22711AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send E	WG22712AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send F	WG22713AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send G	WG22714AU\x0D
Mix-point Gain Input Exp. 8 Output V. Send H	WG22715AU\x0D
Mix-point Gain Input Mic 1 Output Output 1 Left	WG20800AU\x0D
Mix-point Gain Input Mic 1 Output Output 1 Right	WG20801AU\x0D
Mix-point Gain Input Mic 1 Output Output 2 Left	WG20802AU\x0D
Mix-point Gain Input Mic 1 Output Output 2 Right	WG20803AU\x0D
Mix-point Gain Input Mic 1 Output Output 3 Left	WG20804AU\x0D
Mix-point Gain Input Mic 1 Output Output 3 Right	WG20805AU\x0D
Mix-point Gain Input Mic 1 Output Output 4 Left	WG20806AU\x0D
Mix-point Gain Input Mic 1 Output Output 4 Right	WG20807AU\x0D
Mix-point Gain Input Mic 1 Output V. Send A	WG20808AU\x0D
Mix-point Gain Input Mic 1 Output V. Send B	WG20809AU\x0D
Mix-point Gain Input Mic 1 Output V. Send C	WG20810AU\x0D
Mix-point Gain Input Mic 1 Output V. Send D	WG20811AU\x0D
Mix-point Gain Input Mic 1 Output V. Send E	WG20812AU\x0D

Global Scriptor Module Communication Sheet

Mix-point Gain Input Mic 1 Output V. Send F	WG20813AU\x0D
Mix-point Gain Input Mic 1 Output V. Send G	WG20814AU\x0D
Mix-point Gain Input Mic 1 Output V. Send H	WG20815AU\x0D
Mix-point Gain Input Mic 2 Output Output 1 Left	WG20900AU\x0D
Mix-point Gain Input Mic 2 Output Output 1 Right	WG20901AU\x0D
Mix-point Gain Input Mic 2 Output Output 2 Left	WG20902AU\x0D
Mix-point Gain Input Mic 2 Output Output 2 Right	WG20903AU\x0D
Mix-point Gain Input Mic 2 Output Output 3 Left	WG20904AU\x0D
Mix-point Gain Input Mic 2 Output Output 3 Right	WG20905AU\x0D
Mix-point Gain Input Mic 2 Output Output 4 Left	WG20906AU\x0D
Mix-point Gain Input Mic 2 Output Output 4 Right	WG20907AU\x0D
Mix-point Gain Input Mic 2 Output V. Send A	WG20908AU\x0D
Mix-point Gain Input Mic 2 Output V. Send B	WG20909AU\x0D
Mix-point Gain Input Mic 2 Output V. Send C	WG20910AU\x0D
Mix-point Gain Input Mic 2 Output V. Send D	WG20911AU\x0D
Mix-point Gain Input Mic 2 Output V. Send E	WG20912AU\x0D
Mix-point Gain Input Mic 2 Output V. Send F	WG20913AU\x0D
Mix-point Gain Input Mic 2 Output V. Send G	WG20914AU\x0D
Mix-point Gain Input Mic 2 Output V. Send H	WG20915AU\x0D
Mix-point Gain Input Mic 3 Output Output 1 Left	WG21000AU\x0D
Mix-point Gain Input Mic 3 Output Output 1 Right	WG21001AU\x0D
Mix-point Gain Input Mic 3 Output Output 2 Left	WG21002AU\x0D
Mix-point Gain Input Mic 3 Output Output 2 Right	WG21003AU\x0D
Mix-point Gain Input Mic 3 Output Output 3 Left	WG21004AU\x0D
Mix-point Gain Input Mic 3 Output Output 3 Right	WG21005AU\x0D
Mix-point Gain Input Mic 3 Output Output 4 Left	WG21006AU\x0D
Mix-point Gain Input Mic 3 Output Output 4 Right	WG21007AU\x0D
Mix-point Gain Input Mic 3 Output V. Send A	WG21008AU\x0D
Mix-point Gain Input Mic 3 Output V. Send B	WG21009AU\x0D
Mix-point Gain Input Mic 3 Output V. Send C	WG21010AU\x0D
Mix-point Gain Input Mic 3 Output V. Send D	WG21011AU\x0D
Mix-point Gain Input Mic 3 Output V. Send E	WG21012AU\x0D
Mix-point Gain Input Mic 3 Output V. Send F	WG21013AU\x0D
Mix-point Gain Input Mic 3 Output V. Send G	WG21014AU\x0D
Mix-point Gain Input Mic 3 Output V. Send H	WG21015AU\x0D
Mix-point Gain Input Mic 4 Output Output 1 Left	WG21100AU\x0D
Mix-point Gain Input Mic 4 Output Output 1 Right	WG21101AU\x0D
Mix-point Gain Input Mic 4 Output Output 2 Left	WG21102AU\x0D
Mix-point Gain Input Mic 4 Output Output 2 Right	WG21103AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain Input Mic 4 Output Output 3 Left	WG21104AU\x0D
Mix-point Gain Input Mic 4 Output Output 3 Right	WG21105AU\x0D
Mix-point Gain Input Mic 4 Output Output 4 Left	WG21106AU\x0D
Mix-point Gain Input Mic 4 Output Output 4 Right	WG21107AU\x0D
Mix-point Gain Input Mic 4 Output V. Send A	WG21108AU\x0D
Mix-point Gain Input Mic 4 Output V. Send B	WG21109AU\x0D
Mix-point Gain Input Mic 4 Output V. Send C	WG21110AU\x0D
Mix-point Gain Input Mic 4 Output V. Send D	WG21111AU\x0D
Mix-point Gain Input Mic 4 Output V. Send E	WG21112AU\x0D
Mix-point Gain Input Mic 4 Output V. Send F	WG21113AU\x0D
Mix-point Gain Input Mic 4 Output V. Send G	WG21114AU\x0D
Mix-point Gain Input Mic 4 Output V. Send H	WG21115AU\x0D
Mix-point Gain Input Output 1 Left Output Output 1 Left	WG20000AU\x0D
Mix-point Gain Input Output 1 Left Output Output 1 Right	WG20001AU\x0D
Mix-point Gain Input Output 1 Left Output Output 2 Left	WG20002AU\x0D
Mix-point Gain Input Output 1 Left Output Output 2 Right	WG20003AU\x0D
Mix-point Gain Input Output 1 Left Output Output 3 Left	WG20004AU\x0D
Mix-point Gain Input Output 1 Left Output Output 3 Right	WG20005AU\x0D
Mix-point Gain Input Output 1 Left Output Output 4 Left	WG20006AU\x0D
Mix-point Gain Input Output 1 Left Output Output 4 Right	WG20007AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send A	WG20008AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send B	WG20009AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send C	WG20010AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send D	WG20011AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send E	WG20012AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send F	WG20013AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send G	WG20014AU\x0D
Mix-point Gain Input Output 1 Left Output V. Send H	WG20015AU\x0D
Mix-point Gain Input Output 1 Right Output Output 1 Left	WG20100AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain Input Output 1 Right Output Output 1 Right	WG20101AU\x0D
Mix-point Gain Input Output 1 Right Output Output 2 Left	WG20102AU\x0D
Mix-point Gain Input Output 1 Right Output Output 2 Right	WG20103AU\x0D
Mix-point Gain Input Output 1 Right Output Output 3 Left	WG20104AU\x0D
Mix-point Gain Input Output 1 Right Output Output 3 Right	WG20105AU\x0D
Mix-point Gain Input Output 1 Right Output Output 4 Left	WG20106AU\x0D
Mix-point Gain Input Output 1 Right Output Output 4 Right	WG20107AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send A	WG20108AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send B	WG20109AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send C	WG20110AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send D	WG20111AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send E	WG20112AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send F	WG20113AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send G	WG20114AU\x0D
Mix-point Gain Input Output 1 Right Output V. Send H	WG20115AU\x0D
Mix-point Gain Input Output 2 Left Output Output 1 Left	WG20200AU\x0D
Mix-point Gain Input Output 2 Left Output Output 1 Right	WG20201AU\x0D
Mix-point Gain Input Output 2 Left Output Output 2 Left	WG20202AU\x0D
Mix-point Gain Input Output 2 Left Output Output 2 Right	WG20203AU\x0D
Mix-point Gain Input Output 2 Left Output Output 3 Left	WG20204AU\x0D
Mix-point Gain Input Output 2 Left Output Output 3 Right	WG20205AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain Input Output 2 Left Output Output 4 Left	WG20206AU\X0D
Mix-point Gain Input Output 2 Left Output Output 4 Right	WG20207AU\X0D
Mix-point Gain Input Output 2 Left Output V. Send A	WG20208AU\X0D
Mix-point Gain Input Output 2 Left Output V. Send B	WG20209AU\X0D
Mix-point Gain Input Output 2 Left Output V. Send C	WG20210AU\X0D
Mix-point Gain Input Output 2 Left Output V. Send D	WG20211AU\X0D
Mix-point Gain Input Output 2 Left Output V. Send E	WG20212AU\X0D
Mix-point Gain Input Output 2 Left Output V. Send F	WG20213AU\X0D
Mix-point Gain Input Output 2 Left Output V. Send G	WG20214AU\X0D
Mix-point Gain Input Output 2 Left Output V. Send H	WG20215AU\X0D
Mix-point Gain Input Output 2 Right Output Output 1 Left	WG20300AU\X0D
Mix-point Gain Input Output 2 Right Output Output 1 Right	WG20301AU\X0D
Mix-point Gain Input Output 2 Right Output Output 2 Left	WG20302AU\X0D
Mix-point Gain Input Output 2 Right Output Output 2 Right	WG20303AU\X0D
Mix-point Gain Input Output 2 Right Output Output 3 Left	WG20304AU\X0D
Mix-point Gain Input Output 2 Right Output Output 3 Right	WG20305AU\X0D
Mix-point Gain Input Output 2 Right Output Output 4 Left	WG20306AU\X0D
Mix-point Gain Input Output 2 Right Output Output 4 Right	WG20307AU\X0D
Mix-point Gain Input Output 2 Right Output V. Send A	WG20308AU\X0D
Mix-point Gain Input Output 2 Right Output V. Send B	WG20309AU\X0D
Mix-point Gain Input Output 2 Right Output V. Send C	WG20310AU\X0D
Mix-point Gain Input Output 2 Right Output V. Send D	WG20311AU\X0D
Mix-point Gain Input Output 2 Right Output V. Send E	WG20312AU\X0D
Mix-point Gain Input Output 2 Right Output V. Send F	WG20313AU\X0D
Mix-point Gain Input Output 2 Right Output V. Send G	WG20314AU\X0D

Global Scripter Module Communication Sheet

Mix-point Gain Input Output 2 Right Output V. Send H	WG20315AU\x0D
Mix-point Gain Input Output 3 Left Output Output 1 Left	WG20400AU\x0D
Mix-point Gain Input Output 3 Left Output Output 1 Right	WG20401AU\x0D
Mix-point Gain Input Output 3 Left Output Output 2 Left	WG20402AU\x0D
Mix-point Gain Input Output 3 Left Output Output 2 Right	WG20403AU\x0D
Mix-point Gain Input Output 3 Left Output Output 3 Left	WG20404AU\x0D
Mix-point Gain Input Output 3 Left Output Output 3 Right	WG20405AU\x0D
Mix-point Gain Input Output 3 Left Output Output 4 Left	WG20406AU\x0D
Mix-point Gain Input Output 3 Left Output Output 4 Right	WG20407AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send A	WG20408AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send B	WG20409AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send C	WG20410AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send D	WG20411AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send E	WG20412AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send F	WG20413AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send G	WG20414AU\x0D
Mix-point Gain Input Output 3 Left Output V. Send H	WG20415AU\x0D
Mix-point Gain Input Output 3 Right Output Output 1 Left	WG20500AU\x0D
Mix-point Gain Input Output 3 Right Output Output 1 Right	WG20501AU\x0D
Mix-point Gain Input Output 3 Right Output Output 2 Left	WG20502AU\x0D
Mix-point Gain Input Output 3 Right Output Output 2 Right	WG20503AU\x0D
Mix-point Gain Input Output 3 Right Output Output 3 Left	WG20504AU\x0D
Mix-point Gain Input Output 3 Right Output Output 3 Right	WG20505AU\x0D
Mix-point Gain Input Output 3 Right Output Output 4 Left	WG20506AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Gain Input Output 3 Right Output Output 4 Right	WG20507AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send A	WG20508AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send B	WG20509AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send C	WG20510AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send D	WG20511AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send E	WG20512AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send F	WG20513AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send G	WG20514AU\x0D
Mix-point Gain Input Output 3 Right Output V. Send H	WG20515AU\x0D
Mix-point Gain Input Output 4 Left Output Output 1 Left	WG20600AU\x0D
Mix-point Gain Input Output 4 Left Output Output 1 Right	WG20601AU\x0D
Mix-point Gain Input Output 4 Left Output Output 2 Left	WG20602AU\x0D
Mix-point Gain Input Output 4 Left Output Output 2 Right	WG20603AU\x0D
Mix-point Gain Input Output 4 Left Output Output 3 Left	WG20604AU\x0D
Mix-point Gain Input Output 4 Left Output Output 3 Right	WG20605AU\x0D
Mix-point Gain Input Output 4 Left Output Output 4 Left	WG20606AU\x0D
Mix-point Gain Input Output 4 Left Output Output 4 Right	WG20607AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send A	WG20608AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send B	WG20609AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send C	WG20610AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send D	WG20611AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send E	WG20612AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send F	WG20613AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send G	WG20614AU\x0D
Mix-point Gain Input Output 4 Left Output V. Send H	WG20615AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain Input Output 4 Right Output Output 1 Left	WG20700AU\x0D
Mix-point Gain Input Output 4 Right Output Output 1 Right	WG20701AU\x0D
Mix-point Gain Input Output 4 Right Output Output 2 Left	WG20702AU\x0D
Mix-point Gain Input Output 4 Right Output Output 2 Right	WG20703AU\x0D
Mix-point Gain Input Output 4 Right Output Output 3 Left	WG20704AU\x0D
Mix-point Gain Input Output 4 Right Output Output 3 Right	WG20705AU\x0D
Mix-point Gain Input Output 4 Right Output Output 4 Left	WG20706AU\x0D
Mix-point Gain Input Output 4 Right Output Output 4 Right	WG20707AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send A	WG20708AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send B	WG20709AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send C	WG20710AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send D	WG20711AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send E	WG20712AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send F	WG20713AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send G	WG20714AU\x0D
Mix-point Gain Input Output 4 Right Output V. Send H	WG20715AU\x0D
Mix-point Gain Input V. Return A Output Output 1 Left	WG21200AU\x0D
Mix-point Gain Input V. Return A Output Output 1 Right	WG21201AU\x0D
Mix-point Gain Input V. Return A Output Output 2 Left	WG21202AU\x0D
Mix-point Gain Input V. Return A Output Output 2 Right	WG21203AU\x0D
Mix-point Gain Input V. Return A Output Output 3 Left	WG21204AU\x0D

Global Scriptor Module Communication Sheet

Mix-point Gain Input V. Return A Output Output 3 Right	WG21205AU\x0D
Mix-point Gain Input V. Return A Output Output 4 Left	WG21206AU\x0D
Mix-point Gain Input V. Return A Output Output 4 Right	WG21207AU\x0D
Mix-point Gain Input V. Return A Output V. Send A	WG21208AU\x0D
Mix-point Gain Input V. Return A Output V. Send B	WG21209AU\x0D
Mix-point Gain Input V. Return A Output V. Send C	WG21210AU\x0D
Mix-point Gain Input V. Return A Output V. Send D	WG21211AU\x0D
Mix-point Gain Input V. Return A Output V. Send E	WG21212AU\x0D
Mix-point Gain Input V. Return A Output V. Send F	WG21213AU\x0D
Mix-point Gain Input V. Return A Output V. Send G	WG21214AU\x0D
Mix-point Gain Input V. Return A Output V. Send H	WG21215AU\x0D
Mix-point Gain Input V. Return B Output Output 1 Left	WG21300AU\x0D
Mix-point Gain Input V. Return B Output Output 1 Right	WG21301AU\x0D
Mix-point Gain Input V. Return B Output Output 2 Left	WG21302AU\x0D
Mix-point Gain Input V. Return B Output Output 2 Right	WG21303AU\x0D
Mix-point Gain Input V. Return B Output Output 3 Left	WG21304AU\x0D
Mix-point Gain Input V. Return B Output Output 3 Right	WG21305AU\x0D
Mix-point Gain Input V. Return B Output Output 4 Left	WG21306AU\x0D
Mix-point Gain Input V. Return B Output Output 4 Right	WG21307AU\x0D
Mix-point Gain Input V. Return B Output V. Send A	WG21308AU\x0D
Mix-point Gain Input V. Return B Output V. Send B	WG21309AU\x0D
Mix-point Gain Input V. Return B Output V. Send C	WG21310AU\x0D
Mix-point Gain Input V. Return B Output V. Send D	WG21311AU\x0D
Mix-point Gain Input V. Return B Output V. Send E	WG21312AU\x0D
Mix-point Gain Input V. Return B Output V. Send F	WG21313AU\x0D
Mix-point Gain Input V. Return B Output V. Send G	WG21314AU\x0D
Mix-point Gain Input V. Return B Output V. Send H	WG21315AU\x0D
Mix-point Gain Input V. Return C Output Output 1 Left	WG21400AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain Input V. Return C Output Output 1 Right	WG21401AU\x0D
Mix-point Gain Input V. Return C Output Output 2 Left	WG21402AU\x0D
Mix-point Gain Input V. Return C Output Output 2 Right	WG21403AU\x0D
Mix-point Gain Input V. Return C Output Output 3 Left	WG21404AU\x0D
Mix-point Gain Input V. Return C Output Output 3 Right	WG21405AU\x0D
Mix-point Gain Input V. Return C Output Output 4 Left	WG21406AU\x0D
Mix-point Gain Input V. Return C Output Output 4 Right	WG21407AU\x0D
Mix-point Gain Input V. Return C Output V. Send A	WG21408AU\x0D
Mix-point Gain Input V. Return C Output V. Send B	WG21409AU\x0D
Mix-point Gain Input V. Return C Output V. Send C	WG21410AU\x0D
Mix-point Gain Input V. Return C Output V. Send D	WG21411AU\x0D
Mix-point Gain Input V. Return C Output V. Send E	WG21412AU\x0D
Mix-point Gain Input V. Return C Output V. Send F	WG21413AU\x0D
Mix-point Gain Input V. Return C Output V. Send G	WG21414AU\x0D
Mix-point Gain Input V. Return C Output V. Send H	WG21415AU\x0D
Mix-point Gain Input V. Return D Output Output 1 Left	WG21500AU\x0D
Mix-point Gain Input V. Return D Output Output 1 Right	WG21501AU\x0D
Mix-point Gain Input V. Return D Output Output 2 Left	WG21502AU\x0D
Mix-point Gain Input V. Return D Output Output 2 Right	WG21503AU\x0D
Mix-point Gain Input V. Return D Output Output 3 Left	WG21504AU\x0D
Mix-point Gain Input V. Return D Output Output 3 Right	WG21505AU\x0D
Mix-point Gain Input V. Return D Output Output 4 Left	WG21506AU\x0D
Mix-point Gain Input V. Return D Output Output 4 Right	WG21507AU\x0D
Mix-point Gain Input V. Return D Output V. Send A	WG21508AU\x0D
Mix-point Gain Input V. Return D Output V. Send B	WG21509AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain Input V. Return D Output V. Send C	WG21510AU\x0D
Mix-point Gain Input V. Return D Output V. Send D	WG21511AU\x0D
Mix-point Gain Input V. Return D Output V. Send E	WG21512AU\x0D
Mix-point Gain Input V. Return D Output V. Send F	WG21513AU\x0D
Mix-point Gain Input V. Return D Output V. Send G	WG21514AU\x0D
Mix-point Gain Input V. Return D Output V. Send H	WG21515AU\x0D
Mix-point Gain Input V. Return E Output Output 1 Left	WG21600AU\x0D
Mix-point Gain Input V. Return E Output Output 1 Right	WG21601AU\x0D
Mix-point Gain Input V. Return E Output Output 2 Left	WG21602AU\x0D
Mix-point Gain Input V. Return E Output Output 2 Right	WG21603AU\x0D
Mix-point Gain Input V. Return E Output Output 3 Left	WG21604AU\x0D
Mix-point Gain Input V. Return E Output Output 3 Right	WG21605AU\x0D
Mix-point Gain Input V. Return E Output Output 4 Left	WG21606AU\x0D
Mix-point Gain Input V. Return E Output Output 4 Right	WG21607AU\x0D
Mix-point Gain Input V. Return E Output V. Send A	WG21608AU\x0D
Mix-point Gain Input V. Return E Output V. Send B	WG21609AU\x0D
Mix-point Gain Input V. Return E Output V. Send C	WG21610AU\x0D
Mix-point Gain Input V. Return E Output V. Send D	WG21611AU\x0D
Mix-point Gain Input V. Return E Output V. Send E	WG21612AU\x0D
Mix-point Gain Input V. Return E Output V. Send F	WG21613AU\x0D
Mix-point Gain Input V. Return E Output V. Send G	WG21614AU\x0D
Mix-point Gain Input V. Return E Output V. Send H	WG21615AU\x0D
Mix-point Gain Input V. Return F Output Output 1 Left	WG21700AU\x0D
Mix-point Gain Input V. Return F Output Output 1 Right	WG21701AU\x0D
Mix-point Gain Input V. Return F Output Output 2 Left	WG21702AU\x0D
Mix-point Gain Input V. Return F Output Output 2 Right	WG21703AU\x0D
Mix-point Gain Input V. Return F Output Output 3 Left	WG21704AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain Input V. Return F Output Output 3 Right	WG21705AU\x0D
Mix-point Gain Input V. Return F Output Output 4 Left	WG21706AU\x0D
Mix-point Gain Input V. Return F Output Output 4 Right	WG21707AU\x0D
Mix-point Gain Input V. Return F Output V. Send A	WG21708AU\x0D
Mix-point Gain Input V. Return F Output V. Send B	WG21709AU\x0D
Mix-point Gain Input V. Return F Output V. Send C	WG21710AU\x0D
Mix-point Gain Input V. Return F Output V. Send D	WG21711AU\x0D
Mix-point Gain Input V. Return F Output V. Send E	WG21712AU\x0D
Mix-point Gain Input V. Return F Output V. Send F	WG21713AU\x0D
Mix-point Gain Input V. Return F Output V. Send G	WG21714AU\x0D
Mix-point Gain Input V. Return F Output V. Send H	WG21715AU\x0D
Mix-point Gain Input V. Return G Output Output 1 Left	WG21800AU\x0D
Mix-point Gain Input V. Return G Output Output 1 Right	WG21801AU\x0D
Mix-point Gain Input V. Return G Output Output 2 Left	WG21802AU\x0D
Mix-point Gain Input V. Return G Output Output 2 Right	WG21803AU\x0D
Mix-point Gain Input V. Return G Output Output 3 Left	WG21804AU\x0D
Mix-point Gain Input V. Return G Output Output 3 Right	WG21805AU\x0D
Mix-point Gain Input V. Return G Output Output 4 Left	WG21806AU\x0D
Mix-point Gain Input V. Return G Output Output 4 Right	WG21807AU\x0D
Mix-point Gain Input V. Return G Output V. Send A	WG21808AU\x0D
Mix-point Gain Input V. Return G Output V. Send B	WG21809AU\x0D
Mix-point Gain Input V. Return G Output V. Send C	WG21810AU\x0D
Mix-point Gain Input V. Return G Output V. Send D	WG21811AU\x0D
Mix-point Gain Input V. Return G Output V. Send E	WG21812AU\x0D
Mix-point Gain Input V. Return G Output V. Send F	WG21813AU\x0D
Mix-point Gain Input V. Return G Output V. Send G	WG21814AU\x0D
Mix-point Gain Input V. Return G Output V. Send H	WG21815AU\x0D
Mix-point Gain Input V. Return H Output Output 1 Left	WG21900AU\x0D

Global Scripter Module Communication Sheet

Mix-point Gain Input V. Return H Output Output 1 Right	WG21901AU\x0D
Mix-point Gain Input V. Return H Output Output 2 Left	WG21902AU\x0D
Mix-point Gain Input V. Return H Output Output 2 Right	WG21903AU\x0D
Mix-point Gain Input V. Return H Output Output 3 Left	WG21904AU\x0D
Mix-point Gain Input V. Return H Output Output 3 Right	WG21905AU\x0D
Mix-point Gain Input V. Return H Output Output 4 Left	WG21906AU\x0D
Mix-point Gain Input V. Return H Output Output 4 Right	WG21907AU\x0D
Mix-point Gain Input V. Return H Output V. Send A	WG21908AU\x0D
Mix-point Gain Input V. Return H Output V. Send B	WG21909AU\x0D
Mix-point Gain Input V. Return H Output V. Send C	WG21910AU\x0D
Mix-point Gain Input V. Return H Output V. Send D	WG21911AU\x0D
Mix-point Gain Input V. Return H Output V. Send E	WG21912AU\x0D
Mix-point Gain Input V. Return H Output V. Send F	WG21913AU\x0D
Mix-point Gain Input V. Return H Output V. Send G	WG21914AU\x0D
Mix-point Gain Input V. Return H Output V. Send H	WG21915AU\x0D
Mix-point Mute Input Exp. 1 Output Output 1 Left	WM22000AU\x0D
Mix-point Mute Input Exp. 1 Output Output 1 Right	WM22001AU\x0D
Mix-point Mute Input Exp. 1 Output Output 2 Left	WM22002AU\x0D
Mix-point Mute Input Exp. 1 Output Output 2 Right	WM22003AU\x0D
Mix-point Mute Input Exp. 1 Output Output 3 Left	WM22004AU\x0D
Mix-point Mute Input Exp. 1 Output Output 3 Right	WM22005AU\x0D
Mix-point Mute Input Exp. 1 Output Output 4 Left	WM22006AU\x0D
Mix-point Mute Input Exp. 1 Output Output 4 Right	WM22007AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send A	WM22008AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send B	WM22009AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send C	WM22010AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send D	WM22011AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send E	WM22012AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send F	WM22013AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send G	WM22014AU\x0D
Mix-point Mute Input Exp. 1 Output V. Send H	WM22015AU\x0D
Mix-point Mute Input Exp. 2 Output Output 1 Left	WM22100AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Input Exp. 2 Output Output 1 Right	WM22101AU\x0D
Mix-point Mute Input Exp. 2 Output Output 2 Left	WM22102AU\x0D
Mix-point Mute Input Exp. 2 Output Output 2 Right	WM22103AU\x0D
Mix-point Mute Input Exp. 2 Output Output 3 Left	WM22104AU\x0D
Mix-point Mute Input Exp. 2 Output Output 3 Right	WM22105AU\x0D
Mix-point Mute Input Exp. 2 Output Output 4 Left	WM22106AU\x0D
Mix-point Mute Input Exp. 2 Output Output 4 Right	WM22107AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send A	WM22108AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send B	WM22109AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send C	WM22110AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send D	WM22111AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send E	WM22112AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send F	WM22113AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send G	WM22114AU\x0D
Mix-point Mute Input Exp. 2 Output V. Send H	WM22115AU\x0D
Mix-point Mute Input Exp. 3 Output Output 1 Left	WM22200AU\x0D
Mix-point Mute Input Exp. 3 Output Output 1 Right	WM22201AU\x0D
Mix-point Mute Input Exp. 3 Output Output 2 Left	WM22202AU\x0D
Mix-point Mute Input Exp. 3 Output Output 2 Right	WM22203AU\x0D
Mix-point Mute Input Exp. 3 Output Output 3 Left	WM22204AU\x0D
Mix-point Mute Input Exp. 3 Output Output 3 Right	WM22205AU\x0D
Mix-point Mute Input Exp. 3 Output Output 4 Left	WM22206AU\x0D
Mix-point Mute Input Exp. 3 Output Output 4 Right	WM22207AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send A	WM22208AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send B	WM22209AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send C	WM22210AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send D	WM22211AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send E	WM22212AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send F	WM22213AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send G	WM22214AU\x0D
Mix-point Mute Input Exp. 3 Output V. Send H	WM22215AU\x0D
Mix-point Mute Input Exp. 4 Output Output 1 Left	WM22300AU\x0D
Mix-point Mute Input Exp. 4 Output Output 1 Right	WM22301AU\x0D
Mix-point Mute Input Exp. 4 Output Output 2 Left	WM22302AU\x0D
Mix-point Mute Input Exp. 4 Output Output 2 Right	WM22303AU\x0D
Mix-point Mute Input Exp. 4 Output Output 3 Left	WM22304AU\x0D
Mix-point Mute Input Exp. 4 Output Output 3 Right	WM22305AU\x0D
Mix-point Mute Input Exp. 4 Output Output 4 Left	WM22306AU\x0D
Mix-point Mute Input Exp. 4 Output Output 4 Right	WM22307AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Mute Input Exp. 4 Output V. Send A	WM22308AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send B	WM22309AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send C	WM22310AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send D	WM22311AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send E	WM22312AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send F	WM22313AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send G	WM22314AU\x0D
Mix-point Mute Input Exp. 4 Output V. Send H	WM22315AU\x0D
Mix-point Mute Input Exp. 5 Output Output 1 Left	WM22400AU\x0D
Mix-point Mute Input Exp. 5 Output Output 1 Right	WM22401AU\x0D
Mix-point Mute Input Exp. 5 Output Output 2 Left	WM22402AU\x0D
Mix-point Mute Input Exp. 5 Output Output 2 Right	WM22403AU\x0D
Mix-point Mute Input Exp. 5 Output Output 3 Left	WM22404AU\x0D
Mix-point Mute Input Exp. 5 Output Output 3 Right	WM22405AU\x0D
Mix-point Mute Input Exp. 5 Output Output 4 Left	WM22406AU\x0D
Mix-point Mute Input Exp. 5 Output Output 4 Right	WM22407AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send A	WM22408AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send B	WM22409AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send C	WM22410AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send D	WM22411AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send E	WM22412AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send F	WM22413AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send G	WM22414AU\x0D
Mix-point Mute Input Exp. 5 Output V. Send H	WM22415AU\x0D
Mix-point Mute Input Exp. 6 Output Output 1 Left	WM22500AU\x0D
Mix-point Mute Input Exp. 6 Output Output 1 Right	WM22501AU\x0D
Mix-point Mute Input Exp. 6 Output Output 2 Left	WM22502AU\x0D
Mix-point Mute Input Exp. 6 Output Output 2 Right	WM22503AU\x0D
Mix-point Mute Input Exp. 6 Output Output 3 Left	WM22504AU\x0D
Mix-point Mute Input Exp. 6 Output Output 3 Right	WM22505AU\x0D
Mix-point Mute Input Exp. 6 Output Output 4 Left	WM22506AU\x0D
Mix-point Mute Input Exp. 6 Output Output 4 Right	WM22507AU\x0D
Mix-point Mute Input Exp. 6 Output V. Send A	WM22508AU\x0D
Mix-point Mute Input Exp. 6 Output V. Send B	WM22509AU\x0D
Mix-point Mute Input Exp. 6 Output V. Send C	WM22510AU\x0D
Mix-point Mute Input Exp. 6 Output V. Send D	WM22511AU\x0D
Mix-point Mute Input Exp. 6 Output V. Send E	WM22512AU\x0D
Mix-point Mute Input Exp. 6 Output V. Send F	WM22513AU\x0D
Mix-point Mute Input Exp. 6 Output V. Send G	WM22514AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Input Exp. 6 Output V. Send H	WM22515AU\x0D
Mix-point Mute Input Exp. 7 Output Output 1 Left	WM22600AU\x0D
Mix-point Mute Input Exp. 7 Output Output 1 Right	WM22601AU\x0D
Mix-point Mute Input Exp. 7 Output Output 2 Left	WM22602AU\x0D
Mix-point Mute Input Exp. 7 Output Output 2 Right	WM22603AU\x0D
Mix-point Mute Input Exp. 7 Output Output 3 Left	WM22604AU\x0D
Mix-point Mute Input Exp. 7 Output Output 3 Right	WM22605AU\x0D
Mix-point Mute Input Exp. 7 Output Output 4 Left	WM22606AU\x0D
Mix-point Mute Input Exp. 7 Output Output 4 Right	WM22607AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send A	WM22608AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send B	WM22609AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send C	WM22610AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send D	WM22611AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send E	WM22612AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send F	WM22613AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send G	WM22614AU\x0D
Mix-point Mute Input Exp. 7 Output V. Send H	WM22615AU\x0D
Mix-point Mute Input Exp. 8 Output Output 1 Left	WM22700AU\x0D
Mix-point Mute Input Exp. 8 Output Output 1 Right	WM22701AU\x0D
Mix-point Mute Input Exp. 8 Output Output 2 Left	WM22702AU\x0D
Mix-point Mute Input Exp. 8 Output Output 2 Right	WM22703AU\x0D
Mix-point Mute Input Exp. 8 Output Output 3 Left	WM22704AU\x0D
Mix-point Mute Input Exp. 8 Output Output 3 Right	WM22705AU\x0D
Mix-point Mute Input Exp. 8 Output Output 4 Left	WM22706AU\x0D
Mix-point Mute Input Exp. 8 Output Output 4 Right	WM22707AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send A	WM22708AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send B	WM22709AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send C	WM22710AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send D	WM22711AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send E	WM22712AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send F	WM22713AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send G	WM22714AU\x0D
Mix-point Mute Input Exp. 8 Output V. Send H	WM22715AU\x0D
Mix-point Mute Input Mic 1 Output Output 1 Left	WM20800AU\x0D
Mix-point Mute Input Mic 1 Output Output 1 Right	WM20801AU\x0D
Mix-point Mute Input Mic 1 Output Output 2 Left	WM20802AU\x0D
Mix-point Mute Input Mic 1 Output Output 2 Right	WM20803AU\x0D
Mix-point Mute Input Mic 1 Output Output 3 Left	WM20804AU\x0D
Mix-point Mute Input Mic 1 Output Output 3 Right	WM20805AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Input Mic 1 Output Output 4 Left	WM20806AU\x0D
Mix-point Mute Input Mic 1 Output Output 4 Right	WM20807AU\x0D
Mix-point Mute Input Mic 1 Output V. Send A	WM20808AU\x0D
Mix-point Mute Input Mic 1 Output V. Send B	WM20809AU\x0D
Mix-point Mute Input Mic 1 Output V. Send C	WM20810AU\x0D
Mix-point Mute Input Mic 1 Output V. Send D	WM20811AU\x0D
Mix-point Mute Input Mic 1 Output V. Send E	WM20812AU\x0D
Mix-point Mute Input Mic 1 Output V. Send F	WM20813AU\x0D
Mix-point Mute Input Mic 1 Output V. Send G	WM20814AU\x0D
Mix-point Mute Input Mic 1 Output V. Send H	WM20815AU\x0D
Mix-point Mute Input Mic 2 Output Output 1 Left	WM20900AU\x0D
Mix-point Mute Input Mic 2 Output Output 1 Right	WM20901AU\x0D
Mix-point Mute Input Mic 2 Output Output 2 Left	WM20902AU\x0D
Mix-point Mute Input Mic 2 Output Output 2 Right	WM20903AU\x0D
Mix-point Mute Input Mic 2 Output Output 3 Left	WM20904AU\x0D
Mix-point Mute Input Mic 2 Output Output 3 Right	WM20905AU\x0D
Mix-point Mute Input Mic 2 Output Output 4 Left	WM20906AU\x0D
Mix-point Mute Input Mic 2 Output Output 4 Right	WM20907AU\x0D
Mix-point Mute Input Mic 2 Output V. Send A	WM20908AU\x0D
Mix-point Mute Input Mic 2 Output V. Send B	WM20909AU\x0D
Mix-point Mute Input Mic 2 Output V. Send C	WM20910AU\x0D
Mix-point Mute Input Mic 2 Output V. Send D	WM20911AU\x0D
Mix-point Mute Input Mic 2 Output V. Send E	WM20912AU\x0D
Mix-point Mute Input Mic 2 Output V. Send F	WM20913AU\x0D
Mix-point Mute Input Mic 2 Output V. Send G	WM20914AU\x0D
Mix-point Mute Input Mic 2 Output V. Send H	WM20915AU\x0D
Mix-point Mute Input Mic 3 Output Output 1 Left	WM21000AU\x0D
Mix-point Mute Input Mic 3 Output Output 1 Right	WM21001AU\x0D
Mix-point Mute Input Mic 3 Output Output 2 Left	WM21002AU\x0D
Mix-point Mute Input Mic 3 Output Output 2 Right	WM21003AU\x0D
Mix-point Mute Input Mic 3 Output Output 3 Left	WM21004AU\x0D
Mix-point Mute Input Mic 3 Output Output 3 Right	WM21005AU\x0D
Mix-point Mute Input Mic 3 Output Output 4 Left	WM21006AU\x0D
Mix-point Mute Input Mic 3 Output Output 4 Right	WM21007AU\x0D
Mix-point Mute Input Mic 3 Output V. Send A	WM21008AU\x0D
Mix-point Mute Input Mic 3 Output V. Send B	WM21009AU\x0D
Mix-point Mute Input Mic 3 Output V. Send C	WM21010AU\x0D
Mix-point Mute Input Mic 3 Output V. Send D	WM21011AU\x0D
Mix-point Mute Input Mic 3 Output V. Send E	WM21012AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Input Mic 3 Output V. Send F	WM21013AU\x0D
Mix-point Mute Input Mic 3 Output V. Send G	WM21014AU\x0D
Mix-point Mute Input Mic 3 Output V. Send H	WM21015AU\x0D
Mix-point Mute Input Mic 4 Output Output 1 Left	WM21100AU\x0D
Mix-point Mute Input Mic 4 Output Output 1 Right	WM21101AU\x0D
Mix-point Mute Input Mic 4 Output Output 2 Left	WM21102AU\x0D
Mix-point Mute Input Mic 4 Output Output 2 Right	WM21103AU\x0D
Mix-point Mute Input Mic 4 Output Output 3 Left	WM21104AU\x0D
Mix-point Mute Input Mic 4 Output Output 3 Right	WM21105AU\x0D
Mix-point Mute Input Mic 4 Output Output 4 Left	WM21106AU\x0D
Mix-point Mute Input Mic 4 Output Output 4 Right	WM21107AU\x0D
Mix-point Mute Input Mic 4 Output V. Send A	WM21108AU\x0D
Mix-point Mute Input Mic 4 Output V. Send B	WM21109AU\x0D
Mix-point Mute Input Mic 4 Output V. Send C	WM21110AU\x0D
Mix-point Mute Input Mic 4 Output V. Send D	WM21111AU\x0D
Mix-point Mute Input Mic 4 Output V. Send E	WM21112AU\x0D
Mix-point Mute Input Mic 4 Output V. Send F	WM21113AU\x0D
Mix-point Mute Input Mic 4 Output V. Send G	WM21114AU\x0D
Mix-point Mute Input Mic 4 Output V. Send H	WM21115AU\x0D
Mix-point Mute Input Output 1 Left Output Output 1 Left	WM20000AU\x0D
Mix-point Mute Input Output 1 Left Output Output 1 Right	WM20001AU\x0D
Mix-point Mute Input Output 1 Left Output Output 2 Left	WM20002AU\x0D
Mix-point Mute Input Output 1 Left Output Output 2 Right	WM20003AU\x0D
Mix-point Mute Input Output 1 Left Output Output 3 Left	WM20004AU\x0D
Mix-point Mute Input Output 1 Left Output Output 3 Right	WM20005AU\x0D
Mix-point Mute Input Output 1 Left Output Output 4 Left	WM20006AU\x0D
Mix-point Mute Input Output 1 Left Output Output 4 Right	WM20007AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send A	WM20008AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send B	WM20009AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send C	WM20010AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send D	WM20011AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Input Output 1 Left Output V. Send E	WM20012AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send F	WM20013AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send G	WM20014AU\x0D
Mix-point Mute Input Output 1 Left Output V. Send H	WM20015AU\x0D
Mix-point Mute Input Output 1 Right Output Output 1 Left	WM20100AU\x0D
Mix-point Mute Input Output 1 Right Output Output 1 Right	WM20101AU\x0D
Mix-point Mute Input Output 1 Right Output Output 2 Left	WM20102AU\x0D
Mix-point Mute Input Output 1 Right Output Output 2 Right	WM20103AU\x0D
Mix-point Mute Input Output 1 Right Output Output 3 Left	WM20104AU\x0D
Mix-point Mute Input Output 1 Right Output Output 3 Right	WM20105AU\x0D
Mix-point Mute Input Output 1 Right Output Output 4 Left	WM20106AU\x0D
Mix-point Mute Input Output 1 Right Output Output 4 Right	WM20107AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send A	WM20108AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send B	WM20109AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send C	WM20110AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send D	WM20111AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send E	WM20112AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send F	WM20113AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send G	WM20114AU\x0D
Mix-point Mute Input Output 1 Right Output V. Send H	WM20115AU\x0D
Mix-point Mute Input Output 2 Left Output Output 1 Left	WM20200AU\x0D
Mix-point Mute Input Output 2 Left Output Output 1 Right	WM20201AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Input Output 2 Left Output Output 2 Left	WM20202AU\x0D
Mix-point Mute Input Output 2 Left Output Output 2 Right	WM20203AU\x0D
Mix-point Mute Input Output 2 Left Output Output 3 Left	WM20204AU\x0D
Mix-point Mute Input Output 2 Left Output Output 3 Right	WM20205AU\x0D
Mix-point Mute Input Output 2 Left Output Output 4 Left	WM20206AU\x0D
Mix-point Mute Input Output 2 Left Output Output 4 Right	WM20207AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send A	WM20208AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send B	WM20209AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send C	WM20210AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send D	WM20211AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send E	WM20212AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send F	WM20213AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send G	WM20214AU\x0D
Mix-point Mute Input Output 2 Left Output V. Send H	WM20215AU\x0D
Mix-point Mute Input Output 2 Right Output Output 1 Left	WM20300AU\x0D
Mix-point Mute Input Output 2 Right Output Output 1 Right	WM20301AU\x0D
Mix-point Mute Input Output 2 Right Output Output 2 Left	WM20302AU\x0D
Mix-point Mute Input Output 2 Right Output Output 2 Right	WM20303AU\x0D
Mix-point Mute Input Output 2 Right Output Output 3 Left	WM20304AU\x0D
Mix-point Mute Input Output 2 Right Output Output 3 Right	WM20305AU\x0D
Mix-point Mute Input Output 2 Right Output Output 4 Left	WM20306AU\x0D
Mix-point Mute Input Output 2 Right Output Output 4 Right	WM20307AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send A	WM20308AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send B	WM20309AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Input Output 2 Right Output V. Send C	WM20310AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send D	WM20311AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send E	WM20312AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send F	WM20313AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send G	WM20314AU\x0D
Mix-point Mute Input Output 2 Right Output V. Send H	WM20315AU\x0D
Mix-point Mute Input Output 3 Left Output Output 1 Left	WM20400AU\x0D
Mix-point Mute Input Output 3 Left Output Output 1 Right	WM20401AU\x0D
Mix-point Mute Input Output 3 Left Output Output 2 Left	WM20402AU\x0D
Mix-point Mute Input Output 3 Left Output Output 2 Right	WM20403AU\x0D
Mix-point Mute Input Output 3 Left Output Output 3 Left	WM20404AU\x0D
Mix-point Mute Input Output 3 Left Output Output 3 Right	WM20405AU\x0D
Mix-point Mute Input Output 3 Left Output Output 4 Left	WM20406AU\x0D
Mix-point Mute Input Output 3 Left Output Output 4 Right	WM20407AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send A	WM20408AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send B	WM20409AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send C	WM20410AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send D	WM20411AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send E	WM20412AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send F	WM20413AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send G	WM20414AU\x0D
Mix-point Mute Input Output 3 Left Output V. Send H	WM20415AU\x0D
Mix-point Mute Input Output 3 Right Output Output 1 Left	WM20500AU\x0D
Mix-point Mute Input Output 3 Right Output Output 1 Right	WM20501AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Mute Input Output 3 Right Output Output 2 Left	WM20502AU\x0D
Mix-point Mute Input Output 3 Right Output Output 2 Right	WM20503AU\x0D
Mix-point Mute Input Output 3 Right Output Output 3 Left	WM20504AU\x0D
Mix-point Mute Input Output 3 Right Output Output 3 Right	WM20505AU\x0D
Mix-point Mute Input Output 3 Right Output Output 4 Left	WM20506AU\x0D
Mix-point Mute Input Output 3 Right Output Output 4 Right	WM20507AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send A	WM20508AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send B	WM20509AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send C	WM20510AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send D	WM20511AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send E	WM20512AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send F	WM20513AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send G	WM20514AU\x0D
Mix-point Mute Input Output 3 Right Output V. Send H	WM20515AU\x0D
Mix-point Mute Input Output 4 Left Output Output 1 Left	WM20600AU\x0D
Mix-point Mute Input Output 4 Left Output Output 1 Right	WM20601AU\x0D
Mix-point Mute Input Output 4 Left Output Output 2 Left	WM20602AU\x0D
Mix-point Mute Input Output 4 Left Output Output 2 Right	WM20603AU\x0D
Mix-point Mute Input Output 4 Left Output Output 3 Left	WM20604AU\x0D
Mix-point Mute Input Output 4 Left Output Output 3 Right	WM20605AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Input Output 4 Left Output Output 4 Left	WM20606AU\x0D
Mix-point Mute Input Output 4 Left Output Output 4 Right	WM20607AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send A	WM20608AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send B	WM20609AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send C	WM20610AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send D	WM20611AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send E	WM20612AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send F	WM20613AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send G	WM20614AU\x0D
Mix-point Mute Input Output 4 Left Output V. Send H	WM20615AU\x0D
Mix-point Mute Input Output 4 Right Output Output 1 Left	WM20700AU\x0D
Mix-point Mute Input Output 4 Right Output Output 1 Right	WM20701AU\x0D
Mix-point Mute Input Output 4 Right Output Output 2 Left	WM20702AU\x0D
Mix-point Mute Input Output 4 Right Output Output 2 Right	WM20703AU\x0D
Mix-point Mute Input Output 4 Right Output Output 3 Left	WM20704AU\x0D
Mix-point Mute Input Output 4 Right Output Output 3 Right	WM20705AU\x0D
Mix-point Mute Input Output 4 Right Output Output 4 Left	WM20706AU\x0D
Mix-point Mute Input Output 4 Right Output Output 4 Right	WM20707AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send A	WM20708AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send B	WM20709AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send C	WM20710AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send D	WM20711AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send E	WM20712AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send F	WM20713AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Input Output 4 Right Output V. Send G	WM20714AU\x0D
Mix-point Mute Input Output 4 Right Output V. Send H	WM20715AU\x0D
Mix-point Mute Input V. Return A Output Output 1 Left	WM21200AU\x0D
Mix-point Mute Input V. Return A Output Output 1 Right	WM21201AU\x0D
Mix-point Mute Input V. Return A Output Output 2 Left	WM21202AU\x0D
Mix-point Mute Input V. Return A Output Output 2 Right	WM21203AU\x0D
Mix-point Mute Input V. Return A Output Output 3 Left	WM21204AU\x0D
Mix-point Mute Input V. Return A Output Output 3 Right	WM21205AU\x0D
Mix-point Mute Input V. Return A Output Output 4 Left	WM21206AU\x0D
Mix-point Mute Input V. Return A Output Output 4 Right	WM21207AU\x0D
Mix-point Mute Input V. Return A Output V. Send A	WM21208AU\x0D
Mix-point Mute Input V. Return A Output V. Send B	WM21209AU\x0D
Mix-point Mute Input V. Return A Output V. Send C	WM21210AU\x0D
Mix-point Mute Input V. Return A Output V. Send D	WM21211AU\x0D
Mix-point Mute Input V. Return A Output V. Send E	WM21212AU\x0D
Mix-point Mute Input V. Return A Output V. Send F	WM21213AU\x0D
Mix-point Mute Input V. Return A Output V. Send G	WM21214AU\x0D
Mix-point Mute Input V. Return A Output V. Send H	WM21215AU\x0D
Mix-point Mute Input V. Return B Output Output 1 Left	WM21300AU\x0D
Mix-point Mute Input V. Return B Output Output 1 Right	WM21301AU\x0D
Mix-point Mute Input V. Return B Output Output 2 Left	WM21302AU\x0D
Mix-point Mute Input V. Return B Output Output 2 Right	WM21303AU\x0D
Mix-point Mute Input V. Return B Output Output 3 Left	WM21304AU\x0D
Mix-point Mute Input V. Return B Output Output 3 Right	WM21305AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Mute Input V. Return B Output Output 4 Left	WM21306AU\x0D
Mix-point Mute Input V. Return B Output Output 4 Right	WM21307AU\x0D
Mix-point Mute Input V. Return B Output V. Send A	WM21308AU\x0D
Mix-point Mute Input V. Return B Output V. Send B	WM21309AU\x0D
Mix-point Mute Input V. Return B Output V. Send C	WM21310AU\x0D
Mix-point Mute Input V. Return B Output V. Send D	WM21311AU\x0D
Mix-point Mute Input V. Return B Output V. Send E	WM21312AU\x0D
Mix-point Mute Input V. Return B Output V. Send F	WM21313AU\x0D
Mix-point Mute Input V. Return B Output V. Send G	WM21314AU\x0D
Mix-point Mute Input V. Return B Output V. Send H	WM21315AU\x0D
Mix-point Mute Input V. Return C Output Output 1 Left	WM21400AU\x0D
Mix-point Mute Input V. Return C Output Output 1 Right	WM21401AU\x0D
Mix-point Mute Input V. Return C Output Output 2 Left	WM21402AU\x0D
Mix-point Mute Input V. Return C Output Output 2 Right	WM21403AU\x0D
Mix-point Mute Input V. Return C Output Output 3 Left	WM21404AU\x0D
Mix-point Mute Input V. Return C Output Output 3 Right	WM21405AU\x0D
Mix-point Mute Input V. Return C Output Output 4 Left	WM21406AU\x0D
Mix-point Mute Input V. Return C Output Output 4 Right	WM21407AU\x0D
Mix-point Mute Input V. Return C Output V. Send A	WM21408AU\x0D
Mix-point Mute Input V. Return C Output V. Send B	WM21409AU\x0D
Mix-point Mute Input V. Return C Output V. Send C	WM21410AU\x0D
Mix-point Mute Input V. Return C Output V. Send D	WM21411AU\x0D
Mix-point Mute Input V. Return C Output V. Send E	WM21412AU\x0D
Mix-point Mute Input V. Return C Output V. Send F	WM21413AU\x0D
Mix-point Mute Input V. Return C Output V. Send G	WM21414AU\x0D
Mix-point Mute Input V. Return C Output V. Send H	WM21415AU\x0D
Mix-point Mute Input V. Return D Output Output 1 Left	WM21500AU\x0D
Mix-point Mute Input V. Return D Output Output 1 Right	WM21501AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Input V. Return D Output Output 2 Left	WM21502AU\x0D
Mix-point Mute Input V. Return D Output Output 2 Right	WM21503AU\x0D
Mix-point Mute Input V. Return D Output Output 3 Left	WM21504AU\x0D
Mix-point Mute Input V. Return D Output Output 3 Right	WM21505AU\x0D
Mix-point Mute Input V. Return D Output Output 4 Left	WM21506AU\x0D
Mix-point Mute Input V. Return D Output Output 4 Right	WM21507AU\x0D
Mix-point Mute Input V. Return D Output V. Send A	WM21508AU\x0D
Mix-point Mute Input V. Return D Output V. Send B	WM21509AU\x0D
Mix-point Mute Input V. Return D Output V. Send C	WM21510AU\x0D
Mix-point Mute Input V. Return D Output V. Send D	WM21511AU\x0D
Mix-point Mute Input V. Return D Output V. Send E	WM21512AU\x0D
Mix-point Mute Input V. Return D Output V. Send F	WM21513AU\x0D
Mix-point Mute Input V. Return D Output V. Send G	WM21514AU\x0D
Mix-point Mute Input V. Return D Output V. Send H	WM21515AU\x0D
Mix-point Mute Input V. Return E Output Output 1 Left	WM21600AU\x0D
Mix-point Mute Input V. Return E Output Output 1 Right	WM21601AU\x0D
Mix-point Mute Input V. Return E Output Output 2 Left	WM21602AU\x0D
Mix-point Mute Input V. Return E Output Output 2 Right	WM21603AU\x0D
Mix-point Mute Input V. Return E Output Output 3 Left	WM21604AU\x0D
Mix-point Mute Input V. Return E Output Output 3 Right	WM21605AU\x0D
Mix-point Mute Input V. Return E Output Output 4 Left	WM21606AU\x0D
Mix-point Mute Input V. Return E Output Output 4 Right	WM21607AU\x0D
Mix-point Mute Input V. Return E Output V. Send A	WM21608AU\x0D
Mix-point Mute Input V. Return E Output V. Send B	WM21609AU\x0D
Mix-point Mute Input V. Return E Output V. Send C	WM21610AU\x0D
Mix-point Mute Input V. Return E Output V. Send D	WM21611AU\x0D

Global Scripter Module Communication Sheet

Mix-point Mute Input V. Return E Output V. Send E	WM21612AU\x0D
Mix-point Mute Input V. Return E Output V. Send F	WM21613AU\x0D
Mix-point Mute Input V. Return E Output V. Send G	WM21614AU\x0D
Mix-point Mute Input V. Return E Output V. Send H	WM21615AU\x0D
Mix-point Mute Input V. Return F Output Output 1 Left	WM21700AU\x0D
Mix-point Mute Input V. Return F Output Output 1 Right	WM21701AU\x0D
Mix-point Mute Input V. Return F Output Output 2 Left	WM21702AU\x0D
Mix-point Mute Input V. Return F Output Output 2 Right	WM21703AU\x0D
Mix-point Mute Input V. Return F Output Output 3 Left	WM21704AU\x0D
Mix-point Mute Input V. Return F Output Output 3 Right	WM21705AU\x0D
Mix-point Mute Input V. Return F Output Output 4 Left	WM21706AU\x0D
Mix-point Mute Input V. Return F Output Output 4 Right	WM21707AU\x0D
Mix-point Mute Input V. Return F Output V. Send A	WM21708AU\x0D
Mix-point Mute Input V. Return F Output V. Send B	WM21709AU\x0D
Mix-point Mute Input V. Return F Output V. Send C	WM21710AU\x0D
Mix-point Mute Input V. Return F Output V. Send D	WM21711AU\x0D
Mix-point Mute Input V. Return F Output V. Send E	WM21712AU\x0D
Mix-point Mute Input V. Return F Output V. Send F	WM21713AU\x0D
Mix-point Mute Input V. Return F Output V. Send G	WM21714AU\x0D
Mix-point Mute Input V. Return F Output V. Send H	WM21715AU\x0D
Mix-point Mute Input V. Return G Output Output 1 Left	WM21800AU\x0D
Mix-point Mute Input V. Return G Output Output 1 Right	WM21801AU\x0D
Mix-point Mute Input V. Return G Output Output 2 Left	WM21802AU\x0D
Mix-point Mute Input V. Return G Output Output 2 Right	WM21803AU\x0D
Mix-point Mute Input V. Return G Output Output 3 Left	WM21804AU\x0D
Mix-point Mute Input V. Return G Output Output 3 Right	WM21805AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Mix-point Mute Input V. Return G Output Output 4 Left	WM21806AU\x0D
Mix-point Mute Input V. Return G Output Output 4 Right	WM21807AU\x0D
Mix-point Mute Input V. Return G Output V. Send A	WM21808AU\x0D
Mix-point Mute Input V. Return G Output V. Send B	WM21809AU\x0D
Mix-point Mute Input V. Return G Output V. Send C	WM21810AU\x0D
Mix-point Mute Input V. Return G Output V. Send D	WM21811AU\x0D
Mix-point Mute Input V. Return G Output V. Send E	WM21812AU\x0D
Mix-point Mute Input V. Return G Output V. Send F	WM21813AU\x0D
Mix-point Mute Input V. Return G Output V. Send G	WM21814AU\x0D
Mix-point Mute Input V. Return G Output V. Send H	WM21815AU\x0D
Mix-point Mute Input V. Return H Output Output 1 Left	WM21900AU\x0D
Mix-point Mute Input V. Return H Output Output 1 Right	WM21901AU\x0D
Mix-point Mute Input V. Return H Output Output 2 Left	WM21902AU\x0D
Mix-point Mute Input V. Return H Output Output 2 Right	WM21903AU\x0D
Mix-point Mute Input V. Return H Output Output 3 Left	WM21904AU\x0D
Mix-point Mute Input V. Return H Output Output 3 Right	WM21905AU\x0D
Mix-point Mute Input V. Return H Output Output 4 Left	WM21906AU\x0D
Mix-point Mute Input V. Return H Output Output 4 Right	WM21907AU\x0D
Mix-point Mute Input V. Return H Output V. Send A	WM21908AU\x0D
Mix-point Mute Input V. Return H Output V. Send B	WM21909AU\x0D
Mix-point Mute Input V. Return H Output V. Send C	WM21910AU\x0D
Mix-point Mute Input V. Return H Output V. Send D	WM21911AU\x0D
Mix-point Mute Input V. Return H Output V. Send E	WM21912AU\x0D
Mix-point Mute Input V. Return H Output V. Send F	WM21913AU\x0D
Mix-point Mute Input V. Return H Output V. Send G	WM21914AU\x0D
Mix-point Mute Input V. Return H Output V. Send H	WM21915AU\x0D
Output Audio Select Output 1	wOAFMT\x0D\x0A
Output Audio Select Output 4	wOAFMT\x0D\x0A
Output Post-mixer Trim Output 1 L/R Left	wG60100AU\x0D

Global Scripter Module Communication Sheet

Revision: 5/16/2019

Output Post-mixer Trim Output 1 L/R Right	wG60101AU\x0D
Output Post-mixer Trim Output 4 L/R Left	wG60106AU\x0D
Output Post-mixer Trim Output 4 L/R Right	wG60107AU\x0D
Output Resolution Output 3	W3RATE\x0D
Output Resolution Output 4	W4RATE\x0D
OutputTieStatus	1%2%3%4%1\$2\$3\$4\$
Phantom Power Input 1	wZ40000AU\x0D
Phantom Power Input 4	wZ40003AU\x0D
Post Matrix Gain Output 1 L/R Left	WG50000AU\x0D
Post Matrix Gain Output 1 L/R Right	WG50001AU\x0D
Post Matrix Gain Output 4 L/R Left	WG50006AU\x0D
Post Matrix Gain Output 4 L/R Right	WG50007AU\x0D
Post Matrix Mute Output 1 L/R Left	WM50000AU\x0D
Post Matrix Mute Output 1 L/R Right	WM50001AU\x0D
Post Matrix Mute Output 4 L/R Left	WM50006AU\x0D
Post Matrix Mute Output 4 L/R Right	WM50007AU\x0D
Pre-matrix Trim Input 1 L/R Left	wG30100AU\x0D
Pre-matrix Trim Input 1 L/R Right	wG30101AU\x0D
Pre-matrix Trim Input 8 L/R Left	wG30114AU\x0D
Pre-matrix Trim Input 8 L/R Right	wG30115AU\x0D
Pre-mixer Gain Input 1	WG40100AU\x0D
Pre-mixer Gain Input 4	WG40103AU\x0D
Pre-mixer Mute Input 1	WM40100AU\x0D
Pre-mixer Mute Input 4	WM40103AU\x0D
Temperature	S
Test Pattern Output 3	W3TEST\x0D
Test Pattern Output 4	W4TEST\x0D
Video Mute Output 1	1B\x0D
Video Mute Output 4	4B\x0D
Virtual Return Gain Input A	WG50100AU\x0D\x0A
Virtual Return Gain Input B	WG50101AU\x0D\x0A
Virtual Return Gain Input C	WG50102AU\x0D\x0A
Virtual Return Gain Input D	WG50103AU\x0D\x0A
Virtual Return Gain Input E	WG50104AU\x0D\x0A
Virtual Return Gain Input F	WG50105AU\x0D\x0A
Virtual Return Gain Input G	WG50106AU\x0D\x0A
Virtual Return Gain Input H	WG50107AU\x0D\x0A
Virtual Return Mute Input A	WM50100AU\x0D\x0A
Virtual Return Mute Input B	WM50101AU\x0D\x0A

Global Scripter Module Communication Sheet

Virtual Return Mute Input C	WM50102AU\x0D\x0A
Virtual Return Mute Input D	WM50103AU\x0D\x0A
Virtual Return Mute Input E	WM50104AU\x0D\x0A
Virtual Return Mute Input F	WM50105AU\x0D\x0A
Virtual Return Mute Input H	WM50107AU\x0D\x0A