RS218

ASK Super heterodyne wireless receiving module

Features:


Power Supply： DC 5V
static current： 7~8mA
Sensitivity： -112dBm
size： 19× 48× 5mm
working temperature： -30° ~+85°
working frequency： 433 MHz
switching mode：Toggle
output ：4 channel of data , one channel of signal instatement.
signal : TTL, high lever is valid
encoding : rolling code HCS301, normal, manufactory code is set
Capacity : 1000 rolling codes

Application

1、Door opener
2、RF alarm
3、RF doorbell
4、car door control
5、RF receiver

Pin distribution

1、D3 2、D2
3、D1 4、D0
5、GND 6、VT
7、VCC 8、LERAN
9、GND 10、ANT

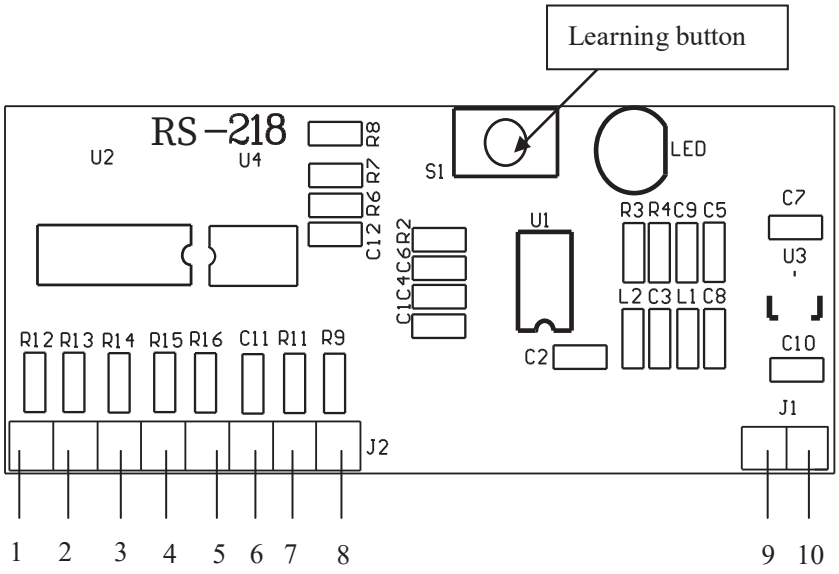

Pin	output	function
1	D3	D3 output
2	D2	D2 output
3	D1	D1 output
4	D0	D0 output
5	GND	GND
6	VT	Data indicator Signal indicates that the high level is output when the remote control signal is received
7	VCC	VCC
8	GND	GND ,can connect to an external learning key
9	GND	GND
10	ANT	anntena

RS218　How to match receiver with transmitter

Keep pressing learning key on the receiver board, when LED light goes one and turn to off, release it. Long press any one key of the remote transmitter until LED light stay on , then release the key . At this moment, LED is off , press the previous transmitter key again , LED light flashes quickly for 3 times before off , now the receiver is ready for work.

In case the remote transmitter lost or you want to delete the memory codes , long pressing Learning Key more than 6 s , when LED goes off, all is cleared, you can programme new remote transmitter .

Dimention

