

NAME: RESHEKESH B

REG NO: 192512123

EX NO: 2a	GENERATION AND ANALYSIS OF FREQUENCY MODULATED (FM) SIGNALS USING MATLAB
DATE:	

Objectives

- (i) To generate a Frequency Modulated (FM) signal using MATLAB by varying the frequency of a high-frequency carrier in accordance with the amplitude of the message signal and to observe the resulting waveform in the time domain.
- (ii) To analyze the frequency spectrum of the generated FM signal using FFT and identify the carrier component, sideband frequencies, and the bandwidth of the FM signal based on Carson's rule.


Objective 1: To generate a Frequency Modulated (FM) signal using MATLAB by varying the frequency of a high-frequency carrier in accordance with the amplitude of the message signal and to observe the resulting waveform in the time domain.

PROGRAM (MATLAB CODE)

```
clc;
clear;
close all;
Am=1;
Ac=1;
fm=5;
fc=50;
beta=5;
kp=5;
fs=1000;
t=0:1/fs:1;
m = Am*cos(2*pi*fm*t); % Message signal
c = Ac*cos(2*pi*fc*t); % Carrier signal
fm_sig = Ac*cos(2*pi*fc*t + beta*sin(2*pi*fm*t)); % FM
subplot(4,1,1), plot(t,m), title('Message Signal')
subplot(4,1,2), plot(t,c), title('Carrier Signal')
```

```
subplot(4,1,3), plot(t, fm_sig), title('FM Signal')
```

OUTPUT (GRAPH)

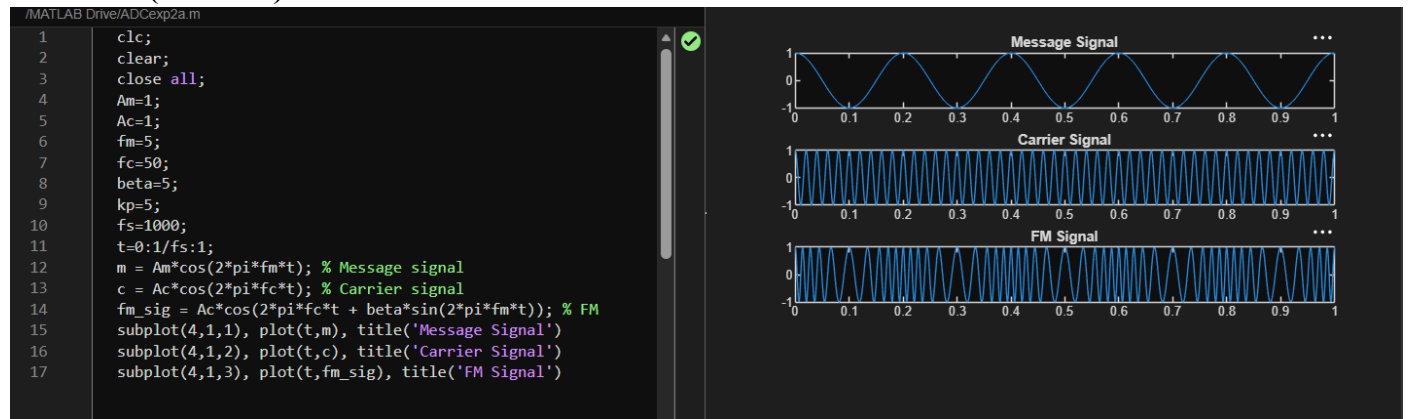

Result

The Frequency Modulated (FM) signal was successfully generated using MATLAB, and the time-domain waveforms of the message signal, carrier signal, and FM signal were observed and analyzed.

Objective 2: To analyze the frequency spectrum of the generated FM signal using FFT and identify the carrier component, sideband frequencies, and the bandwidth of the FM signal based on Carson's rule

PROGRAM (MATLAB CODE)

```
% Calculation and Verification of Frequency Deviation
% and Modulation Index of FM Signals
```

```
clc;
```

```
clear;
```

```
close all;
```

```
%% Input Parameters
```

```
Am = 2; % Message signal amplitude
```

```
fm = 500; % Message frequency (Hz)
```

```
Ac = 1; % Carrier amplitude
```

```
fc = 10000; % Carrier frequency (Hz) kf = 1000;
```

```
% Frequency sensitivity (Hz/V) fs = 1000000; %
```

```
Sampling frequency (Hz) T = 0.02; %
```

```
Simulation duration (s) t = 0:1/fs:T;
```

```
%% Message Signal
```

```

m = Am*cos(2*pi*fm*t);
%% Frequency Deviation Calculation
delta_f = kf * Am;
%% Modulation Index Calculation
beta = delta_f/fm;
%% FM Signal Generation
fm_signal = Ac*cos(2*pi*fc*t +
beta*sin(2*pi*fm*t)); %% Plot Message Signal
figure;
subplot(2,1,1);
plot(t,m,'LineWidth',1.5);
title('Message Signal');
xlabel('Time (s)');
ylabel('Amplitude');
grid on;
%% Plot FM Signal
subplot(2,1,2);
plot(t,fm_signal,'LineWidth',1.5);
title('Frequency Modulated Signal');
xlabel('Time (s)');
ylabel('Amplitude');
grid on;
%% Spectrum Analysis
N = length(fm_signal);
FM_fft = fftshift(abs(fft(fm_signal))/N);
f = (-N/2:N/2-1)*(fs/N);
figure;
plot(f,FM_fft,'LineWidth',1.5);
title('FM Signal Spectrum');
xlabel('Frequency (Hz)');
ylabel('Magnitude');
grid on;
xlim([fc-10000 fc+10000]);
%% Display Results
fprintf('\nFM SIGNAL PARAMETERS\n');
fprintf('-----\n');
fprintf('Carrier Frequency = %.0f Hz\n',fc);
fprintf('Message Frequency = %.0f Hz\n',fm);
fprintf('Message Amplitude = %.2f V\n',Am);

```

```

fprintf('Frequency Sensitivity = %.0f Hz/V\n',kf);
fprintf('\nCALCULATED VALUES\n');
fprintf('-----\n');
fprintf('Frequency Deviation ( $\Delta f$ ) = %.0f Hz\n',delta_f);
fprintf('Modulation Index ( $\beta$ ) = %.2f\n',beta);
%% Carson's Rule Bandwidth
BW = 2*(delta_f + fm);
fprintf('Bandwidth (Carson Rule) = %.0f Hz\n',BW);

```

OUTPUT



Result

- The time-domain waveform was observed, and the frequency spectrum obtained using FFT has been plotted.
- Also, calculated the frequency deviation and bandwidth using Carson's rule.

EX NO: 2b	CALCULATION AND VERIFICATION OF FREQUENCY DEVIATION AND MODULATION INDEX OF FM SIGNALS USING MATLAB SIMULATION
DATE:	

Objectives:

To generate a Frequency Modulated (FM) signal in MATLAB using specified message and carrier signal parameters, and to determine the frequency deviation and modulation index of the FM signal while analyzing the relationship between frequency deviation, message frequency, and modulation index.

PROGRAM (MATLAB CODE)

```
% Calculation and Verification of Frequency Deviation
```

```
% and Modulation Index of FM Signal
```

```
clc;
```

```
clear;
```

```
close all;
```

```
%% Message Signal Parameters
```

```
Am = 2; % Message amplitude (V)
```

```
fm = 500; % Message frequency (Hz)
```

```
%% Carrier Signal Parameters
```

```
Ac = 1; % Carrier amplitude (V)
```

```
fc = 10000; % Carrier frequency (Hz)
```

```
%% FM Parameters
```

```
kf = 250; % Frequency sensitivity (Hz/V)
```

```
fs = 100000; % Sampling frequency (Hz)
```

```
T = 0.01; % Simulation duration (s)
```

```
%% Time Vector
```

```
t = 0:1/fs:T;
```

```
%% Message Signal
```

```
m = Am*cos(2*pi*fm*t);
```

```
%% Frequency Deviation
```

```
delta_f = kf*Am;
```

```
%% Modulation Index
```

```
beta = delta_f/fm;
```

```

%% FM Signal
fm_signal = Ac*cos(2*pi*fc*t + beta*sin(2*pi*fm*t));

%% Display Parameters
fprintf('Carrier Frequency (fc) = %.0f Hz\n',fc);
fprintf('Message Frequency (fm) = %.0f Hz\n',fm);
fprintf('Message Amplitude (Am) = %.0f V\n',Am);
fprintf('Frequency Sensitivity (kf) = %.0f Hz/V\n',kf);
fprintf('\nFrequency Deviation (Delta f) = %.2f Hz\n',delta_f);
fprintf('Modulation Index (Beta) = %.2f\n',beta);

%% Verification
beta_verify = delta_f/fm;
fprintf('Verified Modulation Index = %.2f\n',beta_verify);

%% Verification Check
tolerance = 1e-6;
if abs(beta - beta_verify) < tolerance
    fprintf('\nVerification Successful\n');
else
    fprintf('\nVerification Failed\n');
end

%% Plotting
figure;
subplot(2,1,1);
plot(t,m,'LineWidth',1.5);
grid on;
title('Message Signal');
xlabel('Time (s)');
ylabel('Amplitude (V)');
subplot(2,1,2);
plot(t,fm_signal,'LineWidth',1);
grid on;
title('FM Signal');
xlabel('Time (s)');
ylabel('Amplitude (V)');

```

OUTPUT



Result

This experiment verifies that the modulation index is equal to the ratio of frequency deviation to message frequency, i.e., $\beta = \Delta f / f_m$.