

To be transmitted, data must be transformed to electromagnetic signals

3-1 ANALOG AND DIGITAL

Data can be *analog* or *digital*. The term *analog data* refers to information that is continuous; *digital data* refers to information that has discrete states. Analog data take on continuous values.. Digital data take on discrete values..

Data can be analog or digital.

Analog data are continuous and take continuous values.


Digital data have discrete states and take discrete values.

Signals can be analog or digital.

Analog signals can have an infinite number of values in a range; digital signals can have only a limited number of values.

3.1


Figure 3.1 Comparison of analog and digital signals

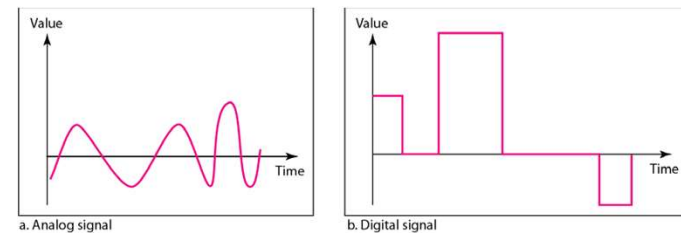

In data communications, we commonly use periodic analog signals and nonperiodic digital signals.

3.2

Figure 3.2 A sine wave

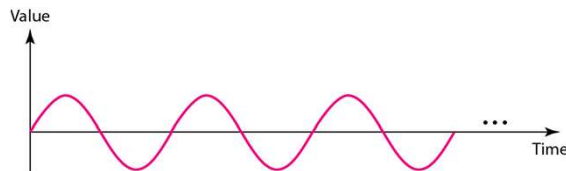


3.3

Example 3.1

The power in your house can be represented by a sine wave with a peak amplitude of 155 to 170 V. However, it is common knowledge that the voltage of the power in U.S. homes is 110 to 120 V. This discrepancy is due to the fact that these are *root mean square* (rms) values. The signal is squared and then the average amplitude is calculated. The peak value is equal to $2^{1/2} \times \text{rms}$ value.

3.4

Figure 3.3 Two signals with the same phase and frequency, but different amplitudes

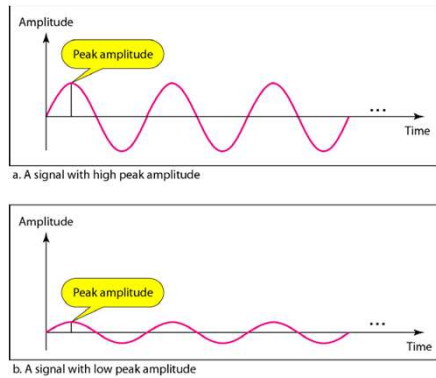

3.5

Example 3.2


The voltage of a battery is a constant; this constant value can be considered a sine wave, as we will see later. For example, the peak value of an *A* battery is normally **1.5 V**.

Frequency and period are the inverse of each other.

$$f = \frac{1}{T} \quad \text{and} \quad T = \frac{1}{f}$$

3.6

Figure 3.4 Two signals with the same amplitude and phase, but different frequencies

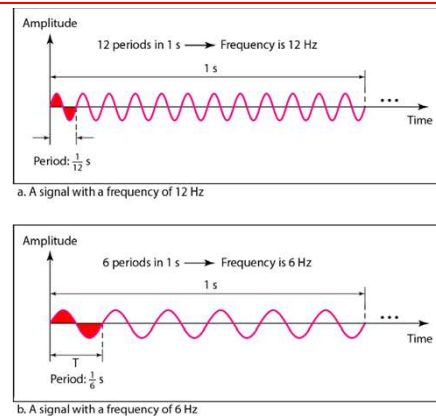

3.7

Table 3.1 Units of period and frequency

Unit	Equivalent	Unit	Equivalent
Seconds (s)	1 s	Hertz (Hz)	1 Hz
Milliseconds (ms)	10^{-3} s	Kilohertz (kHz)	10^3 Hz
Microseconds (μ s)	10^{-6} s	Megahertz (MHz)	10^6 Hz
Nanoseconds (ns)	10^{-9} s	Gigahertz (GHz)	10^9 Hz
Picoseconds (ps)	10^{-12} s	Terahertz (THz)	10^{12} Hz

3.8

Example 3.3

The power we use at home has a frequency of **60 Hz**. The period of this sine wave can be determined as follows:

$$T = \frac{1}{f} = \frac{1}{60} = 0.0166 \text{ s} = 0.0166 \times 10^3 \text{ ms} = 16.6 \text{ ms}$$

3.9

Example 3.4

Express a period of 100 ms in microseconds.

Solution

From Table 3.1 we find the equivalents of 1 ms (1 ms is 10^{-3} s) and 1 s (1 s is 10^6 μ s). We make the following substitutions:.

$$100 \text{ ms} = 100 \times 10^{-3} \text{ s} = 100 \times 10^{-3} \times 10^6 \mu\text{s} = 10^2 \times 10^{-3} \times 10^6 \mu\text{s} = 10^5 \mu\text{s}$$

3.10

Example 3.5

The period of a signal is 100 ms. What is its frequency in kilohertz?

Solution

First we change 100 ms to seconds, and then we calculate the frequency from the period (1 Hz = 10^{-3} kHz)

$$100 \text{ ms} = 100 \times 10^{-3} \text{ s} = 10^{-1} \text{ s}$$

$$f = \frac{1}{T} = \frac{1}{10^{-1}} \text{ Hz} = 10 \text{ Hz} = 10 \times 10^{-3} \text{ kHz} = 10^{-2} \text{ kHz}$$

3.11

Frequency is the rate of change with respect to time. Change in a short span of time means high frequency. Change over a long span of time means low frequency.


If a signal does not change at all, its frequency is zero.

If a signal changes instantaneously, its frequency is infinite.

Phase describes the position of the waveform relative to time 0.

3.12

Figure 3.5 Three sine waves with the same amplitude and frequency, but different phases

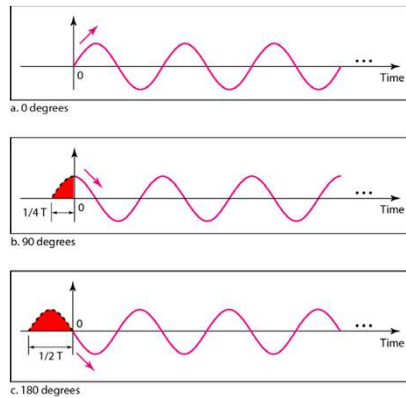

3.13

Example 3.6

sine wave is offset 1/6 cycle with respect to time 0. What is its phase in degrees and radians?


Solution

We know that 1 complete cycle is 360°. Therefore, 1/6 cycle is

$$\frac{1}{6} \times 360 = 60^\circ = 60 \times \frac{2\pi}{360} \text{ rad} = \frac{\pi}{3} \text{ rad} = 1.046 \text{ rad}$$


3.14

Figure 3.6 Wavelength and period

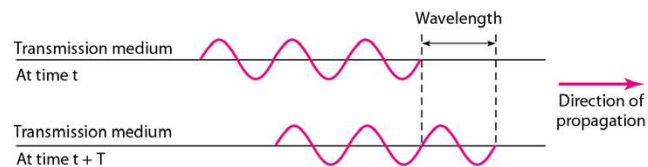

3.15

Figure 3.7 The time-domain and frequency-domain plots of a sine wave

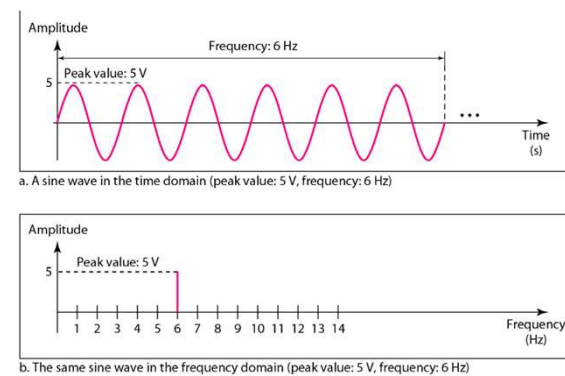

3.16

Note

A complete sine wave in the time domain can be represented by one single spike in the frequency domain.


3.17

Example 3.7

The frequency domain is more compact and useful when we are dealing with more than one sine wave. For example, Figure 3.8 shows three sine waves, each with different amplitude and frequency. All can be represented by three spikes in the frequency domain.

3.18

Figure 3.8 *The time domain and frequency domain of three sine waves*

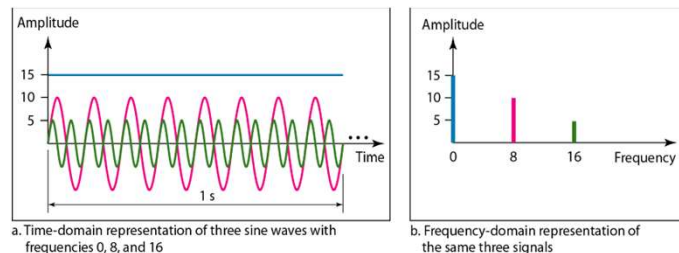

3.19

A single-frequency sine wave is not useful in data communications; we need to send a composite signal, a signal made of many simple sine waves.

According to Fourier analysis, any composite signal is a combination of simple sine waves with different frequencies, amplitudes, and phases. Fourier analysis is discussed in Appendix C.

If the composite signal is periodic, the decomposition gives a series of signals with discrete frequencies; if the composite signal is nonperiodic, the decomposition gives a combination of sine waves with continuous frequencies.


3.20

Example 3.8

Figure 3.9 shows a periodic composite signal with frequency f . This type of signal is not typical of those found in data communications. We can consider it to be three alarm systems, each with a different frequency. The analysis of this signal can give us a good understanding of how to decompose signals.


3.21

Figure 3.9 A composite periodic signal

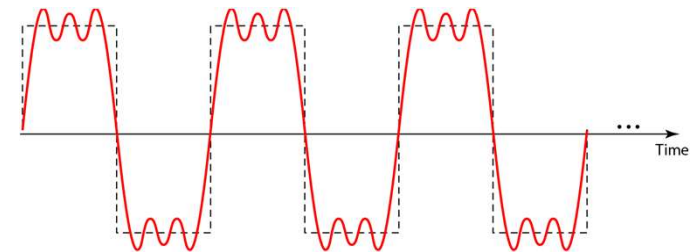


3.22

Figure 3.10 Decomposition of a composite periodic signal in the time and frequency domains

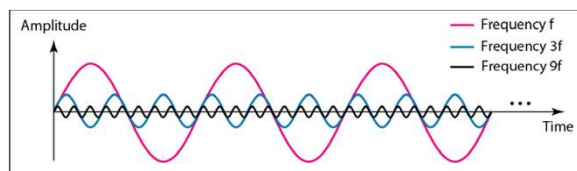

a. Time-domain decomposition of a composite signal

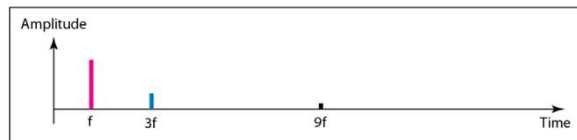

b. Frequency-domain decomposition of the composite signal


3.23

Example 3.9

Figure 3.11 shows a nonperiodic composite signal. It can be the signal created by a microphone or a telephone set when a word or two is pronounced. In this case, the composite signal cannot be periodic, because that implies that we are repeating the same word or words with exactly the same tone.

3.24

Figure 3.11 The time and frequency domains of a nonperiodic signal

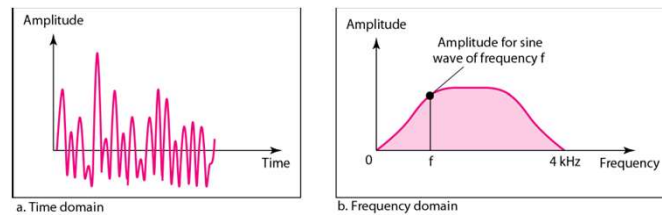


3.25

Note

The bandwidth of a composite signal is the difference between the highest and the lowest frequencies contained in that signal.

3.26

Figure 3.12 The bandwidth of periodic and nonperiodic composite signals

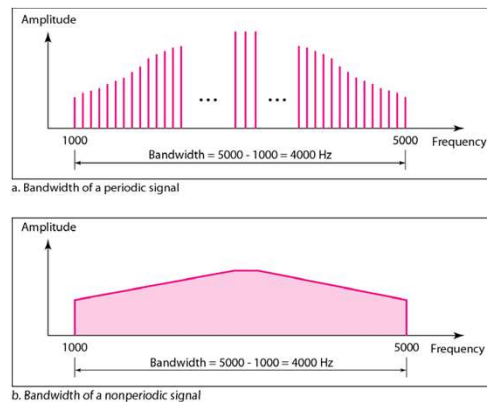

3.27

Example 3.10

If a periodic signal is decomposed into five sine waves with frequencies of 100, 300, 500, 700, and 900 Hz, what is its bandwidth? Draw the spectrum, assuming all components have a maximum amplitude of 10 V.

Solution


Let f_h be the highest frequency, f_l the lowest frequency, and B the bandwidth. Then

$$B = f_h - f_l = 900 - 100 = 800 \text{ Hz}$$

The spectrum has only five spikes, at 100, 300, 500, 700, and 900 Hz (see Figure 3.13).

3.28

Figure 3.13 The bandwidth for Example 3.10

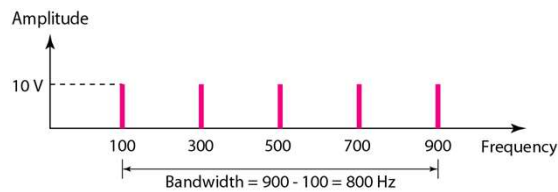

3.29

Example 3.11

A periodic signal has a bandwidth of 20 Hz. The highest frequency is 60 Hz. What is the lowest frequency? Draw the spectrum if the signal contains all frequencies of the same amplitude.

Solution


Let f_h be the highest frequency, f_l the lowest frequency, and B the bandwidth. Then

$$B = f_h - f_l \Rightarrow 20 = 60 - f_l \Rightarrow f_l = 60 - 20 = 40 \text{ Hz}$$

The spectrum contains all integer frequencies. We show this by a series of spikes (see Figure 3.14).

3.30

Figure 3.14 The bandwidth for Example 3.11

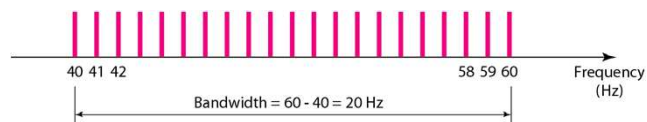

3.31

Example 3.12


nonperiodic composite signal has a bandwidth of 200 kHz, with a middle frequency of 140 kHz and peak amplitude of 20 V. The two extreme frequencies have an amplitude of 0. Draw the frequency domain of the signal

Solution

The lowest frequency must be at 40 kHz and the highest at 240 kHz. Figure 3.15 shows the frequency domain and the bandwidth.

3.32

Figure 3.15 The bandwidth for Example 3.12

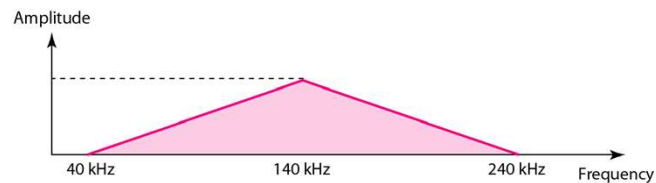

3.33

Example 3.13

An example of a nonperiodic composite signal is the signal propagated by an AM radio station. In the United States, each AM radio station is assigned a 10-kHz bandwidth. The total bandwidth dedicated to AM radio ranges from 530 to 1700 kHz. We will show the rationale behind this 10-kHz bandwidth in Chapter 5.

3.34

Example 3.14

Another example of a nonperiodic composite signal is the signal propagated by an FM radio station. In the United States, each FM radio station is assigned a 200-kHz bandwidth. The total bandwidth dedicated to FM radio ranges from 88 to 108 MHz. We will show the rationale behind this 200-kHz bandwidth in Chapter 5.

3.35

Example 3.15

Another example of a nonperiodic composite signal is the signal received by an old-fashioned analog black-and-white TV. A TV screen is made up of pixels. If we assume a resolution of 525×700 , we have 367,500 pixels per screen. If we scan the screen 30 times per second, this is $367,500 \times 30 = 11,025,000$ pixels per second. The worst-case scenario is alternating black and white pixels. We can send 2 pixels per cycle. Therefore, we need $11,025,000 / 2 = 5,512,500$ cycles per second, or Hz. The bandwidth needed is 5.5125 MHz.

3.36

3-3 DIGITAL SIGNALS

*In addition to being represented by an analog signal, information can also be represented by a **digital signal**.... For example, a 1 can be encoded as a positive voltage and a 0 as zero voltage.... A digital signal can have more than two levels. In this case, we can send more than 1 bit for each level.*

Topics discussed in this section:

Bit Rate


Bit Length

Digital Signal as a Composite Analog Signal


Application Layer

3.37

Figure 3.16 Two digital signals: one with two signal levels and the other with four signal levels

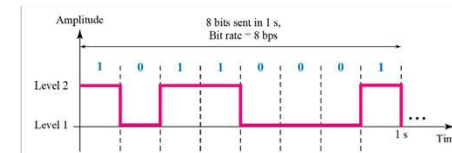

a. A digital signal with two levels

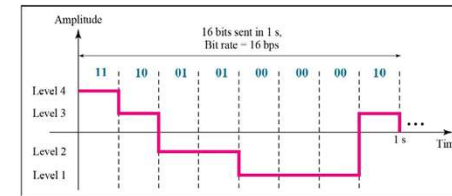

b. A digital signal with four levels

3.38

Example 3.16

digital signal has eight levels. How many bits are needed per level? We calculate the number of bits from the formula

$$\text{Number of bits per level} = \log_2 8 = 3$$

Each signal level is represented by 3 bits.

3.39

Example 3.17

digital signal has nine levels. How many bits are needed per level? We calculate the number of bits by using the formula Each signal level is represented by 3.17 bits. However, this answer is not realistic. The number of bits sent per level needs to be an integer as well as a power of 2. For this example, 4 bits can represent one level

3.40

Example 3.18

Assume we need to download text documents at the rate of 100 pages per second. What is the required bit rate of the channel?

Solution

page is an average of 24 lines with 80 characters in each line. If we assume that one character requires 8 bits, the bit rate is

$$100 \times 24 \times 80 \times 8 = 1,636,000 \text{ bps} = 1.636 \text{ Mbps}$$

3.41

Example 3.19

A digitized voice channel, as we will see in Chapter 4, is made by digitizing a 4-kHz bandwidth analog voice signal. We need to sample the signal at twice the highest frequency (two samples per hertz). We assume that each sample requires 8 bits. What is the required bit rate?

Solution

The bit rate can be calculated as

$$2 \times 4000 \times 8 = 64,000 \text{ bps} = 64 \text{ kbps}$$

3.42

Example 3.20

What is the bit rate for high-definition TV (HDTV)?

Solution


HDTV uses digital signals to broadcast high quality video signals. The HDTV screen is normally a ratio of 16 : 9. There are 1920 by 1080 pixels per screen, and the screen is renewed 30 times per second. Twenty-four bits represents one color pixel.

$$1920 \times 1080 \times 30 \times 24 = 1,492,992,000 \text{ or } 1.5 \text{ Gbps}$$


The TV stations reduce this rate to 20 to 40 Mbps through compression.

3.43

Figure 3.17 The time and frequency domains of periodic and nonperiodic digital signals

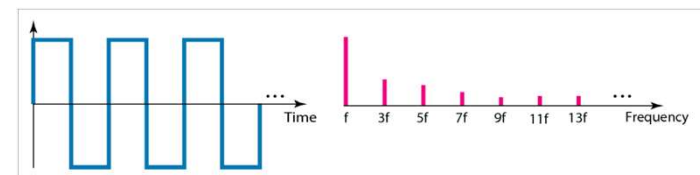


a. Time and frequency domains of periodic digital signal

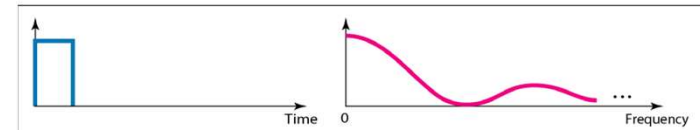

b. Time and frequency domains of nonperiodic digital signal

3.44


Figure 3.18 Baseband transmission

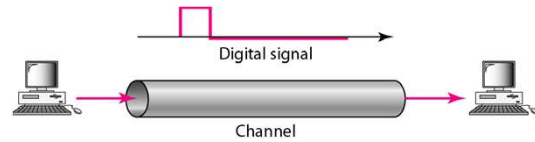

A digital signal is a composite analog signal with an infinite bandwidth.

3.45

Figure 3.19 Bandwidths of two low-pass channels

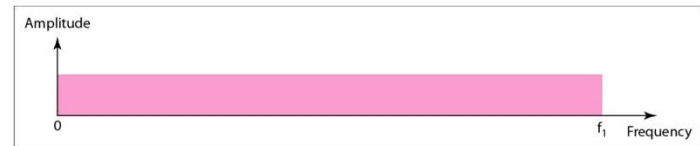


a. Low-pass channel, wide bandwidth



b. Low-pass channel, narrow bandwidth

3.46

Figure 3.20 Baseband transmission using a dedicated medium

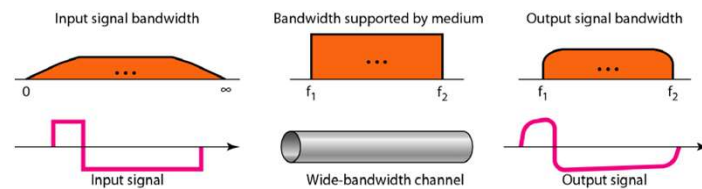

3.47



Note

Baseband transmission of a digital signal that preserves the shape of the digital signal is possible only if we have a low-pass channel with an infinite or very wide bandwidth.


3.48

Example 3.21

An example of a dedicated channel where the entire bandwidth of the medium is used as one single channel is a LAN. Almost every wired LAN today uses a dedicated channel for two stations communicating with each other. In a bus topology LAN with multipoint connections, only two stations can communicate with each other at each moment in time (timesharing); the other stations need to refrain from sending data. In a star topology LAN, the entire channel between each station and the hub is used for communication between these two entities. We study LANs in Chapter 14.


3.49

Figure 3.21 Rough approximation of a digital signal using the first harmonic for worst case

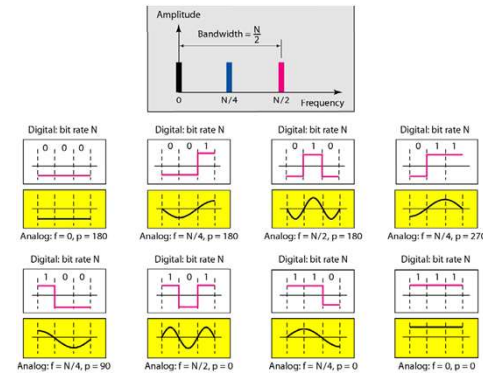

3.50

Figure 3.22 Simulating a digital signal with first three harmonics

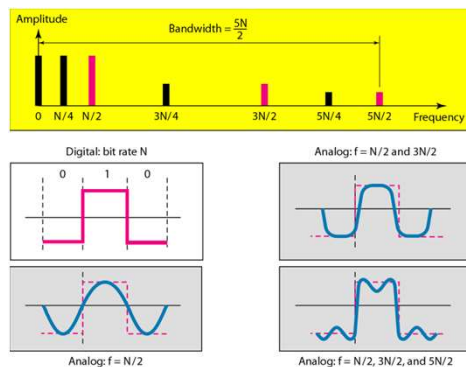

3.51

In baseband transmission, the required bandwidth is proportional to the bit rate;
if we need to send bits faster, we need more bandwidth.
if we need to send bits faster, we need more bandwidth.

3.52

Table 3.2 Bandwidth requirements

Bit Rate	Harmonic 1	Harmonics 1, 3	Harmonics 1, 3, 5
$n = 1$ kbps	$B = 500$ Hz	$B = 1.5$ kHz	$B = 2.5$ kHz
$n = 10$ kbps	$B = 5$ kHz	$B = 15$ kHz	$B = 25$ kHz
$n = 100$ kbps	$B = 50$ kHz	$B = 150$ kHz	$B = 250$ kHz

3.53

**Example 3.22**

What is the required bandwidth of a low-pass channel if we need to send 1 Mbps by using baseband transmission?

Solution

The answer depends on the accuracy desired.

a. *The minimum bandwidth, is $B = \text{bit rate} / 2$, or 500 kHz.*

b. *A better solution is to use the first and the third harmonics with $B = 3 \times 500 \text{ kHz} = 1.5 \text{ MHz}$.*

c. *Still a better solution is to use the first, third, and fifth harmonics with $B = 5 \times 500 \text{ kHz} = 2.5 \text{ MHz}$.*

3.54


**Example 3.22**

We have a low-pass channel with bandwidth 100 kHz. What is the maximum bit rate of this channel?

Solution

The maximum bit rate can be achieved if we use the first harmonic. The bit rate is 2 times the available bandwidth, or 200 kbps.

3.55

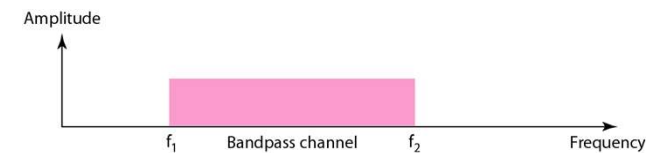Figure 3.23 Bandwidth of a bandpass channel


3.56

Note

If the available channel is a bandpass channel, we cannot send the digital signal directly to the channel; we need to convert the digital signal to an analog signal before transmission.

3.57

Figure 3.24 Modulation of a digital signal for transmission on a bandpass channel

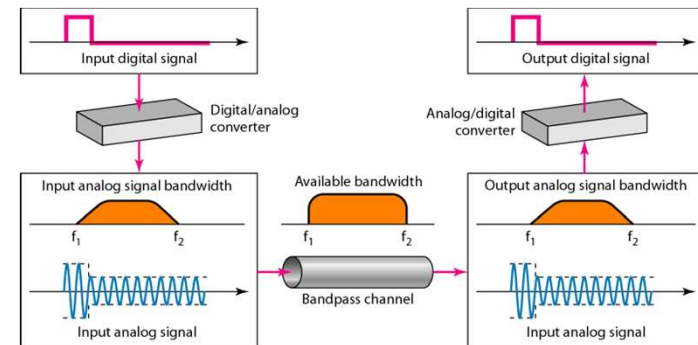

3.58

Example 3.24

An example of broadband transmission using modulation is the sending of computer data through a telephone subscriber line, the line connecting a resident to the central telephone office. These lines are designed to carry voice with a limited bandwidth. The channel is considered a bandpass channel. We convert the digital signal from the computer to an analog signal, and send the analog signal. We can install two converters to change the digital signal to analog and vice versa at the receiving end. The converter, in this case, is called a **modem** which we discuss in detail in Chapter 5.

3.59

Example 3.25

second example is the digital cellular telephone. For better reception, digital cellular phones convert the analog voice signal to a digital signal (see Chapter 16) Although the bandwidth allocated to a company providing digital cellular phone service is very wide, we still cannot send the digital signal without conversion. The reason is that we only have a bandpass channel available between caller and callee. We need to convert the digitized voice to a composite analog signal before sending.

3.60

3-4 TRANSMISSION IMPAIRMENT

Signals travel through transmission media, which are not perfect. The imperfection causes signal impairment. This means that the signal at the beginning of the medium is not the same as the signal at the end of the medium. What is sent is not what is received. Three causes of impairment are **attenuation**, **distortion**, and **noise**.

Topics discussed in this section:


Attenuation

Distortion

Noise


3.61

Figure 3.25 Causes of impairment

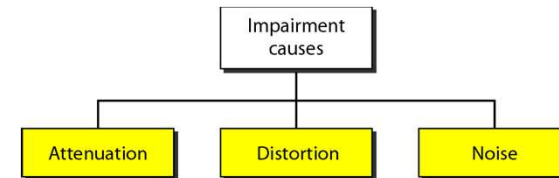


3.62

Figure 3.26 Attenuation

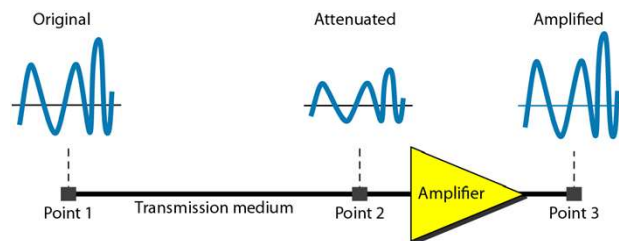


3.63


Figure 3.27 Decibels for Example 3.28

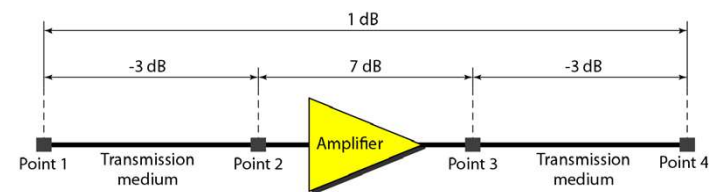


3.64

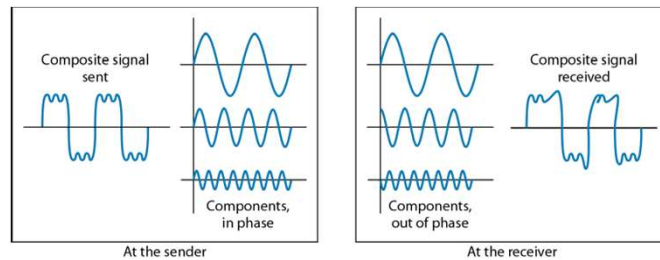Figure 3.28 *Distortion*

3.65

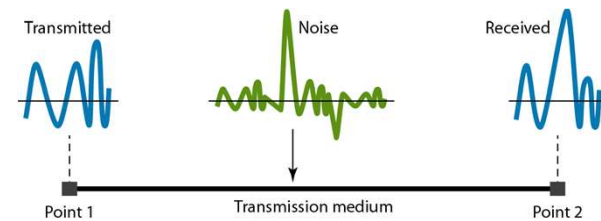Figure 3.29 *Noise*

3.66

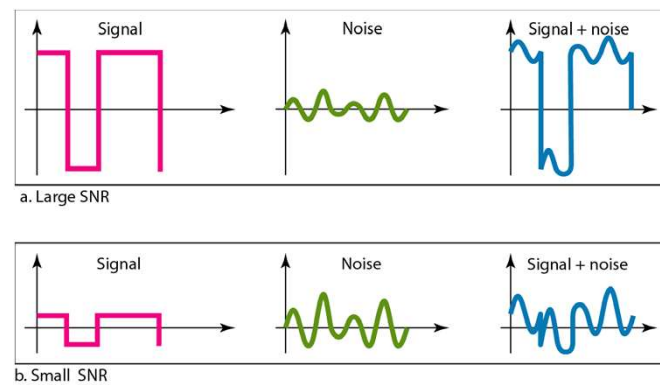Figure 3.30 *Two cases of SNR: a high SNR and a low SNR*

3.67

3-5 DATA RATE LIMITS

A very important consideration in data communications is how fast we can send data, in bits per second, over a channel. Data rate depends on three factors:

- 1. The bandwidth available*
- 2. The level of the signals we use*
- 3. The quality of the channel (the level of noise)*

Increasing the levels of a signal may reduce the reliability of the system.

3.68

Example 3.33


Does the **Nyquist theorem** bit rate agree with the intuitive bit rate described in baseband transmission?

Solution

They match when we have only two levels. We said, in baseband transmission, the bit rate is 2 times the bandwidth if we use only the first harmonic in the worst case. However, the Nyquist formula is more general than what we derived intuitively; it can be applied to baseband transmission and modulation. Also, it can be applied when we have two or more levels of signals.

3.69

Figure 3.31 Filling the link with bits for case 1

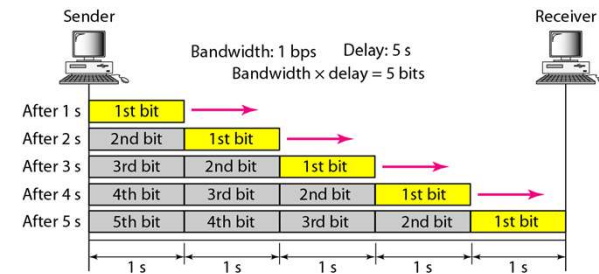


3.70

Example 3.48

We can think about the link between two points as a pipe. The cross section of the pipe represents the bandwidth, and the length of the pipe represents the delay. We can say the volume of the pipe defines the bandwidth-delay product, as shown in Figure 3.33

3.71


Figure 3.32 Filling the link with bits in case 2

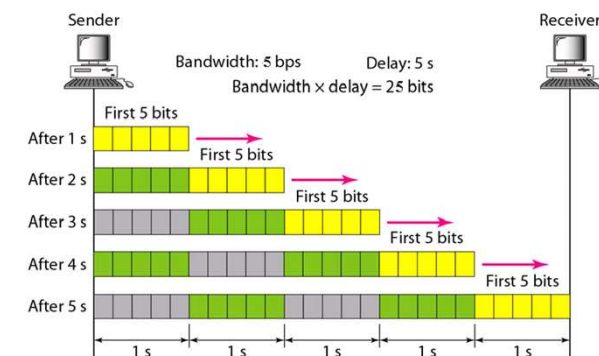

3.72

The bandwidth-delay product defines the number of bits that can fill the link

Figure 3.33 Concept of bandwidth-delay product



3.73

4-1 DIGITAL-TO-DIGITAL CONVERSION


In this section, we see how we can represent digital data by using digital signals. The conversion involves three techniques: **line coding**, **block coding**, and **scrambling**. Line coding is always needed; block coding and scrambling may or may not be needed.

Topics discussed in this section:

Line Coding
Line Coding Schemes
Block Coding
Scrambling


4.2

Figure 4.1 Line coding and decoding

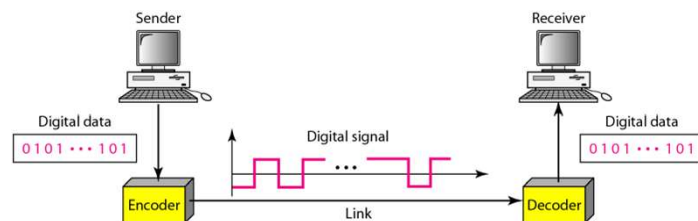

4.3

Figure 4.2 Signal element versus data element

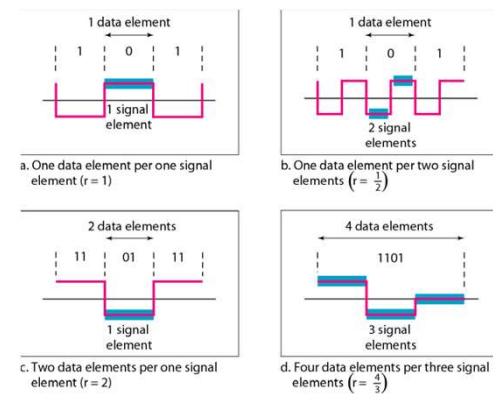


4.4

Note

Although the actual bandwidth of a digital signal is infinite, the effective bandwidth is finite.

4.6

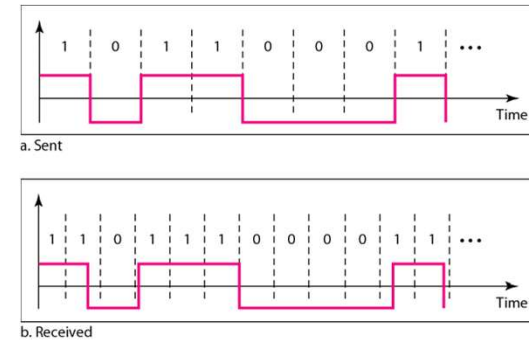Figure 4.3 Effect of lack of synchronization

4.8

Example 4.3

In a digital transmission, the receiver clock is 0.1 percent faster than the sender clock. How many extra bits per second does the receiver receive if the data rate is 1 kbps? How many if the data rate is 1 Mbps?

Solution


At 1 kbps, the receiver receives 1001 bps instead of 1000 bps.

1000 bits sent	1001 bits received	1 extra bps
----------------	--------------------	-------------

At 1 Mbps, the receiver receives 1,001,000 bps instead of 1,000,000 bps.


1,000,000 bits sent	1,001,000 bits received	1000 extra bps
---------------------	-------------------------	----------------

4.9

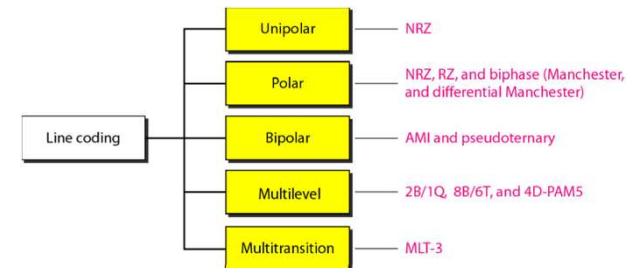Figure 4.4 Line coding schemes


4.10

Figure 4.5 Unipolar NRZ scheme

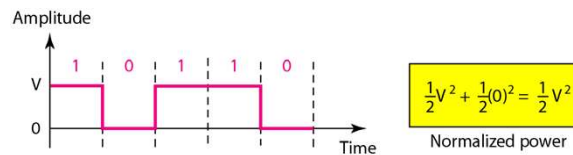

4.11

Figure 4.6 Polar NRZ-L and NRZ-I schemes

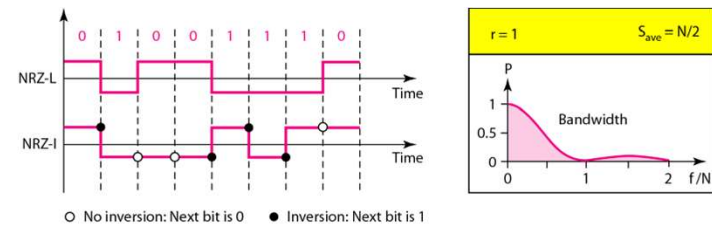

4.12

In NRZ-L the level of the voltage determines the value of the bit.

In NRZ-I the inversion or the lack of inversion determines the value of the bit.

NRZ-L and NRZ-I both have an average signal rate of $N/2$ Bd.

NRZ-L and NRZ-I both have a DC component problem.

4.13


Example 4.4

A system is using NRZ-I to transfer 1-Mbps data. What are the average signal rate and minimum bandwidth?


Solution

The average signal rate is $S = N/2 = 500$ kbaud. The minimum bandwidth for this average baud rate is $B_{min} = S = 500$ kHz.

4.16

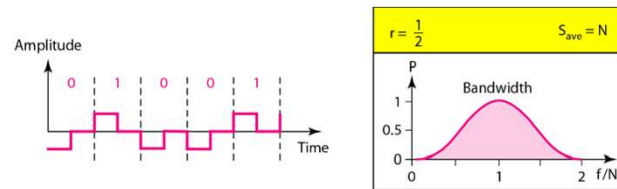Figure 4.7 Polar RZ scheme

4.17

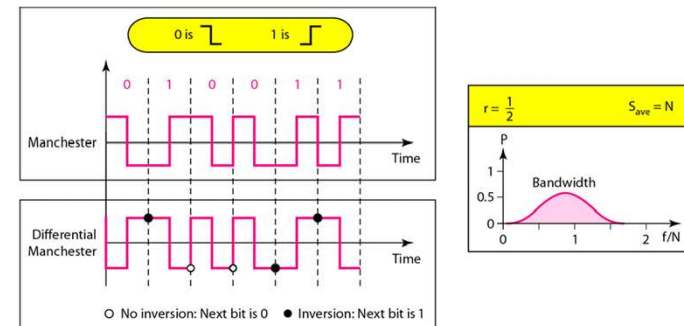Figure 4.8 Polar biphase: Manchester and differential Manchester schemes


4.18

In Manchester and differential Manchester encoding, the transition at the middle of the bit is used for synchronization.

The minimum bandwidth of Manchester and differential Manchester is 2 times that of NRZ.

In bipolar encoding, we use three levels: positive, zero, and negative.

4.19

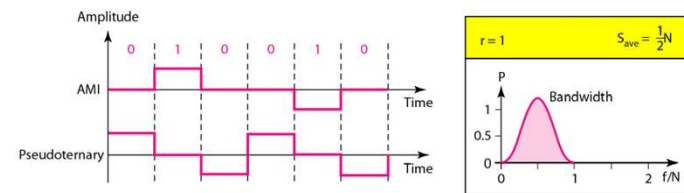Figure 4.9 Bipolar schemes: AMI and pseudoternary


4.22

Note

In $mBnL$ schemes, a pattern of m data elements is encoded as a pattern of n signal elements in which $2^m \leq L^n$.


4.23

Figure 4.10 Multilevel: 2B1Q scheme

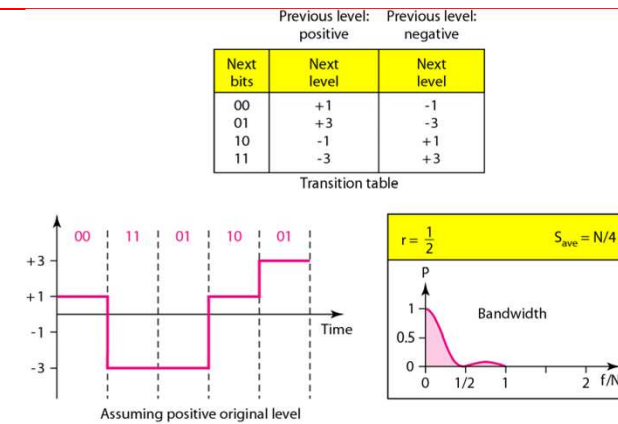


4.24

Figure 4.11 Multilevel: 8B6T scheme

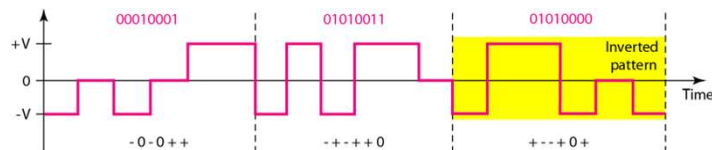


4.25

Figure 4.12 Multilevel: 4D-PAM5 scheme

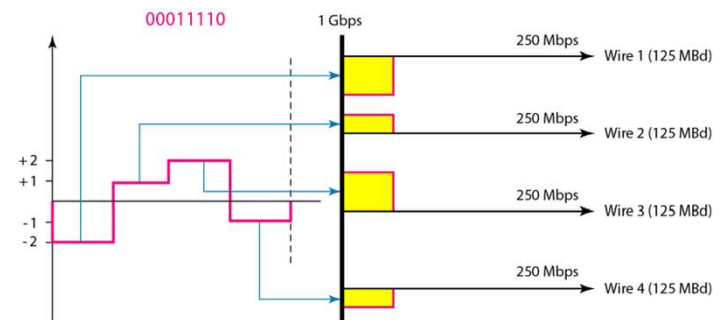

4.26

Figure 4.13 Multitransition: MLT-3 scheme

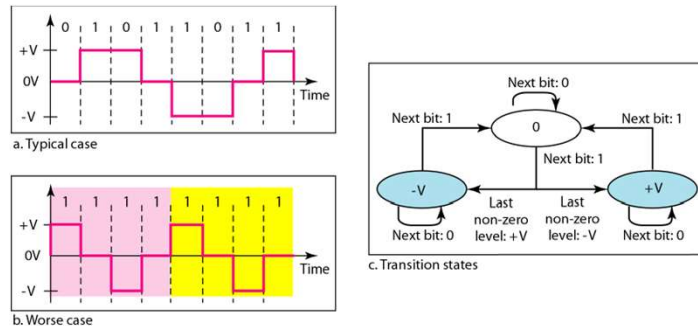

4.27

Table 4.1 Summary of line coding schemes

Category	Scheme	Bandwidth (average)	Characteristics
Unipolar	NRZ	$B = N/2$	Costly, no self-synchronization if long 0s or 1s, DC
Unipolar	NRZ-L	$B = N/2$	No self-synchronization if long 0s or 1s, DC
	NRZ-I	$B = N/2$	No self-synchronization for long 0s, DC
Biphase	Biphase	$B = N$	Self-synchronization, no DC, high bandwidth
Bipolar	AMI	$B = N/2$	No self-synchronization for long 0s, DC
Multilevel	2B1Q	$B = N/4$	No self-synchronization for long same double bits
	8B6T	$B = 3N/4$	Self-synchronization, no DC
	4D-PAM5	$B = N/8$	Self-synchronization, no DC
Multiline	MLT-3	$B = N/3$	No self-synchronization for long 0s


4.28

Note

Block coding is normally referred to as mB/nB coding; it replaces each m -bit group with an n -bit group.


4.29

Figure 4.14 Block coding concept

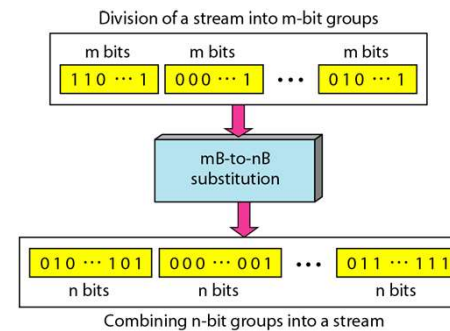

4.30

Figure 4.15 Using block coding 4B/5B with NRZ-I line coding scheme

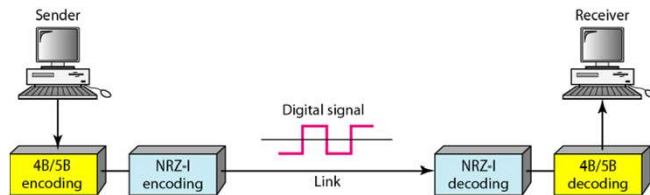


4.31

Table 4.2 4B/5B mapping codes

Data Sequence	Encoded Sequence	Control Sequence	Encoded Sequence
0000	11110	Q (Quiet)	00000
0001	01001	I (Idle)	11111
0010	10100	H (Halt)	00100
0011	10101	J (Start delimiter)	11000
0100	01010	K (Start delimiter)	10001
0101	01011	T (End delimiter)	01101
0110	01110	S (Set)	11001
0111	01111	R (Reset)	00111
1000	10010		
1001	10011		
1010	10110		
1011	10111		
1100	11010		
1101	11011		
1110	11100		
1111	11101		

4.32

Figure 4.16 Substitution in 4B/5B block coding

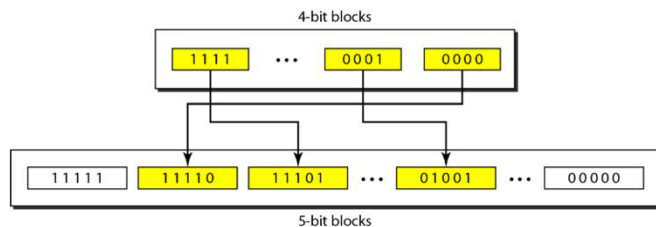

4.33

Example 4.5


We need to send data at a 1-Mbps rate. What is the minimum required bandwidth, using a combination of 4B/5B and NRZ-I or Manchester coding?

Solution

First 4B/5B block coding increases the bit rate to 1.25 Mbps. The minimum bandwidth using NRZ-I is $N/2$ or 625 kHz. The Manchester scheme needs a minimum bandwidth of 1 MHz. The first choice needs a lower bandwidth, but has a DC component problem; the second choice needs a higher bandwidth, but does not have a DC component problem


4.34

Figure 4.17 8B/10B block encoding

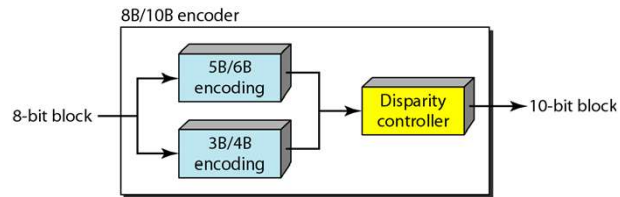


4.35

Figure 4.18 AMI used with scrambling

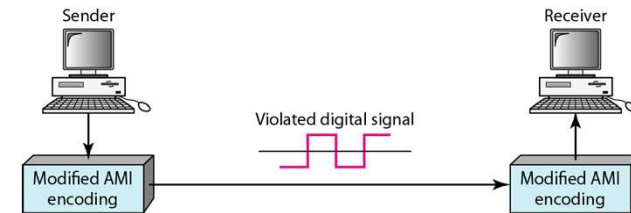

4.36

Figure 4.19 Two cases of B8ZS scrambling technique

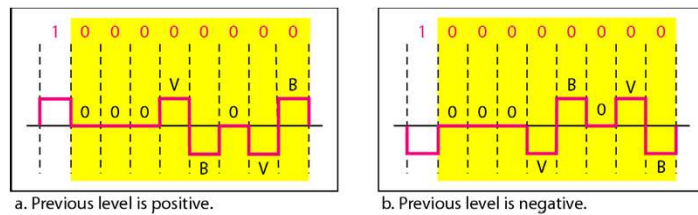


4.37

Note

B8ZS substitutes eight consecutive zeros with 000VB0VB.

4.38

Figure 4.20 Different situations in HDB3 scrambling technique

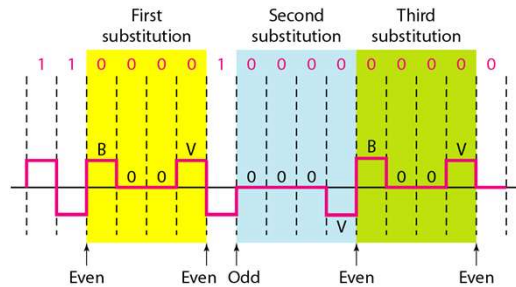

4.39

Note

HDB3 substitutes four consecutive zeros with 000V or B00V depending on the number of nonzero pulses after the last substitution.

4.40

4-2 ANALOG-TO-DIGITAL CONVERSION

*We have seen in Chapter 3 that a digital signal is superior to an analog signal. The tendency today is to change an analog signal to digital data. In this section we describe two techniques, **pulse code modulation** and **delta modulation**.*


Topics discussed in this section:

Pulse Code Modulation (PCM)

Delta Modulation (DM)


4.41

Figure 4.21 Components of PCM encoder

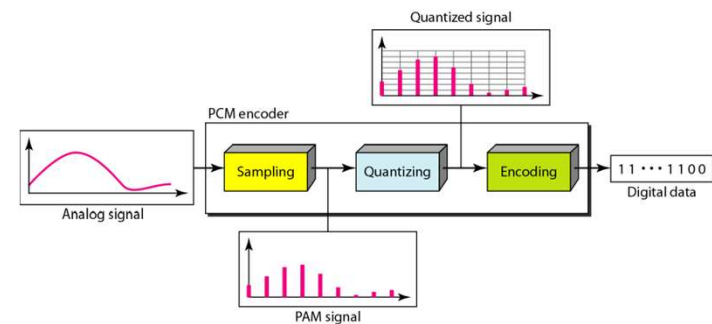

4.42

Figure 4.22 Three different sampling methods for PCM

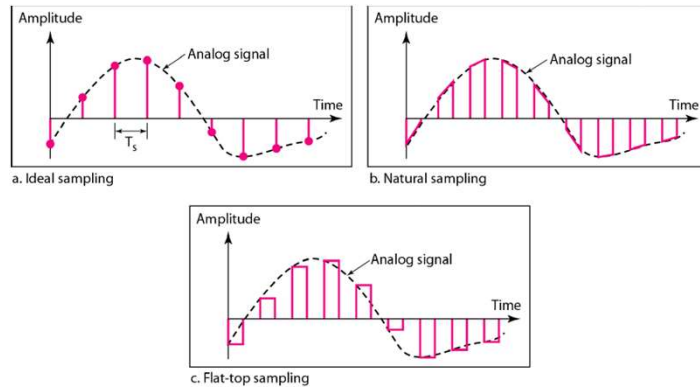


4.43

Note

According to the Nyquist theorem, the sampling rate must be at least 2 times the highest frequency contained in the signal.

4.44

Figure 4.23 Nyquist sampling rate for low-pass and bandpass signals

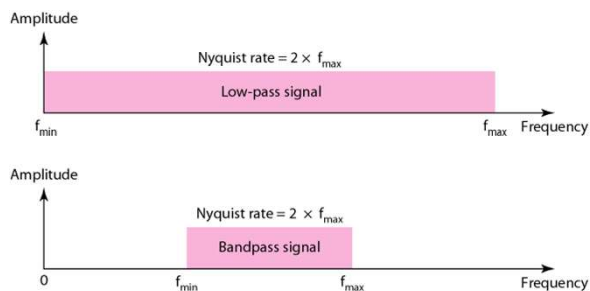

4.45


Example 4.6

For an intuitive example of the Nyquist theorem, let us sample a simple sine wave at three sampling rates: $f_s = 4f$ (2 times the Nyquist rate), $f_s = 2f$ (Nyquist rate), and $f_s = f$ (one-half the Nyquist rate). Figure 4.24 shows the sampling and the subsequent recovery of the signal.

It can be seen that sampling at the Nyquist rate can create a good approximation of the original sine wave (part a). Oversampling in part b can also create the same approximation, but it is redundant and unnecessary. Sampling below the Nyquist rate (part c) does not produce a signal that looks like the original sine wave.

4.46

Figure 4.24 Recovery of a sampled sine wave for different sampling rates

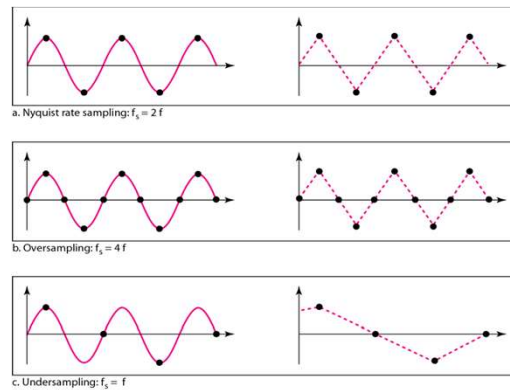


4.47

Example 4.7

Consider the revolution of a hand of a clock. The second hand of a clock has a period of 60 s. According to the Nyquist theorem, we need to sample the hand every 30 s ($T_s = T$ or $f_s = 2f$). In Figure 4.25a, the sample points, in order, are 12, 6, 12, 6, 12, and 6. The receiver of the samples cannot tell if the clock is moving forward or backward. In part b, we sample at double the Nyquist rate (every 15 s). The sample points are 12, 3, 6, 9, and 12. The clock is moving forward. In part c, we sample below the Nyquist rate ($T_s = T$ or $f_s = f$). The sample points are 12, 9, 6, 3, and 12. Although the clock is moving forward, the receiver thinks that the clock is moving backward.

4.48

Figure 4.25 Sampling of a clock with only one hand

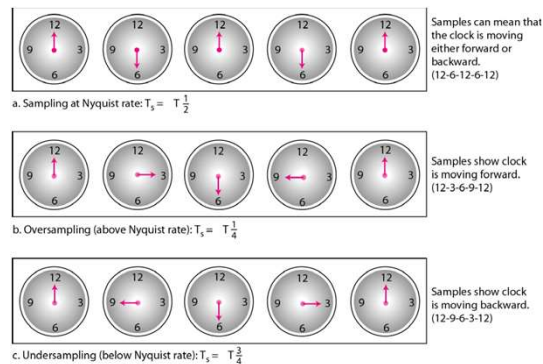

4.49

Example 4.8

An example related to Example 4.7 is the seemingly backward rotation of the wheels of a forward-moving car in a movie. This can be explained by under-sampling. A movie is filmed at 24 frames per second. If a wheel is rotating more than 12 times per second, the under-sampling creates the impression of a backward rotation.

Telephone companies digitize voice by assuming a maximum frequency of 4000 Hz. The sampling rate therefore is 8000 samples per second.

4.50

Example 4.10

A complex low-pass signal has a bandwidth of 200 kHz. What is the minimum sampling rate for this signal?

Solution

The bandwidth of a low-pass signal is between 0 and f , where f is the maximum frequency in the signal. Therefore, we can sample this signal at 2 times the highest frequency (200 kHz). The sampling rate is therefore 400,000 samples per second.

4.52


Example 4.11

A complex bandpass signal has a bandwidth of 200 kHz. What is the minimum sampling rate for this signal?

Solution

We cannot find the minimum sampling rate in this case because we do not know where the bandwidth starts or ends. We do not know the maximum frequency in the signal.

4.53

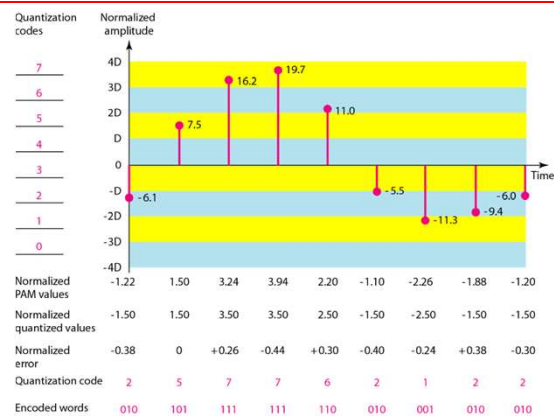Figure 4.26 Quantization and encoding of a sampled signal

4.54

Example 4.12

What is the SNR_{dB} in the example of Figure 4.26?

Solution

We can use the formula to find the quantization. We have eight levels and 3 bits per sample, so

$$SNR_{dB} = 6.02(3) + 1.76 = 19.82 \text{ dB}$$

Increasing the number of levels increases the SNR.

4.55

Example 4.13

A telephone subscriber line must have an SNR_{dB} above 40. What is the minimum number of bits per sample?

Solution

We can calculate the number of bits as

$$SNR_{dB} = 6.02n_b + 1.76 = 40 \rightarrow n = 6.35$$

Telephone companies usually assign 7 or 8 bits per sample.

4.56

Example 4.14

We want to digitize the human voice. What is the bit rate, assuming 8 bits per sample?


Solution

The human voice normally contains frequencies from 0 to 4000 Hz. So the sampling rate and bit rate are calculated as follows:

$$\begin{aligned} \text{Sampling rate} &= 4000 \times 2 = 8000 \text{ samples/s} \\ \text{Bit rate} &= 8000 \times 8 = 64,000 \text{ bps} = 64 \text{ kbps} \end{aligned}$$

4.57

Figure 4.27 Components of a PCM decoder

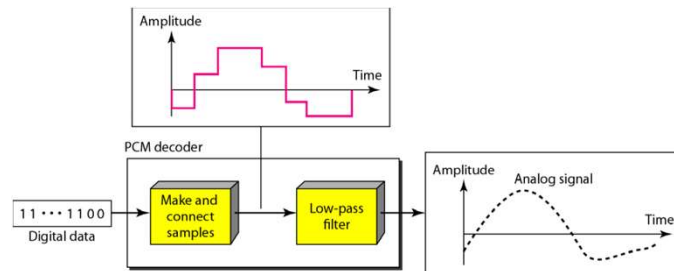


4.58

Example 4.15

We have a low-pass analog signal of 4 kHz. If we send the analog signal, we need a channel with a minimum bandwidth of 4 kHz. If we digitize the signal and send 8 bits per sample, we need a channel with a minimum bandwidth of $8 \times 4 \text{ kHz} = 32 \text{ kHz}$.


4.59

Figure 4.28 The process of delta modulation

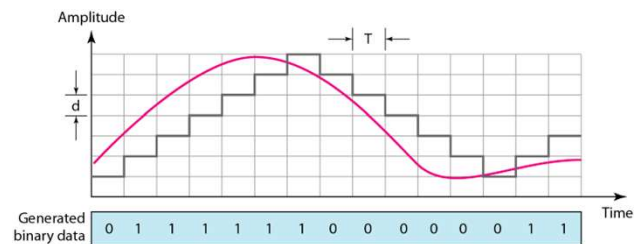


4.60

Figure 4.29 Delta modulation components

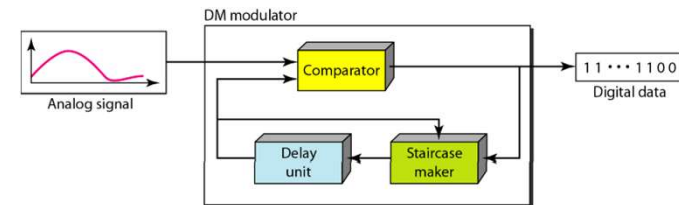

4.61

Figure 4.30 Delta demodulation components

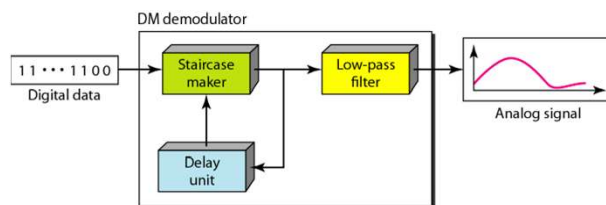

4.62

4-3 TRANSMISSION MODES

The transmission of binary data across a link can be accomplished in either parallel or serial mode. In parallel mode, multiple bits are sent with each clock tick. In serial mode, 1 bit is sent with each clock tick. While there is only one way to send parallel data, there are three subclasses of serial transmission: asynchronous, synchronous, and isochronous..


Topics discussed in this section:

Parallel Transmission

Serial Transmission


4.63

Figure 4.31 Data transmission and modes

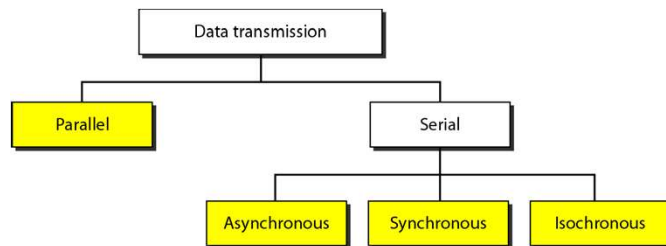


4.64

Figure 4.32 Parallel transmission

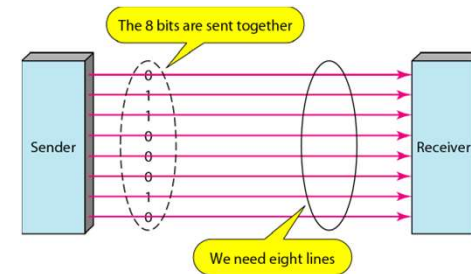

4.65

Figure 4.33 Serial transmission

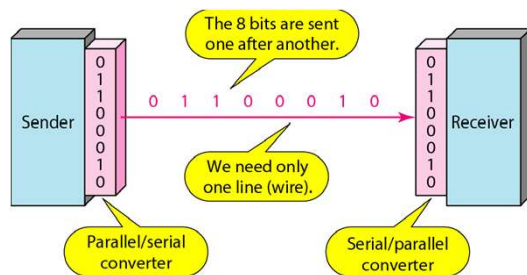


4.66

In asynchronous transmission, we send 1 start bit (0) at the beginning and 1 or more stop bits (1s) at the end of each byte. There may be a gap between each byte.

Asynchronous here means “asynchronous at the byte level,” but the bits are still synchronized; their durations are the same.

4.67


Figure 4.34 Asynchronous transmission

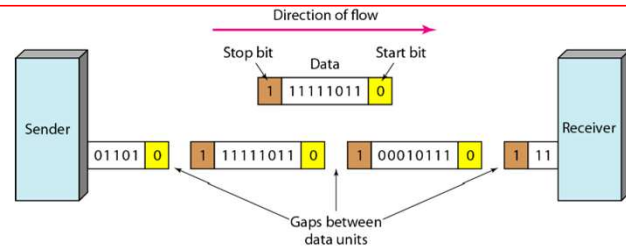

In synchronous transmission, we send bits one after another without start or stop bits or gaps. It is the responsibility of the receiver to group the bits.

4.69

Figure 4.35 Synchronous transmission

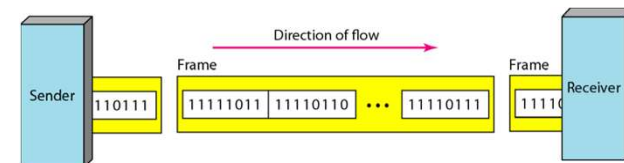

4.71

5-1 DIGITAL-TO-ANALOG CONVERSION

Digital-to-analog conversion is the process of changing one of the characteristics of an analog signal based on the information in digital data.

Topics discussed in this section:

Aspects of Digital-to-Analog Conversion

Amplitude Shift Keying


Frequency Shift Keying

Phase Shift Keying

Quadrature Amplitude Modulation


5.2

Figure 5.1 Digital-to-analog conversion

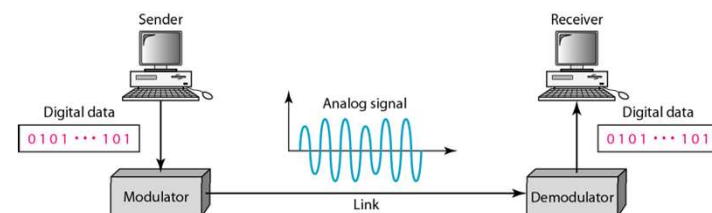

5.3

Figure 5.2 Types of digital-to-analog conversion

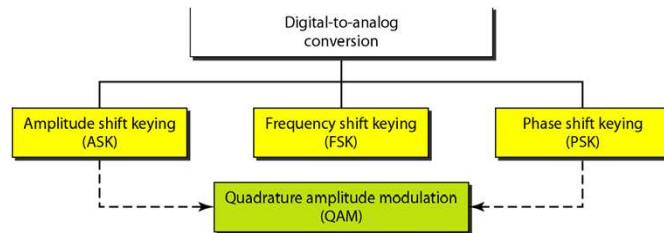

5.4

Note

**Bit rate is the number of bits per second.
Baud rate is the number of signal elements per second.**

In the analog transmission of digital data, the baud rate is less than or equal to the bit rate.

5.5

Example 5.1

An analog signal carries 4 bits per signal element. If 1000 signal elements are sent per second, find the bit rate.

Solution

In this case, $r = 4$, $S = 1000$, and N is unknown. We can find the value of N from

$$S = N \times \frac{1}{r} \quad \text{or} \quad N = S \times r = 1000 \times 4 = 4000 \text{ bps}$$

5.6

Example 5.2

An analog signal has a bit rate of 8000 bps and a baud rate of 1000 baud. How many data elements are carried by each signal element? How many signal elements do we need?

Solution


In this example, $S = 1000$, $N = 8000$, and r and L are unknown. We find first the value of r and then the value of L .

$$S = N \times \frac{1}{r} \quad \rightarrow \quad r = \frac{N}{S} = \frac{8000}{1000} = 8 \text{ bits/baud}$$

$$r = \log_2 L \quad \rightarrow \quad L = 2^r = 2^8 = 256$$


5.7

Figure 5.3 Binary amplitude shift keying

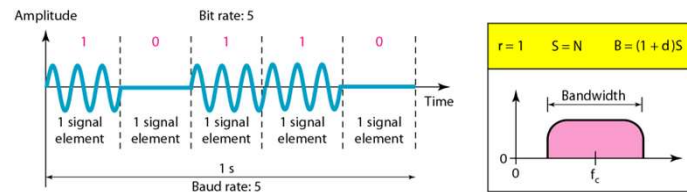

5.8

Figure 5.4 Implementation of binary ASK

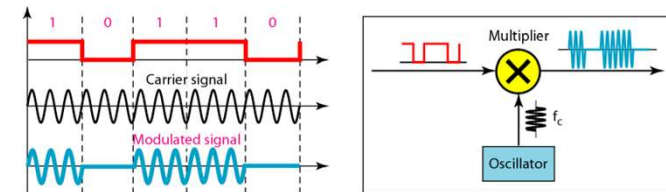

5.9

Example 5.3

We have an available bandwidth of 100 kHz which spans from 200 to 300 kHz. What are the carrier frequency and the bit rate if we modulated our data by using ASK with $d = 1$?

Solution

The middle of the bandwidth is located at 250 kHz. This means that our carrier frequency can be at $f_c = 250$ kHz. We can use the formula for bandwidth to find the bit rate (with $d = 1$ and $r = 1$).

$$B = (1 + d) \times S = 2 \times N \times \frac{1}{r} = 2 \times N = 100 \text{ kHz} \rightarrow N = 50 \text{ kbps}$$

5.10

Example 5.4

In data communications, we normally use full-duplex links with communication in both directions. We need to divide the bandwidth into two with two carrier frequencies, as shown in Figure 5.5. The figure shows the positions of two carrier frequencies and the bandwidths. The available bandwidth for each direction is now 50 kHz, which leaves us with a data rate of 25 kbps in each direction.

5.11

Example 5.6


We need to send data 3 bits at a time at a bit rate of 3 Mbps. The carrier frequency is 10 MHz. Calculate the number of levels (different frequencies), the baud rate, and the bandwidth.

Solution

We can have $L = 2^3 = 8$. The baud rate is $S = 3 \text{ MHz}/3 = 1000 \text{ Mbaud}$. This means that the carrier frequencies must be 1 MHz apart ($2\Delta f = 1 \text{ MHz}$). The bandwidth is $B = 8 \times 1000 = 8000$. Figure 5.8 shows the allocation of frequencies and bandwidth.


5.16

Figure 5.8 Bandwidth of MFSK used in Example 5.6

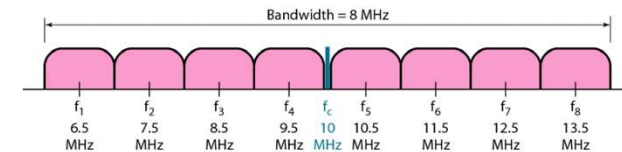


5.17

Figure 5.9 Binary phase shift keying

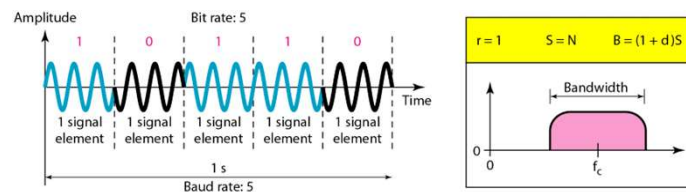


5.18

Figure 5.10 Implementation of BASK

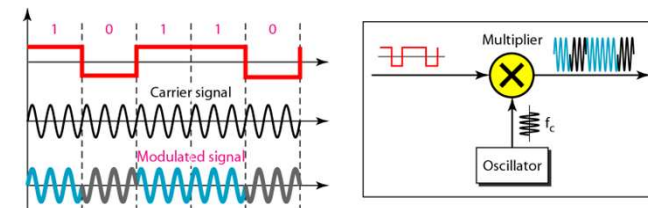

5.19

Figure 5.11 QPSK and its implementation

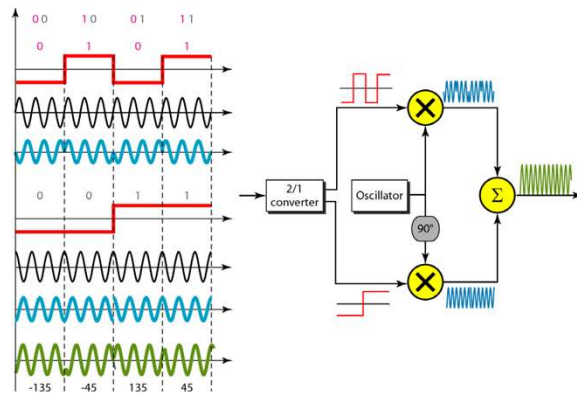

5.20

Example 5.7


Find the bandwidth for a signal transmitting at 12 Mbps for QPSK. The value of $d = 0$.

Solution

For QPSK, 2 bits is carried by one signal element. This means that $r = 2$. So the signal rate (baud rate) is $S = N \times (1/r) = 6 \text{ Mbaud}$. With a value of $d = 0$, we have $B = S = 6 \text{ MHz}$.

5.21

Figure 5.12 Concept of a constellation diagram

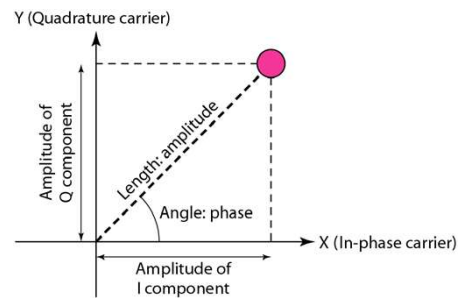

5.22

Example 5.8


Show the constellation diagrams for an ASK (OOK), BPSK, and QPSK signals.

Solution

Figure 5.13 shows the three constellation diagrams.

5.23

Figure 5.13 Three constellation diagrams

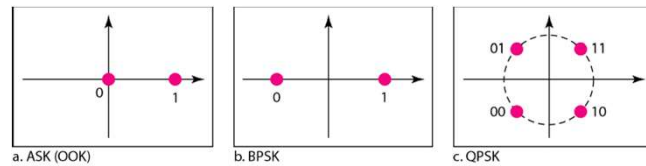

5.24




Note

Quadrature amplitude modulation is a combination of ASK and PSK.

5.25

Figure 5.14 Constellation diagrams for some QAMs

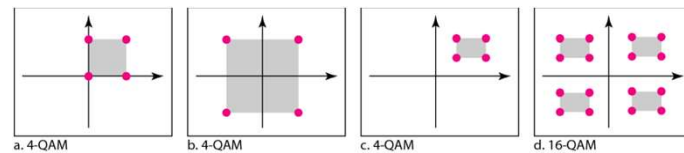

5.26

5-2 ANALOG AND DIGITAL


Analog-to-analog conversion is the representation of analog information by an analog signal. One may ask why we need to modulate an analog signal; it is already analog. Modulation is needed if the medium is bandpass in nature or if only a bandpass channel is available to us.

Topics discussed in this section:

Amplitude Modulation
Frequency Modulation
Phase Modulation


5.27

Figure 5.15 Types of analog-to-analog modulation

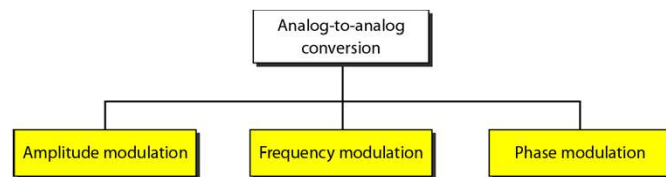

5.28

Figure 5.16 Amplitude modulation

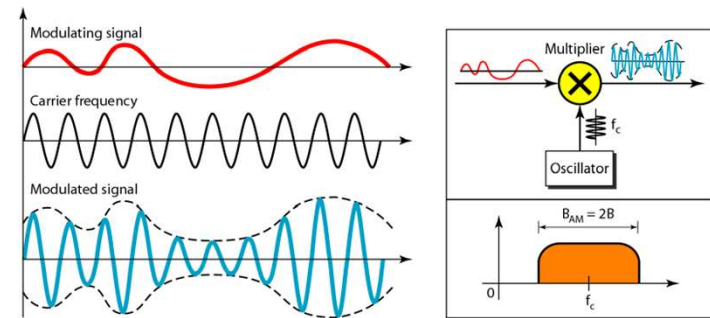

5.29

Note

The total bandwidth required for AM can be determined from the bandwidth of the audio signal: $B_{AM} = 2B$.

5.30

Figure 5.17 AM band allocation




5.31

Note

The total bandwidth required for FM can be determined from the bandwidth of the audio signal: $B_{FM} = 2(1 + \beta)B$.

5.32

Figure 5.18 Frequency modulation

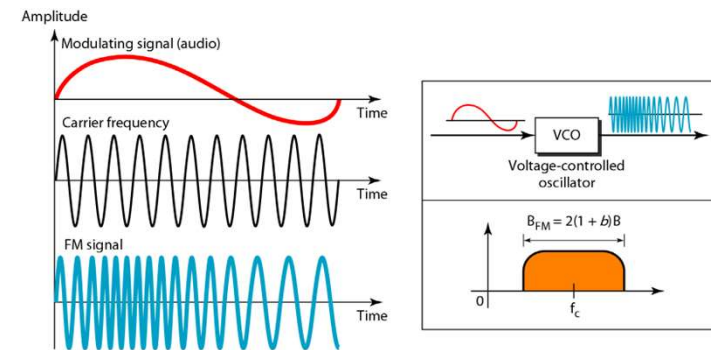


5.33

Figure 5.19 FM band allocation



5.34

Figure 5.20 Phase modulation

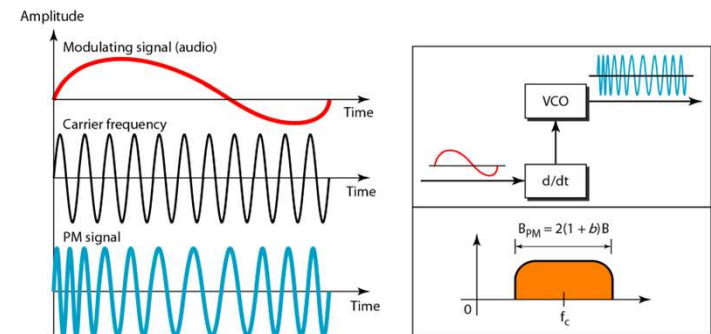

5.35

Note

The total bandwidth required for PM can be determined from the bandwidth and maximum amplitude of the modulating signal:

$$B_{PM} = 2(1 + \beta)B.$$

5.36

Note

Bandwidth utilization is the wise use of available bandwidth to achieve specific goals.

Efficiency can be achieved by multiplexing; privacy and anti-jamming can be achieved by spreading.

6.2

6-1 MULTIPLEXING

Whenever the bandwidth of a medium linking two devices is greater than the bandwidth needs of the devices, the link can be shared. Multiplexing is the set of techniques that allows the simultaneous transmission of multiple signals across a single data link. As data and telecommunications use increases, so does traffic.

Topics discussed in this section:

Frequency-Division Multiplexing


Wavelength-Division Multiplexing

Synchronous Time-Division Multiplexing

Statistical Time-Division Multiplexing


6.3

Figure 6.1 Dividing a link into channels

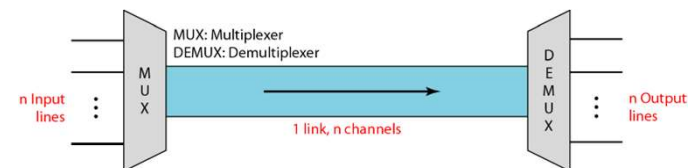


6.4

Figure 6.2 Categories of multiplexing

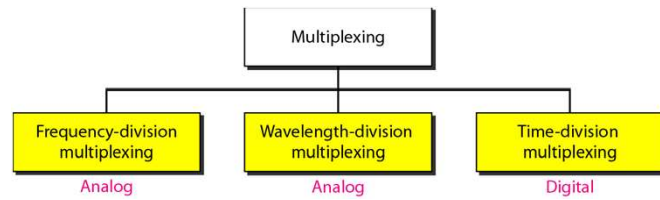

6.5


Figure 6.3 Frequency-division multiplexing

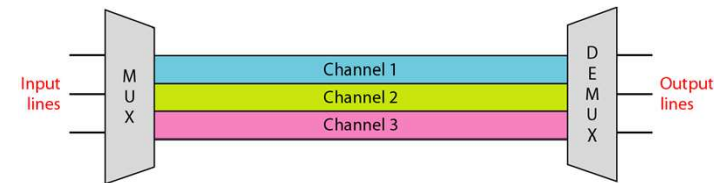

FDM is an analog multiplexing technique that combines analog signals.


6.6

Figure 6.4 FDM process

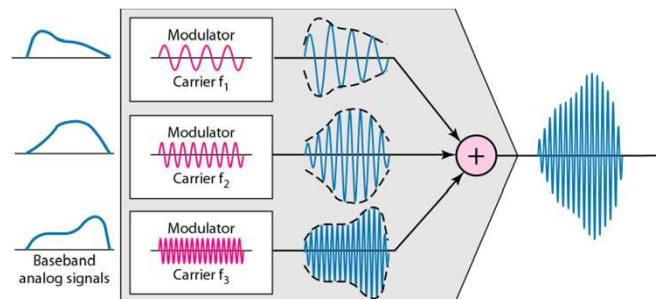

6.8

Figure 6.5 FDM demultiplexing example

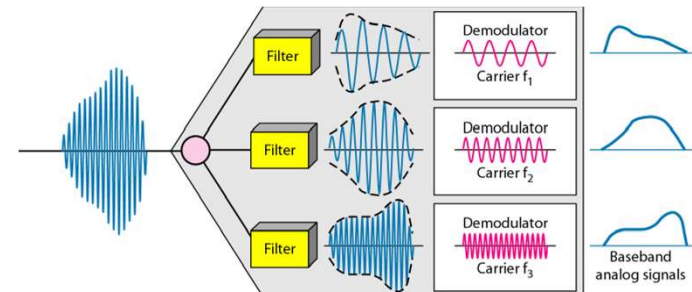

6.9

Example 6.1


Assume that a voice channel occupies a bandwidth of 4 kHz. We need to combine three voice channels into a link with a bandwidth of 12 kHz, from 20 to 32 kHz. Show the configuration, using the frequency domain. Assume there are no guard bands.

Solution

We shift (modulate) each of the three voice channels to a different bandwidth, as shown in Figure 6.6. We use the 20- to 24-kHz bandwidth for the first channel, the 24- to 28-kHz bandwidth for the second channel, and the 28- to 32-kHz bandwidth for the third one. Then we combine them as shown in Figure 6.6.

6.10

Figure 6.6 Example 6.1

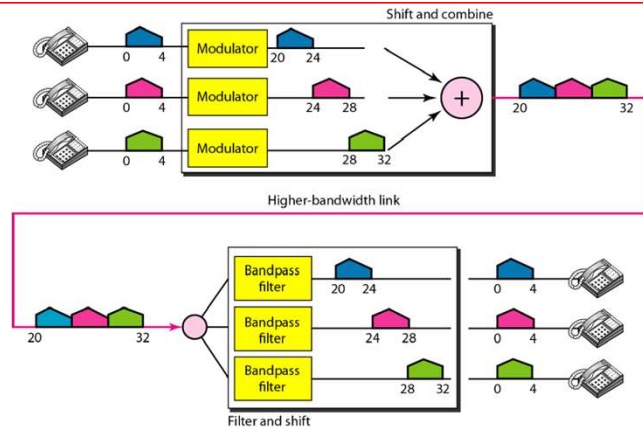

6.11

Example 6.2

Five channels, each with a 100-kHz bandwidth, are to be multiplexed together. What is the minimum bandwidth of the link if there is a need for a guard band of 10 kHz between the channels to prevent interference?

Solution


For five channels, we need at least four guard bands. This means that the required bandwidth is at least

$$5 \times 100 + 4 \times 10 = 540 \text{ kHz},$$

as shown in Figure 6.7.

6.12

Figure 6.7 Example 6.2

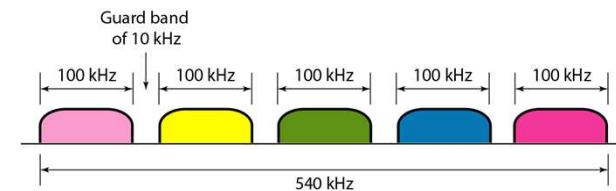

6.13

Example 6.3


Four data channels (digital), each transmitting at 1 Mbps, use a satellite channel of 1 MHz. Design an appropriate configuration, using FDM

Solution

The satellite channel is analog. We divide it into four channels, each channel having a 250-kHz bandwidth. Each digital channel of 1 Mbps is modulated such that each 4 bits is modulated to 1 Hz. One solution is 16-QAM modulation. Figure 6.8 shows one possible configuration.


6.14

Figure 6.8 Example 6.3

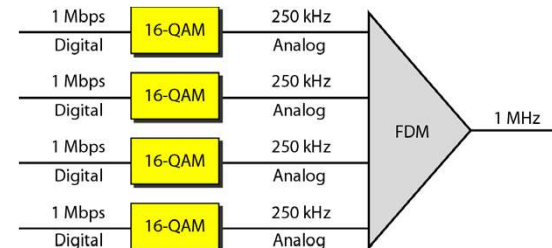

6.15

Figure 6.9 Analog hierarchy

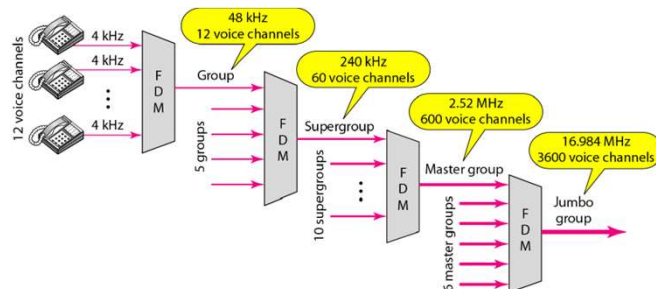

6.16

Example 6.4


The Advanced Mobile Phone System (AMPS) uses two bands. The first band of 824 to 849 MHz is used for sending, and 869 to 894 MHz is used for receiving. Each user has a bandwidth of 30 kHz in each direction. How many people can use their cellular phones simultaneously?

Solution

Each band is 25 MHz. If we divide 25 MHz by 30 kHz, we get 833.33. In reality, the band is divided into 832 channels. Of these, 42 channels are used for control, which means only 790 channels are available for cellular phone users.

6.17

Figure 6.10 Wavelength-division multiplexing

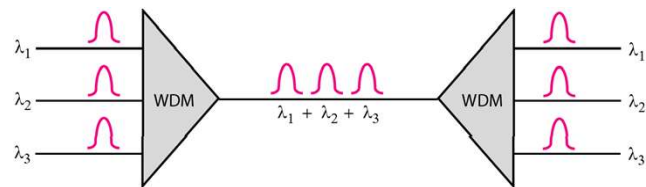

6.18




Note

WDM is an analog multiplexing technique to combine optical signals.


6.19

Figure 6.11 Prisms in wavelength-division multiplexing and demultiplexing

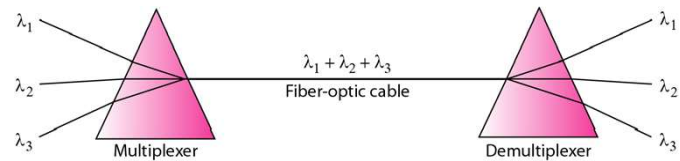

6.20


Figure 6.12 TDM

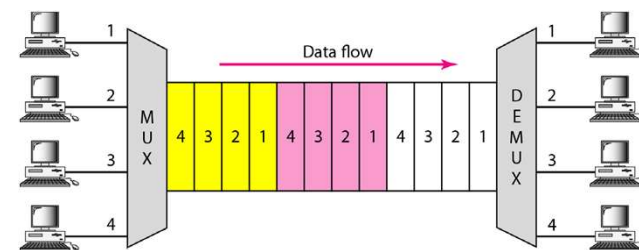

TDM is a digital multiplexing technique for combining several low-rate channels into one high-rate one.

6.21

Figure 6.13 Synchronous time-division multiplexing

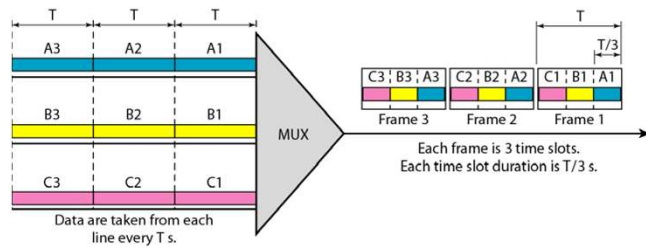

6.23

Note

In synchronous TDM, the data rate of the link is n times faster, and the unit duration is n times shorter.

6.24

Example 6.5

In Figure 6.13, the data rate for each input connection is 3 kbps. If 1 bit at a time is multiplexed (a unit is 1 bit), what is the duration of (a) each input slot, (b) each output slot, and (c) each frame?

Solution

We can answer the questions as follows:

- a. The data rate of each input connection is 1 kbps. This means that the bit duration is $1/1000$ s or 1 ms. The duration of the input time slot is 1 ms (same as bit duration).

6.25

Example 6.5 (continued)

- b. The duration of each output time slot is one-third of the input time slot. This means that the duration of the output time slot is $1/3$ ms.
- c. Each frame carries three output time slots. So the duration of a frame is $3 \times 1/3$ ms, or 1 ms. The duration of a frame is the same as the duration of an input unit.

6.26

Example 6.6

Figure 6.14 shows synchronous TDM with a data stream for each input and one data stream for the output. The unit of data is 1 bit. Find (a) the input bit duration, (b) the output bit duration, (c) the output bit rate, and (d) the output frame rate.

Solution

We can answer the questions as follows:

- a. The input bit duration is the inverse of the bit rate:
 $1/1 \text{ Mbps} = 1 \mu\text{s}$.
- b. The output bit duration is one-fourth of the input bit duration, or $\frac{1}{4} \mu\text{s}$.


6.27

Example 6.6 (continued)

- c. The output bit rate is the inverse of the output bit duration or $1/(4\mu\text{s})$ or 4 Mbps. This can also be deduced from the fact that the output rate is 4 times as fast as any input rate; so the output rate = $4 \times 1 \text{ Mbps} = 4 \text{ Mbps}$.
- d. The frame rate is always the same as any input rate. So the frame rate is 1,000,000 frames per second. Because we are sending 4 bits in each frame, we can verify the result of the previous question by multiplying the frame rate by the number of bits per frame.

6.28

Figure 6.14 Example 6.6

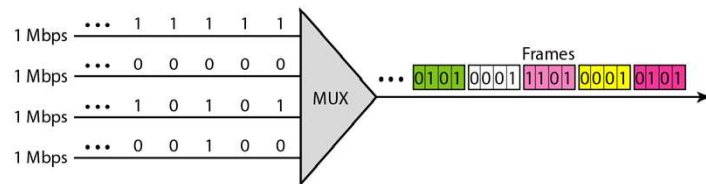

6.29

Example 6.7

Four 1-kbps connections are multiplexed together. A unit is 1 bit. Find (a) the duration of 1 bit before multiplexing, (b) the transmission rate of the link, (c) the duration of a time slot, and (d) the duration of a frame.

Solution

We can answer the questions as follows:

- a. The duration of 1 bit before multiplexing is $1 / 1 \text{ kbps}$, or 0.001 s (1 ms).
- b. The rate of the link is 4 times the rate of a connection, or 4 kbps.


6.30

Example 6.7 (continued)

- c. The duration of each time slot is one-fourth of the duration of each bit before multiplexing, or $1/4$ ms or $250 \mu\text{s}$. Note that we can also calculate this from the data rate of the link, 4 kbps. The bit duration is the inverse of the data rate, or $1/4$ kbps or $250 \mu\text{s}$.
- d. The duration of a frame is always the same as the duration of a unit before multiplexing, or 1 ms. We can also calculate this in another way. Each frame in this case has four time slots. So the duration of a frame is 4 times $250 \mu\text{s}$, or 1 ms.

6.31

Figure 6.15 Interleaving

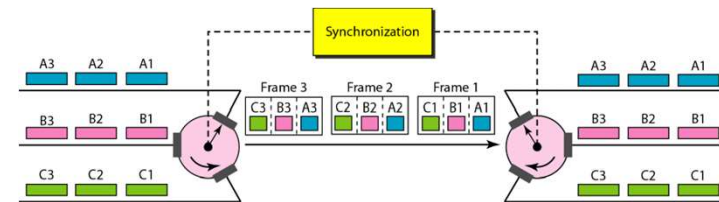

6.32

Example 6.8


Four channels are multiplexed using TDM. If each channel sends 100 bytes/s and we multiplex 1 byte per channel, show the frame traveling on the link, the size of the frame, the duration of a frame, the frame rate, and the bit rate for the link.

Solution

The multiplexer is shown in Figure 6.16. Each frame carries 1 byte from each channel; the size of each frame, therefore, is 4 bytes, or 32 bits. Because each channel is sending 100 bytes/s and a frame carries 1 byte from each channel, the frame rate must be 100 frames per second. The bit rate is 100×32 , or 3200 bps.

6.33

Figure 6.16 Example 6.8

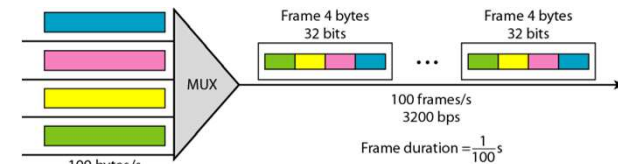

6.34

Example 6.9


A multiplexer combines four 100-kbps channels using a time slot of 2 bits. Show the output with four arbitrary inputs. What is the frame rate? What is the frame duration? What is the bit rate? What is the bit duration?

Solution

Figure 6.17 shows the output for four arbitrary inputs. The link carries 50,000 frames per second. The frame duration is therefore $1/50,000$ s or $20 \mu\text{s}$. The frame rate is 50,000 frames per second, and each frame carries 8 bits; the bit rate is $50,000 \times 8 = 400,000$ bits or 400 kbps. The bit duration is $1/400,000$ s, or $2.5 \mu\text{s}$.


6.35

Figure 6.17 Example 6.9

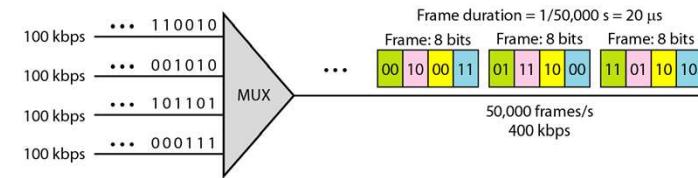


6.36

Figure 6.18 Empty slots

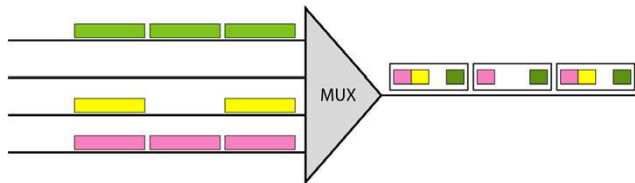


6.37

Figure 6.19 Multilevel multiplexing

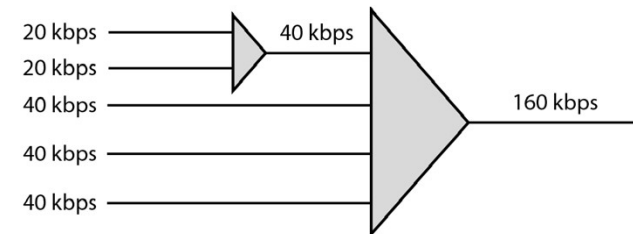


6.38

Figure 6.20 Multiple-slot multiplexing

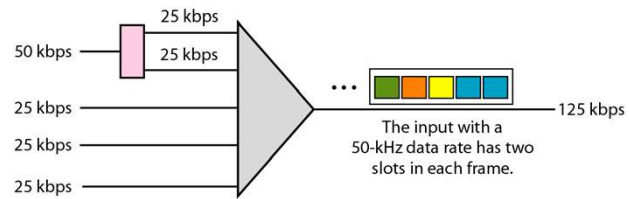


6.39

Figure 6.21 Pulse stuffing

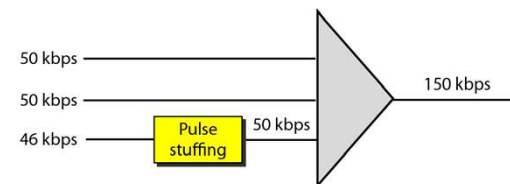

6.40

Figure 6.22 Framing bits

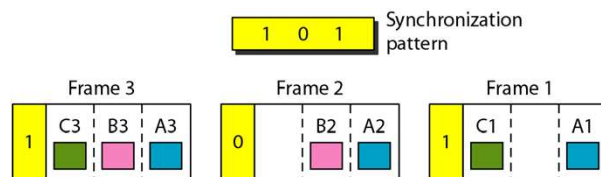

6.41

Example 6.10

We have four sources, each creating 250 characters per second. If the interleaved unit is a character and 1 synchronizing bit is added to each frame, find (a) the data rate of each source, (b) the duration of each character in each source, (c) the frame rate, (d) the duration of each frame, (e) the number of bits in each frame, and (f) the data rate of the link.

Solution

We can answer the questions as follows:

- a. The data rate of each source is $250 \times 8 = 2000 \text{ bps} = 2 \text{ kbps}$.

6.42

Example 6.10 (continued)

- b. Each source sends 250 characters per second; therefore, the duration of a character is $1/250$ s, or 4 ms.*
- c. Each frame has one character from each source, which means the link needs to send 250 frames per second to keep the transmission rate of each source.*
- d. The duration of each frame is $1/250$ s, or 4 ms. Note that the duration of each frame is the same as the duration of each character coming from each source.*
- e. Each frame carries 4 characters and 1 extra synchronizing bit. This means that each frame is $4 \times 8 + 1 = 33$ bits.*

6.43


Example 6.11

Two channels, one with a bit rate of 100 kbps and another with a bit rate of 200 kbps, are to be multiplexed. How this can be achieved? What is the frame rate? What is the frame duration? What is the bit rate of the link?

Solution

We can allocate one slot to the first channel and two slots to the second channel. Each frame carries 3 bits. The frame rate is 100,000 frames per second because it carries 1 bit from the first channel. The bit rate is $100,000 \text{ frames/s} \times 3 \text{ bits per frame}$, or 300 kbps.

6.44

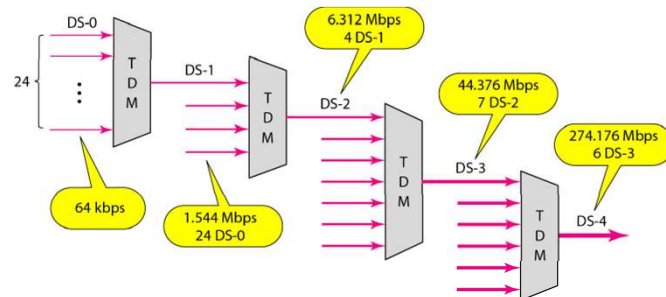
Figure 6.23 Digital hierarchy

6.45


Table 6.1 DS and T line rates

Service	Line	Rate (Mbps)	Voice Channels
DS-1	T-1	1.544	24
DS-2	T-2	6.312	96
DS-3	T-3	44.736	672
DS-4	T-4	274.176	4032

6.46

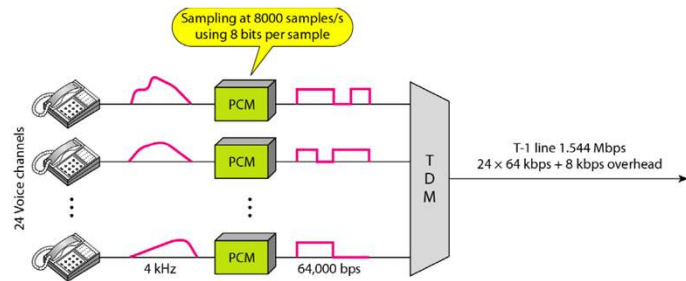Figure 6.24 T-1 line for multiplexing telephone lines

6.47

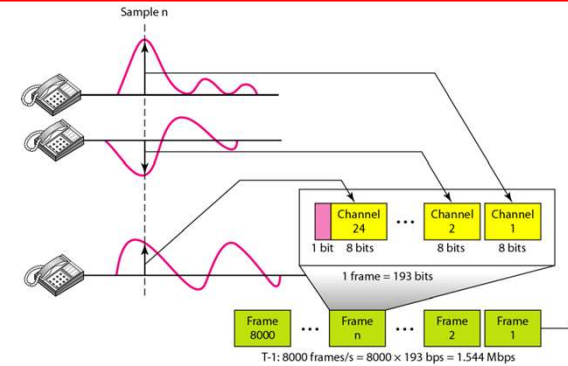
Figure 6.25 T-1 frame structure

6.48


Table 6.2 E line rates

Line	Rate (Mbps)	Voice Channels
E-1	2.048	30
E-2	8.448	120
E-3	34.368	480
E-4	139.264	1920

6.49

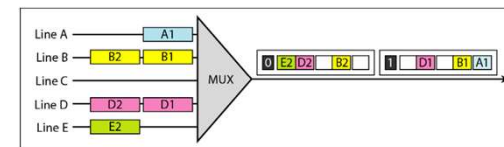Figure 6.26 TDM slot comparison


a. Synchronous TDM

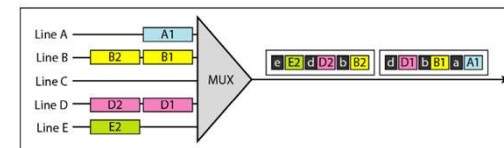

b. Statistical TDM


6.50

Figure 7.1 *Transmission medium and physical layer*

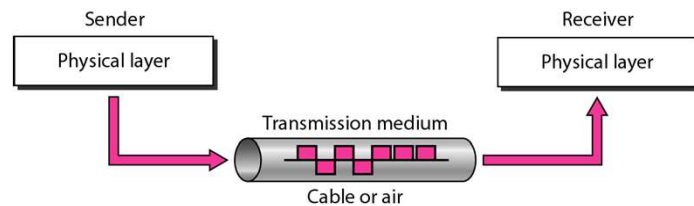

7.2

Figure 7.2 *Classes of transmission media*

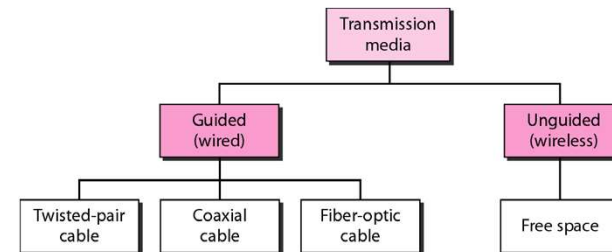

7.3

7-1 GUIDED MEDIA

Guided media, which are those that provide a conduit from one device to another, include twisted-pair cable, coaxial cable, and fiber-optic cable.

Topics discussed in this section:

Twisted-Pair Cable
Coaxial Cable
Fiber-Optic Cable


7.4

Figure 7.3 *Twisted-pair cable*



7.5

Figure 7.4 UTP and STP cables

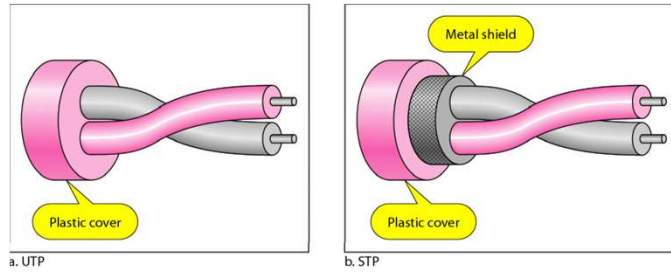


7.6

Table 7.1 Categories of unshielded twisted-pair cables

Category	Specification	Data Rate (Mbps)	Use
1	Unshielded twisted-pair used in telephone	< 0.1	Telephone
2	Unshielded twisted-pair originally used in T-lines	2	T-1 lines
3	Improved CAT 2 used in LANs	10	LANs
4	Improved CAT 3 used in Token Ring networks	20	LANs
5	Cable wire is normally 24 AWG with a jacket and outside sheath	100	LANs
5E	An extension to category 5 that includes extra features to minimize the crosstalk and electromagnetic interference	125	LANs
6	A new category with matched components coming from the same manufacturer. The cable must be tested at a 200-Mbps data rate.	200	LANs
7	Sometimes called SSTP (shielded screen twisted-pair). Each pair is individually wrapped in a helical metallic foil followed by a metallic foil shield in addition to the outside sheath. The shield decreases the effect of crosstalk and increases the data rate.	600	LANs


7.7

Figure 7.5 UTP connector

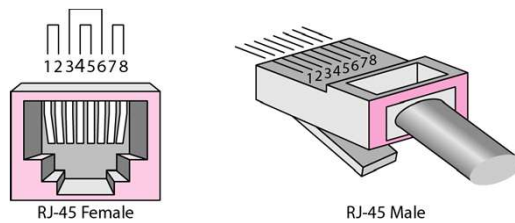


7.8

Figure 7.6 UTP performance

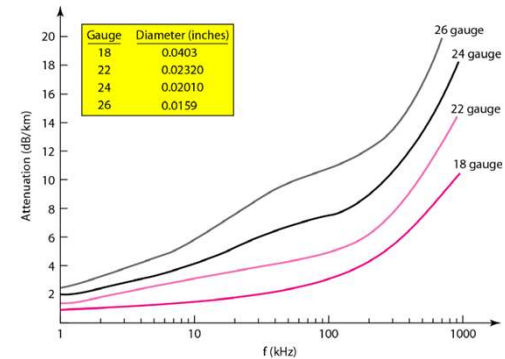

7.9

Figure 7.7 Coaxial cable

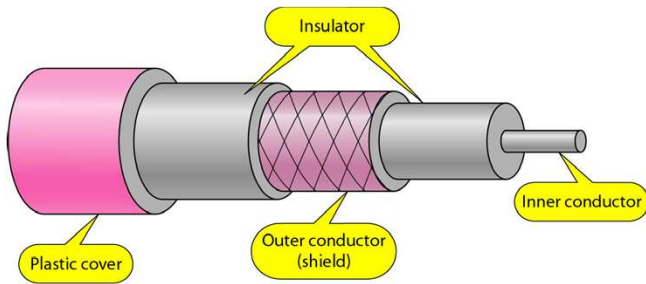


7.10

Table 7.2 Categories of coaxial cables

Category	Impedance	Use
RG-59	75 Ω	Cable TV
RG-58	50 Ω	Thin Ethernet
RG-11	50 Ω	Thick Ethernet


7.11

Figure 7.8 BNC connectors

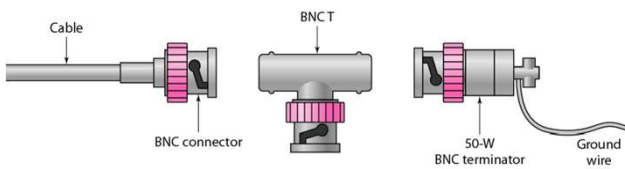


7.12


Figure 7.9 Coaxial cable performance

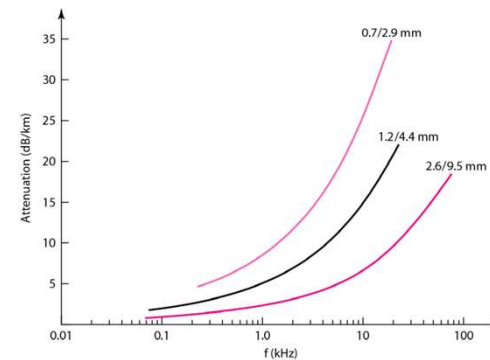


7.13

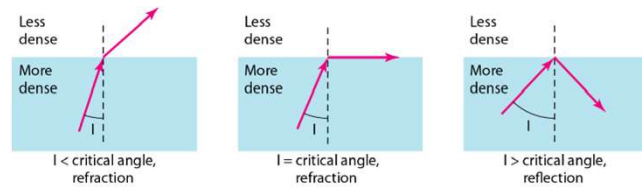Figure 7.10 *Bending of light ray*


7.14

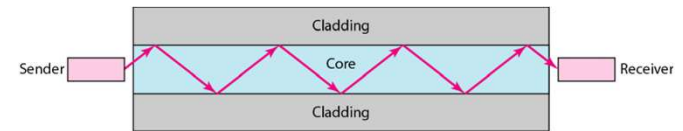Figure 7.11 *Optical fiber*

7.15

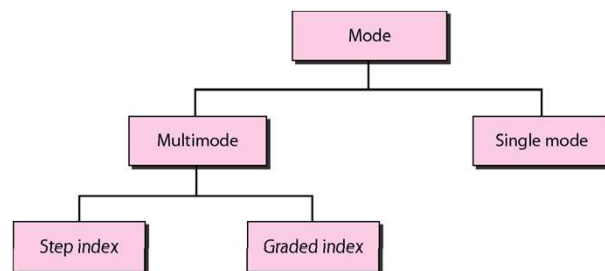Figure 7.12 *Propagation modes*

7.16

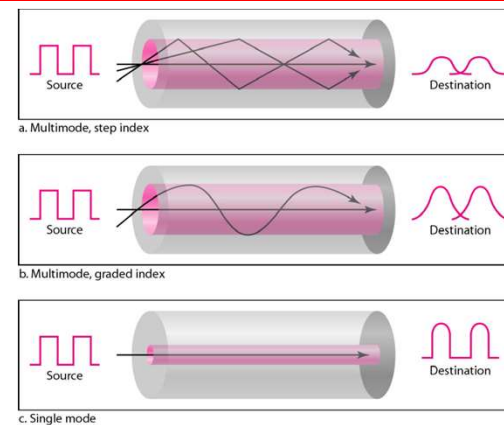
Figure 7.13 *Modes*

7.17


Table 7.3 *Fiber types*

Type	Core (μm)	Cladding (μm)	Mode
50/125	50.0	125	Multimode, graded index
62.5/125	62.5	125	Multimode, graded index
100/125	100.0	125	Multimode, graded index
7/125	7.0	125	Single mode


7.18

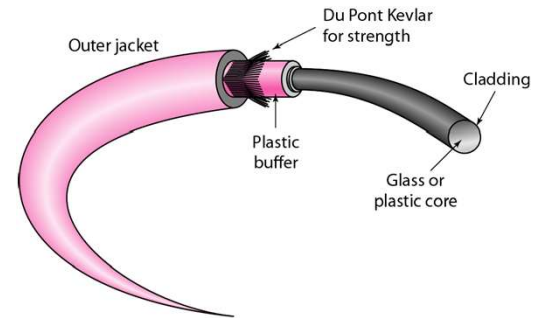Figure 7.14 *Fiber construction*

7.19

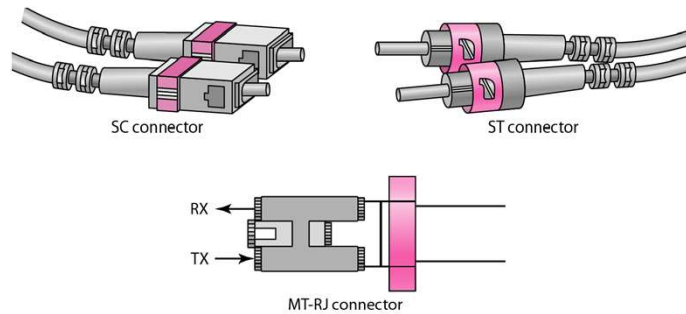Figure 7.15 *Fiber-optic cable connectors*

7.20

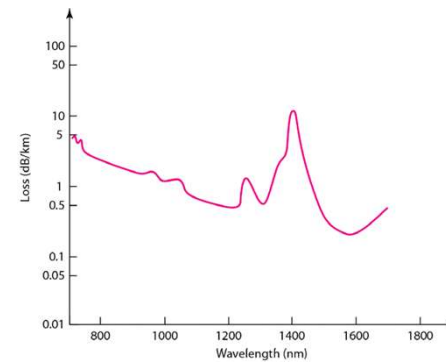Figure 7.16 *Optical fiber performance*

7.21

7-2 UNGUIDED MEDIA: WIRELESS

Unguided media transport electromagnetic waves without using a physical conductor. This type of communication is often referred to as wireless communication.

Topics discussed in this section:


Radio Waves

Microwaves

Infrared


7.22

Figure 7.17 Electromagnetic spectrum for wireless communication

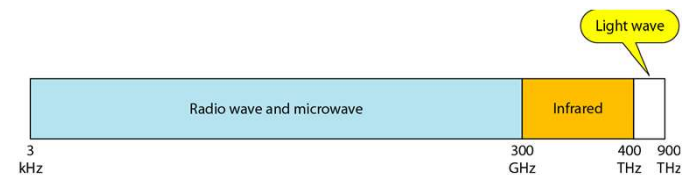

7.23

Figure 7.18 Propagation methods

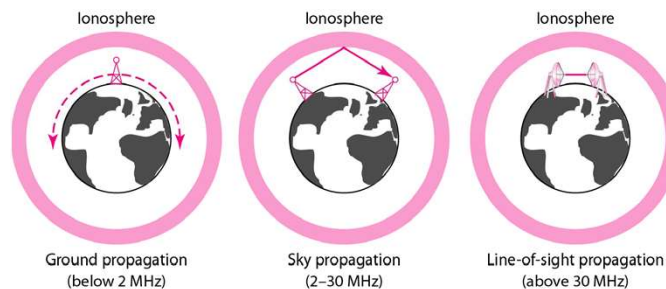


7.24

Table 7.4 Bands

Band	Range	Propagation	Application
VLF (very low frequency)	3-30 kHz	Ground	Long-range radio navigation
LF (low frequency)	30-300 kHz	Ground	Radio beacons and navigational locators
MF (middle frequency)	300 kHz-3 MHz	Sky	AM radio
HF (high frequency)	3-30 MHz	Sky	Citizens band (CB), ship/aircraft communication
VHF (very high frequency)	30-300 MHz	Sky and line-of-sight	VHF TV, FM radio
UHF (ultrahigh frequency)	300 MHz-3 GHz	Line-of-sight	UHF TV, cellular phones, paging, satellite
SHF (superhigh frequency)	3-30 GHz	Line-of-sight	Satellite communication
EHF (extremely high frequency)	30-300 GHz	Line-of-sight	Radar, satellite

7.25

Figure 7.19 *Wireless transmission waves*

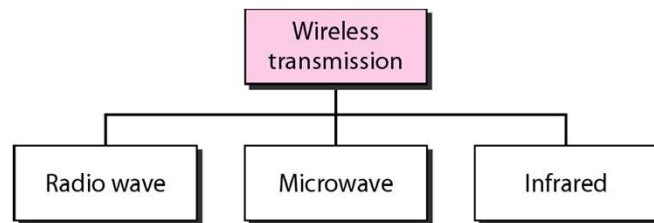

7.26

Figure 7.20 *Omnidirectional antenna*




7.27

Note

Radio waves are used for multicast communications, such as radio and television, and paging systems.

7.28

Figure 7.21 *Unidirectional antennas*

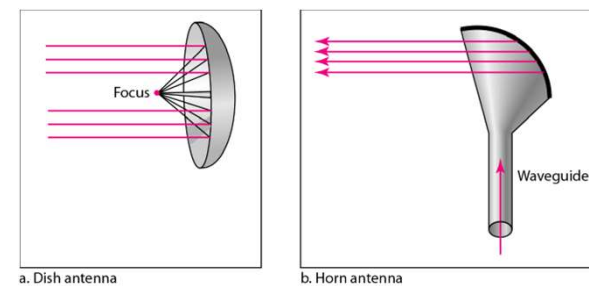


7.29

Microwaves are used for unicast communication such as cellular telephones, satellite networks, and wireless LANs. Infrared signals can be used for short- range communication in a closed area using line-of-sight propagation.


7.30

Figure 8.1 Switched network

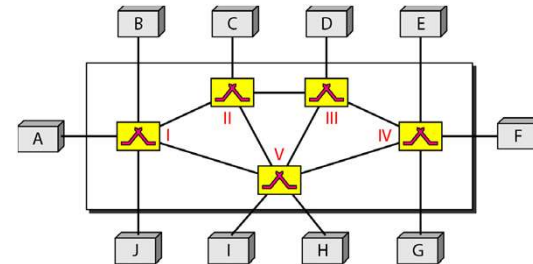

8.2

Figure 8.2 Taxonomy of switched networks

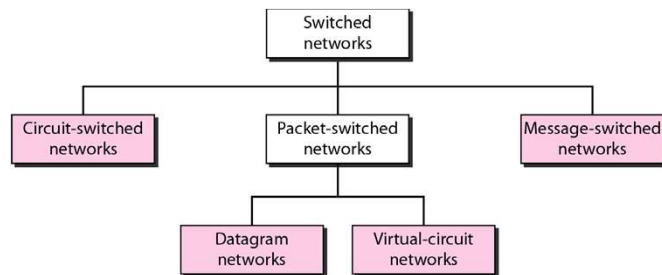

8.3

8-1 CIRCUIT-SWITCHED NETWORKS

A circuit-switched network consists of a set of switches connected by physical links. A connection between two stations is a dedicated path made of one or more links. However, each connection uses only one dedicated channel on each link. Each link is normally divided into n channels by using FDM or TDM.

Topics discussed in this section:

Three Phases

Efficiency

Delay

Circuit-Switched Technology in Telephone Networks


8.4

Note

A circuit-switched network is made of a set of switches connected by physical links, in which each link is divided into n channels.

8.5

Figure 8.3 A trivial circuit-switched network

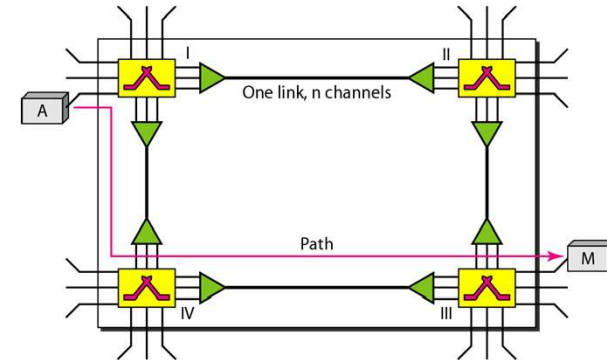

8.6

Note

In circuit switching, the resources need to be reserved during the setup phase; the resources remain dedicated for the entire duration of data transfer until the teardown phase.


8.7

Example 8.1

As a trivial example, let us use a circuit-switched network to connect eight telephones in a small area. Communication is through 4-kHz voice channels. We assume that each link uses FDM to connect a maximum of two voice channels. The bandwidth of each link is then 8 kHz. Figure 8.4 shows the situation. Telephone 1 is connected to telephone 7; 2 to 5; 3 to 8; and 4 to 6. Of course the situation may change when new connections are made. The switch controls the connections.

8.8

Figure 8.4 Circuit-switched network used in Example 8.1

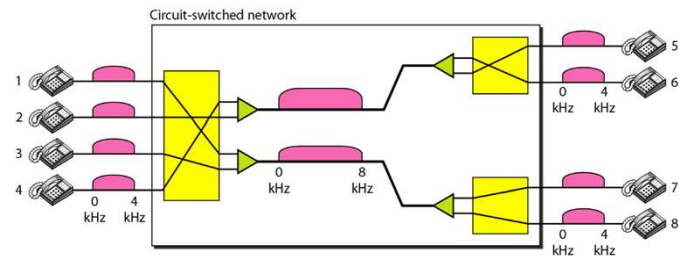


8.9

Example 8.2

As another example, consider a circuit-switched network that connects computers in two remote offices of a private company. The offices are connected using a T-1 line leased from a communication service provider. There are two 4×8 (4 inputs and 8 outputs) switches in this network. For each switch, four output ports are folded into the input ports to allow communication between computers in the same office. Four other output ports allow communication between the two offices. Figure 8.5 shows the situation.


8.10

Figure 8.5 Circuit-switched network used in Example 8.2

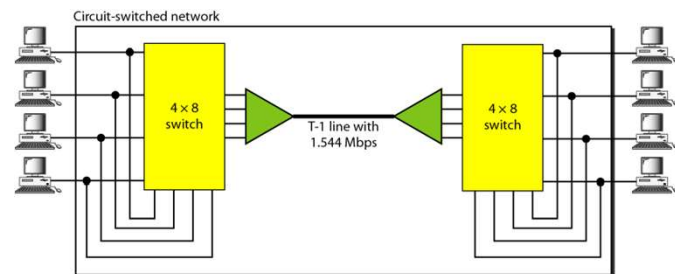

8.11

Figure 8.6 Delay in a circuit-switched network

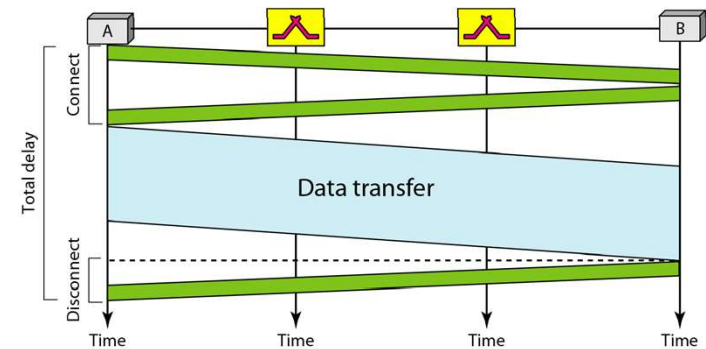

8.12

Note

Switching at the physical layer in the traditional telephone network uses the circuit-switching approach.

8.13

8-2 DATAGRAM NETWORKS

In data communications, we need to send messages from one end system to another. If the message is going to pass through a packet-switched network, it needs to be divided into packets of fixed or variable size. The size of the packet is determined by the network and the governing protocol.

Topics discussed in this section:

Routing Table

Efficiency

Delay

Datagram Networks in the Internet


8.14

Note

In a packet-switched network, there is no resource reservation; resources are allocated on demand.


8.15

Figure 8.7 A datagram network with four switches (routers)

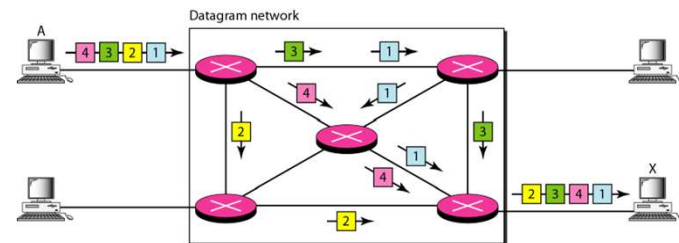

8.16

Figure 8.8 Routing table in a datagram network

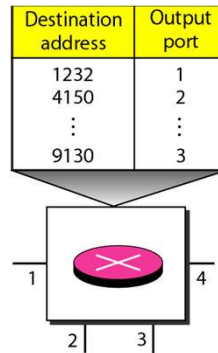

8.17

Note

A switch in a datagram network uses a routing table that is based on the destination address.


8.18

Note

The destination address in the header of a packet in a datagram network remains the same during the entire journey of the packet.

8.19

Figure 8.9 Delay in a datagram network

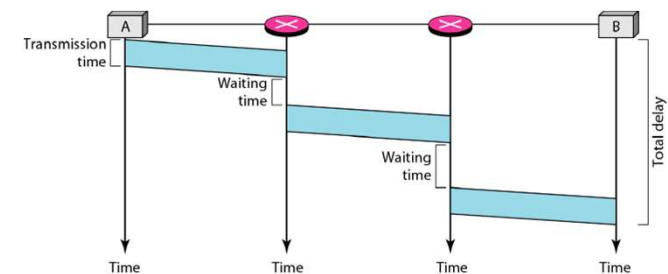

8.20

Note

Switching in the Internet is done by using the datagram approach to packet switching at the network layer.

8.21

8-3 VIRTUAL-CIRCUIT NETWORKS

A virtual-circuit network is a cross between a circuit-switched network and a datagram network. It has some characteristics of both.

Topics discussed in this section:

Addressing

Three Phases


Efficiency

Delay

Circuit-Switched Technology in WANs


8.22

Figure 8.10 Virtual-circuit network

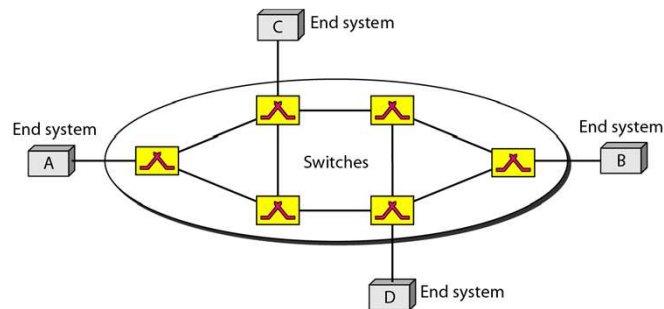


8.23


Figure 8.11 Virtual-circuit identifier

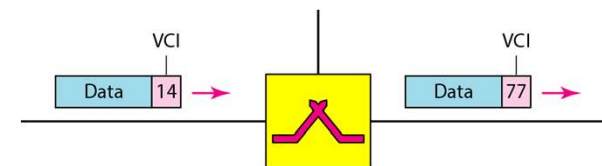


8.24

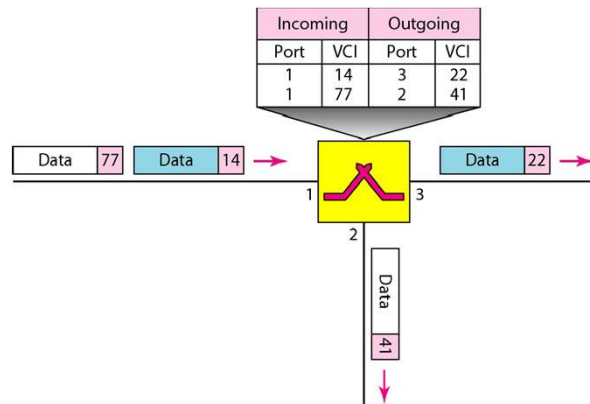Figure 8.12 Switch and tables in a virtual-circuit network


8.25

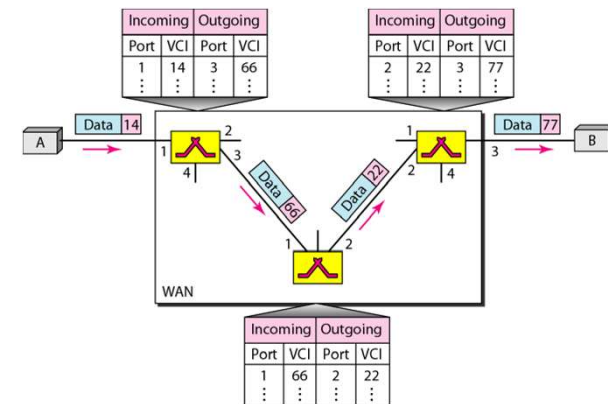Figure 8.13 Source-to-destination data transfer in a virtual-circuit network

8.26

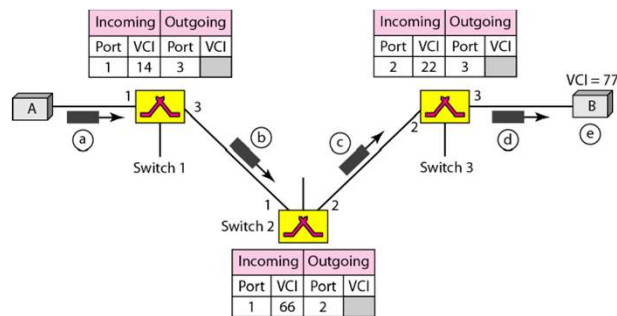Figure 8.14 Setup request in a virtual-circuit network

8.27

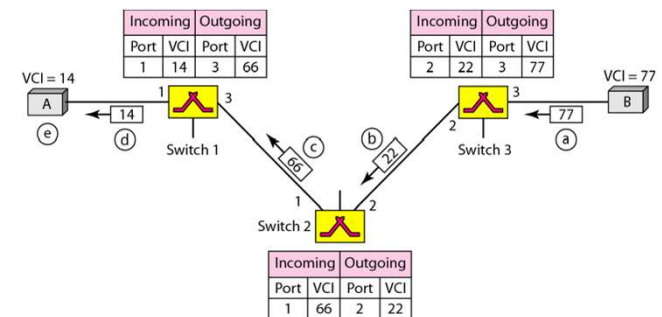Figure 8.15 Setup acknowledgment in a virtual-circuit network


8.28

Note

In virtual-circuit switching, all packets belonging to the same source and destination travel the same path; but the packets may arrive at the destination with different delays if resource allocation is on demand.

8.29

Figure 8.16 Delay in a virtual-circuit network

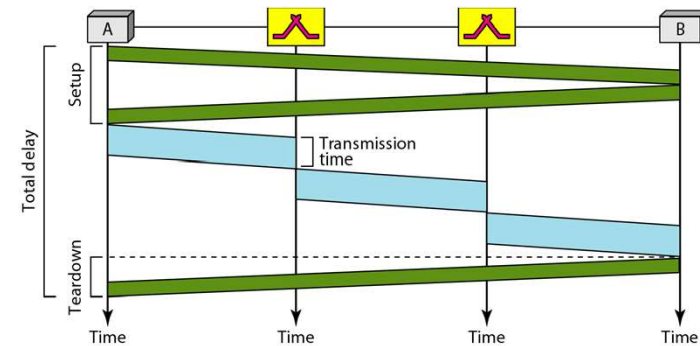

8.30

Note

Switching at the data link layer in a switched WAN is normally implemented by using virtual-circuit techniques.

8.31

8-4 STRUCTURE OF A SWITCH

We use switches in circuit-switched and packet-switched networks. In this section, we discuss the structures of the switches used in each type of network.


Topics discussed in this section:

Structure of Circuit Switches

Structure of Packet Switches


8.32

Figure 8.17 Crossbar switch with three inputs and four outputs

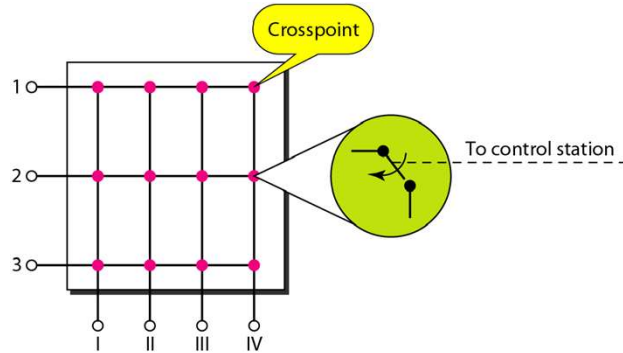

8.33

Figure 8.18 Multistage switch

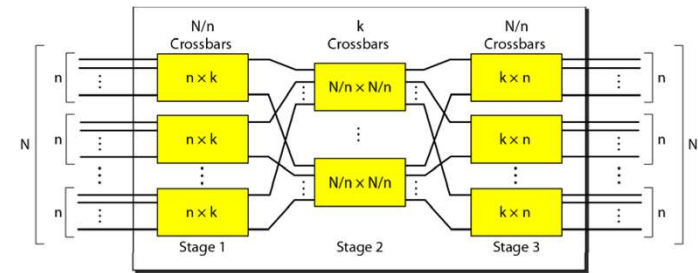

8.34

Note

In a three-stage switch, the total number of crosspoints is $2kN + k(N/n)^2$ which is much smaller than the number of crosspoints in a single-stage switch (N^2).

8.35

Example 8.3

Design a three-stage, 200×200 switch ($N = 200$) with $k = 4$ and $n = 20$.

Solution

In the first stage we have N/n or 10 crossbars, each of size 20×4 . In the second stage, we have 4 crossbars, each of size 10×10 . In the third stage, we have 10 crossbars, each of size 4×20 . The total number of crosspoints is $2kN + k(N/n)^2$, or 2000 crosspoints. This is 5 percent of the number of crosspoints in a single-stage switch ($200 \times 200 = 40,000$).

8.36

Note

According to the Clos criterion:

$$n = (N/2)^{1/2}$$

$$k > 2n - 1$$

$$\text{Crosspoints} \geq 4N [(2N)^{1/2} - 1]$$

8.37


Example 8.4

Redesign the previous three-stage, 200×200 switch, using the Clos criteria with a minimum number of crosspoints.


Solution

We let $n = (200/2)^{1/2}$, or $n = 10$. We calculate $k = 2n - 1 = 19$. In the first stage, we have $200/10$, or 20, crossbars, each with 10×19 crosspoints. In the second stage, we have 19 crossbars, each with 10×10 crosspoints. In the third stage, we have 20 crossbars each with 19×10 crosspoints. The total number of crosspoints is $20(10 \times 19) + 19(10 \times 10) + 20(19 \times 10) = 9500$.

8.38

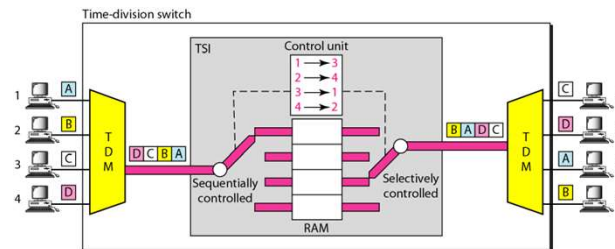
Figure 8.19 Time-slot interchange

8.39

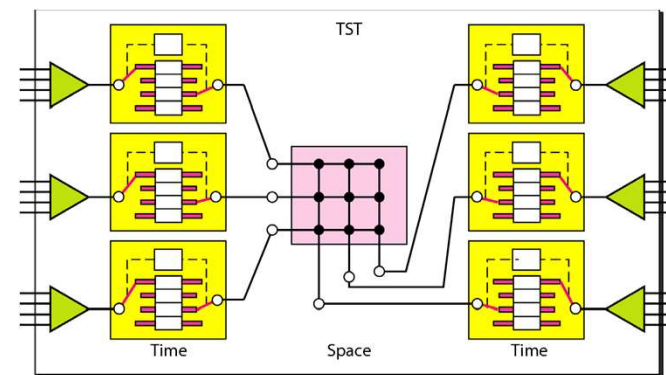Figure 8.20 Time-space-time switch


8.40

Figure 8.21 Packet switch components

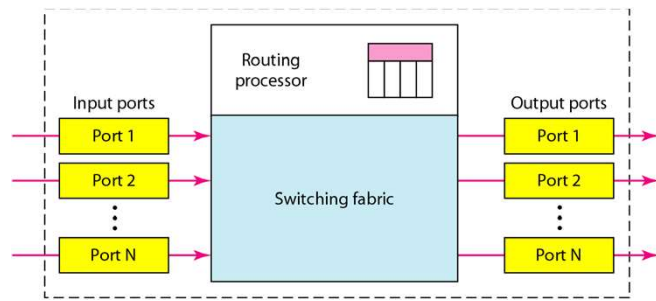


8.41

Figure 8.22 Input port

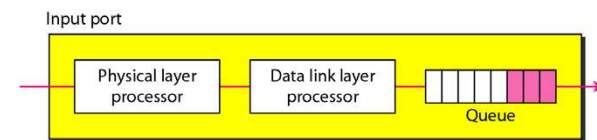


8.42

Figure 8.23 Output port

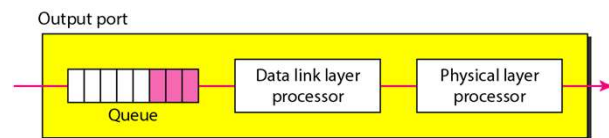


8.43

Figure 8.24 A banyan switch

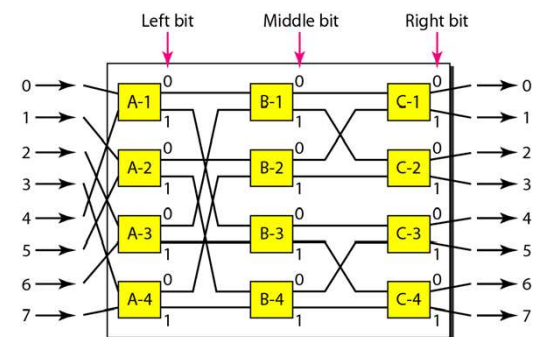


8.44

Figure 8.25 Examples of routing in a banyan switch

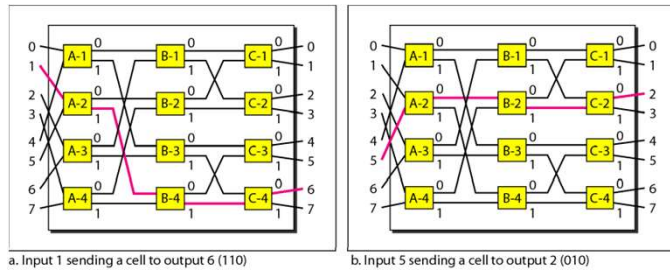

8.45

Figure 8.26 Batched-banyan switch

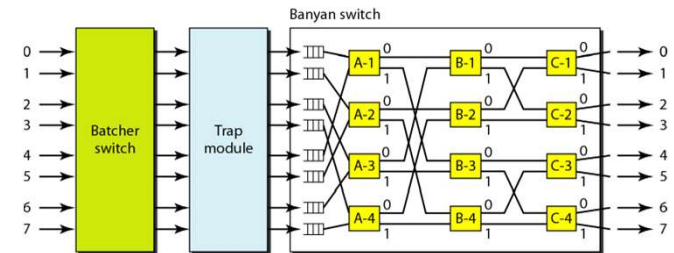

8.46