

This source describes Open Hardware and is licensed under the CERN-OHL-S v2.

You may redistribute and modify this source and make products using it under the terms of the CERN-OHL-S v2 (<https://ohwr.org/cernohlsv2.txt>). This source is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING OF MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE.

Please see the CERN-OHL-S v2 for applicable conditions. Source location: https://github.com/Riesi/ploopy_mouse_kicad

As per CERN-OHL-S v2 section 4, should You produce hardware based on this source, You must where practicable maintain the Source Location visible on the external case of the Ploopy Mouse or other products you make using this source.

Original: Copyright Ploopy Corporation 2021 Modified: Copyright Riesi 2023	
Licensed under the CERN-OHL-S v2 http://ohwr.org/cernohl	
Sheet: / File: QMKMouse.kicad_sch	
Title: QMKMouse-SchDoc	
Size: A4	Date: 17 01 2023
KiCad E.D.A. kicad (6.0.10)	Rev: 2.001 Id: 1/9

Here we provide spaces for pull-up resistors on the I2C lines. A relatively large 10k would work well if they're not the only pull-up resistors on the bus.


Series resistors and ferrite beads on the I2C lines provide some protection against shorts to 5V/GND as well as ESD/EMI.

Everyone recommends we add 10uF of capacitance to the 5V input of the USB port, so we'll do that.


To properly identify this device when connecting to a fully functional USB3.0 upstream device, the CC pins must be pulled down with a "5.1k" resistor. Here, 5k will do to simplify the BoM.

The SBU pins in this application are unused, but perhaps in a future version they could be used to transport I2C from an upstream QMK keyboard? ;)

This neat device protects the mouse from ESD. It should be more than adequate for this relatively tame application.



USB.J.3
DX07S016JA1R1500



Since we hide the USB traces sandwiched between ground planes, it makes a lot of sense to make the ground planes of the PCB continuous with the cable shield.

USB.R.12
10k 1%

USB.R.13
10k 1%

USB.R.14
10k 1%

USB.R.15
10k 1%

USB.R.8
10k 1%

USB.R.9
10k 1%

USB.Z.1
IP4220CZ6

USB.FB.4
ACML-0805-601-T Ferrite Bead 6000hm

USB.FB.5
ACML-0805-601-T

USB.FB.1
ACML-0805-601-T

USB.FB.2
ACML-0805-601-T

USB.FB.3
ACML-0805-601-T

USB.R.10
100R 1%

USB.R.11
100R 1%

USB.C.19
10uF 25V

USB.R.6
22R 1%

USB.R.7
22R 1%

Original: Copyright Ploopy Corporation 2021
Modified: Copyright Riesi 2023

Licensed under the CERN-OHL-S v2
<http://ohwr.org/cernohl>

Sheet: /USB/
File: Connectors-SchDoc.kicad_sch


Title: Connectors-SchDoc

Size: A4
KiCad E.D.A. kicad (6.0.10)

Date: 17 01 2023


Rev: 2.001

Id: 2/9

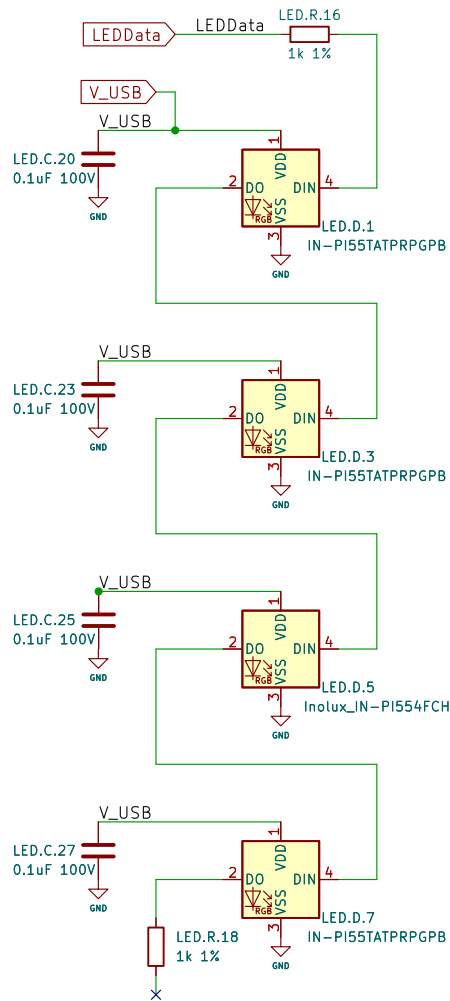

There are two LED strips laid out, one on the top of the board and another on the bottom.

From the factory, only the top strip is populated. If you want, you can populate the bottom strip to get extra lights going. This would allow for lighting to shine through if you also use a translucent bottom cover on the mouse.

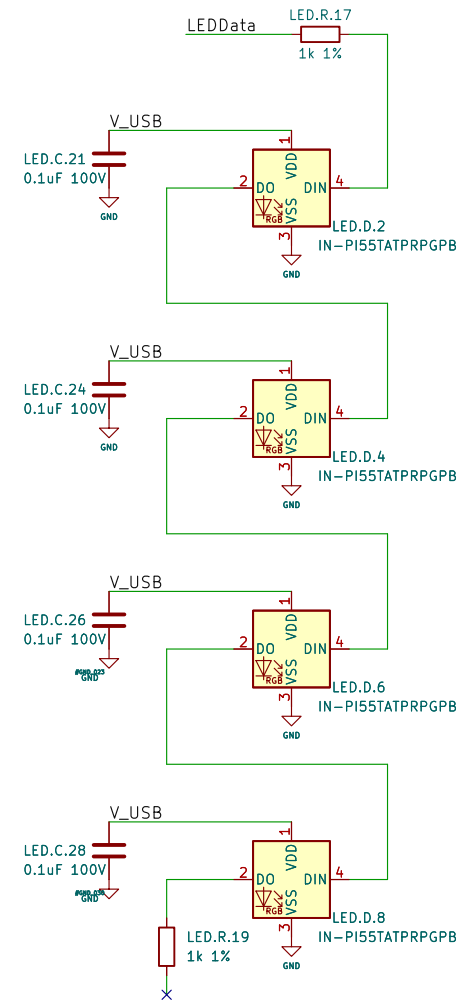

Original: Copyright Ploopy Corporation 2021
Modified: Copyright Riesi 2023

Licensed under the CERN-OHL-S v2
<http://ohwr.org/cernohl>

Sheet: /LED/
File: LEDs-SchDoc.kicad_sch


Title: LEDs-SchDoc

Size: A4 Date: 17 01 2023


KiCad E.D.A. kicad (6.0.10)

Rev: 2.001

Id: 3/9

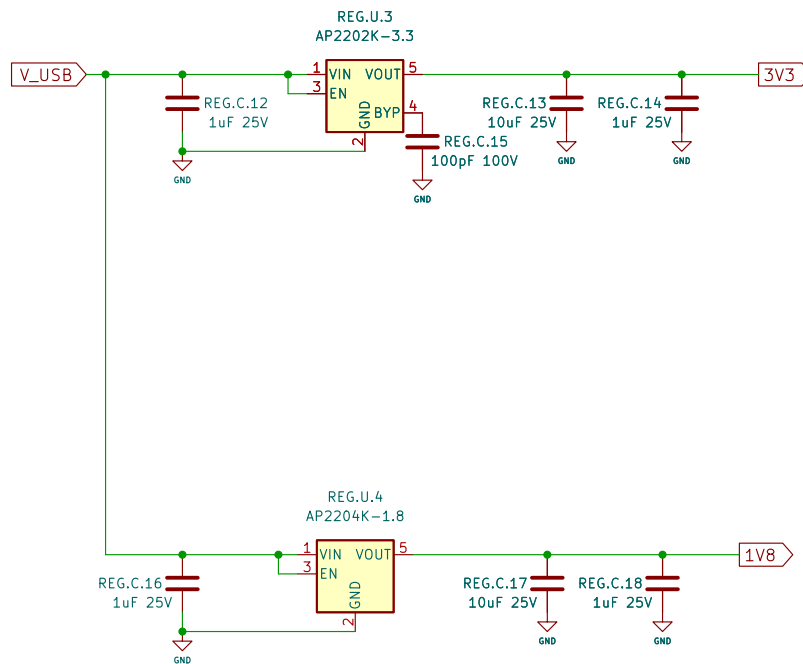

Original: Copyright Ploopy Corporation 2021 Modified: Copyright Riesi 2023		
Licensed under the CERN-OHL-S v2 http://ohwr.org/cernohl		
Sheet: /REG/ File: Regulators-SchDoc.kicad_sch		
Title: Regulators-SchDoc		
Size: A4	Date: 17 01 2023	Rev: 2.001
KiCad E.D.A. kicad (6.0.10)		Id: 4/9

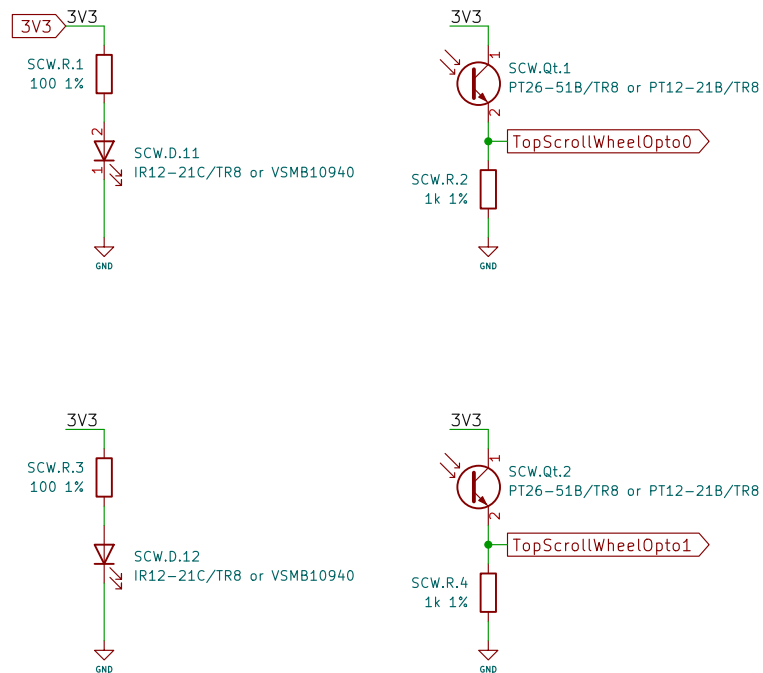

The scroll wheel mechanism is a 2-bit optical encoder. The light paths are spaced 1.5 periods over the encoder wheel holes, which should allow for the detection of the rotation direction as well as the rotation itself.

Two IR LEDs are used as light sources; the light from these is obstructed by the encoder wheel built into the scroll wheel mechanism. Two phototransistors are used to detect when the light is blocked/not blocked by the wheel.


Typical LED forward voltage is 1.3V @20mA. To achieve this current level with a 3.3V supply, we'll use a 100R resistor, which is very convenient.

At this power level, the output should be approx 2.3mW/sr.


Since the light path distance is about 12mm, that works out to about 2mW/cm², though the actual delivered power will be lower due to the vagaries of the obstructions in the mechanism.

With this amount of light (and accounting for the fact that we'll probably lose a lot of it along the way), we are expecting 1-3mA out of the phototransistor (see figure 6 of the datasheet), so we size the biasing resistor accordingly to produce a useful signal.


Original: Copyright Ploopy Corporation 2021 Modified: Copyright Riesi 2023		
Licensed under the CERN-OHL-S v2 http://ohwr.org/cernohl		
Sheet: /SCW/ File: ScrollWheel-SchDoc.kicad_sch		
Title: ScrollWheel-SchDoc		
Size: A4	Date: 17 01 2023	Rev: 2.001
KiCad E.D.A. kicad (6.0.10)		Id: 5/9

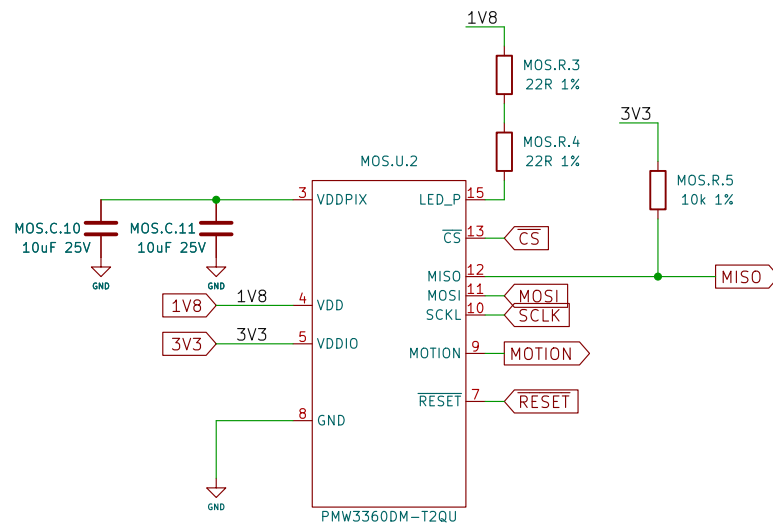

Original: Copyright Ploopy Corporation 2021 Modified: Copyright Riesi 2023		
Licensed under the CERN-OHL-S v2 http://ohwr.org/cernohl		
Sheet: /MOS/ File: MouseSensor-SchDoc.kicad_sch		
Title: MouseSensor-SchDoc		
Size: A4	Date: 17 01 2023	Rev: 2.001
KiCad E.D.A. kicad (6.0.10)		Id: 6/9

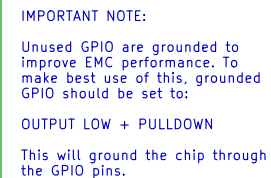


Id: 7/9

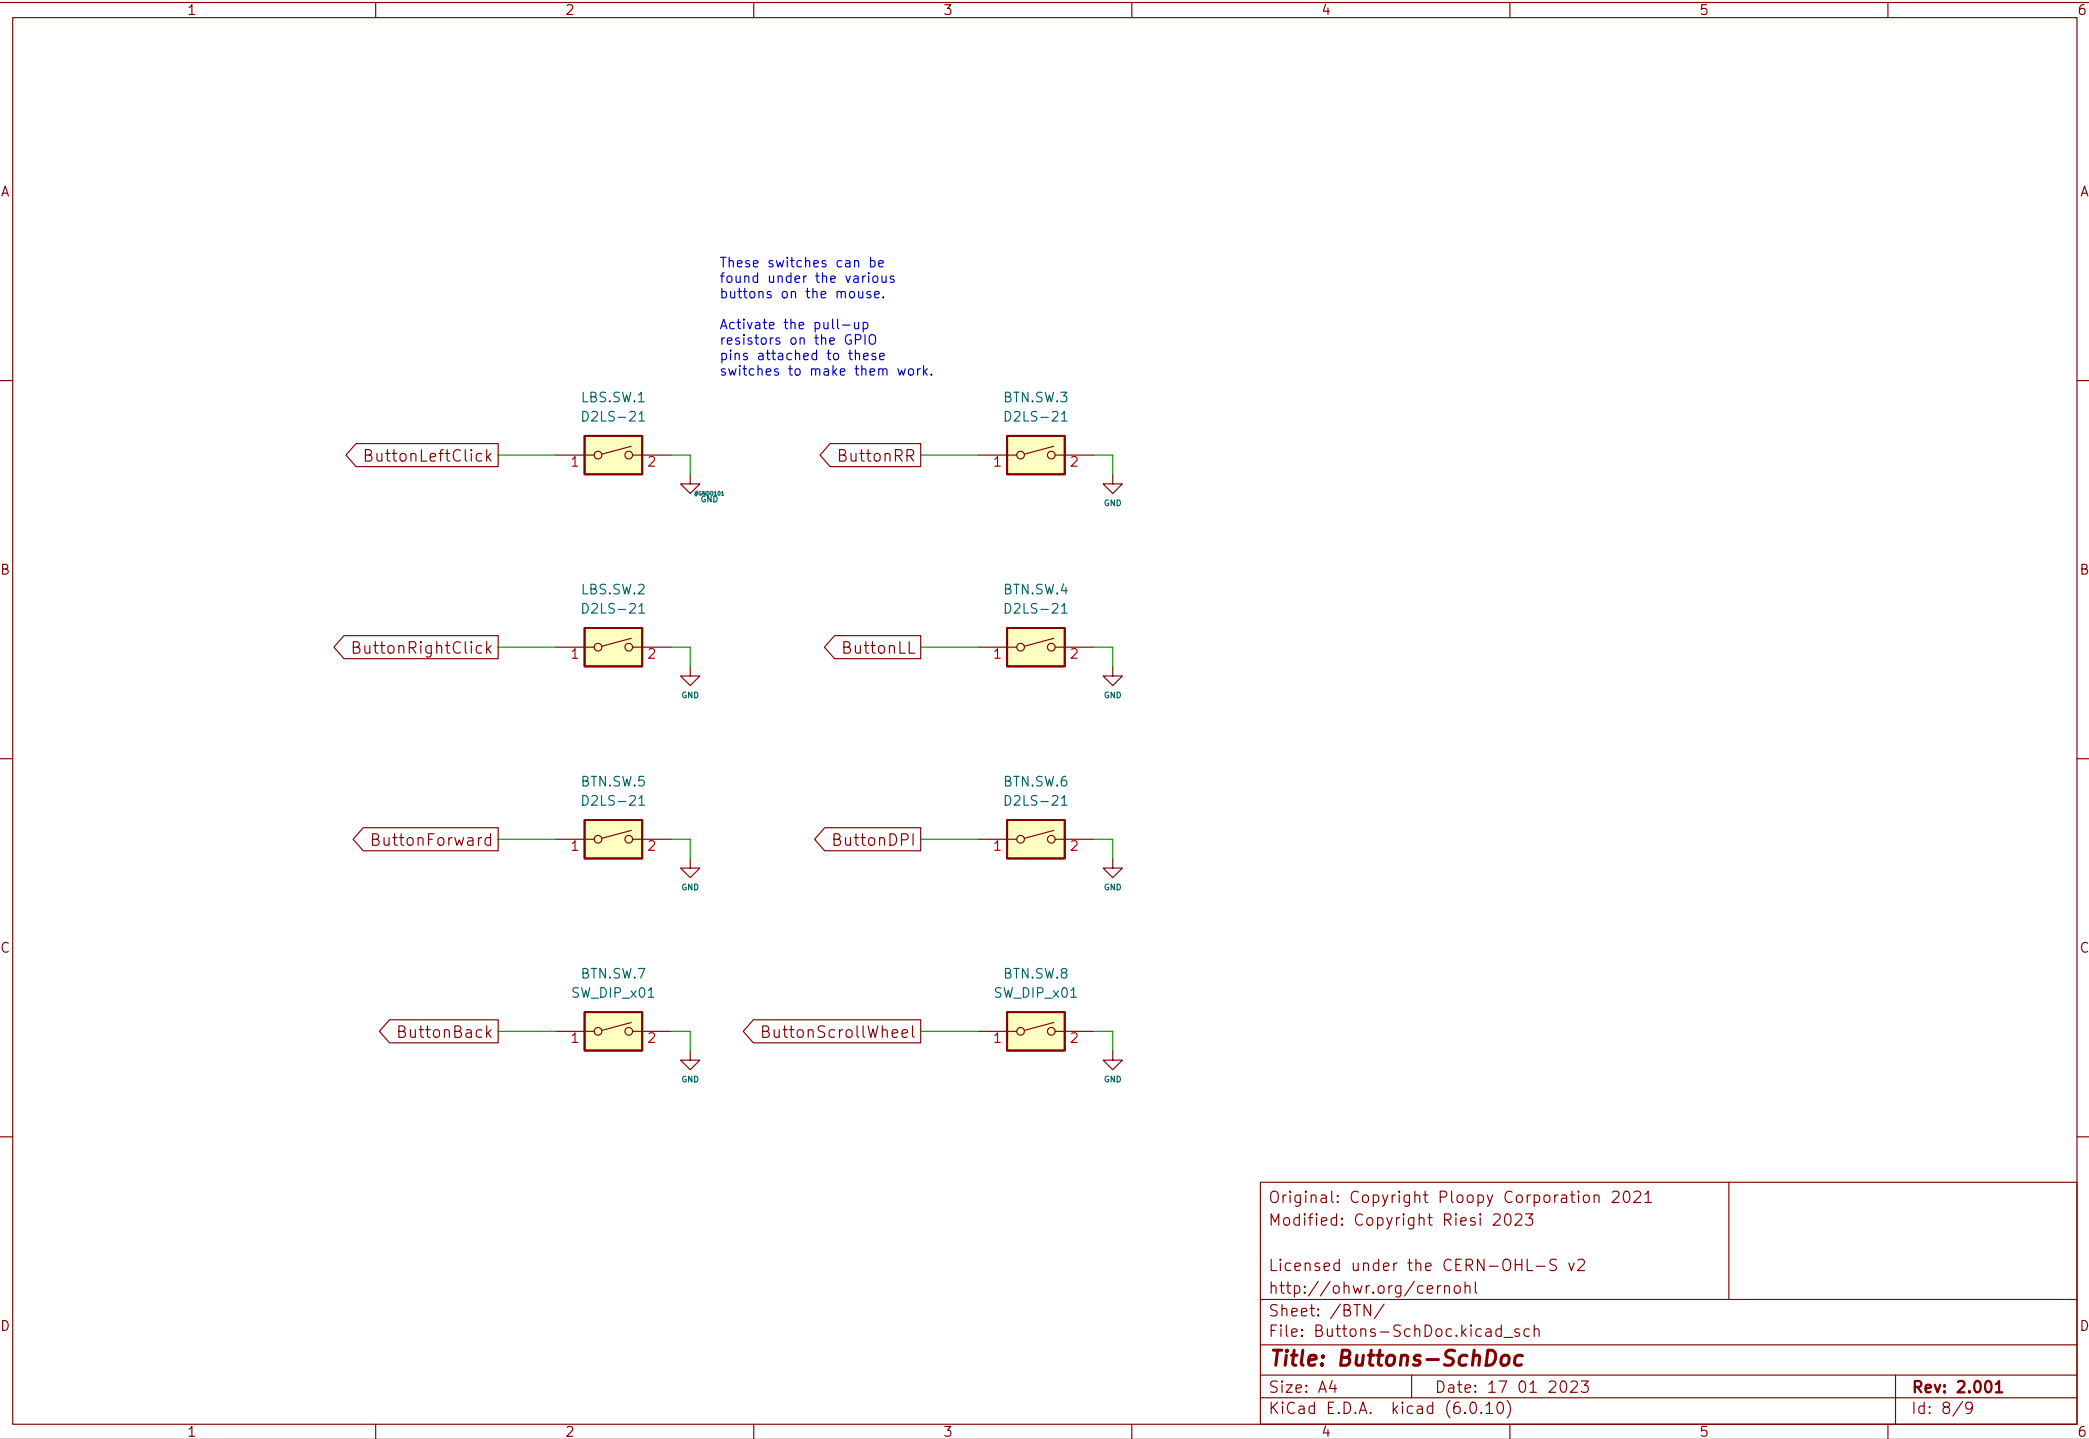


Original: Copyright Ploopy Corporation 2021 Modified: Copyright Riesi 2023		
Licensed under the CERN-OHL-S v2 http://ohwr.org/cernohl		
Sheet: /BTN/ File: Buttons-SchDoc.kicad_sch		
Title: Buttons-SchDoc		
Size: A4	Date: 17 01 2023	Rev: 2.001
KiCad E.D.A. kicad (6.0.10)		Id: 8/9

Pick and Place Fiducials

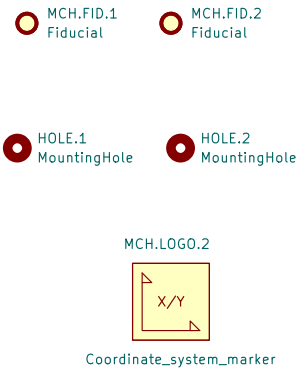

Spark Gaps -- Case

Since the case has gaps in it, we expect ESD to worm its way in via creepage and perhaps other ways. To protect the board from this eventuality, we place spark gaps along the edges.

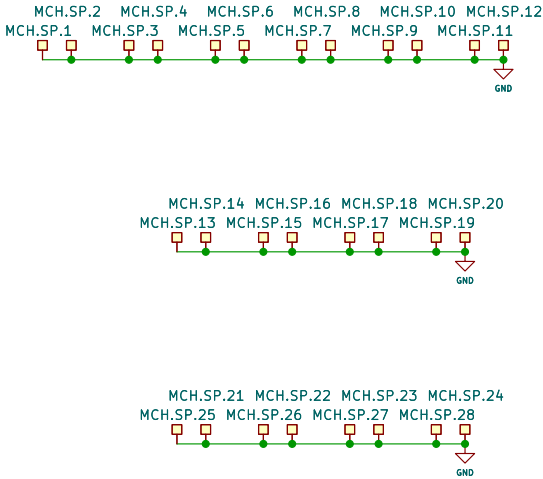

Original: Copyright Ploopy Corporation 2021 Modified: Copyright Riesi 2023		
Licensed under the CERN-OHL-S v2 http://ohwr.org/cernohl		
Sheet: /MCH/ File: Mechanical-SchDoc.kicad_sch		
Title: Mechanical-SchDoc		
Size: A4	Date: 17 01 2023	Rev: 2.001
KiCad E.D.A. kicad (6.0.10)		Id: 9/9