
EXP NO: 11 b | Simulate RIP using

Aim:
To simulate RIP using CISCO packet tracer.

Procedure:

* Create the topology with 3 routers and 2 PC's
* Connect the devices using suitable cables.
* Assign the given IP address to both PCs
* Configure Fast Ethernet and serial interface of all routers
* Enable interface using no shut down
* Set clock rate 64000 and bandwidth on DT serial interface
* Test connectivity using ping 20.0.0.2
* Use tracert 20.0.0.2 to verify the selected route
* Disconnect the direct Router 0 Router 2 link and use tracert again to verify RIP selects the alternate route

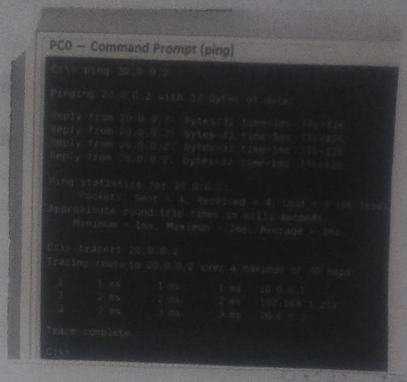

Result:
Thus, simulation of RIP using CISCO Packet Tracer is verified successfully.