Exp no: 03 Date: 30/7/26	Packet tracer tool Installation and User Interface.

Aim:

To understand environment of CISCO PACKET TRACER to design simple network.

Procedure:

1. From the network component box, click & drag-and-drop
   a. 4 generic PCs & 1 HUB.
   b. 4 generic PCs & 1 Switch.
2. Click on connections
   a. Click on copper straight cable
   b. Select on 1 PC and connect it to HUB using the cable. The link LED should glow in green, indicating that link is up.
   c. Similarly connect 4 PCs to the switch
3. Click on the PCs connected to hub, go to desktop tab, Click on IP configuration, and enter an IP address and subnet mask.


Here, the default gateaway and DNS server info is not needed as there are only 2 end devices in the network.

Click on the PDU and drag and drop it to one of PC and then drop it on another PC connected to HUB.

4. Observe the flow of PDU from source PC to destination PC by selecting the Realtime.

5. Repeat step #3 to step #5 for the PCs connected to the switch.

6. Observe how HUB & switch are forwarding the PDU.

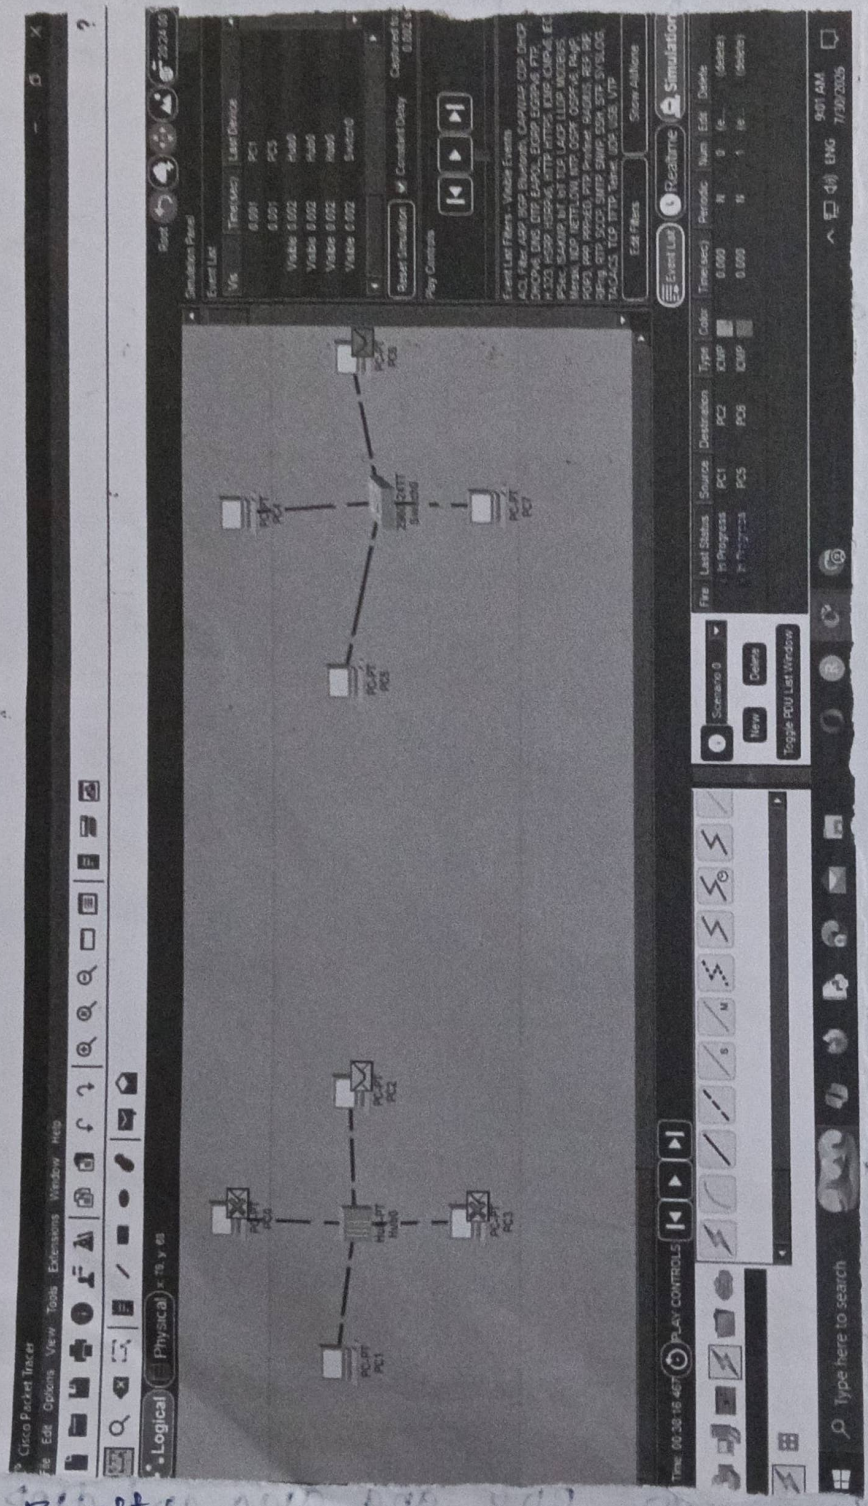

Result:

Thus the connection between the server and the switch or hub was made successfully using cables.