
EXPNO:09 Implementation of subnetting in
DATE: 28.9.26 CISCO PACKET TRACER

Aim:
To implement the subnetting in Cisco Packet Tracer Simulation.

Procedure:
* Open Cisco Packet tracer and create a new network topology.
* Add the required routers, switches and PC's to the workspace.
* Connect the device using appropriate copper cables.
* Use the network 192.168.1.0/24 and divide it into 128 networks
* Configure the router interfaces with the required IP addresses and subnet mask 255.255.255.224
* use enable and configure terminal in the assign the IP using:
  i) IP address
  ii) no shutdown.
* Configure the required switch ports in access mode.
* Assign each PC its IP address subnet mask and default gateway
* Repeat the configuration for all required subnets.
* Use the ping command to test
* If ping is successful, network is configured correctly.

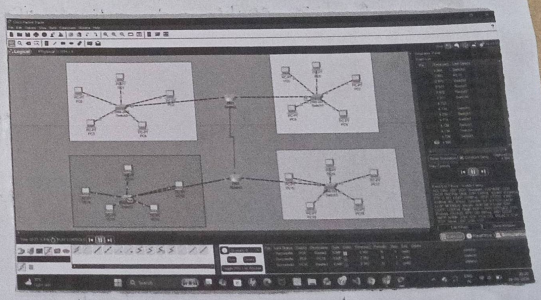

Result:
Thus, Implementation of subnetting in CISCO packet is done successfully.