Exp no: 11b | Simulate RIP using CISCO Packet Tracer


5.10.24

Aim:

To simulate RIP using CISO packet Tracer.

Procedure:

* Create the topology with 3 routers and 2PCs
* Connect the device using suitable cables
* Assign the given IP address to both PCs
* Configure Fast Ethernet and serial interface of all routers
* Enable interface using no shut down
* set clock rate 64000 and bandwidth on DTE serial interface
* Enable RIP on all routers using router rip
* Test connectivity using ping 20.0.0.2
* use tracert 20.0.0.2 to verify the selected route
* Disconnect the direct Router 0 - Router 2 link and use tracert again to verify RIP selects the alternate route

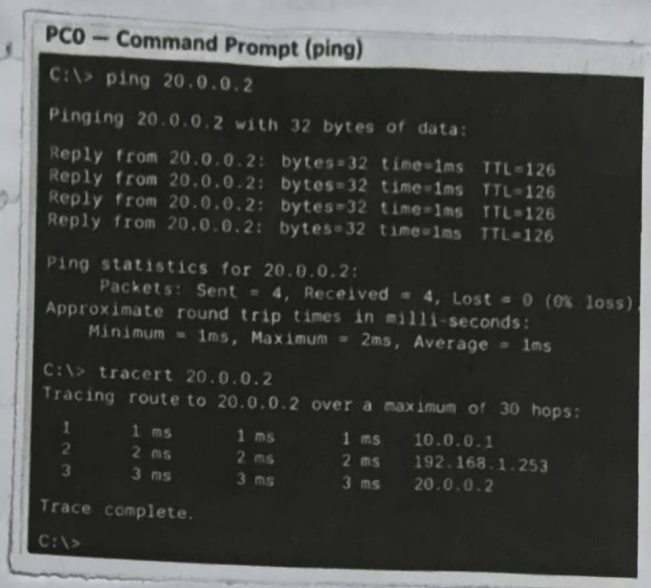

Result :

Thus, stimulation of RIP using CISCO Packet Tracer is verified successfully.