Sr.no: 9 | Implementation of subnetting in CISCO PACKET TRACER simulator

30.9.26


Aim:

To implement the subnetting in Cisco Packet Tracer Simulator

Procedure:

* Open Cisco Packet Tracer and create a new network topology
* Add the required router, switches and PC's to the workspace.
* Connect the device using appropriate copper cables.
* Use the network 192.168.1.0/24 and divide it into 128 networks
* Configure the router interfaces with the required IP addresses and subnet mask 255.255.255.224
* Use enable and configure terminal in the assign the IP using:
  (i). IP Address
  (ii). no shutdown
* Configure the required switch ports in access mode
* Assign each PC its IP address, subnet mask and default gateway
* Repeat the configuration for all required subnets

* Use the ping command to test connectivity between PCs and routers
* If ping is successful, network is configured correctly

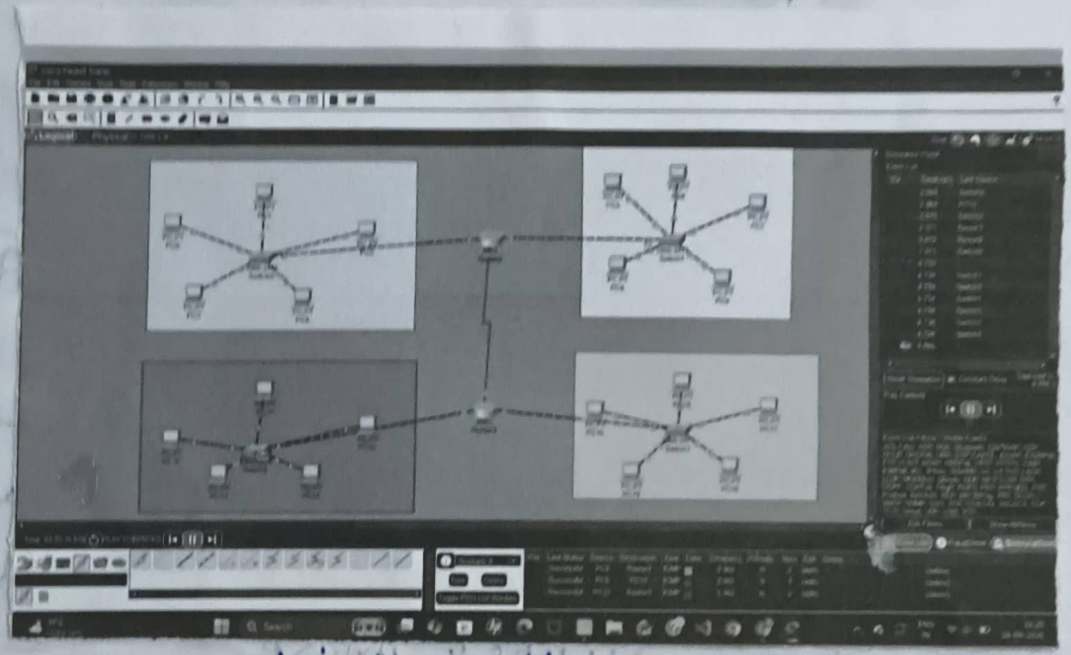

Result:

Thus, Implementation of subnetting in Cisco packet is done successfully