Expno: 03

3.8.26

To study the Packet tracer tool Installation and User Interface Overview

Aim:

To understand environment of CISCO Packet TRACER to design simple network

Procedure:

1. From the network component box, click and drag and drop the below components

a. 4 Generic PCs and One HUB

b. 4 Generic PCs and one switch

2. Click on connections.

a. Click on copper straight-Through cable.

b. Select one of the PC and connect it to HUB using the cable. The link LED should glow in green, indicating that the link is up.

c. Similarly connect 4 PC's to the switch using copper straight-through cable.


3. Click on the PCs connected to hub, go to the Desktop tab, click on IP configuration.

and enter IP address and subnet mask. Here, the default gateway and DNS server information is not needed as there are only two end devices in the network

4. Observe the flow of PDU from source PC to destination PC by selecting the Realtime mode of simulation

5. Repeat Step 3 and 5 for the connected to the switch

6 Observe how HUB and switch are forwading the PDU and write your observation and conclusion about the behaviors of switch and HUB

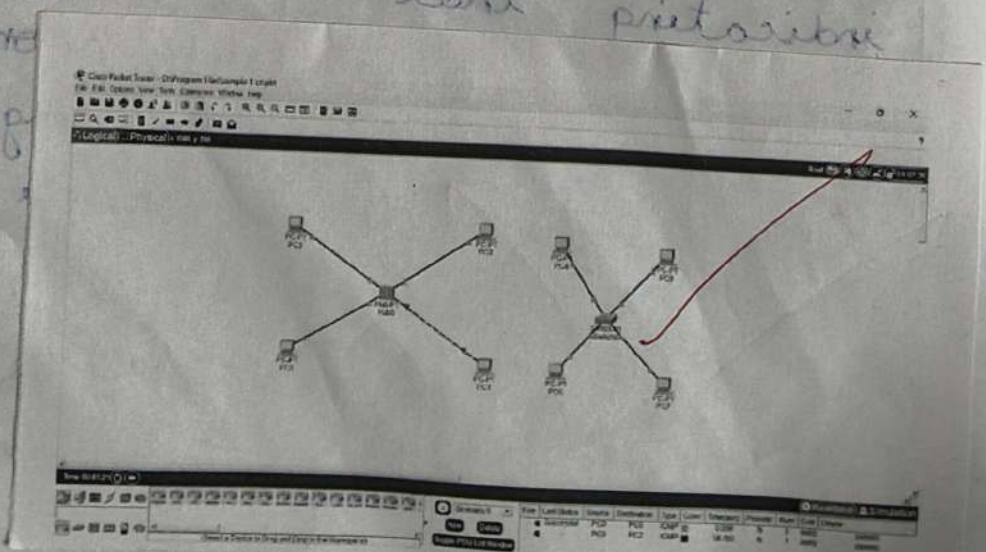

Result:

Thus the connection between the server and the switch or hub was made successfully using cables