




Power
SPI1{MISO,MOSI,SCK,CSN}
SWD{CLK,DIO}
USB{DM,DP}
SPI0{MISO,MOSI,SCK,CSN}
File: untitled.kicad_sch
SPI1{MISO,MOSI,SCK,CSN}
SWD{CLK,DIO}
USB{DM,DP}
SPI0{MISO,MOSI,SCK,CSN}
MCU
SPI1{MISO,MOSI,SCK,CSN}
SWD{CLK,DIO}
USB{DM,DP}
SPI0{MISO,MOSI,SCK,CSN}
I2C_IMU{SDA,SCL}
I2C_LED{SDA,SCL}
I2C_CS{SDA,SCL}
I2C_HES{SDA,SCL}
I2C_TS{SDA,SCL}
I2C_GPIO{SDA,SCL}
Ind_led[0..2]
File: mcu.kicad_sch
IMU
I2C{SDA,SCL}
File: imu.kicad_sch
LED Controller
I2C{SDA,SCL}
File: led_controller.kicad_sch
Color Sensor
I2C{SDA,SCL}
File: color_sensor.kicad_sch
Hall Effect Sensor
I2C{SDA,SCL}
File: hall_effect_sensor.kicad_sch
Temperature Sensor
I2C{SDA,SCL}
File: temp_sensor.kicad_sch
GPIO Expander
I2C{SDA,SCL}
File: gpio_expander.kicad_sch
Indicator LEDs
Ind_led[0..2]
File: ind_leds.kicad_sch


+5V
PWR_FLAG
TP7
TestPoint
GND
MCU Debug Buttons
+3.3V
R1
10k
SW1
SKRPABE010
TP5
Reset
RESET
GND
This button causes the MCU
to enter a reset state
TP4
USB_Boot
SW2
SKRPABE010
USB_BOOT
This causes the MCU
to load from USB than flash
2 MB Flash
C1
100n
USB_BOOT
R2
1k
R3
10k
U1
W25Q16JVSS
VCC
CS
CLK
DI/IO0
DO/IO1
WP/IO2
HOLD/RESET/IO3
QSPI_CS
QSPI_CLK
QSPI_SD0
QSPI_SD1
QSPI_SD2
QSPI_SD3
RP2040 MCU + Support Circuitry
Place 100n caps near power pins
Place 1u caps near
VREG_VIN/OUT
C2
100n
C3
100n
C6
100n
C7
100n
C8
100n
C9
100n
C10
100n
C11
1u
C12
1u
C13
100n
C14
100n
TP2
+1.1V
+1.1V
USB_VDD
ADC_AVDD
IOVDD
VREG_VIN
VREG_VOUT
DVDD
TESTEN
RUN
USB_DM
USB_DP
R4
27.4
R6
27.4
USB{DM,DP}
27.4R close to USB pins
QSPI_SS
QSPI_SCLK
QSPI_SD0
QSPI_SD1
QSPI_SD2
QSPI_SD3
C4
15p
C5
15p
Y1
ABM8-272-T3
R5
1k
XIN
XOUT
SWCLK
SWDIO
SWD.CLK
SWD.DIO
SWD{CLK,DIO}
TP34
TP35
U2
RP2040
GPIO0 SPI0.SCK
GPIO1 SPI0.MISO
GPIO2 SPI0.MOSI
GPIO3 SPI0.CSN
SPI0{MISO,MOSI,SCK,CSN}
Ind_led[0..2]
Ind_led0
Ind_led1
Ind_led2
I2C_CS.SDA
I2C_CS.SCL
I2C_LED.SDA
I2C_LED.SCL
I2C_IMU.SDA
I2C_IMU.SCL
I2C_HES.SDA
I2C_HES.SCL
I2C_TS.SDA
I2C_TS.SCL
I2C_GPIO.SDA
I2C_GPIO.SCL
I2C_CS{SDA,SCL}
I2C_LED{SDA,SCL}
I2C_IMU{SDA,SCL}
I2C_HES{SDA,SCL}
I2C_TS{SDA,SCL}
I2C_GPIO{SDA,SCL}
gp_btn_a
gp_btn_b
SPI1.CSN
SPI1.MOSI
SPI1.MISO
SPI1.SCK
SPI1{MISO,MOSI,SCK,CSN}
Pull up resistors for I2C lines
R7
4.7k
R8
4.7k
R9
4.7k
R10
4.7k
R11
4.7k
R12
4.7k
R13
4.7k
R14
4.7k
R15
4.7k
R16
4.7k
R17
4.7k
R18
4.7k
General-Purpose Debug Buttons
General-Purpose Debug Buttons
gp_btn_a
gp_btn_b
File: gpbuttons.kicad_sch


Indicator LEDs

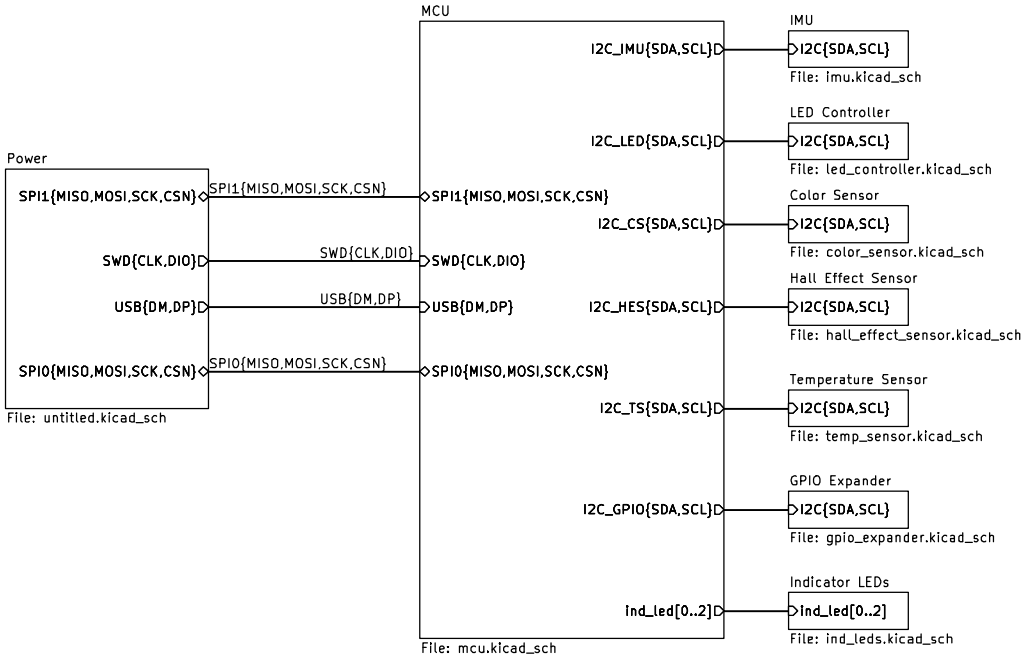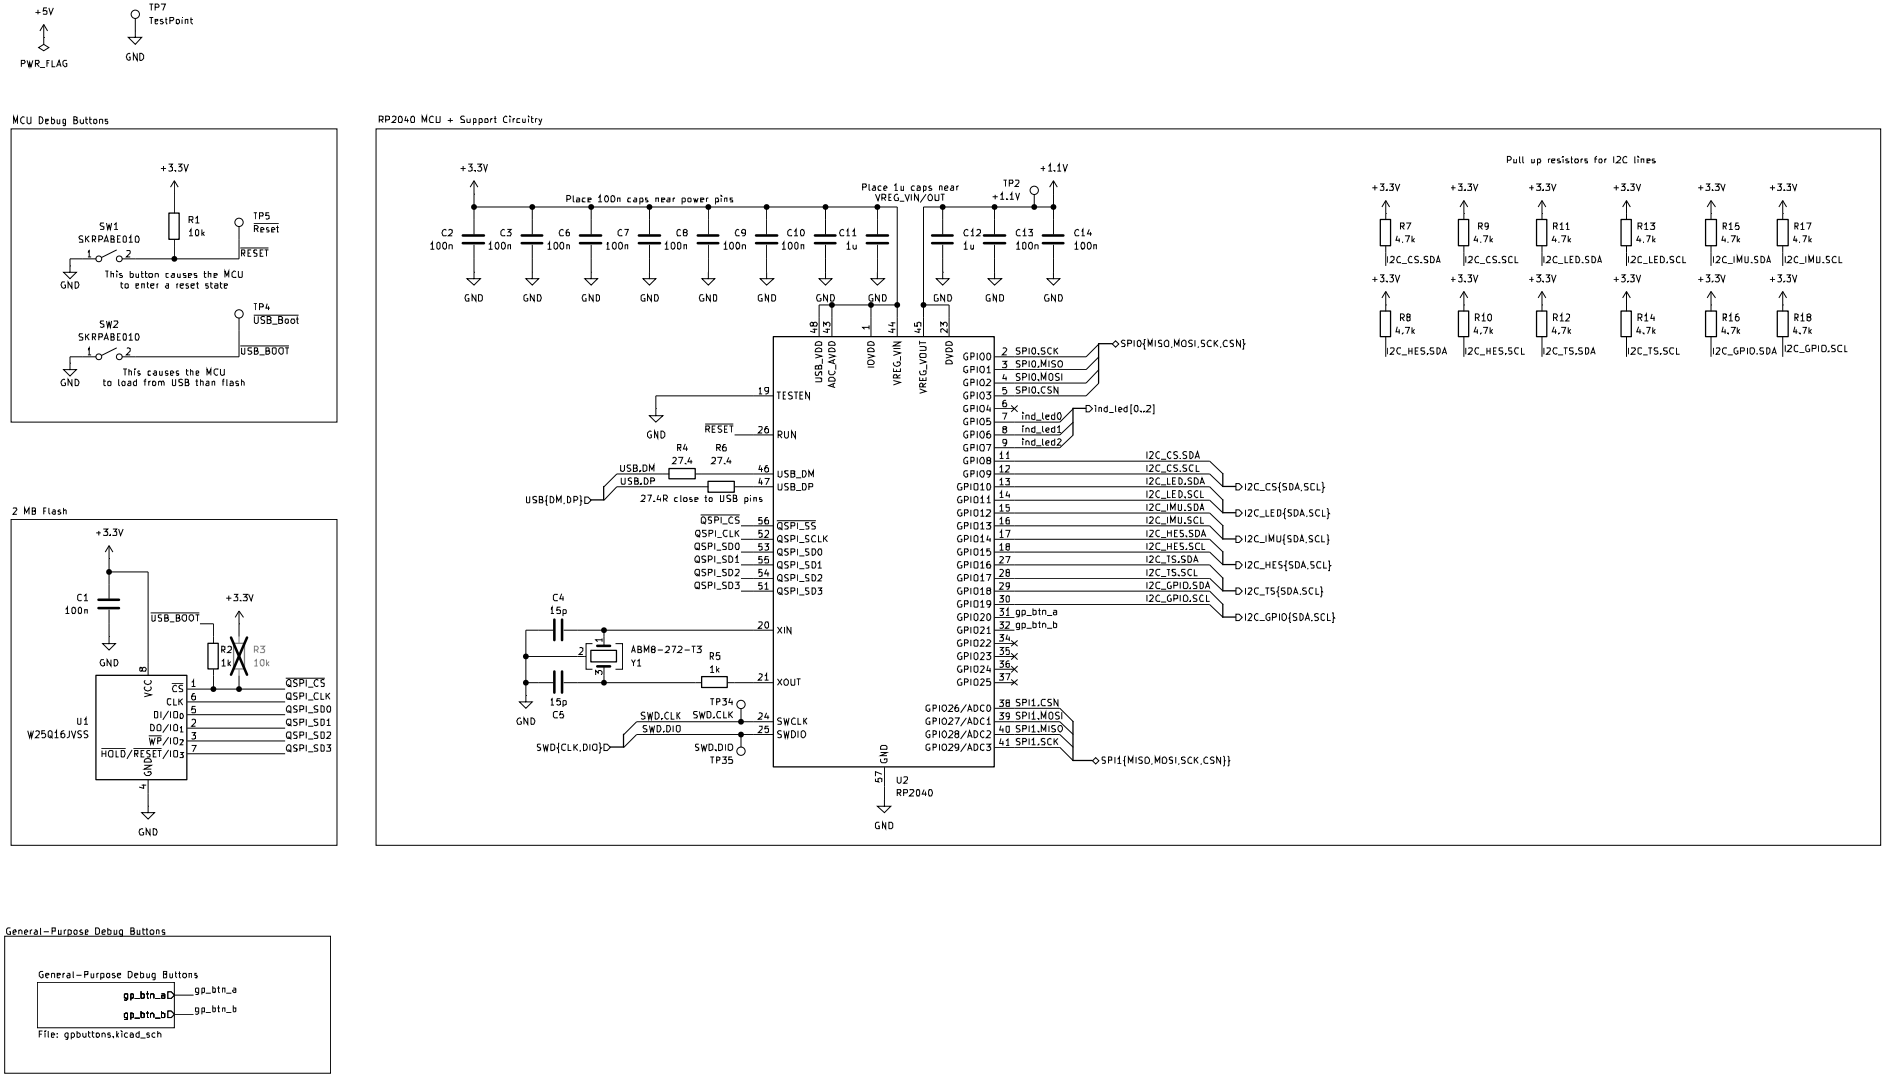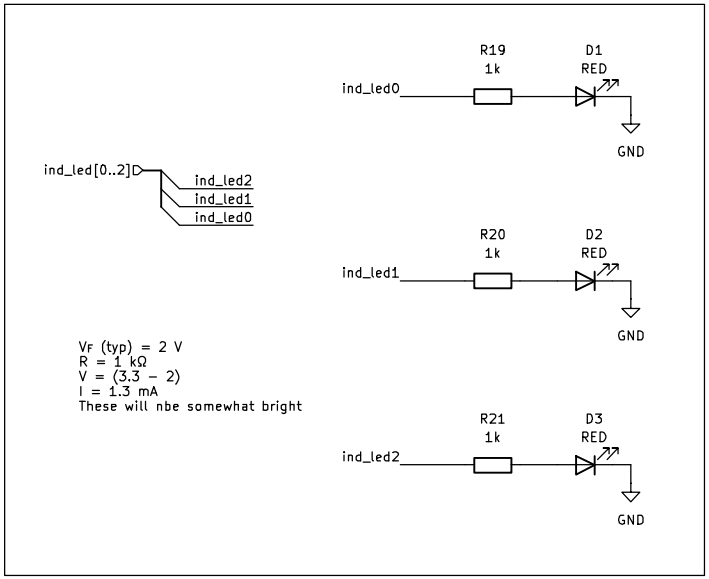

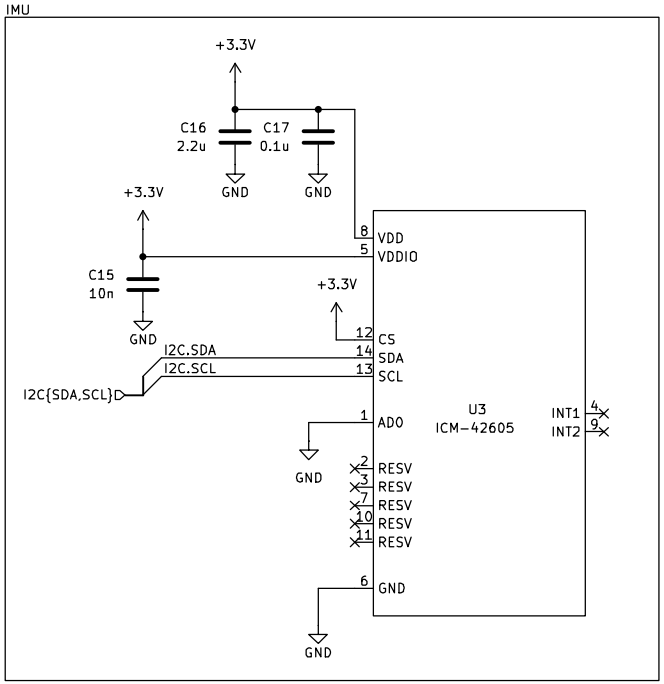


Device	ICM-42605 (U8)
Function	Interial Measurement Unit
I2C Address (7-bit)	1101000 (0x68)
Address Config	AD0 on GND
Voltage Range	1.7-3.6V

LED Driver

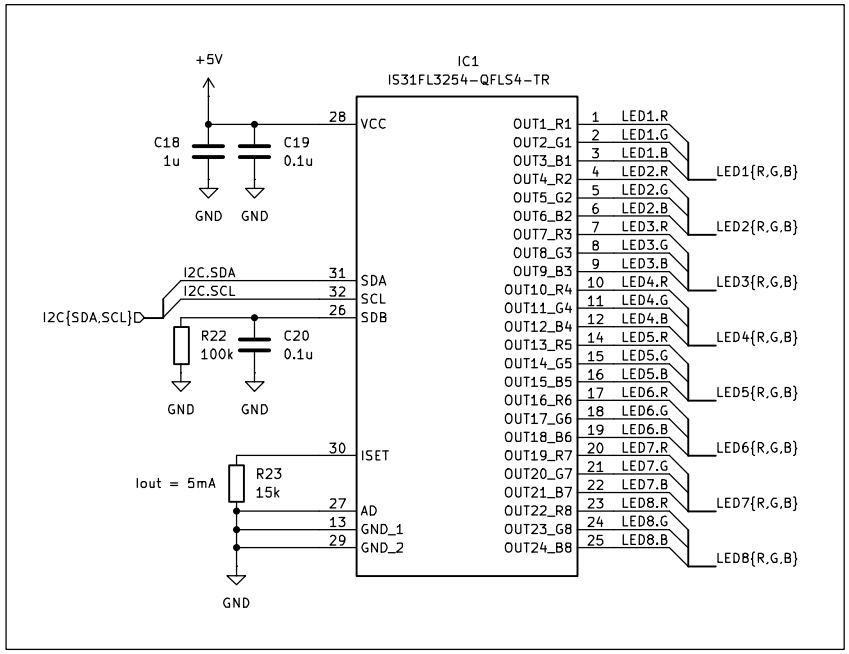


Device	IS31FL3254-QFLS4-TR (IC1)
Function	LED Controller
I2C Address (7-bit)	0110000 (0x30)
Address Config	AD on GND
Voltage Range	2.7-5.5V
Pull-Ups	4.7k on I2C
Led 0 Pin	RP2040 GPIO 5 (Pin 7)
Led 1 Pin	RP2040 GPIO 6 (Pin 8)
Led 2 Pin	RP2040 GPIO 7 (Pin 9)

RGB LEDs

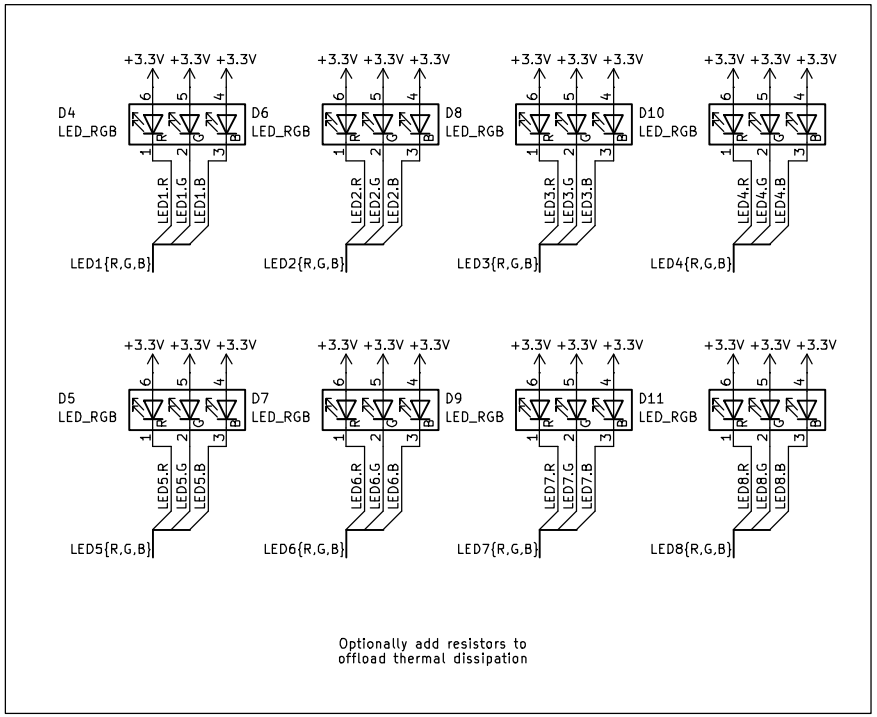


Color Sensor

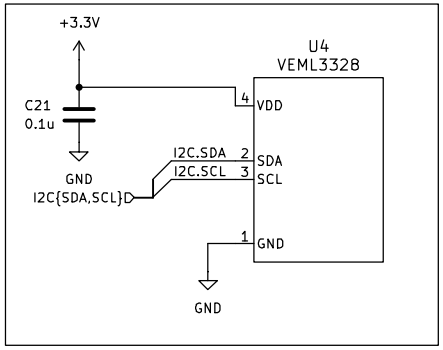

Device	VEML3328 (U4)
Function	Color Sensor
I2C Address (7-bit)	0101000 (0x28)
Address Config	NONE
Voltage Range	2.6-3.6V


Device	TMAG5273A2 (U5)
Function	Hall Effect & Temperature Sensor
I2C Address (7-bit)	0110101 (0x35)
Address Config	Register 0x0C
Voltage Range	1.7–3.6V
Pull-Ups	4.7k on INT and I2C

Hall Effect Sensor

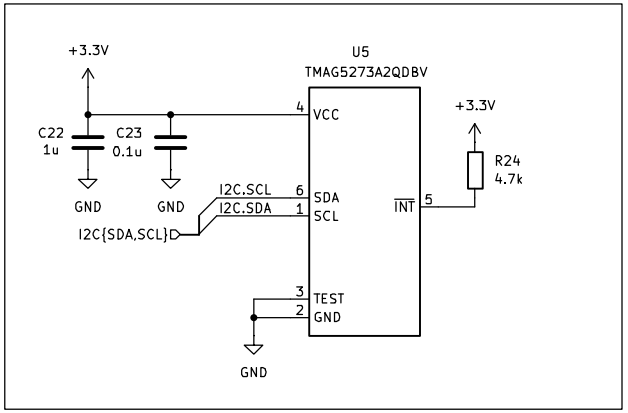


Datasheet advises to ground TEST

Temperature Sensor

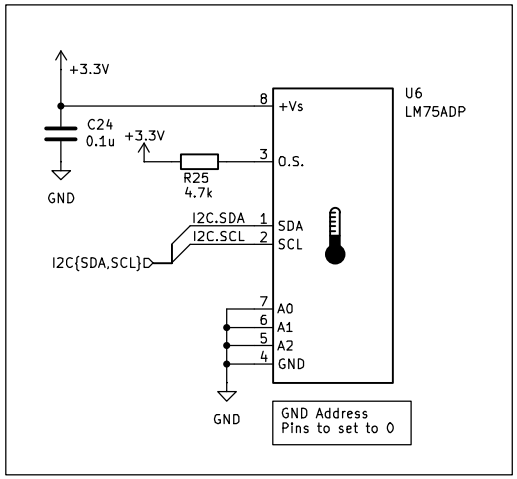


Device	LM75ADP (U6)
Function	Temperature Sensor
I2C Address (7-bit)	1001000 (0x48)
Address Config	A0-A2 on GND
Voltage Range	2.8-5.5V
Pull-Ups	4.7k on OS and I2C

GPIO Expander

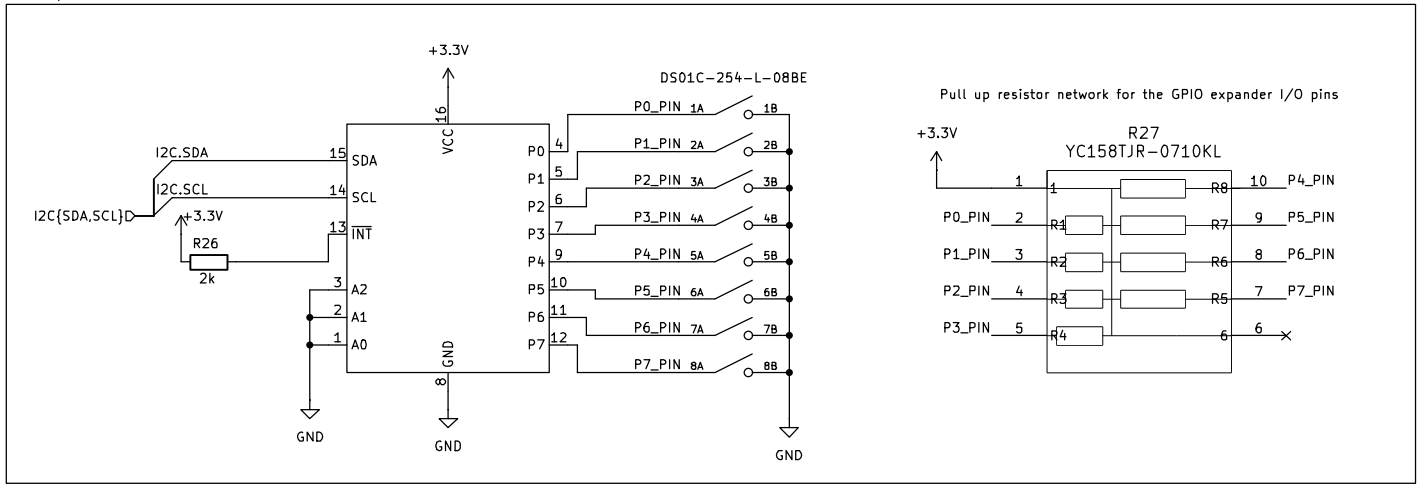


Device	TCA9534PWR (U7)
Function	GPIO Expander
I2C Address (7-bit)	0100000 (0x20)
Address Config	A0-A2 on GND
Voltage Range	1.65-5.5V
Pull-Ups	4.7k on I2C, 2K on INT to VCC


USB-C and SPI Input Power MUXing

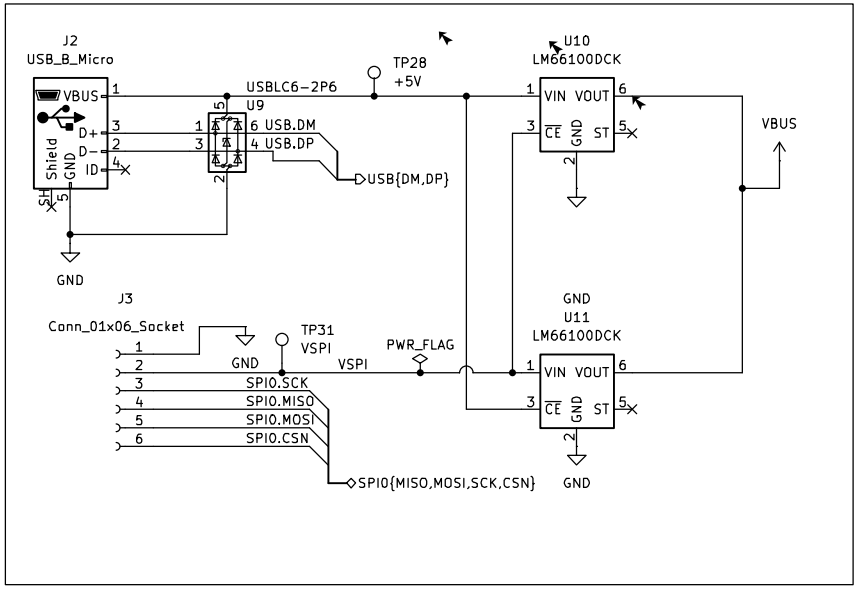


3.3 V 600 mA LDO

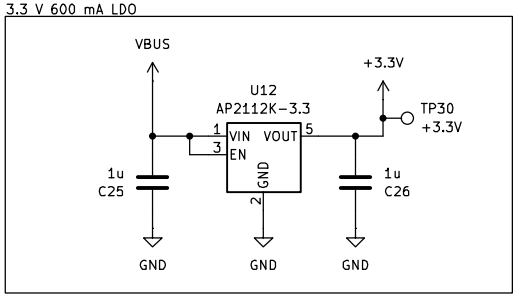

Output SPI Connector

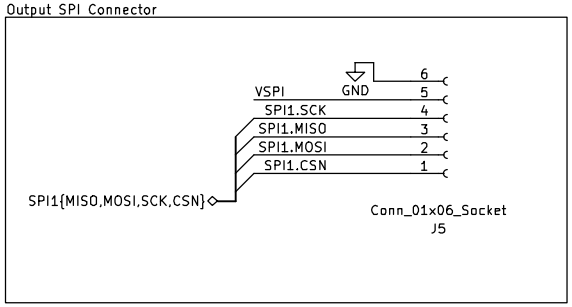

SWD Debug Connector

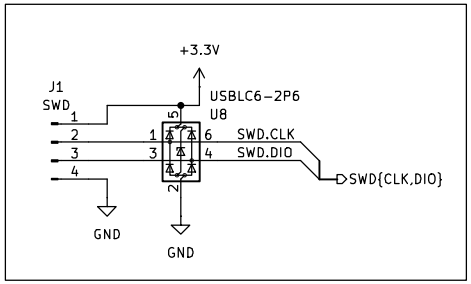

Debug and Option Buttons

