



1. Description

1.1. Project

Project Name	ControlBoard_Testing
Board Name	custom
Generated with:	STM32CubeMX 6.18.1
Date	09/10/2026


1.2. MCU

MCU Series	STM32H7
MCU Line	STM32H723/733
MCU name	STM32H723ZGTx
MCU Package	LQFP144
MCU Pin number	144

1.3. Core(s) information

Core(s)	Arm Cortex-M7
---------	---------------

2. Pinout Configuration

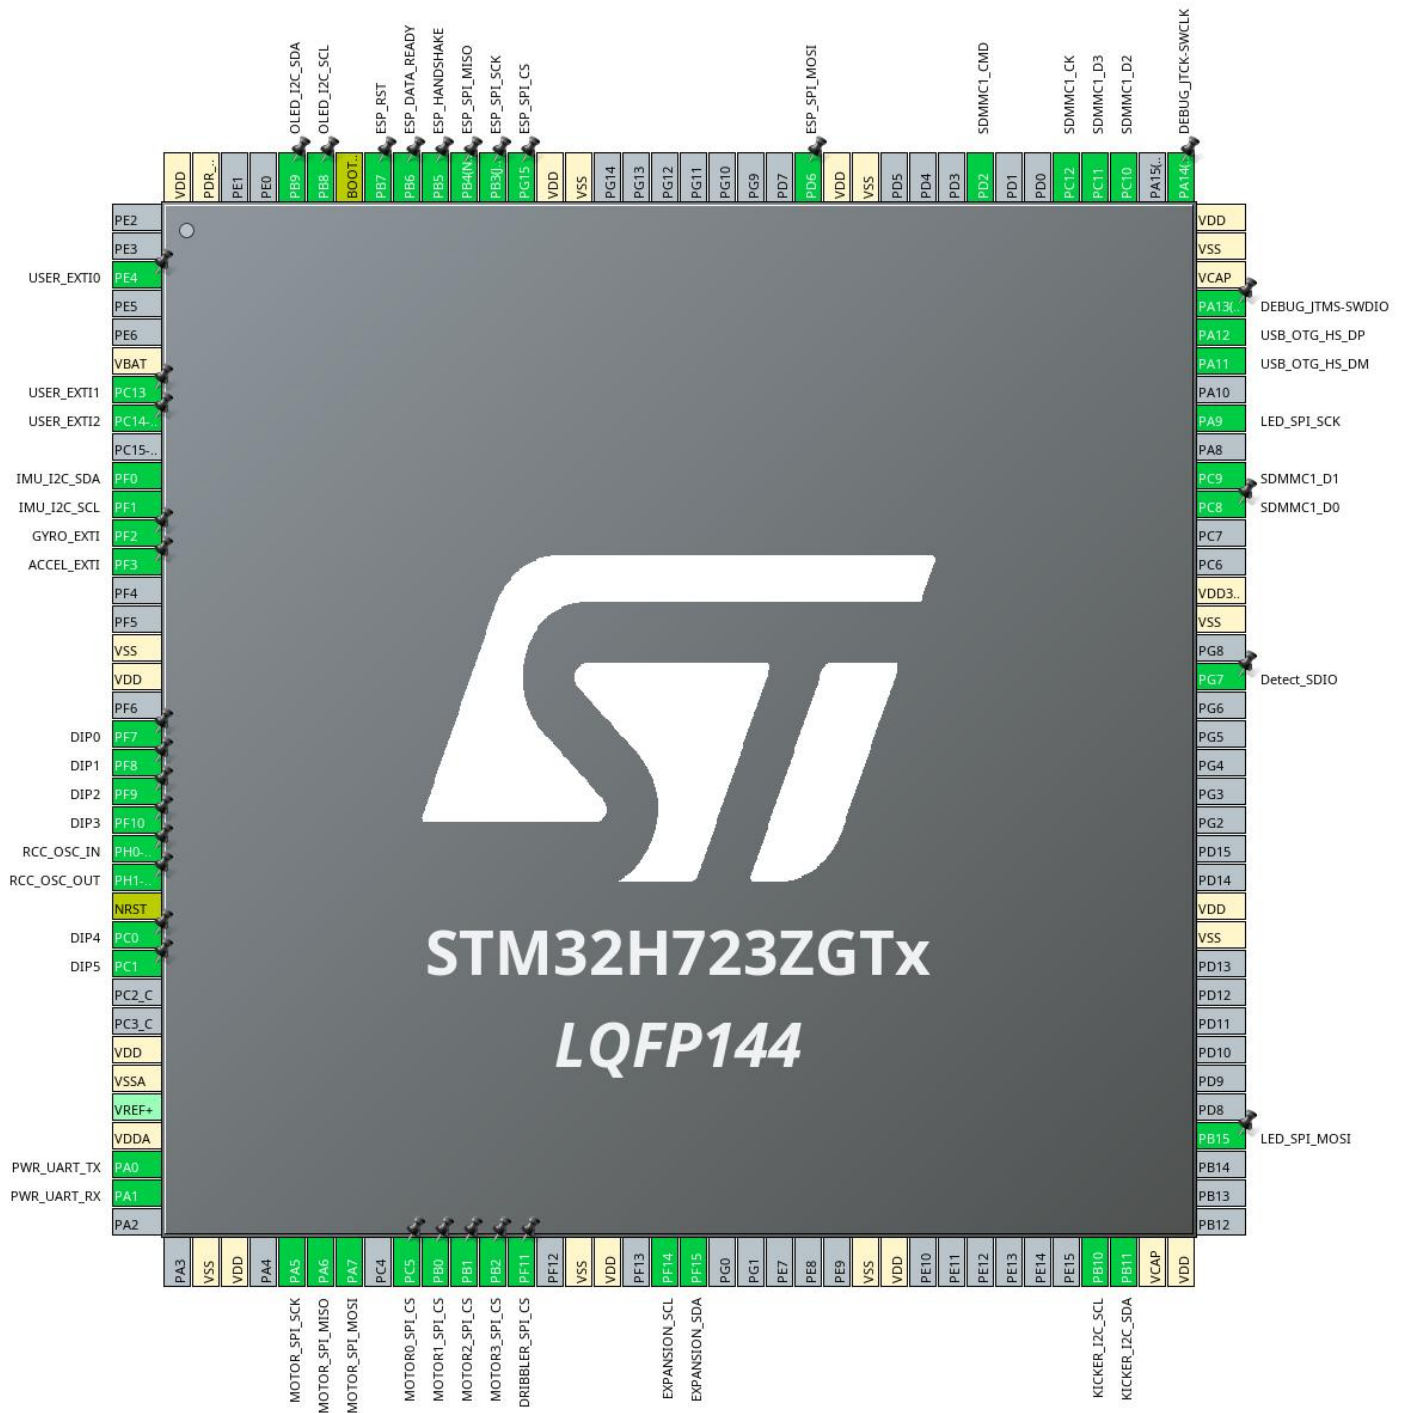

3. Pins Configuration

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
3	PE4	I/O	GPIO_EXTI4	USER_EXTI0
6	VBAT	Power		
7	PC13	I/O	GPIO_EXTI13	USER_EXTI1
8	PC14-OSC32_IN	I/O	GPIO_EXTI14	USER_EXTI2
10	PF0	I/O	I2C5_SDA	IMU_I2C_SDA
11	PF1	I/O	I2C5_SCL	IMU_I2C_SCL
12	PF2	I/O	GPIO_EXTI2	GYRO_EXTI
13	PF3	I/O	GPIO_EXTI3	ACCEL_EXTI
16	VSS	Power		
17	VDD	Power		
19	PF7 *	I/O	GPIO_Input	DIP0
20	PF8 *	I/O	GPIO_Input	DIP1
21	PF9 *	I/O	GPIO_Input	DIP2
22	PF10 *	I/O	GPIO_Input	DIP3
23	PH0-OSC_IN	I/O	RCC_OSC_IN	
24	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
25	NRST	Reset		
26	PC0 *	I/O	GPIO_Input	DIP4
27	PC1 *	I/O	GPIO_Input	DIP5
30	VDD	Power		
31	VSSA	Power		
33	VDDA	Power		
34	PA0	I/O	UART4_TX	PWR_UART_TX
35	PA1	I/O	UART4_RX	PWR_UART_RX
38	VSS	Power		
39	VDD	Power		
41	PA5	I/O	SPI1_SCK	MOTOR_SPI_SCK
42	PA6	I/O	SPI1_MISO	MOTOR_SPI_MISO
43	PA7	I/O	SPI1_MOSI	MOTOR_SPI_MOSI
45	PC5 *	I/O	GPIO_Output	MOTOR0_SPI_CS
46	PB0 *	I/O	GPIO_Output	MOTOR1_SPI_CS
47	PB1 *	I/O	GPIO_Output	MOTOR2_SPI_CS
48	PB2 *	I/O	GPIO_Output	MOTOR3_SPI_CS
49	PF11 *	I/O	GPIO_Output	DRIBBLER_SPI_CS
51	VSS	Power		
52	VDD	Power		


Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
54	PF14	I/O	I2C4_SCL	EXPANSION_SCL
55	PF15	I/O	I2C4_SDA	EXPANSION_SDA
61	VSS	Power		
62	VDD	Power		
69	PB10	I/O	I2C2_SCL	KICKER_I2C_SCL
70	PB11	I/O	I2C2_SDA	KICKER_I2C_SDA
71	VCAP	Power		
72	VDD	Power		
76	PB15	I/O	SPI2_MOSI	LED_SPI_MOSI
83	VSS	Power		
84	VDD	Power		
92	PG7 *	I/O	GPIO_Input	Detect_SDIO
94	VSS	Power		
95	VDD33USB	Power		
98	PC8	I/O	SDMMC1_D0	
99	PC9	I/O	SDMMC1_D1	
101	PA9	I/O	SPI2_SCK	LED_SPI_SCK
103	PA11	I/O	USB_OTG_HS_DM	
104	PA12	I/O	USB_OTG_HS_DP	
105	PA13(JTMS/SWDIO)	I/O	DEBUG_JTMS-SWDIO	
106	VCAP	Power		
107	VSS	Power		
108	VDD	Power		
109	PA14(JTCK/SWCLK)	I/O	DEBUG_JTCK-SWCLK	
111	PC10	I/O	SDMMC1_D2	
112	PC11	I/O	SDMMC1_D3	
113	PC12	I/O	SDMMC1_CK	
116	PD2	I/O	SDMMC1_CMD	
120	VSS	Power		
121	VDD	Power		
122	PD6	I/O	SPI3_MOSI	ESP_SPI_MOSI
130	VSS	Power		
131	VDD	Power		
132	PG15 *	I/O	GPIO_Output	ESP_SPI_CS
133	PB3(JTDO/TRACESWO)	I/O	SPI3_SCK	ESP_SPI_SCK
134	PB4(NJTRST)	I/O	SPI3_MISO	ESP_SPI_MISO
135	PB5	I/O	GPIO_EXTI5	ESP_HANDSHAKE
136	PB6	I/O	GPIO_EXTI6	ESP_DATA_READY
137	PB7 *	I/O	GPIO_Output	ESP_RST

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
138	BOOT0	Boot		
139	PB8	I/O	I2C1_SCL	OLED_I2C_SCL
140	PB9	I/O	I2C1_SDA	OLED_I2C_SDA
143	PDR_ON	Power		
144	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

RIF configuration not available for STM32H723ZGTx

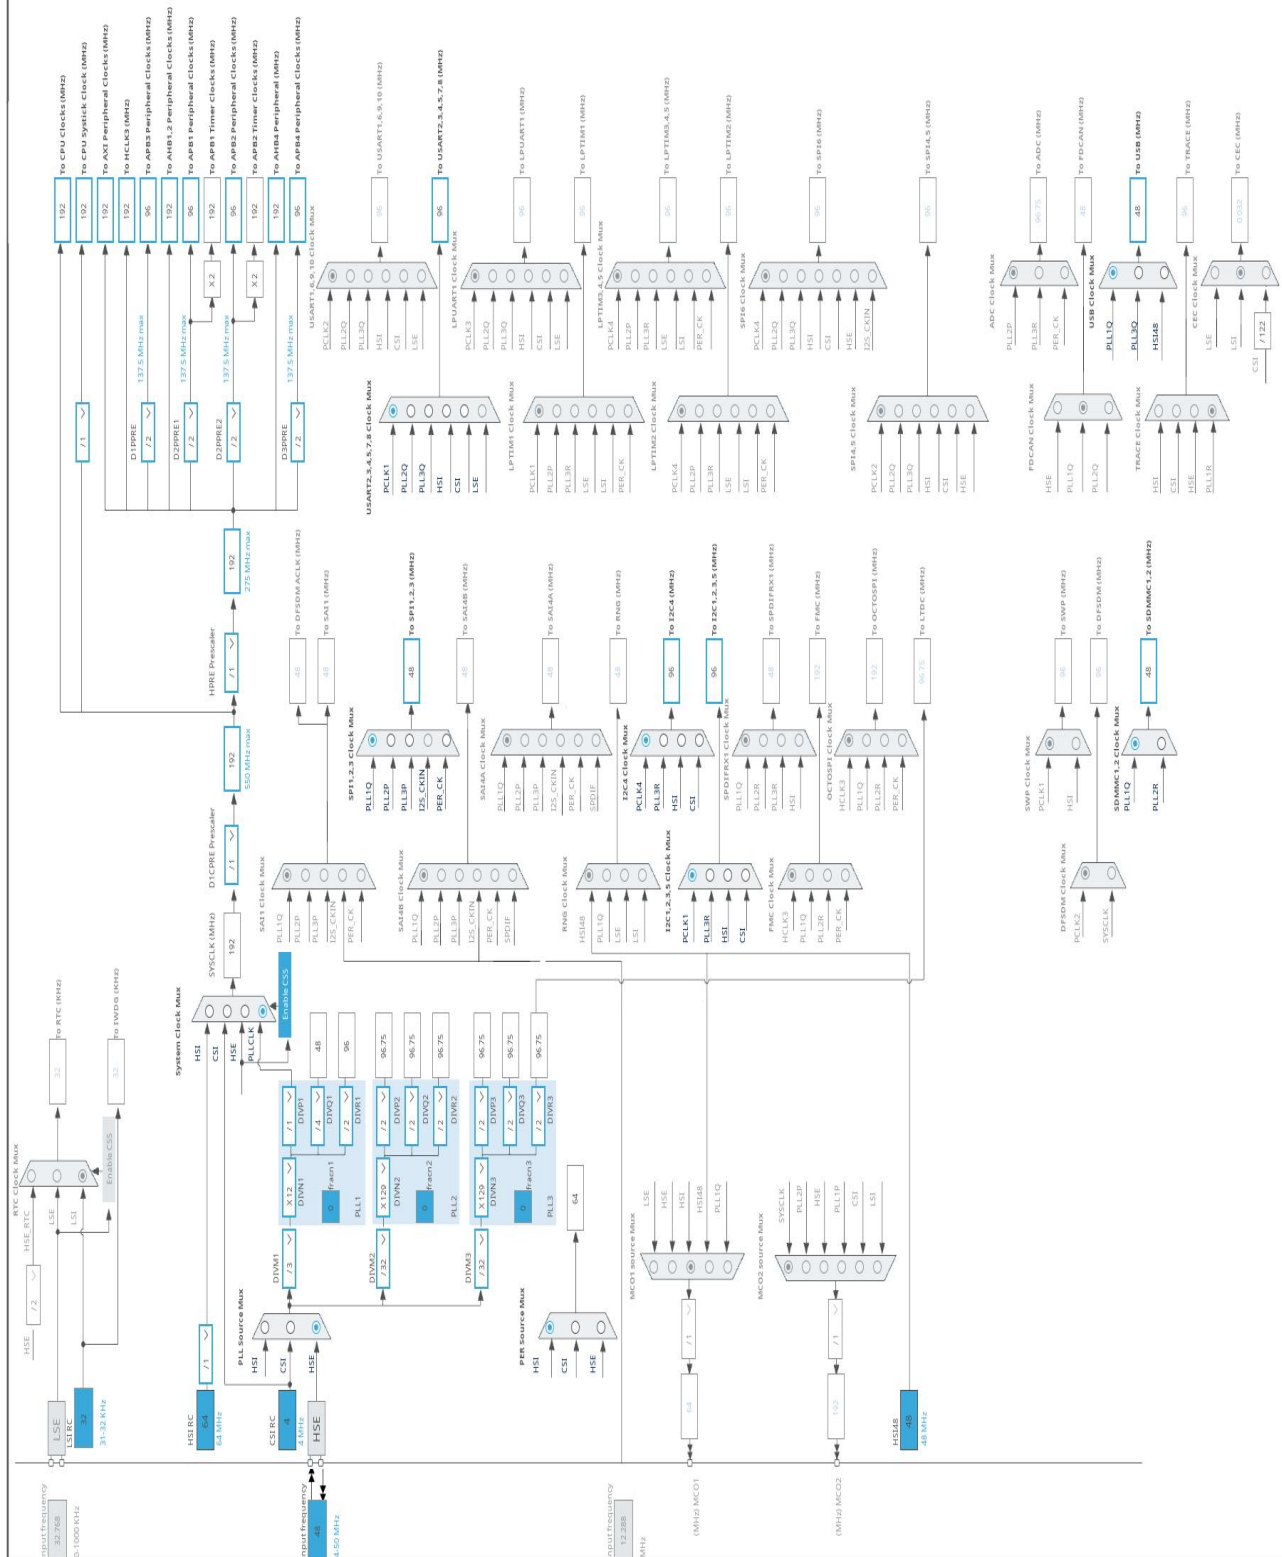

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32H7
Line	STM32H723/733
MCU	STM32H723ZGTx
Datasheet	DS13313 Rev1

1.2. Parameter Selection

Temperature	25
Vdd	3.0

1.3. Battery Selection

Battery	Alkaline(9V)
Capacity	625.0 mAh
Self Discharge	0.3 %/month
Nominal Voltage	9.0 V
Max Cont Current	200.0 mA
Max Pulse Current	0.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	VOS0: Scale0/Boost	SVOS5: System-Scale5
D1 Mode	DRUN	DSTANDBY
D2 Mode	DRUN	DSTANDBY
D3 Mode	DRUN	DSTOP
Fetch Type	SRAM1/FlashMode- ON/Cache	NA
CPU Frequency	550 MHz	0 Hz
Clock Configuration	HSE BYP PLL	ALL_CLOCKS_OFF
Clock Source Frequency	8 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	150 mA	94.5 μ A
Duration	0.1 ms	0.9 ms
DMIPS	1177.0	0.0
Ta Max	105.2	124.99
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	15.09 mA
Battery Life	1 day, 17 hours	Average DMIPS	1177.0 DMIPS

1.6. Chart

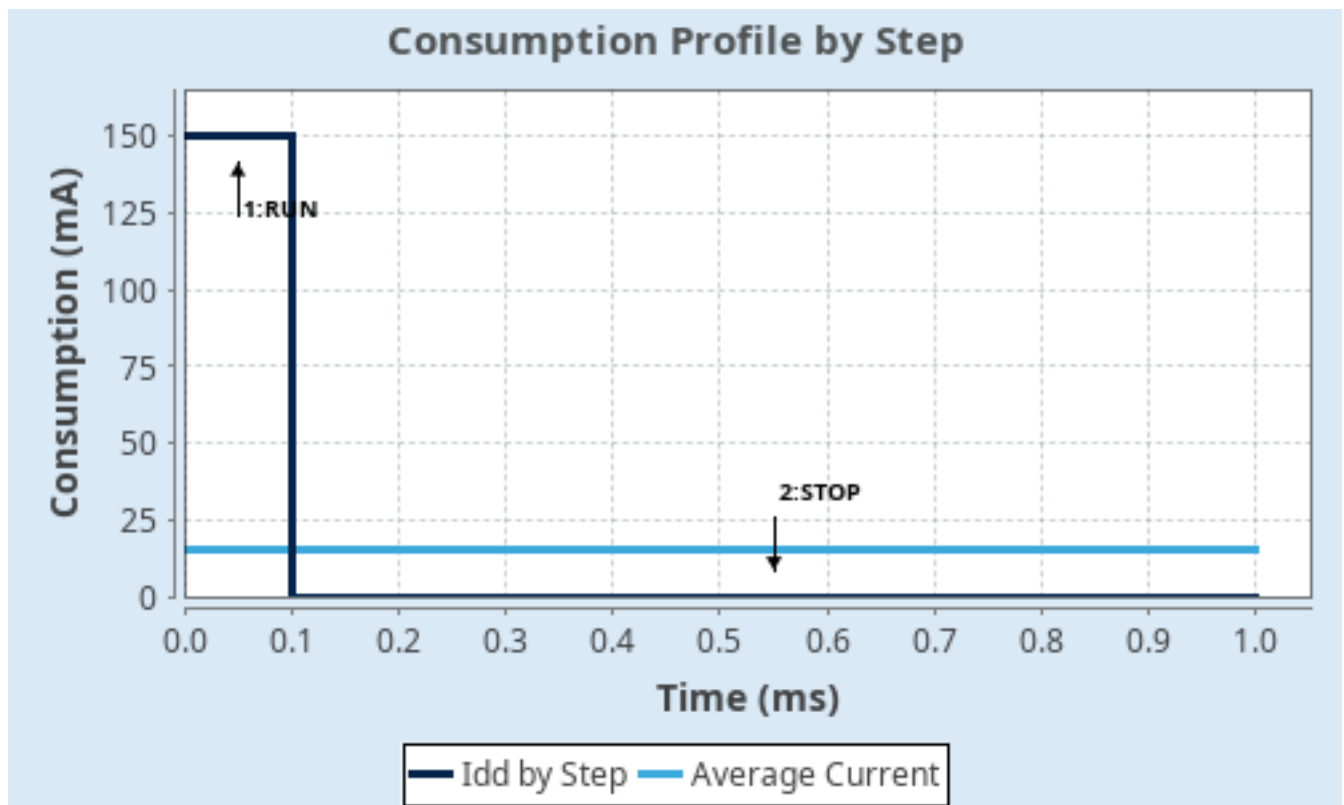

2. Software Project

2.1. Project Settings

Name	Value
Project Name	ControlBoard_Testing
Project Folder	/home/narnarfighter007/Documents/ControlBoard
Toolchain / IDE	CMake
Firmware Package Name and Version	STM32Cube FW_H7 V1.13.0
Application Structure	Advanced
Generate Under Root	No
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_DMA_Init	DMA
4	MX_SPI1_Init	SPI1
5	MX_I2C1_Init	I2C1
6	MX_I2C2_Init	I2C2
7	MX_I2C4_Init	I2C4
8	MX_I2C5_Init	I2C5
9	MX_SDMMC1_SD_Init	SDMMC1
10	MX_SPI2_Init	SPI2
11	MX_SPI3_Init	SPI3

Rank	Function Name	Peripheral Instance Name
12	MX_FATFS_Init	FATFS
13	MX_USB_DEVICE_Init	USB_DEVICE
14	MX_UART4_Init	UART4

3. Peripherals and Middlewares Configuration

3.1. CORTEX_M7

3.1.1. Parameter Settings:

Speculation default mode Settings:

Speculation default mode **Enabled ***

Cortex Interface Settings:

CPU ICache Disabled

CPU DCache Disabled

Cortex Memory Protection Unit Control Settings:

MPU Control Mode Background Region Privileged accesses only + MPU Disabled during hard fault, NMI and FAULTMASK handlers

Cortex Memory Protection Unit Region 0 Settings:

MPU Region Enabled

MPU Region Base Address **0x0 ***

MPU Region Size 4GB

MPU SubRegion Disable **0x87 ***

MPU TEX field level level 0

MPU Access Permission ALL ACCESS NOT PERMITTED

MPU Instruction Access DISABLE

MPU Shareability Permission ENABLE

MPU Cacheable Permission DISABLE

MPU Bufferable Permission DISABLE

Cortex Memory Protection Unit Region 1 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 2 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 3 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 4 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 5 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 6 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 7 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 8 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 9 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 10 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 11 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 12 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 13 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 14 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 15 Settings:

MPU Region Disabled

3.2. DEBUG

Debug: Serial Wire

3.3. I2C1

I2C: I2C

3.3.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Fast Mode *
I2C Speed Frequency (KHz)	400
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x009032AE *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

3.4. I2C2

I2C: I2C

3.4.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Fast Mode *
I2C Speed Frequency (KHz)	400
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x009032AE *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

3.5. I2C4

I2C: I2C

3.5.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Fast Mode *
I2C Speed Frequency (KHz)	400
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x009032AE *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled

Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

3.6. I2C5

I2C: I2C

3.6.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Fast Mode *
I2C Speed Frequency (KHz)	400
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x009032AE *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

3.7. MEMORYMAP

mode: Activated

3.8. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

CRS SYNC: USB_HS

3.8.1. Parameter Settings:

Power Parameters:

SupplySource	PWR_LDO_SUPPLY
Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

RCC Parameters:

TIM Prescaler Selection	Disabled
-------------------------	----------

HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000
CSI Calibration Value	16
HSI Calibration Value	64

System Parameters:

VDD voltage (V)	3.3
Flash Latency(WS)	2 WS (3 CPU cycle)

PLL range Parameters:

PLL1 input frequency range	Between 8 and 16 MHz
PLL1 clock Output range	Wide VCO range

CRS Parameters:

CRS Synchro Divider	1
CRS Synchro Polarity	Active on rising edge
CRS Synchro Reload Value Type	Automatic
CRS Synchro frequency (Hz)	1000
Error limit Value	34
HSI48 Calibration Value	32

3.9. SDMMC1

Mode: SD 4 bits Wide bus

3.9.1. Parameter Settings:

SDMMC parameters:

Clock transition on which the bit capture is made	Rising transition
SDMMC Clock output enable when the bus is idle	Disable the power save for the clock
SDMMC hardware flow control	The hardware control flow is disabled
SDMMC clock divide factor	3 *
Is external transceiver present ?	no

3.10. SPI1

Mode: Full-Duplex Master

3.10.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	8 *
Baud Rate	6.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software
Fifo Threshold	Fifo Threshold 01 Data
Tx Crc Initialization Pattern	All Zero Pattern
Rx Crc Initialization Pattern	All Zero Pattern
Nss Polarity	Nss Polarity Low
Master Ss Idleness	00 Cycle
Master Inter Data Idleness	00 Cycle
Master Receiver Auto Susp	Disable
Master Keep Io State	Master Keep Io State Disable
IO Swap	Disabled

3.11. SPI2

Mode: Transmit Only Master

3.11.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits *
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	16 *
Baud Rate	3.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software
Fifo Threshold	Fifo Threshold 01 Data
Tx Crc Initialization Pattern	All Zero Pattern
Rx Crc Initialization Pattern	All Zero Pattern

Nss Polarity	Nss Polarity Low
Master Ss Idleness	00 Cycle
Master Inter Data Idleness	00 Cycle
Master Receiver Auto Susp	Disable
Master Keep Io State	Master Keep Io State Disable
IO Swap	Disabled

3.12. SPI3

Mode: Full-Duplex Master

3.12.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	16 *
Baud Rate	3.0 MBits/s *
Clock Polarity (CPOL)	High *
Clock Phase (CPHA)	2 Edge *

Advanced Parameters:

CRC Calculation	Enabled *
CRC Length	CRC 8 Bits
CRC Polynomial [0x10:0xFFFFFFFF]	0x10 *
NSSP Mode	Enabled
NSS Signal Type	Software
Fifo Threshold	Fifo Threshold 01 Data
Tx Crc Initialization Pattern	All Zero Pattern
Rx Crc Initialization Pattern	All Zero Pattern
Nss Polarity	Nss Polarity Low
Master Ss Idleness	00 Cycle
Master Inter Data Idleness	00 Cycle
Master Receiver Auto Susp	Disable
Master Keep Io State	Master Keep Io State Disable
IO Swap	Disabled

3.13. SYS

Timebase Source: SysTick

3.14. UART4

Mode: Asynchronous

3.14.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable
ClockPrescaler	1
Fifo Mode	FIFO mode disable
Txfifo Threshold	1 eighth full configuration
Rxfifo Threshold	1 eighth full configuration

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

3.15. USB_OTG_HS

Internal FS Phy: Device_Only

3.15.1. Parameter Settings:

Speed	Device Full Speed 12MBit/s
Enable internal IP DMA	Disabled
Physical interface	Internal Phy
Low power	Disabled
Link Power Management	Disabled

Use dedicated end point 1 interrupt	Disabled
VBUS sensing	Disabled

3.16. FATFS

mode: SD Card

3.16.1. Set Defines:

Version:

FATFS version	R0.12c
---------------	--------

Function Parameters:

FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FASTSEEK (Fast seek function)	Enabled
USE_EXPAND (Use f_expand function)	Disabled
USE_CHMOD (Change attributes function)	Disabled
USE_LABEL (Volume label functions)	Disabled
USE_FORWARD (Forward function)	Disabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Latin 1
USE_LFN (Use Long Filename)	Disabled
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled
USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_TINY (Tiny mode)	Disabled
FS_EXFAT (Support of exFAT file system)	Disabled
FS_NORTC (Timestamp feature)	Dynamic timestamp
FS_REENTRANT (Re-Entrancy)	Disabled
FS_TIMEOUT (Timeout ticks)	1000

FS_LOCK (Number of files opened simultaneously) 2

3.16.2. Advanced Settings:

SDIO/SDMMC:

SDMMC instance	SDMMC1
Use dma template	Enabled *
BSP code for SD	Generic

3.16.3. Platform Settings:

Detect_SDIO	PG7
-------------	-----

3.17. USB_DEVICE

Class For HS IP: Communication Device Class (Virtual Port Com)

3.17.1. Parameter Settings:

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message
USBD_LPM_ENABLED (Link Power Management)	1: Link Power Management supported

Class Parameters:

USB CDC Rx Buffer Size	2048
USB CDC Tx Buffer Size	2048

3.17.2. Device Descriptor:

Device Descriptor:

VID (Vendor Identifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

Device Descriptor HS:

PID (Product Identifier)	22336
PRODUCT_STRING (Product Identifier)	STM32 Virtual ComPort
CONFIGURATION_STRING (Configuration Identifier)	CDC Config

INTERFACE_STRING (Interface Identifier)

CDC Interface

*** User modified value**

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
DEBUG	PA13(JTMS/SWDIO)	DEBUG_JTMS-SWDIO	n/a	n/a	n/a	
	PA14(JTCK/SWCLK)	DEBUG_JTCK-SWCLK	n/a	n/a	n/a	
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	No pull-up and no pull-down	High *	OLED_I2C_SCL
	PB9	I2C1_SDA	Alternate Function Open Drain	No pull-up and no pull-down	High *	OLED_I2C_SDA
I2C2	PB10	I2C2_SCL	Alternate Function Open Drain	No pull-up and no pull-down	High *	KICKER_I2C_SCL
	PB11	I2C2_SDA	Alternate Function Open Drain	No pull-up and no pull-down	High *	KICKER_I2C_SDA
I2C4	PF14	I2C4_SCL	Alternate Function Open Drain	No pull-up and no pull-down	High *	EXPANSION_SCL
	PF15	I2C4_SDA	Alternate Function Open Drain	No pull-up and no pull-down	High *	EXPANSION_SDA
I2C5	PF0	I2C5_SDA	Alternate Function Open Drain	No pull-up and no pull-down	High *	IMU_I2C_SDA
	PF1	I2C5_SCL	Alternate Function Open Drain	No pull-up and no pull-down	High *	IMU_I2C_SCL
RCC	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SDMMC1	PC8	SDMMC1_D0	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC9	SDMMC1_D1	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC10	SDMMC1_D2	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC11	SDMMC1_D3	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC12	SDMMC1_CK	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD2	SDMMC1_CMD	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	MOTOR_SPI_SCK
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	High *	MOTOR_SPI_MISO
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	High *	MOTOR_SPI_MOSI
SPI2	PB15	SPI2_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	High *	LED_SPI_MOSI
	PA9	SPI2_SCK	Alternate Function Push Pull	No pull-up and no pull-down	High *	LED_SPI_SCK
SPI3	PD6	SPI3_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	High *	ESP_SPI_MOSI

ControlBoard_Testing Project
Configuration Report

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
	PB3(JTDO/TRACESWO)	SPI3_SCK	Alternate Function Push Pull	No pull-up and no pull-down	High *	ESP_SPI_SCK
	PB4(NJTRST)	SPI3_MISO	Alternate Function Push Pull	No pull-up and no pull-down	High *	ESP_SPI_MISO
UART4	PA0	UART4_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	PWR_UART_TX
	PA1	UART4_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	PWR_UART_RX
USB_OTG_HS	PA11	USB_OTG_HS_DM	n/a	n/a	n/a	
	PA12	USB_OTG_HS_DP	n/a	n/a	n/a	
GPIO	PE4	GPIO_EXTI4	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	USER_EXTI0
	PC13	GPIO_EXTI13	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	USER_EXTI1
	PC14-OSC32_IN	GPIO_EXTI14	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	USER_EXTI2
	PF2	GPIO_EXTI2	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	GYRO_EXTI
	PF3	GPIO_EXTI3	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	ACCEL_EXTI
	PF7	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	DIP0
	PF8	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	DIP1
	PF9	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	DIP2
	PF10	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	DIP3
	PC0	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	DIP4
	PC1	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	DIP5
	PC5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	MOTOR0_SPI_CS
	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	MOTOR1_SPI_CS
	PB1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	MOTOR2_SPI_CS
	PB2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	MOTOR3_SPI_CS
	PF11	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DRIBBLER_SPI_CS
	PG7	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	Detect_SDIO
	PG15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	ESP_SPI_CS
	PB5	GPIO_EXTI5	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	ESP_HANDSHAKE
	PB6	GPIO_EXTI6	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	ESP_DATA_READY
	PB7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	ESP_RST

4.2. DMA configuration

DMA request	Stream	Direction	Priority
SPI2_TX	DMA1_Stream0	Memory To Peripheral	Low

SPI2_TX: DMA1_Stream0 DMA request Settings:

Mode: Normal
Use fifo: Disable
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: Byte
Memory Data Width: Byte

4.3. BDMA configuration

nothing configured in DMA service

4.4. MDMA configuration

nothing configured in DMA service

4.5. NVIC configuration

4.5.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	15	0
EXTI line2 interrupt	true	0	0
EXTI line3 interrupt	true	0	0
EXTI line4 interrupt	true	0	0
DMA1 stream0 global interrupt	true	0	0
EXTI line[9:5] interrupts	true	0	0
I2C1 event interrupt	true	0	0
I2C1 error interrupt	true	0	0
I2C2 event interrupt	true	0	0
I2C2 error interrupt	true	0	0
SPI1 global interrupt	true	0	0
SPI2 global interrupt	true	0	0
EXTI line[15:10] interrupts	true	0	0
SDMMC1 global interrupt	true	0	0
SPI3 global interrupt	true	0	0
UART4 global interrupt	true	0	0
USB OTG HS global interrupt	true	0	0
I2C4 event interrupt	true	0	0
I2C4 error interrupt	true	0	0
I2C5 event interrupt	true	0	0
I2C5 error interrupt	true	0	0
PVD/AVD through EXTI Line detection Interrupt	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USB On The Go HS End Point 1 Out global interrupt	unused		
USB On The Go HS End Point 1 In global interrupt	unused		
FPU global interrupt	unused		
HSEM1 global interrupt	unused		

Interrupt Table	Enable	Preenmption Priority	SubPriority
Clock Recovery System global interrupt	unused		

4.5.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
EXTI line2 interrupt	false	true	true
EXTI line3 interrupt	false	true	true
EXTI line4 interrupt	false	true	true
DMA1 stream0 global interrupt	false	true	true
EXTI line[9:5] interrupts	false	true	true
I2C1 event interrupt	false	true	true
I2C1 error interrupt	false	true	true
I2C2 event interrupt	false	true	true
I2C2 error interrupt	false	true	true
SPI1 global interrupt	false	true	true
SPI2 global interrupt	false	true	true
EXTI line[15:10] interrupts	false	true	true
SDMMC1 global interrupt	false	true	true
SPI3 global interrupt	false	true	true
UART4 global interrupt	false	true	true
USB OTG HS global interrupt	false	true	true
I2C4 event interrupt	false	true	true
I2C4 error interrupt	false	true	true
I2C5 event interrupt	false	true	true
I2C5 error interrupt	false	true	true

* User modified value

5. System Views

5.1. Category view

5.1.1. Current

6. Docs & Resources

Type	Link
BSDL files	https://www.st.com/resource/en/bsdl_model/stm32h7-bsdl.zip
IBIS models	https://www.st.com/resource/en/ibis_model/stm32h7_ibis.zip
System View Description	https://www.st.com/resource/en/svd/stm32h7-svd.zip
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers_stm32h7_series_product_overview.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_embedded_software_solutions.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_eval-tools_portfolio.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_stm8_functional-safety-packages.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_software_development_tools.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers_stm32h72x-3x_line_product-overview.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32-family-overview.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32h7rs-lines-overview.pdf
Brochures	https://www.st.com/resource/en/brochure/brstm32h7.pdf
Brochures	https://www.st.com/resource/en/brochure/humanoid-robot-reference-guide.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32nucleo.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32trust.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32h7rs.pdf
Security Bulletin	https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-stmicroelectronics.pdf

Security Bulletin	https://www.st.com/resource/en/security_bulletin/sb0023-eucleak-protection-statement-for-stmicroelectronics-certified-products-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an1709-emc-design-guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4839-level-1-cache-on-stm32f7-series-and-stm32h7-series-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4891-stm32h72x-stm32h73x-and-singlecore-stm32h74x75x-system-architecture-and-performance-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4990-getting-started-with-sigmadelata-digital-interface-on-applicable-stm32-microcontrollers-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5033-stm32cube-mcu-package-examples-for-stm32h7-series-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5073-receiving-spdif-audio-stream-with-the-stm32f4f7h7-series-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5612-esd-protection-

of-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5293-migration-guide-from-stm32f7-series-to-stmh74x75x-stm32h72x73x-and-stmh7a37bx-devices-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4991-how-to-wake-up-an-stm32-microcontroller-from-lowpower-mode-with-the-usart-or-the-lpuart-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5325-how-to-use-the-cordic-to-perform-mathematical-functions-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5225-introduction-to-usb-typec-power-delivery-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5342--how-to-use-error-correction-code-ecc-management-for-internal-memories-protection-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5537-how-to-use-adc-oversampling-techniques-to-improve-signaltonoise-ratio-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5405-how-to-use-fdcan-bootloader-protocol-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5690-how-to-use-vrefbuf-peripheral-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4230-introduction-to-random-number-generation-validation-using-the-nist-statistical-test-suite-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2867-guidelines-for-oscillator-design-on-stm8afals-and-stm32-mcusmpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4635-how-to-optimize-lpuart-power-consumption-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4861-introduction-to-lcdtft-display-controller-ltcd-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4908-getting-started-with-uart-automatic-baud-rater-detection-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4943-how-to-use-chromart-accelerator-to-refresh-an-lcdtft-display-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5224-introduction-to-dmamux-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5507-how-to-use-crc-to-check-the-integrity-of-the-internal-flash-memory-on-stm32h7-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5337-guidelines-for-estimating-stm32h7-mcus-lifetime-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5348-introduction-to-fdcan-peripherals-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/cd00211314-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack2-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5020-introduction-to-digital-camera-interface-dcml-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4566-how-to-extend-the-dac-performance-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5647-the-goertzel-algorithm-to-compute-individual-terms-of-the-discrete-fourier-transform-dft-in-stm32-products-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2606-introduction-to-system-memory-boot-mode-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5200-getting-started-with-the-stm32h7-mcu-sdmmc-host-controller-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3126-how-to-use-dac-for-audio-and-waveform-generation-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3155-how-to-use-uart-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3156-how-to-use-usb-ufu-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4286-how-to-use-spi-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4759-introduction-to-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4776-how-to-use-generalpurpose-timer-peripheral-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4989-introduction-to-debug-toolbox-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5050-getting-started-with-octospi-hexadecapi-and-xspi-interfaces-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5419-getting-started-

with-stm32h723733-stm32h725735-and-stm32h730-mcu-hardware-development-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5927-how-to-use-i3c-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5354-getting-started-with-16bit-adc-on-stm32h7-mcus-stmicroelectronics.pdf

Design Notes & Tips https://www.st.com/resource/en/design_tip/dt0117-microphone-array-beamforming-in-the-pcm-and-pdm-domain-stmicroelectronics.pdf

Errata Sheets https://www.st.com/resource/en/errata_sheet/es0491-stm32h72xx73xx-device-errata-stmicroelectronics.pdf

Datasheet <https://www.st.com/resource/en/datasheet/dm00701028.pdf>

Programming Manuals https://www.st.com/resource/en/programming_manual/pm0253-stm32f7-series-and-stm32h7-series-cortexm7-processor-programming-manual-stmicroelectronics.pdf

Reference Manuals https://www.st.com/resource/en/reference_manual/rm0468-stm32h723733-stm32h725735-and-stm32h730-value-line-advanced-armbased-32bit-mcus-stmicroelectronics.pdf

Technical Notes & Articles https://www.st.com/resource/en/technical_note/tn1163-description-of-wlcsp-for-microcontrollers-and-recommendations-for-its-use-stmicroelectronics.pdf

Technical Notes & Articles https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-stmicroelectronics.pdf

Technical Notes & Articles https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-stmicroelectronics.pdf

Technical Notes & Articles https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-stmicroelectronics.pdf

Technical Notes & Articles https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-packages-stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1433-reference-device-

& Articles	marking-schematics-for-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-shipping-media-for-stm32-devices-in-bga-packages-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um2840-stm32h7-dualcore-series-safety-manual-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um2331-stm32h7-singlecore-series-safety-manual-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um3252-stm32h7-series-ulcsaiec-607301603351-selftest-library-user-guide-stmicroelectronics.pdf