



FPVspeed™

DIY Module Series


FPV Video Receiver

FS1264R

1080~2200MHz -95dBm

KEY FEATURES

- Power Supply: 5.0V
- Current Consumption: 380±30mA
- Operating Temperature: -10~+65°C
- Storing Temperature: -30~+85°C
- Operating Humidity: 85% RH
- Receiving Frequency Range: 1080~2200MHz
- Voltage Standing Wave Ratio: 2:1
- Demodulation System: FM/PLL
- IF: 480MHz
- ANT.Input Impedance: 50Ω, Typ.
- LO Frequency Stabilization: ±200kHz
- LO Frequency Precision: ±200kHz
- LO Control: PLL
- Input LO Leak: -65dBm
- Receiving Sensitivity: -95dBm±2
- Input Level Range: -95dBm~+5dBm
- Video Output Impedance: 75Ω, Typ.
- Video Output Level: 1±0.2Vp-p, Typ.
- Video Polarity: Negative
- Video Frequency Response: ±5dB, Max. 50Hz~6MHz
- Differential Gain: ±5%, Max
- Differential Phase: ±5Deg., Max
- 3Db IF WIDEBAND: 16.5MHz
- S/N: 38dB, Min
- RSSI Slope: 22mv/dBm or 45mv/dBm
- Weight: 5.3g
- Dimensions: L37 x W26.3 x H4.5mm

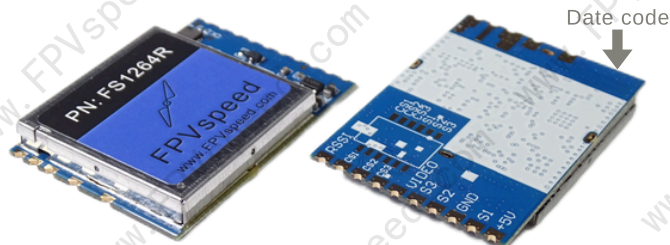

APPLICATIONS

- FPV Drone Racing
- UAV Communication Systems
- Remote Vehicle Monitoring
- Wireless Video Transmission Systems

DISCLAIMER



This product is intended for civilian and commercial use only. It is strictly prohibited from being used for any military purposes or activities.



FPVspeed™

DIY Module Series


FPV Video Receiver

FS1264R

1080~2200MHz -95dBm

Pin No.	Function
1	+5V IN
2	S1, Frequency SEL.
3	GND
4	S2, Frequency SEL.
5	S3, Frequency SEL.
6	Video Out
7	CS3: Refer to Table1
8	CS2: Refer to Table1
9	CS1: Refer to Table1
10	RSSI
11	GND
12	GND
13	GND
14	ANT IN
15	GND

PAD No.	Function
2	Connected with S1
4	Connected with S2
5	Connected with S3
7	Connected with CS3
8	Connected with CS2
9	Connected with CS1
0	Connected with GND

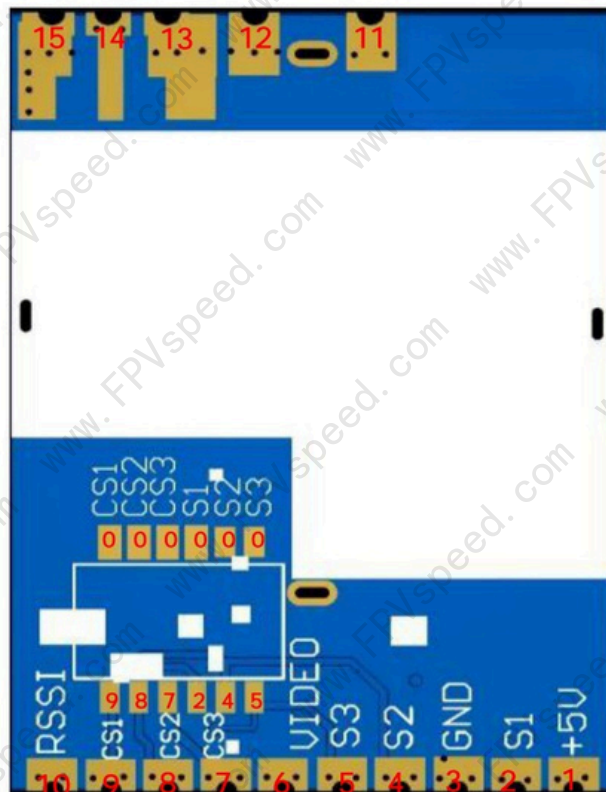

Using the E4421B signal generator as the signal input source for the module, the RSSI output voltage at the 1080MHz frequency point is for reference only.

Input Signal Strength	RSSI Output Voltage	Input Signal Strength	RSSI Output Voltage
-90dB	0.38V	-60dB	1.035V
-85dB	0.48V	-55dB	1.15V
-80dB	0.58V	-50dB	1.24V
-75dB	0.68V	-45dB	1.26V
-70dB	0.81V	-40dB	1.28V
-65dB	0.92V		



DIY Module Series

FPV Video Receiver

FS1264R

FPVspeed™

1080~2200MHz -95dBm

THE CHANNEL TABLE

FS1264R Receiver Module Channel Setting Table										
0 represents ground or low level, 1 represents floating or high level.			CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
			CS3/CS2/ CS1	CS3/CS2/ CS1	CS3/CS2/ CS1	CS3/CS2/ CS1	CS3/CS2/ CS1	CS3/CS2/ CS1	CS3/CS2/ CS1	CS3/CS2/ CS1
			0/0/0	0/0/1	0/1/0	0/1/1	1/0/0	1/0/1	1/1/0	1/1/1
FR 1	S3/S2/S1	0/0/0	1920	1960	2000	2040	2080	2120	2160	2200
FR 2	S3/S2/S1	0/0/1	1900	1940	1980	2020	2060	2100	2140	2180
FR 3	S3/S2/S1	0/1/0	1740	1760	1780	1800	1820	1840	1860	1880
FR 4	S3/S2/S1	0/1/1	1720	1740	1760	1780	1800	1820	1840	1860
FR 5	S3/S2/S1	1/0/0	1420	1460	1500	1540	1580	1620	1660	1700
FR 6	S3/S2/S1	1/0/1	1400	1440	1480	1520	1560	1600	1640	1680
FR 7	S3/S2/S1	1/1/0	1100	1140	1180	1220	1260	1300	1340	1380
FR 8	S3/S2/S1	1/1/1	1080	1120	1160	1200	1240	1280	1320	1360



FPVspeed™

DIY Module Series

FPV Video Receiver

FS1264R

1080~2200MHz -95dBm

APPLICATION CIRCUIT

