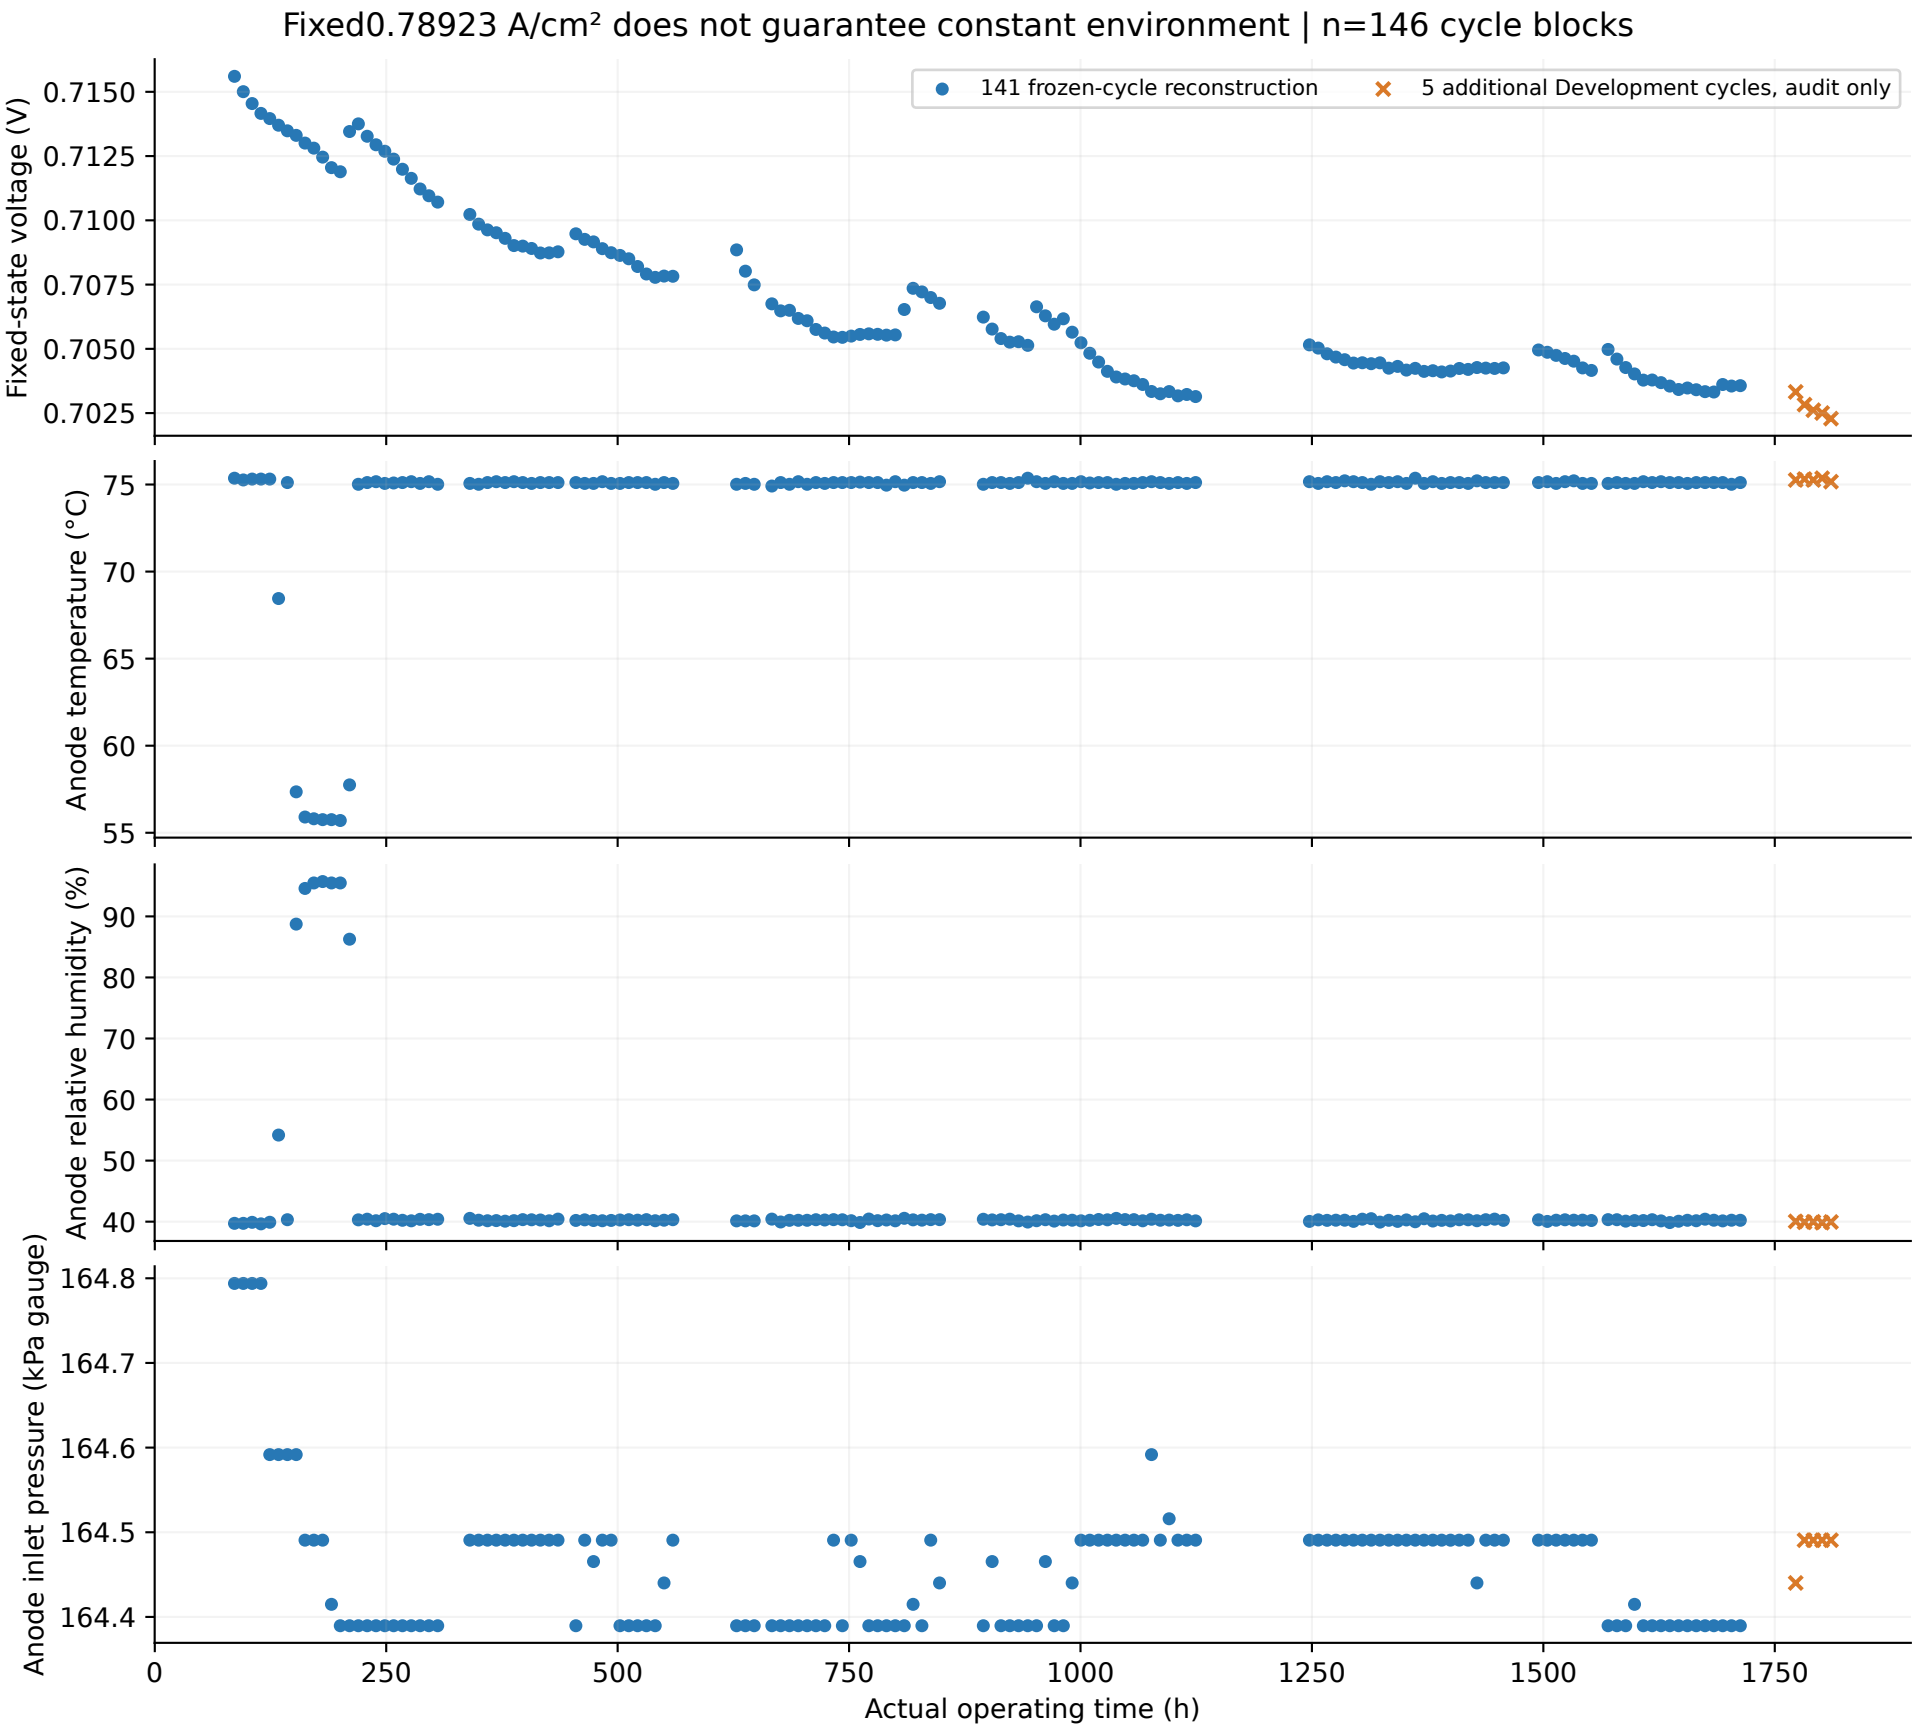
Fixed0.78923 A/cm² does not guarantee constant environment | n=146 cycle blocks
141 frozen-cycle reconstruction
5 additional Development cycles, audit only
Fixed-state voltage (V)
0.7150
0.7125
0.7100
0.7075
0.7050
0.7025
Anode temperature (°C)
75
70
65
60
55
Anode relative humidity (%)
90
80
70
60
50
40
Anode inlet pressure (kPa gauge)
164.8
164.7
164.6
164.5
164.4
0
250
500
750
1000
1250
1500
1750
Actual operating time (h)