Mittuniversitetet
MID SWEDEN UNIVERSITY

Försättsblad Prov Original

Kurskod	Provkod	Tentamensdatum
DT081A	T101	2024-10-29

Kursnamn	Datateknik AV, Signal- och bildbehandling
Provnamn	Tentamen
Ort	Sundsvall
Termin	
Ämne	

6895642268

Utskriven 2024-12-20 kl. 13:30:48

Mittuniversitetet
MID SWEDEN UNIVERSITY

Department of
Computer and Electrical Engineering (DET)
Mårten Sjöström (Marten.Sjostrom@miun.se), 010 142 8836
Roger Olsson (Roger.Olsson@miun.se), 010 142 8698

2024-10-29. Examination in

DT081A – Signal and Image Processing, 6 hp

Allowed aids	Dictionary, non-programmable calculator and drawing tools (e.g ruler)
Miscellaneous	Don't forget to: 1. Submit one, or several pages, per solved assignment and NOT several solved assignments per page. 2. Order the handed in pages with the solved assignments in ascending order. 3. Describe and clearly motivate all solutions, assumptions, programming constructs, etc. 4. Attach all neatly drawn figures that you might want to refer to in a solution. **Failing to follow the above instructions will render point reduction.**

Good Luck!


1. What does the following signal processing concepts mean? Be clear, concise, and relevant.

a) Sampling (1p)
b) Quantization (1p)
c) Impulse response (1p)
d) Frequency response (1p)
e) Windowing (1p)

2. A time-discrete signal $s(n)$ is defined as $s(n) = \{3, 7, 10, 3, -5\}$.

a) Convolve $s(n)$ with the filter defined using the impulse response $h(n) = \{-0.5, 0, 0.5\}$
Show your calculations and provide the resulting sequence and any assumptions. (3p)
b) Identify the operation that this filter approximates and explain the reasoning behind your answer. (2p)


3. A time discrete system is defined as below.

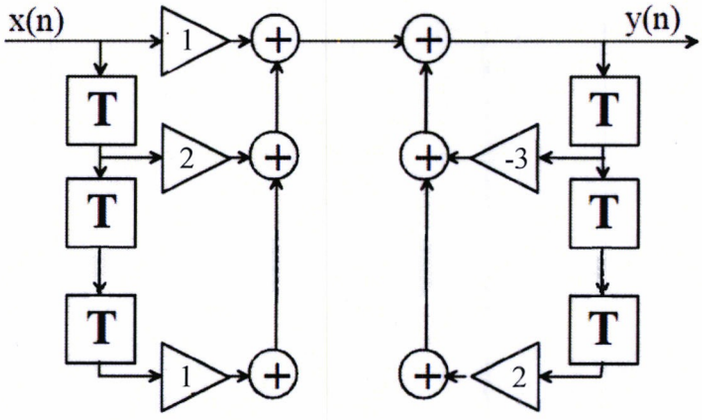

1

a) Describe the system based on its impulse response behavior. (1p)
b) Present the system's difference equation. (2p)

4. A signal $s(t)$ have been sampled using $f_s = 50$ kHz. The amplitude spectrum of the sampled signal is shown in the figure below for a limited normalized frequency range.

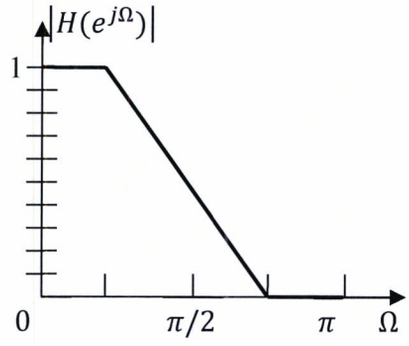


a) Sketch the amplitude spectrum for an extended normalized frequency range by extending axis to $-2\pi < \Omega < 2\pi$. (2p)
b) What is the lowest sampling frequency in Hz that the signal $s(t)$ could be sampled in while still being possible to be reconstructed exactly? Motivate. (3p)

5. An LTI system $H(f)$ is defined by its amplification and phase-shift below. A signal $x(t)$ is fed to the system, giving the output $y(t)$.

a) Give the mathematical relation between amplitudes and phases of the input and the output. (2p)


b) Draw the amplitude spectrum and phase spectrum for the output $y(t)$. (4p)

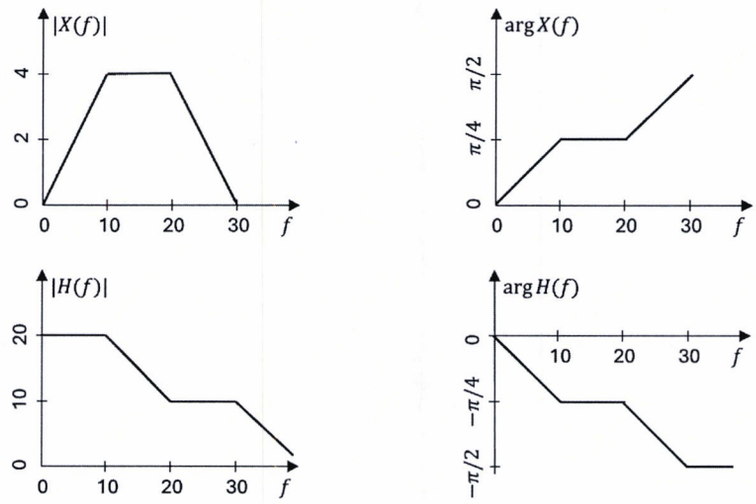


6. The plots below show the frequency spectra (i to iv) of different window functions with varying window lengths employed in spectrogram analysis.

a) Based on these spectra, which window function achieves the best frequency separation? Justify your selection. (2p)

b) Which window function best minimizes spectral leakage (where unwanted frequency components appear away from the main frequency)? Motivate. (2p)

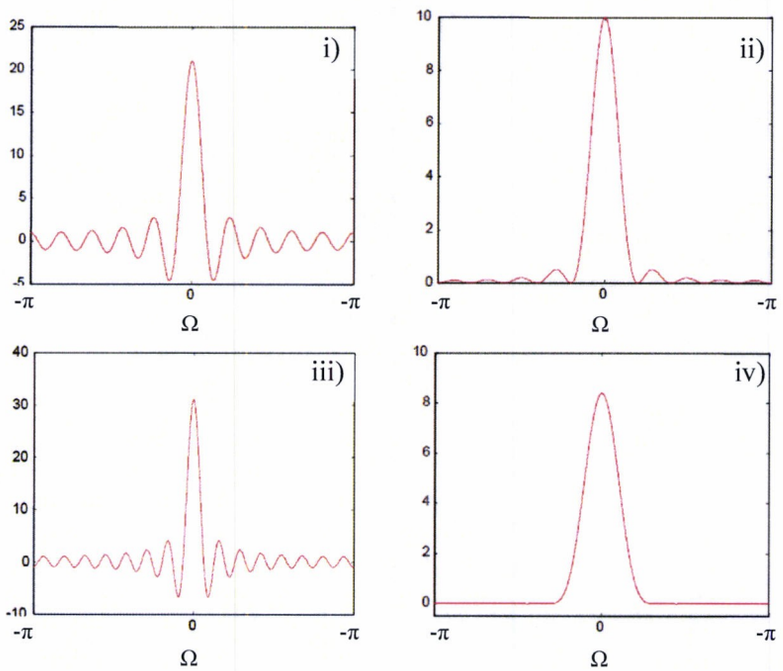

7. A two-dimensional linear system can partially be described by the figure below. Based on the information in the figure, describe the system's frequency selective properties.

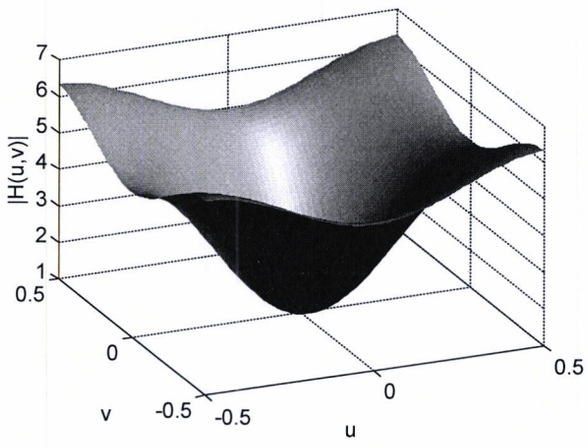

(3p)

8. The closeup image below has been filtered with 4 different filters.



Match the following kernels (1–5) with the corresponding filtered results (i–v). Justify your choices by explaining how the filter kernels affect the image.

Kernels

$$\begin{bmatrix} 0 & 0 & 0 \\ 0 & 0.5 & 0 \\ 0 & 0 & 0 \end{bmatrix}$$ **1)**

$$\begin{bmatrix} -1 & 0 & 1 \\ -1 & 0 & 1 \\ -1 & 0 & 1 \end{bmatrix}$$ **2)**

$$\begin{bmatrix} 0 & -1 & 0 \\ -1 & 4 & -1 \\ 0 & -1 & 0 \end{bmatrix}$$ **3)**

$$\frac{1}{9}\begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 1 \end{bmatrix}$$ **4)**

$$\begin{bmatrix} 0 & -1 & 0 \\ -1 & 5 & -1 \\ 0 & -1 & 0 \end{bmatrix}$$ **5)**

Filter results


i)


ii)


iii)


iv)


v)

(5p)

9. Given the two matrices representing the input $x(i,j)$ and output $y(i,j)$ of a linear 2D filter: describe the $3x3$ point spread function (PSF) or kernel $h(i,j)$ that transforms $x(i,j)$ into $y(i,j)$. Assume boundary conditions are zero, meaning pixels outside the matrix boundaries of $x(i,j)$ and $y(i,j)$ are zero.

$x(i,j)$

i \ j	0	1	2	3	4	5
0	0	0	0	0	0	144
1	0	112	0	0	0	0
2	0	0	0	224	0	0
3	80	0	64	0	0	0
4	0	0	0	176	0	0
5	0	0	0	0	0	48

$y(i,j)$

i \ j	0	1	2	3	4	5
0	0	14	0	0	18	72
1	14	56	14	28	0	18
2	10	14	36	112	28	0
3	40	18	32	58	0	0
4	10	0	30	88	22	6
5	0	0	0	22	6	24

(6p)

DT081A - Signal and Image Processing - Collection of Formulas

Version 2, HT2024

Signals & Systems

Base Signals: $s(t)$ (continuous), $s[n]$ (discrete)
Stochastic: $w(n) \sim \mathcal{N}(0, \sigma^2)$
Linearity: $ax_1 + bx_2 \rightarrow ay_1 + by_2$
Time-Shift: $x(t - t_0) \rightarrow y(t - t_0)$
Causality: $h(t) = 0, t < 0$
Nyquist-Shannon Sampling Theorem: $f_s \geq 2f_{max}$

Transforms

Fourier Series: $x(t) = \sum_{k=-\infty}^{\infty} C_k e^{jk\omega_0 t}$
Fourier Transform: $X(\omega) = \int_{-\infty}^{\infty} x(t) e^{-j\omega t} dt$
DTFT: $X(e^{j\Omega}) = \sum_{n=-\infty}^{\infty} x[n] e^{-j\Omega n}$
DFT: $X(k) = \sum_{n=0}^{N-1} x[n] e^{-j2\pi kn/N}$
STFT: $X(t, \omega) = \int_{-\infty}^{\infty} x(\tau) w(t - \tau) e^{-j\omega\tau} d\tau$
Spectrogram: $S(t, \omega) = |X(t, \omega)|^2$
2D DFT: $G(m, n) = \frac{1}{\sqrt{MN}} \sum_{k=0}^{M-1} \sum_{l=0}^{N-1} g(k, l) e^{-2\pi j(km/M + ln/N)}$

Filters

FIR: $y[n] = \sum_{k=0}^{M} b_k x[n - k]$
IIR: $y[n] = \sum_{k=1}^{N} a_k y[n - k] + \sum_{k=0}^{M} b_k x[n - k]$
Frequency Response: $H(e^{j\Omega}) = |H(e^{j\Omega})| e^{j \arg H(e^{j\Omega})}$
System Output: $Y(\omega) = H(\omega) X(\omega)$
BIBO Stability: $\sum_{k=-\infty}^{\infty} |h[k]| < \infty$

Image Processing

PSF Basic: $h(x, \alpha, y, \beta)$
Shift-Invariant: $g(\alpha, \beta) = \sum_x \sum_y f(x, y) h(\alpha - x, \beta - y)$
Separable Transform: $g = h_c^T f h_r$
Elementary Expansion: $f = \sum_{i=1}^{N} \sum_{j=1}^{N} g_{ij} u_i, v_j^T$
DCT Basis: $U_{x\alpha} = \sqrt{\frac{2}{N}} \cos(\frac{\pi(2x+1)\alpha}{2N})$
FFT Basis: $W_N^{kn} = e^{-j2\pi kn/N}$

Enhancement

Histogram: $h(r_k) = n_k$ where n_k is number of pixels with intensity r_k
Histogram Equalization: $s = H(r) = \frac{L-1}{MN} \sum_{j=0}^{k} n_j$
Log Transform: $s = c \log(1 + r)$
Power Law: $s = cr^\gamma$

Morphological Processing

Thresholding: $f_{threshold}(a) = \{a_0, a < a_{th}; a_1, a \geq a_{th}\}$
Dilation: $A \oplus B = \{z|(B_z \cap A) \neq \emptyset\}$
Erosion: $A \ominus B = \{z|(B_z \subseteq A)\}$
Opening: $A \circ B = (A \ominus B) \oplus B$
Closing: $A \bullet B = (A \oplus B) \ominus B$

Spatial Frequency

Normalized frequency: $\omega = 2\pi\frac{f}{f_s} = 2\pi f T_s, \quad q = \frac{f}{f_s}$
Magnitude: $f_m = \sqrt{f_x^2 + f_y^2}$
Direction: $\theta = \arctan(f_y/f_x)$
Matrix Form: $\hat{g} = UgU$
Sampling Limit: $f_{s,i} \geq 2f_{max,i}$

Color Processing

RGB to YCbCr: $\begin{bmatrix} Y' \\ Cb \\ Cr \end{bmatrix} = \begin{bmatrix} 0.299 & 0.587 & 0.114 \\ -0.169 & -0.331 & 0.500 \\ 0.500 & -0.419 & -0.081 \end{bmatrix} \begin{bmatrix} R \\ G \\ B \end{bmatrix}$
YCbCr to RGB: $\begin{bmatrix} R \\ G \\ B \end{bmatrix} = \begin{bmatrix} 1 & 0 & 1.403 \\ 1 & -0.344 & -0.714 \\ 1 & 1.773 & 0 \end{bmatrix} \begin{bmatrix} Y' \\ Cb \\ Cr \end{bmatrix}$
CIE Coordinates: $x = \frac{X}{X+Y+Z}, y = \frac{Y}{X+Y+Z}$
Gamma: $C' = C^{1/\gamma}$