



SECTION B-B scale 1.05 : 1

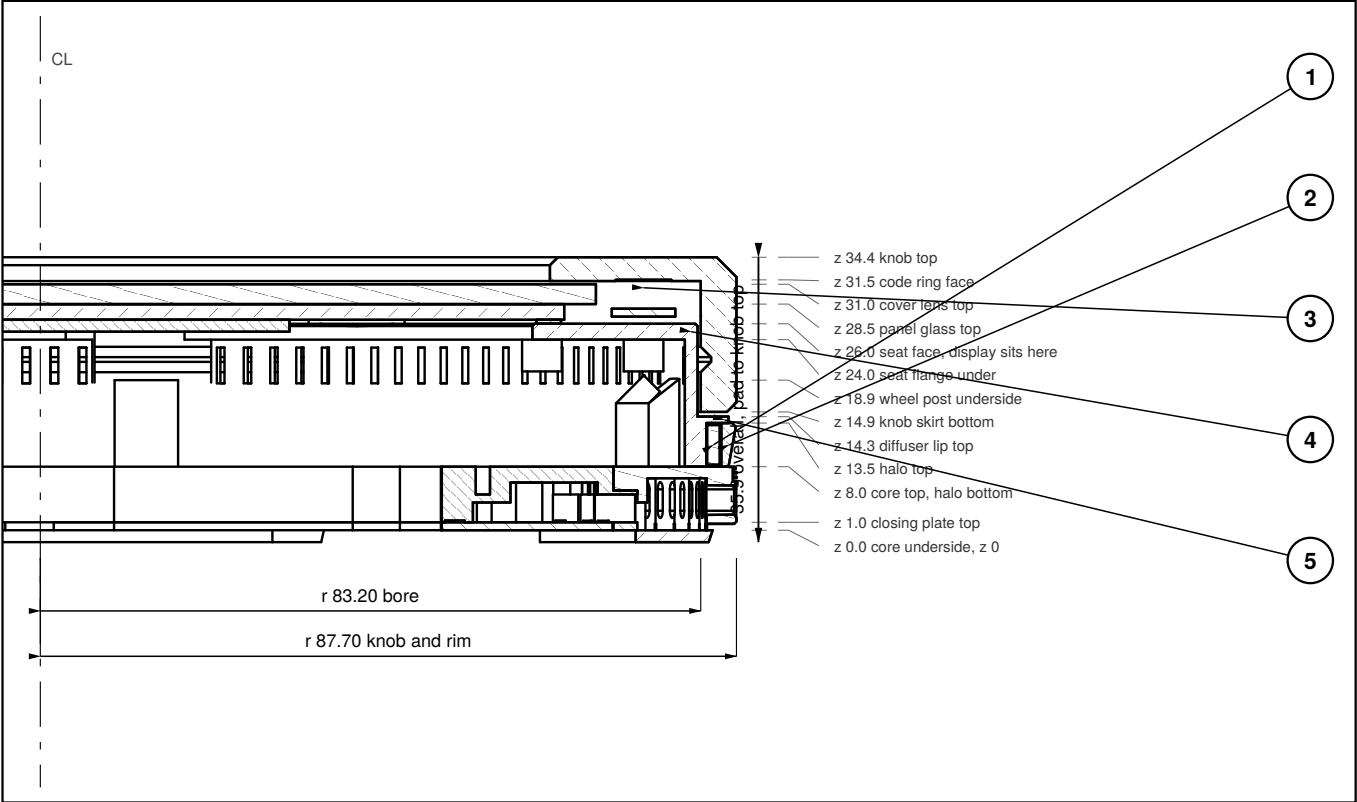

Right half, on the 310 deg - 130 deg axis, through the encoder at 310 deg. The whole vertical stack, pad to lens.

PLAN - HORIZONTAL SECTION AT z 10.8 scale 0.56 : 1

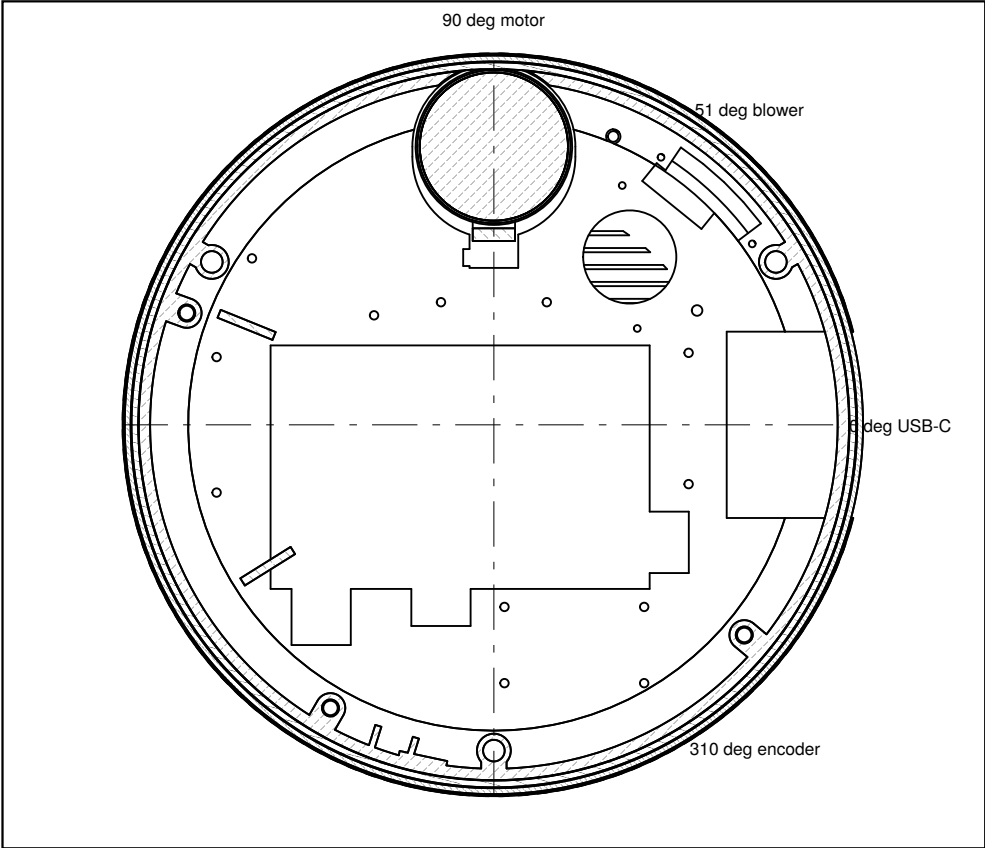


About 53 LEDs on a 6.8 deg pitch at r 84.80, unbroken all the way round: on the wall's outer face nothing inside can interrupt it. The rim ring below carries the vents; this cut is above it, in the halo band. The port slot at 0 deg passes under the halo, through the core.

NOTES

- 1 About 53 LEDs on a 100 per metre strip, 5.0 wide and 1.6 thick, standing VERTICALLY on the wall's outer face at r 84.0 - 85.6, z 8.25 - 13.25. v15 stood the strip up on the wall; v9 lay a flex ring flat on the plate at r 58.8 and fired outward across the gap.
- 2 Diffuser r 85.8 inside, 86.7 - 87.7 outside (bottom to top, flush with the knob and the rim at r 87.7), so it leans 1.0 over the band's 5.5 height. Retained by a lip at r 86.7, z 13.5 - 14.3, with a 0.6 shadow gap under the knob skirt.
- 3 Continuous through 360 deg. Standing the strip on the wall takes it clear of everything inside: the motor at 90 deg reaches r 83.8 with its band, and the strip's back face is at r 83.9. Nothing now breaks the ring.
- 4 Peak draw 2.54 A at full white (12.7 W at 5 V) for 53 LEDs at 48 mA each. That is what sizes the converter, the halo feed and its connector; the sustained level is a firmware limit, not a fuse.
- 5 AEDR-8300 at 310 deg on a board at z 26.9, looking UP at a 0.15 code ring on the crown's underside: ring face z 31.53, r 72.5 - 79.5, in a 0.15 recess so the printed crown and the stuck-on ring finish flush. Nominal 2.00 gap, set by the shim - print the family 0.7 / 0.8 / 0.9 / 1 / 1.1 and fit the one the bench wants.
- 6 Reading from below rather than across the bore leaves the bore smooth for the wheels and sets the gap by a shim on a flat face, not by the knob's radial runout.
- 7 Display: the panel sits on the seat flange's top face at z 26.0, bonded with 0.50 tape; glass z 26.5 - 28.48, cover lens r 70.0 x 2.5 thick on top, to z 30.98. There are no columns and no M4 seat tabs - the inverted structure prints the seat as one flat face.
- 8 The ambient-light sensor is not in this wall: it is in the port face, looking rearward - see D04.


DETAIL P - HALO 7 : 1

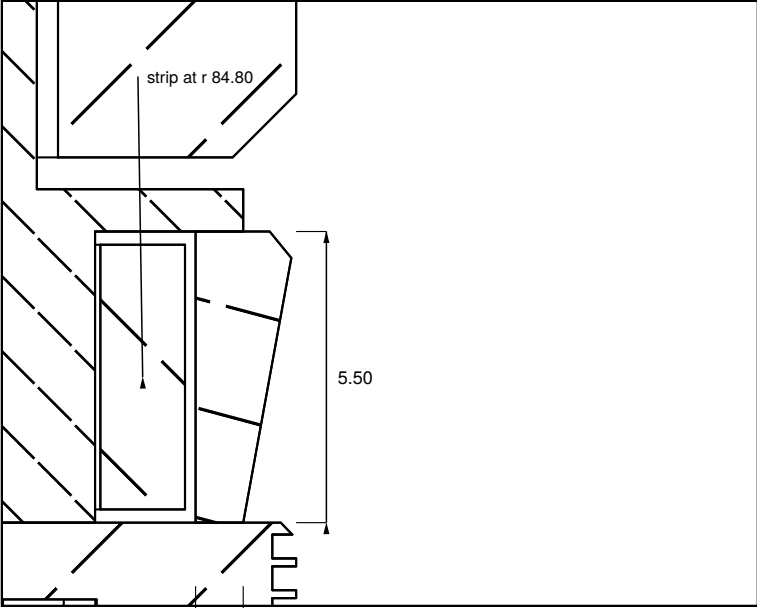

The strip stands on the wall's outer face and fires straight out through the diffuser: r 85.6 to r 86.7 is 1.1 of acrylic in front of the LEDs.


Bench test the diffuser before committing: see docs HALO-BENCH-TEST.

DETAIL Q - ENCODER AND CODE RING 4.5 : 1

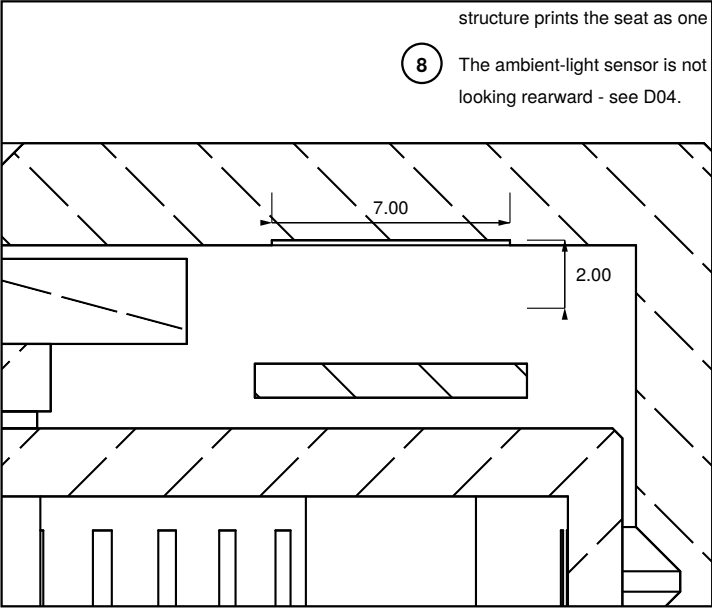

Package top to ring face: 2.00 nominal, set by the shim under the board, not by the knob's radial runout. The ring is a 0.15 recess in the crown's underside, so the stuck-on ring finishes flush.

PLAN - HORIZONTAL SECTION AT z 25.5, UNDER THE SEAT FACE scale 0.56 : 1

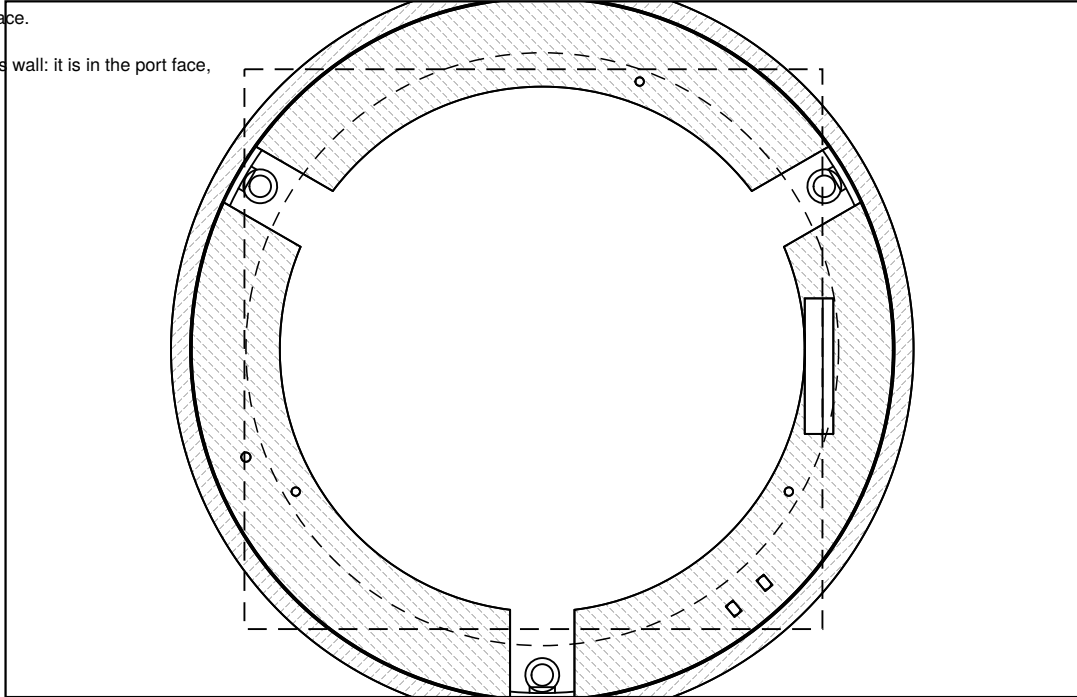

Dashed rectangle: the panel, 136.5 x 132.2, on the seat face above this cut. Dashed circle: the cover lens, r 70.0.

The seat is one flat face at z 26.0. Panel mass 70 g is carried on the bond, so the tape's area and its peel strength are the fixing.

LIGHT BAND, DISPLAY SEAT AND ENCODER

the 60 (Cadrane) — desk dial

DRAWING
60-15-D02

REV
v15

SCALE
AS SHOWN

DATE
2026-09-07

UNITS
mm

MODELLED, NOT MADE — no v15 part has been produced. Dimensions are model values, not inspection results. Bodies tagged ENVELOPE or ASSUMED in the model are drawn as envelopes, not as the real part.

Projected from docs/v15/the60_v15_assembly.step by hidden-line projection, with dimension text written from docs/v15/src/params.py. No hand drafting. The knob is drawn on its turned profile: the knurl is on the part but is not drawn.