HYBRID ADAPTIVE TRANSFORMER DIFFERENTIAL PROTECTION: AN INTELLIGENT DWT–LSTM FRAMEWORK

A Thesis Submitted by

Md Moinul Haque (Student ID: 202216206)

Md Reyaz Uddin (Student ID: 202216211)

In partial fulfillment of the requirements for the degree of

Bachelor of Science in Electrical, Electronic and Communication Engineering

Department of Electrical, Electronic and Communication Engineering

MILITARY INSTITUTE OF SCIENCE AND TECHNOLOGY

Mirpur Cantonment, Dhaka-1216, Bangladesh

OCTOBER 2026

APPROVAL CERTIFICATE

This is to certify that the thesis entitled

"Hybrid Adaptive Transformer Differential Protection: An Intelligent DWT–LSTM Framework"

submitted by Md Moinul Haque (Candidate ID: 202216206) and Md Reyaz Uddin (Candidate ID: 202216211) to the Department of Electrical, Electronic and Communication Engineering (EECE), Military Institute of Science and Technology (MIST), Mirpur Cantonment, Dhaka, Bangladesh, in partial fulfillment of the requirements for the degree of Bachelor of Science in Electrical, Electronic and Communication Engineering, has been accepted as satisfactory for the award of the degree and approved by the undersigned examiners.

Supervisor (Chairman):

_____

Cdre A N M Didarul Alam, (L), NUP, psc, BN
Dean, Faculty of Maritime Business Studies, Bangladesh Maritime University
(formerly Professor, Department of EECE, MIST)

Head of the Department (Member, Ex-officio):

_____

Brigadier General Md Rezaul Awal, psc
Head of the Department, Department of EECE, MIST, Dhaka, Bangladesh

Internal Examiner (Member):

_____

Md Golam Mostafa, PhD
Professor, Department of EECE, MIST, Dhaka, Bangladesh

External Examiner (Member):

_____

Dr. Satya Prasad Majumder
Professor, Department of EEE, BUET, Dhaka-1205, Bangladesh

Counter-signed on behalf of the Board of Advanced Studies.

DECLARATION

We hereby declare that the thesis entitled

"Hybrid Adaptive Transformer Differential Protection: An Intelligent DWT–LSTM Framework"

submitted to the Department of Electrical, Electronic and Communication Engineering, Military Institute of Science and Technology (MIST), Mirpur Cantonment, Dhaka, Bangladesh, in partial fulfillment of the requirements for the degree of Bachelor of Science in Electrical, Electronic and Communication Engineering, is a record of original work carried out by us under the supervision of Cdre A N M Didarul Alam, (L), NUP, psc, BN.

We further declare that this work has not been submitted elsewhere for any other degree, diploma, or certificate. All literature and secondary sources consulted or cited have been duly referenced and acknowledged.

Md Moinul Haque
Candidate ID: 202216206
Department of EECE, MIST

Md Reyaz Uddin
Candidate ID: 202216211
Department of EECE, MIST

ACKNOWLEDGEMENTS

First and foremost, all praises are due to Almighty Allah for His infinite blessings, guidance, and mercy, without which this endeavor would not have been possible. We are profoundly grateful for the strength, patience, and wisdom He bestowed upon us throughout the course of our research and our entire academic journey.

We would like to express our deepest gratitude to our thesis supervisor, Cdre A N M Didarul Alam, (L), NUP, psc, BN, Dean, Faculty of Maritime Business Studies, Bangladesh Maritime University (formerly Professor, Department of Electrical, Electronic and Communication Engineering, MIST), for his invaluable guidance, continuous encouragement, and unwavering support throughout every phase of this research. His profound expertise in power system protection, insightful suggestions, and patient mentorship have been instrumental in shaping the direction and quality of this work.

Our sincere thanks go to the Head of the Department, Department of Electrical, Electronic and Communication Engineering, MIST, for providing the necessary academic facilities, laboratory resources, and an excellent research environment. We are also grateful to all faculty members of the Department of EECE at MIST whose teachings and guidance have enriched our engineering knowledge and technical competence.

Finally, we owe our deepest gratitude to our beloved parents and families for their endless love, prayers, moral support, and sacrifices throughout our academic pursuits. We also extend our heartfelt appreciation to our fellow classmates and friends whose camaraderie, technical discussions, and encouragement made this journey both productive and memorable.

Md Moinul Haque
Md Reyaz Uddin
Dhaka, Bangladesh, October 2026

ABSTRACT

Power transformers constitute the most critical and capital-intensive components of electrical power transmission and distribution networks, making their reliable and rapid protection a paramount concern for the continuity and stability of electric power supply. Differential protection has long been the primary scheme for safeguarding power transformers against internal faults, comparing the currents entering and leaving the protected zone. However, conventional percentage differential relays struggle to distinguish genuine internal faults from non-fault transients such as magnetizing inrush, recovery inrush, overexcitation, and external through-faults accompanied by severe current transformer (CT) saturation. Furthermore, harmonic-restraint methods suffer reduced sensitivity in modern transformers with low-loss, high-permeability core steels.

This thesis proposes a hybrid adaptive differential protection framework that integrates multi-resolution Discrete Wavelet Transform (DWT) feature extraction and second-harmonic restraint ratios with the temporal sequence modeling of Long Short-Term Memory (LSTM) neural networks. A two-level Daubechies-4 (db4) decomposition extracts nine wavelet energy features across three phases (E_{D1}, E_{D2}, E_{A2}), complemented by three phase-wise second-harmonic ratios ($I_{d,2nd}/I_{d,fund}$) to form a compact 12-dimensional feature vector over a 32-sample sliding window (20 ms at 1.6 kHz). A two-layer unidirectional LSTM (64 hidden units per layer, 58,241 trainable parameters) is trained strictly under a leak-free, trace-stratified cross-validation protocol using waveform-measured onset labeling.

To eliminate the operational risks of standalone black-box classifiers, the neural network is embedded within a dual-path supervisory architecture: an instantaneous high-set overcurrent bypass for severe faults ($I_d > 10.0$ pu); a percentage-restraint (87T) gated handshake for normal fault currents; and an autonomous AI trip path with a 20-sample (12.5 ms) persistence dwell timer and ultra-high confidence threshold ($\theta_{\text{solo}} = 0.998$) that recovers sensitivity to high-impedance internal faults ($R_f = 1.2$–$7.0\,\Omega$) below the 87T pickup threshold.

The framework was evaluated on an EMT simulation of a 300 MVA, 230/11 kV, Yd1 transformer in MATLAB/Simulink across 16 operating categories, yielding 3,218 evaluated traces, alongside an independent 300-trace Out-of-Distribution (OOD) stress set. Across 5-fold cross-validation repeated over three independent random seeds (15 models total), the hybrid relay achieved **99.01% dependability** ($\pm 0.48\%$) and **99.66% security** ($\pm 0.24\%$) across the 3,124 evaluated traces (with 94 sub-noise-floor faults segregated), reducing false trips from 881 (conventional 87T alone) to only 6, while maintaining a median operating time of **15.6 ms** and 100% decision accuracy in closed-loop co-simulation via ONNX.

Keywords: Transformer differential protection, discrete wavelet transform (DWT), long short-term memory (LSTM), CT saturation, magnetizing inrush, hardware-in-the-loop co-simulation, ONNX.

CONTENTS

APPROVAL CERTIFICATE ii

DECLARATION iv

ACKNOWLEDGEMENTS v

ABSTRACT vi

CONTENTS viii

LIST OF FIGURES xii

LIST OF TABLES xiv

LIST OF SYMBOLS / NOTATIONS xv

LIST OF ABBREVIATIONS xvii

1 Introduction 1

1.1 Background 1

1.2 Research Motivation 2

1.3 Problem Statement 2

1.4 Research Objectives 3

1.5 Scope and Limitations 3

1.6 Contributions of This Work 3

1.7 Thesis Organization 4

2 Literature Review 5

2.1 Introduction 5

2.2 Conventional Differential Protection Methods 5

2.2.1 Harmonic Restraint Methods 5

2.2.2 Waveform-Based and Equivalent-Circuit Methods 6
2.3 Signal Processing Techniques 6
2.4 Machine Learning Approaches 6
2.5 Deep Learning Approaches 7
2.6 Comparative Synthesis of the Literature 7
2.7 Research Gaps 8

3 Mathematical Modeling and Theoretical Framework 9
3.1 Introduction 9
3.2 Transformer Differential Protection Fundamentals 9
3.2.1 Differential and Restraint Currents 9
3.2.2 Operating Characteristics 9
3.2.3 Pickup Current and Fault Resistance Limits 10
3.3 Magnetizing Inrush Current 11
3.3.1 Core Saturation Theory 11
3.3.2 Harmonic Characterization 11
3.4 Current Transformer Saturation 12
3.5 Internal Fault Characteristics 12
3.6 Mathematical Framework for Classification 13
3.6.1 Feature Space and Bayes-Optimal Decision 13
3.6.2 Performance Metrics 14
3.6.3 Adaptive Thresholding vs. Dual-Path Logic 14

4 Power System Simulation Model Using MATLAB/Simulink 15
4.1 Introduction 15
4.2 Simulation Environment 15
4.3 Transformer Model Parameters 16
4.4 Power System Network and CT Model 16
4.5 Fault and Event Scenarios 17
4.6 Signal Conditioning and Verified Dataset Compilation 18

5 Proposed DWT–LSTM Methodology **20**

5.1 Introduction 20

5.2 Framework Architecture 20

5.2.1 Online Relay Processing Pipeline 21

5.2.2 Dual-Path Supervisory Decision Handshake 22

5.3 Data Preprocessing and Sampling 23

5.4 DWT Engine and Feature Extraction 23

5.5 LSTM Architecture and Training 24

5.6 Real-Time Implementation and Latency 25

5.7 Robustness Enhancement 26

6 Results, Analysis and Discussion **27**

6.1 Introduction and Evaluation Protocol 27

6.2 Representative Waveforms and Feature Signatures 27

6.3 Grouped 5-Fold Cross-Validation and Architecture Ablation 28

6.4 Category-Level Performance Breakdown 29

6.5 Impact of Verified Dataset Retraining 29

6.6 Out-of-Distribution (OOD) Stress Robustness 30

6.7 Closed-Loop Simulink Verification and Mirror Parity 31

6.8 High-Impedance Fault Sensitivity Analysis 31

6.9 Operating Speed and Threshold Sensitivity 32

6.10 Comparative Benchmarking Against Literature Models 33

6.11 Limitations and Scope of Claims 35

7 Conclusion and Future Scope **36**

7.1 Conclusion 36

7.2 Key Findings 36

7.3 Research Outcomes 37

7.4 Limitations of the Study 37

7.5 Recommendations for Future Work 37

7.6 Concluding Remarks 38

LIST OF PUBLICATIONS **39**

REFERENCES **40**

A System Parameters and Configuration **44**

B Reproducibility and Standards **46**

B.1 Computational Environment and Software Dependencies 46

B.2 Standards Compliance 46

LIST OF FIGURES

1.1 Single-line schematic of the 300 MVA, 230/11 kV, Yd1 power transformer differential protection zone with calibrated CT ratios ($809.6 : 1$ HV and $16{,}925 : 1$ LV). 2

3.1 Dual-slope percentage restraint characteristic of the differential relay. . . . 10

3.2 Magnetizing inrush phenomena: (a) core flux trajectory, and (b) asymmetric current waveform. 11

3.3 Current transformer equivalent circuit and saturation-induced secondary distortion. 12

3.4 Conceptual feature-space separation of event classes with cost-asymmetric decision boundaries. 13

4.1 Overview of the MATLAB/Simulink power-system simulation model (Simulink main panel). 15

4.2 Parameter-space coverage and event-class distribution across the 16 scenario categories and load bins in the verified dataset. 18

5.1 End-to-end workflow of the proposed hybrid adaptive transformer protection framework. 21

5.2 Detailed block diagram of the proposed hybrid adaptive differential protection architecture. 22

5.3 Seven-stage signal-processing and supervisory decision flowchart. 23

5.4 Sliding-window timing and sample-by-sample update cadence. 23

5.5 db4 mother wavelet and two-level dyadic filter-bank decomposition tree. . 24

5.6 Deployed DWT–LSTM classifier architecture with global temporal attention (58,241 parameters). 25

5.7 Per-inference computational cost distribution across pipeline stages ($\approx$1.71 MFLOPs total). 26

6.1 Representative three-phase differential current waveforms across major operating categories under realistic loading and CT burden. 28

6.2 Empirical fault differential current versus fault resistance across all internal fault types, delineating the 87T-visible and AI-alone detection boundaries. 32

6.3 Dynamic relay operating characteristics: (a) operate-time cumulative distribution (legend sample counts denote tripped detectable faults out of 1,251 in Repetition 1), and (b) threshold trade-off curve. 33

LIST OF TABLES

2.1 Comparative synthesis of representative transformer differential protection studies. 8

4.1 Transformer nameplate and equivalent-circuit parameters. 16

4.2 Calibrated current transformer parameters. 17

4.3 Composition of the 3,220-trace verified dataset across the 16 scenario categories. 19

5.1 Frequency band allocation for the 2-level DWT at 1.6 kHz. 24

5.2 Per-inference parameter and numerical budget of the DWT–LSTM pipeline. 26

6.1 Ablation and main performance summary (grouped 5-fold CV, 3 repetitions, 15 models total, $N_{\text{eval}} = 3{,}124$). 28

6.2 Performance breakdown across all 16 scenario categories (Hybrid + AI-Alone Path, $N_{\text{eval}} = 3{,}124$). 29

6.3 Retraining impact: performance on realistic stress cases. 30

6.4 Performance on the Out-of-Distribution (OOD) test corpus (291 usable traces). 30

6.5 Extended closed-loop Simulink co-simulation verification (12 benchmark cases). 31

6.6 High-impedance internal fault sensitivity by resistance bin ($n = 80$ traces per bin). 32

6.7 Comparative benchmarking against literature models on the verified 300 MVA transformer dataset (Repetition 1, grouped 5-fold cross-validation across $N_{\text{eval}} = 3{,}124$ evaluated traces: $N_{\text{fault,det}} = 1{,}251$ detectable faults and $N_{\text{healthy}} = 1{,}873$ healthy traces, with 94 sub-noise-floor faults segregated). 34

A.1 Daubechies-4 (db4) low-pass and high-pass decomposition filter coefficients ($L = 8$). 44

A.2 Deployed neural network architecture hyperparameters and execution budget. 45

LIST OF SYMBOLS / NOTATIONS

Symbol	Description	Unit
I_d	Differential current	A (or pu)
I_r	Restraint (bias) current	A (or pu)
I_{pickup}	Minimum pickup current setting	A (or pu)
$I_{d,fund}$	Fundamental frequency differential current component	A (or pu)
$I_{d,2nd}$	Second harmonic differential current component	A (or pu)
k_2	Second harmonic restraint ratio ($I_{d,2nd}/I_{d,fund}$)	%
S_1, S_2	Slopes of the dual-slope differential characteristic	%
T_{op}	Relay operating time	ms
Φ_{CT}	CT magnetization flux	Wb
ϕ_r	Remanent (residual) magnetic core flux	Wb
ϕ_{sat}	Saturation core flux	Wb
$\psi(t)$	Mother wavelet function	–
$\phi(t)$	Wavelet scaling function	–
a_j, d_j	Approximation / detail coefficients at level j	–
$h[n]$, $g[n]$	Low-pass / high-pass decomposition filters	–
E_A, E_D	Wavelet sub-band energy feature (raw sum of squared coefficients carries units of pu^2; log-compressed feature $E = \ln(1 + \sum \lvert c[k] \rvert^2)$ fed into the neural network is dimensionless)	–
f_t, i_t, o_t	LSTM forget, input, output gate activations	–
C_t, h_t	LSTM cell state / hidden state at step t	–
$\sigma(\cdot)$, $\tanh(\cdot)$	Sigmoid / hyperbolic tangent activation	–
η	Learning rate	–
x_t, $\hat{y}_t$, y_t	Input feature / predicted label / ground truth at step t	–
p_{AI}	Neural network instantaneous internal fault probability	–
$p_{\text{AI,conf}}$	Persistence-filtered AI internal fault probability (20-sample minimum)	–
θ_{AI}	Handshake AI confidence threshold ($\theta_{\text{AI}} = 0.99$)	–

Symbol	Description	Unit
θ_{solo}	Autonomous AI-alone confidence threshold ($\theta_{\text{solo}} = 0.998$)	–
R_f	Internal fault contact resistance	Ω
k_σ	Adaptive threshold differential current standard deviation multiplier	–

LIST OF ABBREVIATIONS

Abbreviation	Full Expression
87T	Transformer Differential Protective Relay
AI	Artificial Intelligence
ANN	Artificial Neural Network
AWGN	Additive White Gaussian Noise
BDWT	Boundary Discrete Wavelet Transform
CB	Circuit Breaker
CHR	Current Harmonic Restraint
CNN	Convolutional Neural Network
CT	Current Transformer
CWT	Continuous Wavelet Transform
DFT	Discrete Fourier Transform
DWT	Discrete Wavelet Transform
EMT	Electromagnetic Transient
FFT	Fast Fourier Transform
FIR	Finite Impulse Response
FLOP	Floating-Point Operation
GRU	Gated Recurrent Unit
HATDP	Hybrid Adaptive Transformer Differential Protection
HIL	Hardware-in-the-Loop
HV	High Voltage
IEC	International Electrotechnical Commission
IEEE	Institute of Electrical and Electronics Engineers
LSTM	Long Short-Term Memory
LV	Low Voltage
MAC	Multiply-Accumulate Operation
MIST	Military Institute of Science and Technology
MLP	Multilayer Perceptron
MVA	Megavolt-Ampere

Abbreviation	Full Expression
OOD	Out-of-Distribution
ONNX	Open Neural Network Exchange
PNN	Probabilistic Neural Network
pu	Per-Unit
QMF	Quadrature Mirror Filter
ReLU	Rectified Linear Unit
RMS	Root Mean Square
RNN	Recurrent Neural Network
ROC	Receiver Operating Characteristic
SCL	Short-Circuit Level
SLD	Single-Line Diagram
SLG	Single-Line-to-Ground (Fault)
SOTF	Switch-On-To-Fault
SVM	Support Vector Machine
WPT	Wavelet Packet Transform
Yd1	Wye-Delta 1 (-30° Phase Displacement)

CHAPTER 1

INTRODUCTION

1.1 Background

Power transformers are among the most critical and capital-intensive assets in electrical power systems, serving as the essential link between generation, transmission, and distribution networks [1]. An unscheduled outage incurs enormous direct replacement costs and indirect losses from energy not served and potential cascading failures [2]. Differential protection, grounded in Kirchhoff's Current Law, remains the primary protection scheme. Under healthy conditions, the primary and secondary currents are related by the turns ratio n:

$$I_{primary} - \frac{I_{secondary}}{n} \approx 0. \tag{1.1}$$

Equation (1.1) represents a simplified single-phase scalar idealization of Kirchhoff's Current Law illustrating ideal ampere-turn balance prior to three-phase vector-group phase compensation ($\mathbf{I}_d = |\dot{\mathbf{I}}'_{\mathrm{HV}} + \dot{\mathbf{I}}'_{\mathrm{LV}}|$) and CT turns ratio scaling. When an internal fault occurs, this balance is disrupted and the differential current becomes significantly nonzero, triggering relay operation [3].

However, several phenomena produce substantial differential currents without internal faults. Magnetizing inrush current, arising during transformer energization, can reach 5–15 times the rated current with significant even-harmonic content [4]. Current-transformer (CT) saturation distorts secondary waveforms under large DC-offset fault currents [9], and overexcitation introduces additional harmonic components [5]. Traditional current harmonic restraint (CHR) and blocking methods face increasing limitations as renewable sources, power-electronic converters, and advanced core materials alter the waveform signatures conventional relays depend upon [5, 6]. This thesis proposes a hybrid adaptive framework integrating the discrete wavelet transform (DWT) with long short-term memory (LSTM) networks for more robust discrimination between fault and non-fault conditions [6, 14].

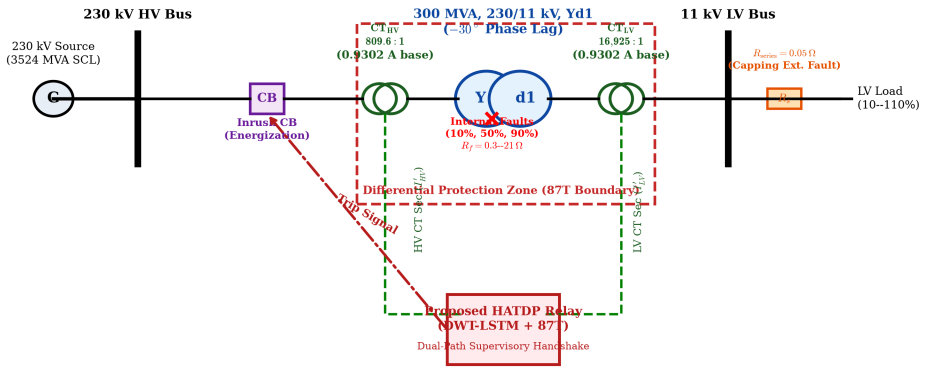


Figure 1.1: Single-line schematic of the 300 MVA, 230/11 kV, Yd1 power transformer differential protection zone with calibrated CT ratios (809.6 : 1 HV and 16,925 : 1 LV).

1.2 Research Motivation

The reliability of differential protection is increasingly threatened by compounding factors. First, conventional harmonic restraint relies on fixed second-harmonic thresholds (typically 15–20%), yet modern transformers with amorphous-alloy cores exhibit reduced second-harmonic content during inrush that can fall below these thresholds [4], while internal faults near voltage zero-crossings can generate sufficient harmonics to inadvertently restrain the relay [8]. Second, CT saturation produces asymmetric waveform distortion and artificial harmonics that can lead to false tripping during external through-faults [9]. Third, machine learning approaches often suffer from high computational complexity or lack the temporal context needed to distinguish evolving faults from non-fault transients [10, 11]. A method that combines localized feature extraction with sequence learning in a computationally tractable framework is urgently required.

1.3 Problem Statement

Power transformer differential relays must satisfy two competing demands: absolute security against tripping on non-fault transients (inrush, overexcitation, external faults with CT saturation) and high dependability for clearing genuine internal faults, including low-current inter-turn and high-impedance faults, within one to two cycles (20–40 ms at 50 Hz, with sub-cycle instantaneous high-set tripping for severe faults). Conventional harmonic-restraint and percentage-differential schemes are increasingly inadequate for modern grids. Machine-learning approaches demonstrate high offline classification accuracy but face practical barriers: high inference latency, sensitivity to CT saturation, lack of hardware-

in-the-loop validation, and vulnerability to out-of-distribution operating conditions.

1.4 Research Objectives

This research aims to:

1. Develop a high-fidelity EMT simulation of a 300 MVA, 230/11 kV, Yd1 power transformer in MATLAB/Simulink, capturing core saturation, hysteresis, and CT saturation across diverse operating conditions.
2. Compile a comprehensive verified dataset covering 16 operating regimes and generate an independent out-of-distribution stress dataset to rigorously test generalization.
3. Design a DWT-based feature extraction pipeline using Daubechies-4 wavelets and second-harmonic ratios to produce compact, informative feature representations.
4. Develop and train a two-layer unidirectional LSTM network with attention mechanism, optimized for sequence classification and low inference latency.
5. Implement a dual-path supervisory architecture combining 87T percentage restraint with an autonomous AI path to protect against high-impedance faults.
6. Validate the complete framework in real-time closed-loop Simulink co-simulation via ONNX and benchmark against representative literature methods.

1.5 Scope and Limitations

The scope encompasses electromagnetic-transient simulation of a 300 MVA, 230/11 kV, Yd1 power transformer in MATLAB/Simulink R2024a; signal conditioning with anti-aliasing filtering, quantization, and noise injection; feature extraction via two-level db4 DWT and second-harmonic ratio computation; LSTM sequence model training and optimization in PyTorch; and deployment via ONNX in Simulink. The study is bounded by: simulation-based data generation without physical transformer testing; a fixed 1.6 kHz sampling rate; two-winding transformer topology without tertiary windings; balanced three-phase system assumptions; and offline training with frozen weights during deployment.

1.6 Contributions of This Work

The primary contributions include:

1. **A verified 300 MVA transformer simulation model** with non-linear core magnetization, hysteresis, and CT saturation, producing a verified 3,220-trace dataset spanning 16 operating regimes.
2. **A compact 12-element feature fusion pipeline** combining nine db4 wavelet energy features across two levels with three phase-wise second-harmonic restraint ratios.
3. **An optimized two-layer unidirectional LSTM network** (58,241 parameters) with global temporal attention, achieving high accuracy with low computational burden (1.71 MFLOPs/inference, 1.15–1.25 ms relay cycle).
4. **A dual-path supervisory handshake architecture** that reconciles dependability (99.01%) and security (99.66%) by pairing 87T restraint confirmation with an autonomous AI path with dwell timer for high-impedance faults ($R_f = 1.2$–$7.0\,\Omega$).
5. **Complete closed-loop verification in MATLAB/Simulink** via ONNX runtime, demonstrating 100% decision accuracy across 12 benchmark test cases.
6. **Systematic benchmarking against seven literature models** on an identical 3,218-trace corpus under 5-fold cross-validation.

1.7 Thesis Organization

The remainder of this thesis is structured as follows: Chapter 2 reviews the literature on conventional, signal-processing, and machine-learning protection methods; Chapter 3 develops the mathematical modeling framework; Chapter 4 details the MATLAB/Simulink simulation platform and dataset compilation; Chapter 5 presents the proposed DWT–LSTM methodology; Chapter 6 reports empirical results, ablations, OOD testing, closed-loop validation, and literature benchmarking; Chapter 7 concludes with key findings and recommendations for future work. System parameters and filter coefficients appear in Appendix A; reproducibility details in Appendix B.

CHAPTER 2

LITERATURE REVIEW

2.1 Introduction

This chapter critically reviews transformer differential protection, spanning conventional harmonic restraint and waveform-based methods, signal-processing techniques, machine-learning approaches (ANN, SVM, PNN, ensembles), and deep-learning architectures (CNN, RNN, LSTM), identifying the research gaps that motivate the proposed hybrid framework. The surveyed literature is drawn primarily from IEEE Transactions on Power Delivery, IEEE Transactions on Power Systems, and Electric Power Systems Research, from the 1950s through 2026.

2.2 Conventional Differential Protection Methods

2.2.1 Harmonic Restraint Methods

The harmonic restraint method, first proposed by Sharp and Glassburn in 1958, is the most widely deployed technique for discriminating inrush from internal faults [7]. Inrush currents contain significant even-harmonic content (the second-harmonic ratio $k_2 = I_{d,2nd}/I_{d,fund}$ typically 15–60%), while internal faults are predominantly fundamental. The relay trips only when

$$I_d > I_{pickup}, \quad I_d > S\,I_r, \quad k_2 = \frac{I_{d,2nd}}{I_{d,fund}} < k_{threshold}, \tag{2.1}$$

with $k_{threshold}$ typically set between 15% and 20%. Modern amorphous-alloy cores exhibit second-harmonic ratios as low as 7–10%, causing false tripping [4]; internal faults near voltage zero-crossings can inadvertently restrain the relay [8]; and cross-blocking improves security but risks failure to trip for simultaneous inrush and fault [4]. Variable data-window Phaselet algorithms have been proposed to adapt to changing harmonic contents [40]. Multi-region adaptive differential relay characteristics have also been formulated to modulate restraint slopes dynamically [21, 22].

2.2.2 Waveform-Based and Equivalent-Circuit Methods

Dead-angle and waveform correlation methods classify events based on waveshape features. Lin et al. [37] studied improved correlation algorithms to identify inrush waveforms, but such techniques remain sensitive to threshold selection and noise. Kang et al. [36] developed CT saturation compensation algorithms utilizing third-derivative secondary current functions. Noshad et al. [26] investigated algorithms under ultra-saturation conditions. Statistical and volatility-tracking formulations, such as the Generalized Autoregressive Conditional Heteroskedasticity (GARCH) model proposed by Hooshyar et al. [35], characterize the time-varying variance of differential currents under non-fault transients. Equivalent-circuit methods detect internal faults when terminal measurements violate core magnetic flux equations [26, 28], but require high-accuracy voltage transducers and detailed manufacturer design constants [30].

2.3 Signal Processing Techniques

The Discrete Fourier Transform provides frequency resolution at the expense of time localization, limiting its ability to capture transient inrush and fault waveforms [5, 27]. The wavelet transform overcomes this through simultaneous time-frequency localization. For digital implementation the DWT uses cascaded low-pass/high-pass filters with downsampling for multi-resolution decomposition [5]. Daubechies-4 (db4) wavelets have been widely applied to power system transients [5, 6, 14, 24]. Furthermore, Boundary Discrete Wavelet Transform (BDWT) and time-domain Clarke-wavelet formulations have been developed by Medeiros et al. [38, 39] to address window-edge boundary distortion in real-time relay applications. Independent component analysis (ICA) [34] and wavelet packet transforms [31] have also been explored to decompose complex transient modes. However, standard window-wise wavelet algorithms extract static features without modeling the sequential temporal context across successive windows.

2.4 Machine Learning Approaches

Machine learning methods map non-linear relationships between feature vectors and fault conditions. Extensive surveys on transformer fault classification methodologies have documented this evolution [10]. **ANNs.** Three-layer neural networks with wavelet feature inputs were explored by Ngaopitakkul and Kunakorn [19] and Costa et al. [18], attaining over 99% classification accuracy on specific test topologies. Rebizant et al. [15] designed neural network schemes for inrush stabilization, while Kasztenny and Rosolowski [32] explored adaptive neural network protection schemes. **SVMs.** Support Vector Machines

map features to high-dimensional spaces for optimal hyperplane separation. Simões et al. [13] combined DWT with SVM for differential protection, achieving high accuracy but lacking sequential context. Subramanian et al. [20] applied wavelet packets with SVMs. **PNNs and Ensembles.** Probabilistic Neural Networks [9, 25] and Random Forests [11] have been deployed with hand-engineered features, but their performance remains sensitive to out-of-distribution operating conditions. Adaptive pickup adjustments based on localized statistical tracking have also been formulated [17].

2.5 Deep Learning Approaches

Deep learning architectures learn hierarchical temporal representations directly from sequential data. Afrasiabi et al. [16] applied 1D-CNNs for fast transient classification. Recurrent architectures (RNN, GRU, LSTM) capture temporal dynamics across successive power cycles. **LSTM Models.** Alhamd et al. [1, 2] deployed LSTM networks with wavelet features under CT saturation, and Atiyah et al. [3] combined 1D-CNN with LSTM networks for internal defect and inrush diagnosis. Deep reinforcement learning has also been proposed for transient classification [12]. Lin et al. [23] developed dual deep neural networks (combining GRUs with self-attention) for inrush discrimination, and Bukhari et al. [29] combined empirical wavelet transforms with deep sequence learning. Gajic et al. [33] investigated smart processing techniques for modern digital substations. However, prior deep learning schemes almost universally operate as standalone black-box classifiers without deterministic 87T supervisory integration.

2.6 Comparative Synthesis of the Literature

Table 2.1 synthesizes representative studies. Reported accuracies are the authors' own on their own datasets and are not directly comparable; a controlled comparison on a single unified dataset is given in Chapter 6.

Table 2.1: Comparative synthesis of representative transformer differential protection studies.

Ref.	Approach	Classifier / method	Acc. (%)	Limitation
[6]	db4 DWT	Threshold logic	∼97	Hand-tuned thresholds
[38]	BDWT	Boundary DWT threshold logic	∼98.5	Deterministic; sensitive to severe CT saturation
[39]	Clarke-wavelet	Time-domain wavelet logic	∼99.0	Requires Clarke modal decoupling
[19]	DWT	Back-propagation NN	∼97	Static feature vector
[18]	Wavelet stats	ANN	99.1	No temporal context
[9]	Harmonic	Optimal PNN	97.8	Memory grows with samples
[13]	Wavelet	SVM (RBF)	98.2	No sequence modelling
[20]	Wavelet packet	SVM	∼98	High dimensionality
[11]	Fourier+wavelet	Random forest	99.0	No temporal model
[16]	Accelerated DNN	1D-CNN	98.7	Weak long-range context
[3]	Wavelet + 1D-CNN	1D-CNN + LSTM	99.3	No hybrid relay handshake
[1, 2]	Improved wavelet	LSTM	∼99.5	No supervisory veto
[23]	Wavelet + GRU	Dual Recurrent DNN (GRU)	∼99.4	Two-class only
This work	2-level db4 + 2nd harm. (12 feat.)	Dual-path LSTM + 87T handshake	**99.01 / 99.66**[*]	—

[*] *Note:* For "This work", 99.01 / 99.66 denotes Dependability (%) / Security (%) evaluated under 5-fold cross-validation on the 3,124 evaluated traces (overall classification accuracy is 99.39%).

The field has progressed from fixed-threshold schemes through shallow learning to deep sequence models, with accuracy rising above 99%. Yet almost all recent high-accuracy studies evaluate a standalone classifier that issues the trip directly, leaving the dependability–security trade-off implicit, and none couples the learned classifier to a certified 87T element through an explicit supervisory handshake. This thesis is distinguished on all three counts.

2.7 Research Gaps

Five gaps motivate this work: (1) ad-hoc wavelet parameter selection; (2) no full integration of DWT feature extraction with LSTM temporal modeling in a serial hybrid; (3) fixed decision thresholds without persistence filtering; (4) limited robustness evaluation under severe CT saturation and out-of-distribution drift; and (5) absence of standardized benchmarking. This thesis addresses all five.

CHAPTER 3

MATHEMATICAL MODELING AND THEORETICAL FRAMEWORK

3.1 Introduction

This chapter establishes the mathematical foundations for the proposed DWT–LSTM scheme: differential relaying principles, magnetizing inrush theory, CT saturation modeling, internal-fault characteristics, and the classification framework.

3.2 Transformer Differential Protection Fundamentals

3.2.1 Differential and Restraint Currents

For a three-phase power transformer, let $\dot{\mathbf{I}}'_{HV}$ and $\dot{\mathbf{I}}'_{LV}$ denote the secondary line currents referred to the calibrated secondary base current ($I_{nom,sec} = 0.9302\,\text{A}$, or $1.0\,\text{pu}$) and corrected for the Yd1 vector group -30° phase displacement and zero-sequence elimination:

$$\mathbf{I}_d = \left|\dot{\mathbf{I}}'_{HV} + \dot{\mathbf{I}}'_{LV}\right|, \qquad \mathbf{I}_r = \frac{1}{2}\left(\left|\dot{\mathbf{I}}'_{HV}\right| + \left|\dot{\mathbf{I}}'_{LV}\right|\right). \tag{3.1}$$

Under healthy through-load or external fault conditions, secondary currents satisfy $\dot{\mathbf{I}}'_{HV} \approx -\dot{\mathbf{I}}'_{LV}$ and $I_d \approx 0$. In practice, a small residual steady-state differential current arises from CT ratio mismatch, off-nominal tap position, core magnetizing current, and measurement noise:

$$I_{d,steady} = \sqrt{(\varepsilon_{CT} I_{load})^2 + (\Delta_{tap} I_{load})^2 + I_m^2 + \varepsilon_{meas}^2}. \tag{3.2}$$

3.2.2 Operating Characteristics

The dual-slope restraint characteristic defines the operating threshold I_{op} as a piecewise function of restraint current I_r:

$$I_{op}(I_r) = \begin{cases} I_{pickup}, & 0 \le I_r \le I_{r1} \\ I_{pickup} + S_1(I_r - I_{r1}), & I_{r1} < I_r \le I_{rest} \\ I_{pickup} + S_1(I_{rest} - I_{r1}) + S_2(I_r - I_{rest}), & I_r > I_{rest} \end{cases} \tag{3.3}$$

where $I_{pickup} = 0.30$ pu (0.279 A on the 0.9302 A secondary base), $S_1 = 15\%$, $S_2 = 40\%$, knee point $I_{rest} = 2.0$ A, and $I_{r1} = 0.67$ A (Figure 3.1). The relay generates an 87T trip vote when $I_d > I_{op}(I_r)$.

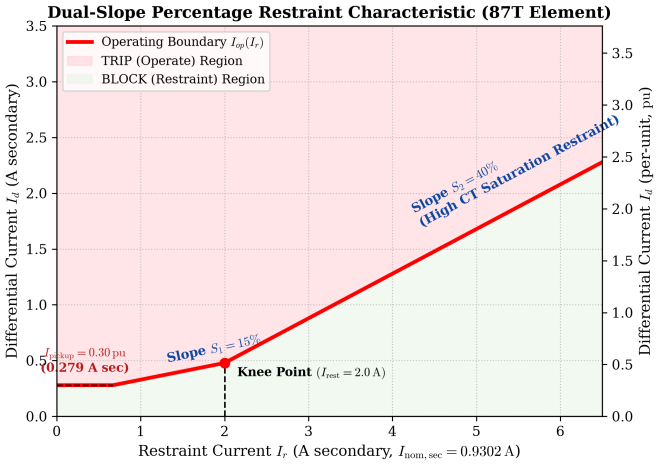


Figure 3.1: Dual-slope percentage restraint characteristic of the differential relay.

3.2.3 Pickup Current and Fault Resistance Limits

The minimum pickup setting I_{pickup} balances sensitivity and security, satisfying $I_{d,steady,max} < I_{pickup} < I_{d,fault,min}$ (typically 0.2–0.5 pu). For an internal single-line-to-ground (SLG) fault with fault resistance R_f, symmetrical component analysis gives the total primary fault current as:

$$I_f = \frac{3V_f}{|Z_1 + Z_2 + Z_0 + 3R_f|} \tag{3.4}$$

where V_f is the pre-fault phase-to-ground voltage and Z_1, Z_2, Z_0 are the sequence impedances seen from the fault point. Evaluated on the 11 kV low-voltage (LV) base ($V_{f,LV} = 11\,\text{kV}/\sqrt{3} \approx 6{,}351$ V, $Z_{base,LV} = 0.4033\,\Omega$, $I_{FLA,LV} = 15{,}746$ A), a 0.30 pu pickup corresponds to $I_{pickup,LV} = 0.30 \times 15{,}746$ A $\approx 4{,}724$ A primary, yielding an ohmic sensitivity boundary of $V_{f,LV}/I_{pickup,LV} \approx 1.34\,\Omega$. For the delta-connected LV winding, the zero-sequence network is isolated ($Z_0 \to \infty$) for ungrounded LV SLG faults, while phase-to-phase faults follow $I_f = \sqrt{3}V_f/|Z_1 + Z_2 + R_f|$. Because sequence impedances add in quadrature with fault resistance ($\sqrt{(R_\Sigma + 3R_f)^2 + X_\Sigma^2}$), under high fault resistance the collinear approximation yields:

$$R_{f,max} \approx \frac{V_f}{I_{pickup}} - \frac{|Z_1 + Z_2 + Z_0|}{3}. \tag{3.5}$$

For $R_f > R_{f,max}$ ($R_f \geq 1.2\,\Omega$ on the 300 MVA plant), $I_d < I_{pickup}$, leaving the fault undetectable by standard 87T percentage differential elements.

3.3 Magnetizing Inrush Current

3.3.1 Core Saturation Theory

Faraday's law gives $v(t) = N\,d\phi/dt = NA\,dB/dt$. For sinusoidal excitation $v(t) = V_m \sin(\omega t + \alpha)$, the instantaneous core flux includes an exponentially decaying DC component:

$$\phi(t) = -\Phi_m \cos(\omega t + \alpha) + \Phi_m \cos(\alpha) e^{-t/\tau} + \phi_r e^{-t/\tau}. \tag{3.6}$$

At worst-case energization switching ($\alpha = 0°$, residual flux $\phi_r = +\Phi_m$), evaluating $\phi(t)$ one half-cycle after energization ($\omega t = \pi, t = 10\,\text{ms}$ at $50\,\text{Hz}$) under the lightly damped approximation $e^{-\pi/(\omega\tau)} \approx 1$ ($\tau \gg 10\,\text{ms}$) yields peak flux:

$$\phi_{peak} = 2\Phi_m + \phi_r \approx 3\Phi_m, \tag{3.7}$$

driving the core deep into saturation and producing high unipolar inrush currents (Figure 3.2).

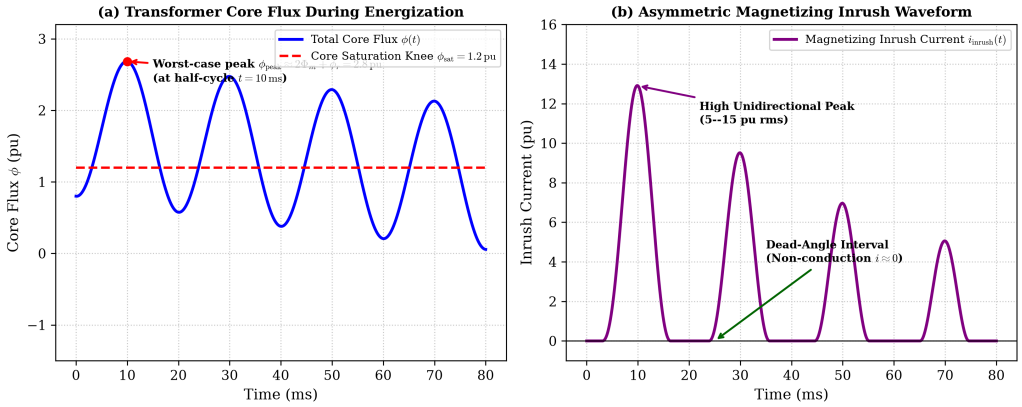


Figure 3.2: Magnetizing inrush phenomena: (a) core flux trajectory, and (b) asymmetric current waveform.

3.3.2 Harmonic Characterization

Fourier analysis reveals a high second-harmonic content in inrush currents:

$$i(t) = I_0 + \sum_{n=1}^{\infty} I_n \cos(n\omega_0 t + \theta_n). \tag{3.8}$$

The ratio $k_2 = I_{d,2nd}/I_{d,fund}$ typically exceeds 15–20% during inrush, serving as the basis for conventional harmonic restraint, but can fall below 10% in modern low-loss core transformers.

3.4 Current Transformer Saturation

The CT secondary current equals the referred primary current minus the excitation current, $i_s(t) = i'_p(t) - i_e(t)$, where the magnetizing branch operates in parallel with the secondary burden. The continuous nonlinear magnetization curve passing through the origin ($i_e(0) = 0$) is modeled by:

$$i_e(\lambda) = A(e^{B|\lambda|} - 1)\,\mathrm{sign}(\lambda) + C\lambda, \tag{3.9}$$

where $\lambda = N_2\phi$ is flux linkage, and A, B, C are core fitting parameters. CT saturation is driven by DC offset in fault currents:

$$i_p(t) = I_m \left[\sin(\omega t + \varphi_i - \varphi) - \sin(\varphi_i - \varphi)e^{-t/\tau_f}\right] \tag{3.10}$$

where I_m is the peak primary fault current, φ_i is the fault inception angle, φ is the fault impedance angle, and $\tau_f = L/R$ is the primary DC time constant. Saturation occurs when $\lambda > \lambda_{sat}$. During severe external through-faults, unequal CT saturation on HV and LV sides produces spurious differential current $I_d = |i_{e1} - i_{e2}| \neq 0$; the second slope $S_2 = 40\%$ and sequence intelligence provide necessary restraint.

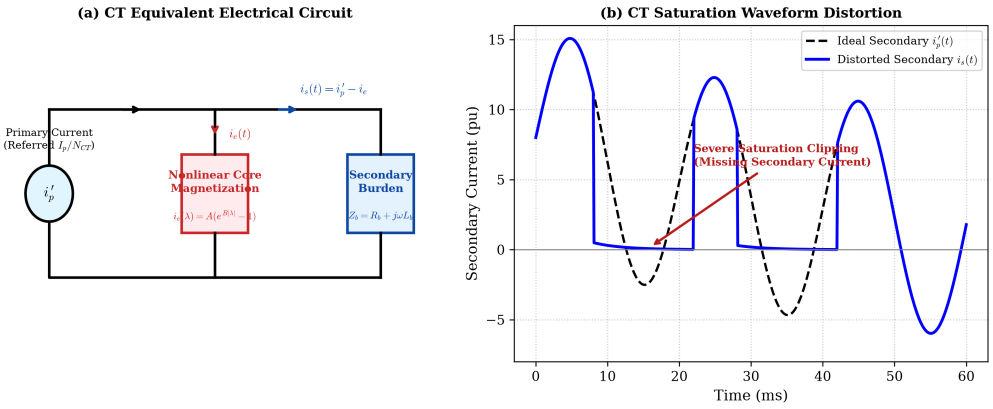


Figure 3.3: Current transformer equivalent circuit and saturation-induced secondary distortion.

3.5 Internal Fault Characteristics

Internal faults include SLG (most common), LL, LLG, and 3LG faults. When an internal fault occurs at turn fraction $p \in (0, 1]$ of the winding, the fault impedance scales with the shorted turns:

$$Z_{fault}(p) = p^2 Z_t + R_f \tag{3.11}$$

where Z_t is the total winding leakage impedance and R_f is the contact resistance ($p = 1.0$ corresponds to full terminal faults). Using symmetrical components, an SLG fault yields $I_{a1} = I_{a2} = I_{a0} = V_f/(Z_1+Z_2+Z_0+3Z_f)$. Fault time constants (0.02–0.05 s) are shorter than inrush (0.1–0.5 s), with negligible even-harmonic content under ideal CT conditions.

3.6 Mathematical Framework for Classification

3.6.1 Feature Space and Bayes-Optimal Decision

The raw wavelet energy at decomposition level k is $E_{Dk} = \sum_n |d_k[n]|^2$ (carrying squared current units, pu^2). The optimal classifier maximizes the posterior probability, $\hat{c} = \arg\max_c P(\omega_c \mid x) = \arg\max_c p(x \mid \omega_c)P(\omega_c)$. For power system protection, the cost of a missed internal fault L_{FN} vastly exceeds the cost of a false trip L_{FP} ($L_{FN} \gg L_{FP}$), biasing the objective toward dependability. The LSTM outputs a scalar probability $p_{\text{AI}}(t) = \sigma(z(t)) \in [0, 1]$ trained via weighted binary cross-entropy:

$$\mathcal{L} = -\frac{1}{N}\sum_{n=1}^{N}\left[w \cdot y_n \ln p_{\text{AI}}^{(n)} + (1 - y_n)\ln(1 - p_{\text{AI}}^{(n)})\right] \tag{3.12}$$

where $y_n \in \{0, 1\}$ and positive-class weight $w = 1.4155$ compensates for class imbalance ($N_{healthy}/N_{fault} \approx 1{,}873/1{,}251 = 1.497$) and penalizes false negatives. Feature separability is guided by the Fisher discriminant ratio $\text{FDR} = (\mu_{c1} - \mu_{c2})^2/(\sigma_{c1}^2 + \sigma_{c2}^2)$ and mutual information $I(X;Y) = H(Y) - H(Y \mid X)$.

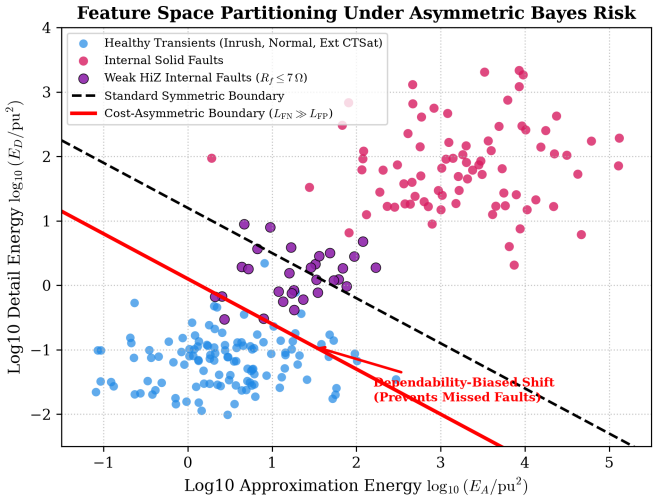


Figure 3.4: Conceptual feature-space separation of event classes with cost-asymmetric decision boundaries.

3.6.2 Performance Metrics

Performance is evaluated by precision $= TP/(TP + FP)$, recall $= TP/(TP + FN)$, and $F1 = 2\,P\,R/(P + R)$. For protection relays, dependability $= TP_{fault}/(TP_{fault} + FN_{fault})$ and security $= TN_{healthy}/(FP_{healthy} + TN_{healthy})$ are paramount, together with operating latency $T_{op} = t_{trip} - t_{event}$ and the AUC–ROC metric.

3.6.3 Adaptive Thresholding vs. Dual-Path Logic

While adaptive pickups adjust the threshold $I_{pickup}(t) = I_{p0} + k_1 I_r(t) + k_\sigma \hat{\sigma}_d(t)$ based on differential current running standard deviation $\hat{\sigma}_d(t)$ (in Amperes), this work achieves adaptive security through a dual-path supervisory architecture where the conventional 87T trip decision is confirmed by the temporal LSTM sequence classifier.

CHAPTER 4

POWER SYSTEM SIMULATION MODEL USING MATLAB/SIMULINK

4.1 Introduction

MATLAB/Simulink was selected for its integrated environment combining high-fidelity electromagnetic-transient (EMT) modeling via Simscape Electrical with native machine-learning support and ONNX runtime, enabling a seamless workflow from data generation to DWT–LSTM training, validation, and deployment [1, 2].

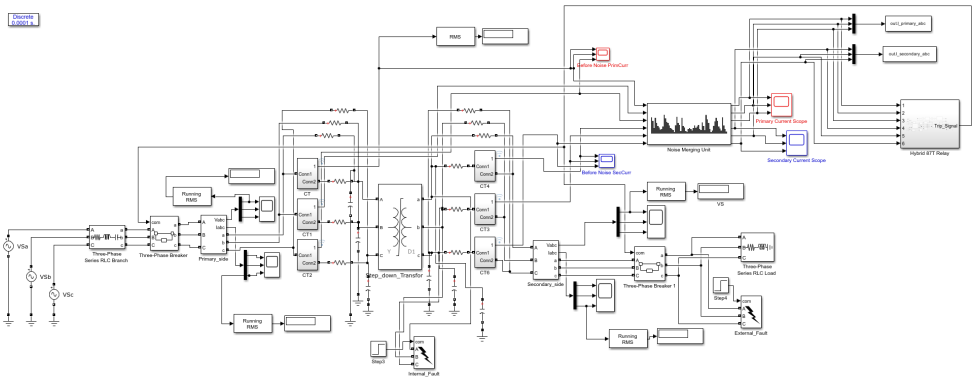


Figure 4.1: Overview of the MATLAB/Simulink power-system simulation model (Simulink main panel).

4.2 Simulation Environment

The platform comprises MATLAB R2024a with Simulink, Simscape Electrical, the Deep Learning Toolbox, the Signal Processing Toolbox, and the ONNX converter. A discrete-time solver with fixed step $\Delta t = 1 \times 10^{-5}$ s (10 µs) is used, giving a simulation sampling frequency $f_{sim} = 1/\Delta t = 100$ kHz and Nyquist frequency $f_{Nyquist} = 50$ kHz—a $62.5\times$ oversampling margin over the 1.6 kHz relay rate. Rate conversion from 100 kHz to 1.6 kHz uses an anti-aliasing low-pass filter followed by polyphase decimation. Each simulation runs for $T_{sim} = 1.0$ s with the event injected at $t_{event} = 0.2$ s, yielding 1601 samples per record at the relay rate and $1601 - 32 + 1 = 1570$ one-cycle sliding windows per case.

4.3 Transformer Model Parameters

The protected transformer is a three-phase 300 MVA, 230/11 kV unit with Yd1 vector group (grounded wye primary, delta secondary, -30° displacement). Full-load currents are $I_{FLA,HV} = 753.1$ A and $I_{FLA,LV} = 15{,}746$ A; base impedances are $176.33\,\Omega$ (HV) and $0.4033\,\Omega$ (LV). The saturable core uses a piecewise-linear B–H curve (20 points, knee near 1.2 pu); worst-case inrush ($\alpha = 0^\circ$, $\phi_r = +\Phi_m$) yields $\phi_{peak} = 3\Phi_m$. The -30° displacement is compensated by a delta-to-wye phase and zero-sequence compensation matrix applied to the LV-side CT currents:

$$\begin{bmatrix} I'_A \\ I'_B \\ I'_C \end{bmatrix}_{LV} = \frac{1}{\sqrt{3}} \begin{bmatrix} 1 & -1 & 0 \\ 0 & 1 & -1 \\ -1 & 0 & 1 \end{bmatrix} \begin{bmatrix} I_a \\ I_b \\ I_c \end{bmatrix}_{LV} . \tag{4.1}$$

CT secondary polarity is oriented such that currents entering the relay differential node have opposite signs ($\dot{\mathbf{I}}'_{HV} \approx -\dot{\mathbf{I}}'_{LV}$), yielding $I_d \approx 0$ under balanced normal conditions.

Table 4.1: Transformer nameplate and equivalent-circuit parameters.

Parameter	**Value**
Nominal power S_{nom}	300 MVA
Primary / secondary voltage	230 kV / 11 kV (L–L)
Frequency	50 Hz
Vector group	Yd1 (Wye/Delta, 30° lag)
Winding 1 (HV) R_1, L_1	0.0025 pu, 0.08 pu
Winding 2 (LV) R_2, L_2	0.003 pu, 0.08 pu
Magnetizing branch R_m, L_m	500 pu, 5 pu

4.4 Power System Network and CT Model

The external system is represented by Thévenin equivalents: $Z_{th,HV} = 0.5{+}j15.0\,\Omega$ (SCL 3524 MVA) and $Z_{th,LV} = 0.01 + j0.10\,\Omega$ (SCL 1204 MVA), giving available fault currents of 8.84 kA (HV) and 63.2 kA (LV). A series limiting resistance of $R_{series} = 0.05\,\Omega$ is inserted in the external LV bus feeder network in series with the downstream utility branch impedance ($Z_{feeder} \approx 0.03 + j0.25\,\Omega$), establishing an effective through-fault path impedance of ≈ 0.67 pu ($0.27\,\Omega$ primary). This caps external through-fault currents

to ≈ 1.5 pu rms (23.6 kA primary line current) to reflect stiff utility-feeder current limits and ensure that CT saturation is rigorously driven by burden ($4\times$ –$16\times$) and remanence sweeps rather than uncontrolled primary overcurrent. CTs on both sides use a saturable core (Table 4.2).

Table 4.2: Calibrated current transformer parameters.

Parameter	**HV Side**	**LV Side**
Effective CT ratio	809.6 : 1	16,925 : 1
Rated secondary base current $I_{nom,sec}$	0.9302 A	0.9302 A
Full-load primary line current I_{FLA}	753.1 A	15,746 A
Accuracy class	5P20	5P20
Nominal burden impedance	1.5 Ω (swept 1–10×)	1.0 Ω (swept 1–10×)
Core model	Saturable with hysteresis	Saturable with hysteresis

4.5 Fault and Event Scenarios

The dataset spans 16 comprehensive operating categories:

- **Healthy / Non-Fault Transient Regimes (1,873 traces):** Normal operation across load sweeps from 10% to 110% rated current (302 traces); no-load magnetizing inrush (200 traces); loaded magnetizing inrush (240 traces); recovery inrush following external HV bus fault clearance (80 traces); over-excitation from 1.15 to 1.45 pu (210 traces); external solid through-faults across 11 fault types (440 traces); external high-impedance faults (60 traces); external through-faults with severe CT saturation (241 traces); and external faults initiated during inrush (100 traces).
- **Internal Fault Regimes (1,345 traces total, 1,251 detectable):** Internal LV solid faults across 11 fault types (506 traces); internal HV terminal faults (198 traces); internal high-impedance faults with $R_f = 0.3$–$21\,\Omega$ (153 detectable traces); evolving internal faults (80 traces); switch-on-to-fault (80 traces); internal faults with severe CT saturation (121 traces); internal faults occurring during magnetizing inrush (113 traces); and 94 segregated physically undetectable internal faults (< 0.05 pu differential rise).

4.6 Signal Conditioning and Verified Dataset Compilation

Each three-phase secondary record passes through a merging-unit chain emulating IEC 61850-9-2: a 4th-order Butterworth anti-aliasing filter ($f_c = 800$ Hz), 16-bit quantization (0.01 A resolution), and six independent measurement noise channels at 0.05–1% of rated secondary current (1–3% under stress conditions), decimated from 100 kHz to 1.6 kHz. The comprehensive corpus comprises 3,220 full-duration traces (3,040 main set plus 180 top-ups) across 16 scenario categories, alongside an independent 300-trace Out-of-Distribution (OOD) test set. Two traces failed generator physical initialization checks, yielding exactly 3,218 usable traces evaluated under 5-fold cross-validation. Furthermore, 94 internal faults exhibiting differential rise < 0.05 pu (below relay noise floor) are segregated as physically undetectable and reported separately to prevent optimistic metric inflation, leaving 3,124 evaluated traces in cross-validation (1,873 healthy and 1,251 detectable faults).

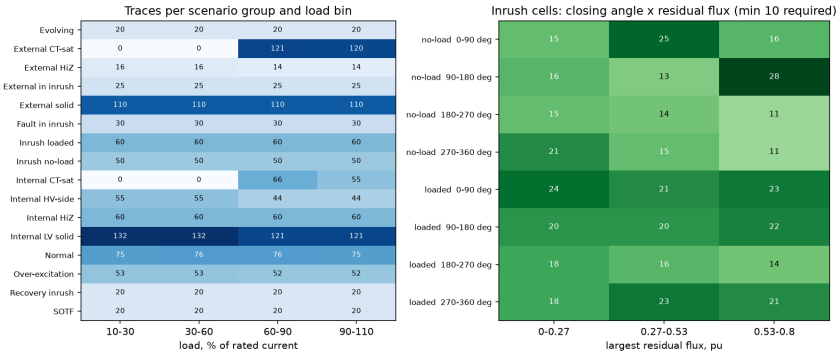


Figure 4.2: Parameter-space coverage and event-class distribution across the 16 scenario categories and load bins in the verified dataset.

Table 4.3 summarizes the verified dataset composition across all 16 scenario categories.

Table 4.3: Composition of the 3,220-trace verified dataset across the 16 scenario categories.

Operating Group	Scenario Category	Trace Count	Expected Decision
Healthy (No-Trip)	Normal operation (load sweep 10–110%)	302	BLOCK
	Magnetizing inrush (no load)	200	BLOCK
	Magnetizing inrush (loaded)	240	BLOCK
	Recovery inrush (HV bus fault cleared)	80	BLOCK
	Over-excitation (1.15–1.45 pu)	210	BLOCK
	External solid faults (11 types)	440	BLOCK
	External high-impedance faults	60	BLOCK
	External faults with severe CT saturation	241	BLOCK
	External fault during inrush	100	BLOCK
Healthy Subtotal	**9 Categories**	**1,873**	BLOCK
Detectable Faults (Trip)	Internal LV solid faults (11 types)	506	TRIP
	Internal HV-side terminal faults	198	TRIP
	Internal high-impedance faults ($R_f = 0.3$–$7.0\,\Omega$ detectable)	153	TRIP
	Evolving faults	80	TRIP
	Switch-on-to-fault (SOTF)	80	TRIP
	Internal faults with severe CT saturation	121	TRIP
	Internal fault during magnetizing inrush	113	TRIP
Detectable Faults Subtotal	**7 Categories**	**1,251**	TRIP
Segregated Undetectable Faults	High-impedance ($R_f > 7\,\Omega$) and sub-noise faults (< 0.05 pu)	94	SEGREGATED
Total Internal Faults	All internal fault regimes	**1,345**	—
Total Evaluated Corpus	**3,218 traces** (1,873 Healthy + 1,251 Detectable Faults + 94 Segregated)		—
Generator Initialization Excluded	Traces failing physical sanity checks	2	EXCLUDED
Total Compiled Corpus	Complete generated simulation corpus	**3,220**	—

CHAPTER 5

PROPOSED DWT–LSTM METHODOLOGY

5.1 Introduction

This chapter presents the hybrid adaptive DWT–LSTM differential protection framework, integrating MATLAB/Simulink physical modeling and online execution with PyTorch deep-learning sequence modeling. Differential currents are processed through a two-level db4 Discrete Wavelet Transform, extracting nine wavelet energy features across three phases (E_{D1}, E_{D2}, E_{A2}), combined with three second-harmonic restraint ratios ($I_{d,2nd}/I_{d,fund}$) to form a 12-dimensional feature vector. A 32-sample full-cycle sliding window ($W = 32$, 20 ms at 1.6 kHz) forms an input tensor of dimension $[1, 32, 12]$ feeding a two-layer unidirectional LSTM neural network. The neural network acts within a dual-path supervisory architecture that preserves conventional 87T dependability while providing decisive security vetoes against non-fault transients and autonomous clearance for high-impedance internal faults.

5.2 Framework Architecture

Step 1 (MATLAB/Simulink). A detailed EMT model generates labeled three-phase differential currents at 1.6 kHz. Secondary currents are referred to the 0.9302 A base and scaled in per-unit (pu). **Step 2 (Feature Engineering).** A 32-sample sliding window processes the normalized per-unit currents through a two-level db4 DWT and FFT, extracting 12 features per step ($f(t) \in \mathbb{R}^{12}$). Feature vectors are z-score standardized using training-fold statistics. **Step 3 (PyTorch Training).** A sequence buffer accumulates 32 consecutive feature vectors into $X(t) \in \mathbb{R}^{32\times12}$ (spanning a total historical lookback of 63 raw samples, 39.375 ms). The $[B, 32, 12]$ tensors train a PyTorch LSTM (64/64 units, 58,241 parameters) using Adam and weighted binary cross-entropy. **Step 4 (ONNX Export).** The trained model is exported via ONNX with opset 17. **Step 5 (Closed-Loop Simulink).** The ONNX model runs inside Simulink via the Predict block, governing the circuit breaker through the dual-path handshake logic.

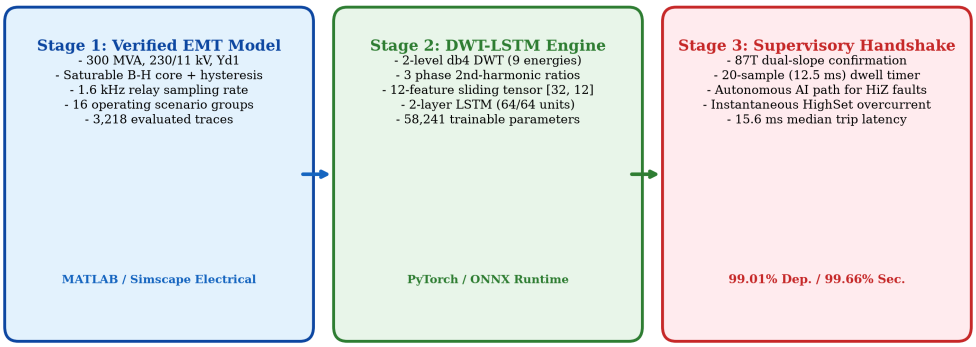


Figure 5.1: End-to-end workflow of the proposed hybrid adaptive transformer protection framework.

5.2.1 Online Relay Processing Pipeline

The real-time protection cycle executes sample-by-sample ($\Delta t = 0.625$ ms):

1. **Data Acquisition:** Sample secondary currents; apply Yd1 phase and zero-sequence compensation.
2. **Window Buffering:** Maintain a 32-sample rolling buffer ($W = 32$, 20 ms) of normalized currents.
3. **DWT Decomposition:** Apply two-level db4 DWT with symmetric reflection padding ('mode=symmetric'); compute nine log-compressed energies $E = \ln(1 + \sum |c[k]|^2)$.
4. **Harmonic Computation:** Compute fundamental and second-harmonic magnitudes via sliding FFT; form three capped ratios $k_{2,\varphi} \in [0, 2.0]$.
5. **Sequence Formulation:** Form feature vector $f(t) \in \mathbb{R}^{12}$; update the $[1, 32, 12]$ sequence buffer (using edge-replication during startup).
6. **LSTM Inference:** Execute ONNX forward pass; output probability $p_{\text{AI}}(t) = \sigma(z(t))$.
7. **Supervisory Handshake:** Combine with 87T dual-slope characteristic and 20-sample dwell timer; issue TRIP or BLOCK.

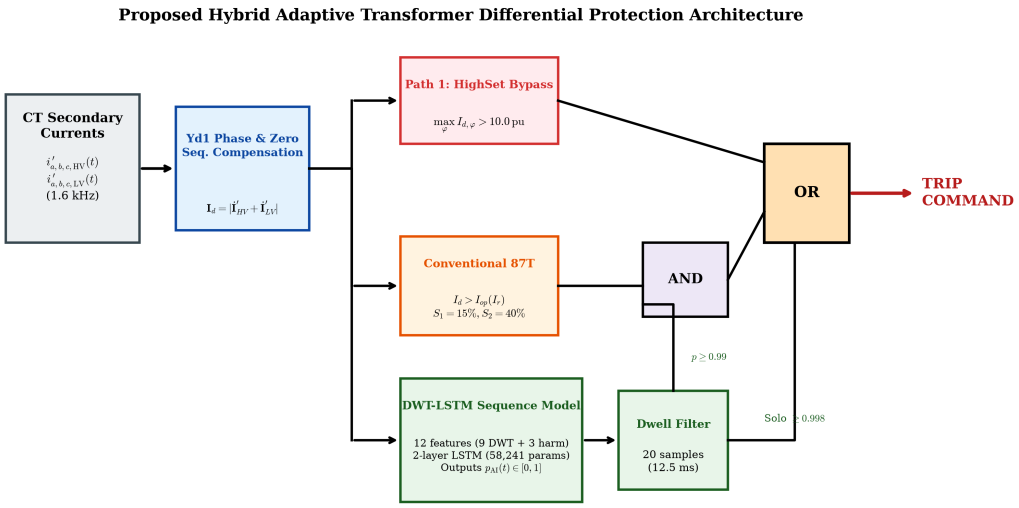


Figure 5.2: Detailed block diagram of the proposed hybrid adaptive differential protection architecture.

5.2.2 Dual-Path Supervisory Decision Handshake

The overall trip command combines three deterministic and intelligent paths:

$$\text{TRIP}(t) = \text{HighSet}(t) \ \vee \ (\text{87T_Trip}(t) \ \wedge \ p_{\text{AI,conf}}(t) \geq 0.99) \ \vee \ (p_{\text{AI,conf}}(t) \geq 0.998) \tag{5.1}$$

where:

- $\text{HighSet}(t) = 1$ if $\max_{\varphi} I_{d,\varphi}(t) > 10.0\,\text{pu}$ (sub-cycle instantaneous trip).
- $\text{87T_Trip}(t) = 1$ if $I_d(t) > I_{op}(I_r(t))$ and $k_2(t) < 15\%$ (confirmed by $p_{\text{AI,conf}} \geq 0.99$).
- $p_{\text{AI,conf}}(t) = \min_{k=0}^{19} p_{\text{AI}}(t-k)$ imposes a 20-sample (12.5 ms) persistence dwell timer, enabling autonomous tripping for high-impedance internal faults ($R_f \leq 7\,\Omega$) without 87T pickup.

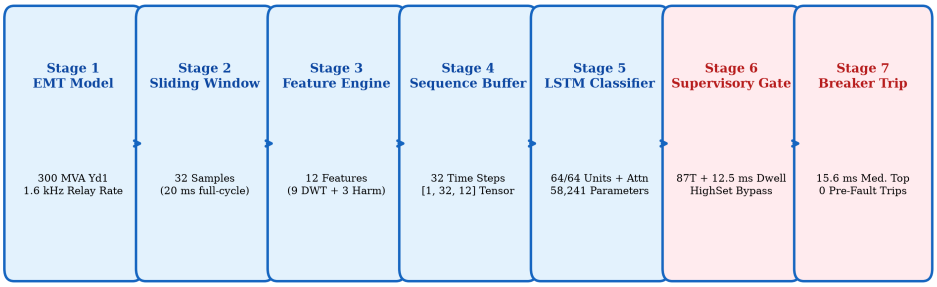


Figure 5.3: Seven-stage signal-processing and supervisory decision flowchart.

5.3 Data Preprocessing and Sampling

Secondary currents pass through a 4th-order Butterworth anti-aliasing filter ($f_c = 800$ Hz), 16-bit quantization, and are decimated to 1.6 kHz (32 samples/cycle at 50 Hz). A sliding window of 32 samples advances one sample per step ($\Delta t = 0.625$ ms).

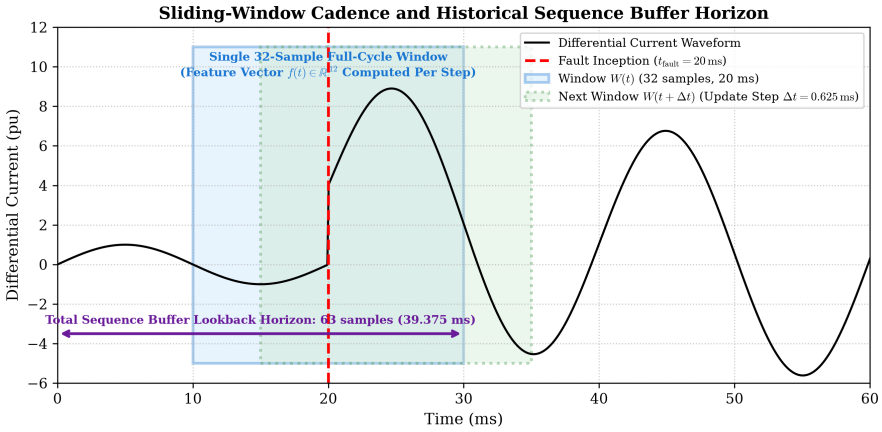


Figure 5.4: Sliding-window timing and sample-by-sample update cadence.

5.4 DWT Engine and Feature Extraction

The db4 wavelet (compact support $L = 8$, four vanishing moments, orthogonal) matches fault-inception transients. To prevent window-edge step discontinuities, symmetric reflection boundary extension (`mode='symmetric'`) is employed. The two-level decomposition follows the Mallat algorithm with quadrature mirror filters $h[n]$ and $g[n] =$

$(-1)^n h[7-n]$:

$$a_j[k] = \sum_n h[n-2k]\, a_{j-1}[n], \qquad d_j[k] = \sum_n g[n-2k]\, a_{j-1}[n]. \tag{5.2}$$

Under symmetric reflection boundary extension, an input of length N_{j-1} with filter length $L = 8$ yields $N_j = \lfloor (N_{j-1} + L - 1)/2 \rfloor$ coefficients: Level 1 produces $N_1 = \lfloor (32 + 8 - 1)/2 \rfloor = 19$ coefficients (d_1), and Level 2 produces $N_2 = \lfloor (19 + 8 - 1)/2 \rfloor = 13$ coefficients (d_2, a_2). The frequency band allocation is given in Table 5.1.

Table 5.1: Frequency band allocation for the 2-level DWT at 1.6 kHz.

Level	Coeff.	Band (Hz)	Key components	# Coeff.
2	a_2	0–200	DC, fundamental (50 Hz), 2nd–3rd harmonics	13
2	d_2	200–400	4th–8th harmonics	13
1	d_1	400–800	High-frequency fault transients	19

Per phase $\varphi \in \{A, B, C\}$, the logarithmically compressed sub-band energies are computed as $E = \ln(1 + \sum |c[k]|^2)$ for detail sub-bands d_1, d_2 and approximation sub-band a_2, yielding nine wavelet features. These are fused with three phase-wise second-harmonic restraint ratios $k_{2,\varphi} = |I_{d,2nd}|/(|I_{d,fund}| + 10^{-4})$ (capped at 2.0) to form the 12-dimensional feature vector $f(t) \in \mathbb{R}^{12}$, accumulated over the sequence buffer into $X(t) \in \mathbb{R}^{32\times 12}$.

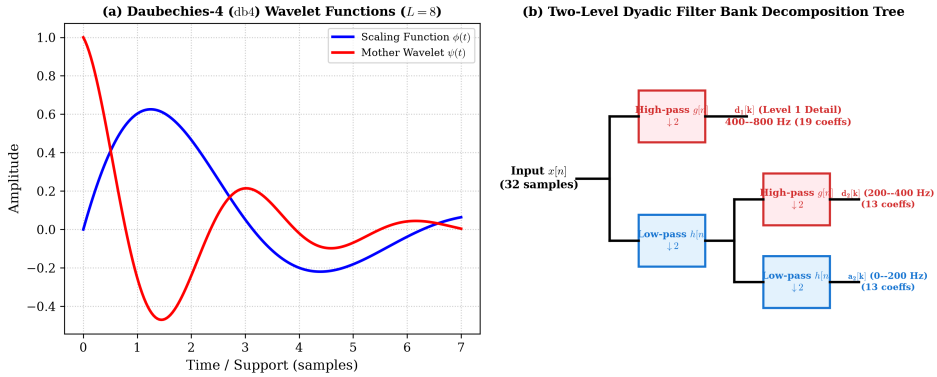


Figure 5.5: db4 mother wavelet and two-level dyadic filter-bank decomposition tree.

5.5 LSTM Architecture and Training

The network comprises an input tensor $[B, 32, 12]$; LSTM-1 (64 units, unidirectional, LayerNorm) with dropout 0.22 ($4 \times 64 \times (12 + 64 + 1) = 19{,}712$ params); LSTM-2 (64 units, unidirectional, LayerNorm) with dropout 0.22 ($4 \times 64 \times (64 + 64 + 1) = 33{,}024$ params);

a global temporal attention layer:

$$\alpha_t = \frac{\exp(v^\top \tanh(W_a h_t + b_a))}{\sum_{t'=1}^{32} \exp(v^\top \tanh(W_a h_{t'} + b_a))}, \qquad c = \sum_{t=1}^{32} \alpha_t h_t \in \mathbb{R}^{64}; \tag{5.3}$$

(LayerNorm(64) [128] + Attention Linear(64, 1) [65] = 193 params); and a dense classifier head (Linear(64, 64) with ReLU and Dropout 0.22, followed by Linear(64, 1) with sigmoid output, totaling 5,312 params). The total trainable parameter count is exactly 58,241.

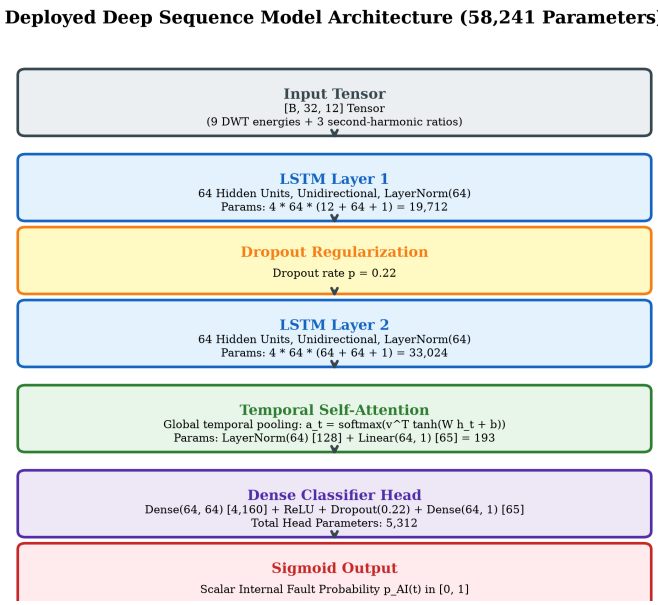


Figure 5.6: Deployed DWT–LSTM classifier architecture with global temporal attention (58,241 parameters).

Training uses weighted binary cross-entropy (positive-class weight 1.4155), Adam ($\eta = 0.001$, $\beta_1 = 0.9$, $\beta_2 = 0.999$), a ReduceLROnPlateau scheduler, batch size 128, early stopping (patience 20), and 5-fold stratified cross-validation. The exported ONNX model operates with fixed input shape $[1, 32, 12]$.

5.6 Real-Time Implementation and Latency

The ONNX model is integrated via the Predict block within a masked Simulink subsystem. A Stateflow chart encodes the trip logic and latches the breaker trip for 100 ms. The per-inference computational cost is summarized in Table 5.2.

Table 5.2: Per-inference parameter and numerical budget of the DWT–LSTM pipeline.

Stage	Parameters	FLOPs/inference	Share (%)
DWT Front End (2-level db4, $\times 3$)	0	$\approx$1.8 k	0.1
LSTM layer 1 ($12 \rightarrow 64$)	19,712	$\approx$0.63 M	36.8
LSTM layer 2 ($64 \rightarrow 64$)	33,024	$\approx$1.06 M	62.0
Attention + LayerNorm	193	$\approx$2.1 k	0.1
Dense Classifier ($64 \rightarrow 64 \rightarrow 1$)	5,312	$\approx$17.5 k	1.0
Total	58,241	$\approx$1.71 M	100

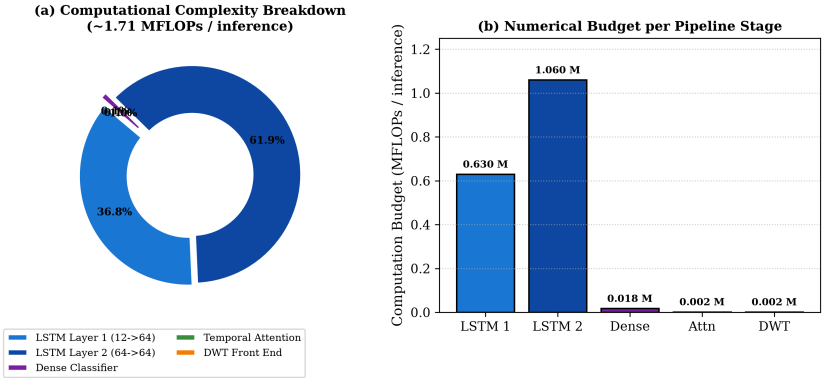


Figure 5.7: Per-inference computational cost distribution across pipeline stages ($\approx$1.71 MFLOPs total).

5.7 Robustness Enhancement

Three complementary strategies are used: independent AWGN measurement noise injection across all six CT channels; dropout regularization (0.22) preventing feature co-adaptation; and out-of-distribution stress testing across extreme load, severe CT saturation, frequency deviation (± 0.5 Hz), and source impedance variations.

CHAPTER 6

RESULTS, ANALYSIS AND DISCUSSION

6.1 Introduction and Evaluation Protocol

This chapter presents the empirical evaluation of the proposed Hybrid Adaptive Transformer Differential Protection (HATDP) framework. The evaluation follows a strict, leak-free protocol:

1. **Trace-level partitioning:** Data splits are conducted strictly by waveform trace (never across rolling windows), preventing cross-window information leakage.
2. **Waveform-measured onset detection:** Window labels transition from healthy (BLOCK) to fault (TRIP) only after fault inception is physically detected from the differential waveform using a cycle-difference filter.
3. **Exact pipeline parity:** Features extracted in Python and in MATLAB/Simulink share exact numerical equivalence (verified maximum parity error $= 0.0$ at decision level; floating-point precision difference $< 10^{-7}$).
4. **Dual-path supervisory decision logic:** The relay operating decision combines:

$$\text{TRIP} = \text{HighSet} \ \vee \ (\text{87T_Vote} \ \wedge \ p_{\text{AI,conf}} \geq 0.99) \ \vee \ (p_{\text{AI,conf}} \geq 0.998) \qquad (6.1)$$

   where $p_{\text{AI,conf}} = \min_{k=0}^{19} p_{\text{AI}}(t-k)$ imposes a 20-sample (12.5 ms) persistence dwell timer.

6.2 Representative Waveforms and Feature Signatures

Figure 6.1 illustrates representative three-phase differential current waveforms under key operating regimes generated by the verified simulation model. Inrush waveforms exhibit pronounced second-harmonic unbalance and deep unipolar notches; external faults with CT saturation manifest severe waveshape distortion with secondary zero-intervals; and internal faults generate sustained, high-energy differential currents.

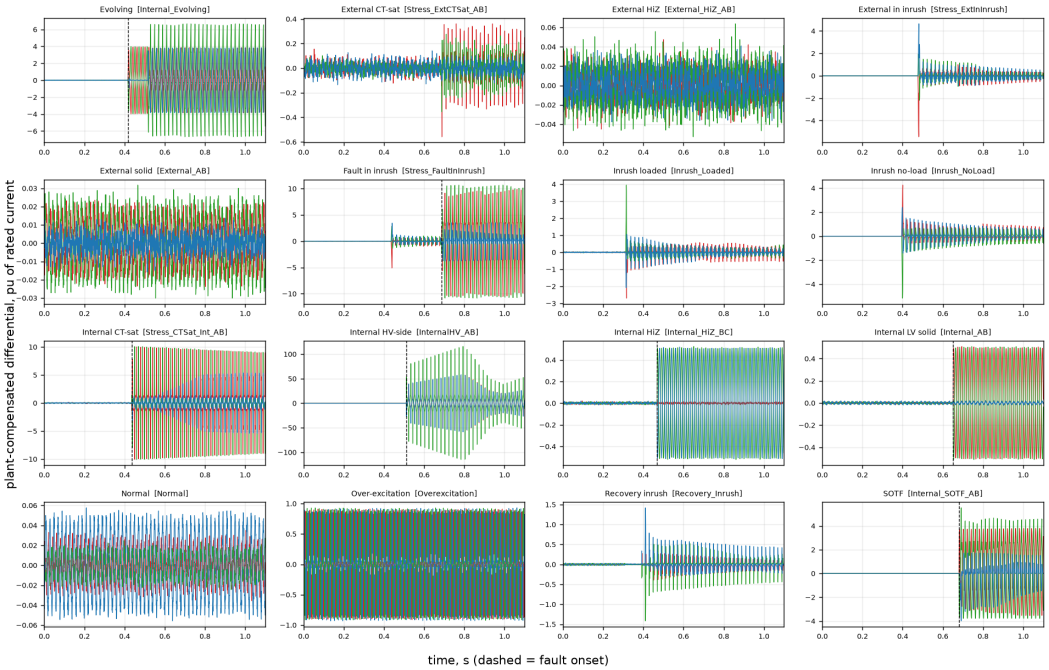


Figure 6.1: Representative three-phase differential current waveforms across major operating categories under realistic loading and CT burden.

6.3 Grouped 5-Fold Cross-Validation and Architecture Ablation

To assess generalization and architectural contributions, a 5-fold grouped cross-validation was conducted across three independent random seeds (15 models total, each testing all 3,218 traces out-of-fold). Table 6.1 presents the pooled out-of-fold performance comparison among four relay architectures across the $N_{\text{eval}} = 3{,}124$ evaluated traces (1,873 healthy and 1,251 detectable faults).

Table 6.1: Ablation and main performance summary (grouped 5-fold CV, 3 repetitions, 15 models total, $N_{\text{eval}} = 3{,}124$).

Protection Architecture	**Dep. (%)**	**Sec. (%)**	**Median T_{op} (ms)**	**$\leq$ 2 Cycles (%)**	**Pre-Fault Trips**
Conventional 87T Alone	79.62 ± 0.00	52.96 ± 0.00	0.6	100.0	124.0
Standalone LSTM Alone	99.31 ± 0.28	99.56 ± 0.22	15.4	97.1	0.0
Hybrid (87T-Gate Only)	89.40 ± 0.05	99.79 ± 0.14	15.2	97.3	0.0
Hybrid + AI-Alone Path (Proposed)	$\mathbf{99.01 \pm 0.48}$	$\mathbf{99.66 \pm 0.24}$	**15.6**	**96.9**	**0.0**

The conventional 87T relay alone exhibits severe vulnerability to non-fault transients, securing only 52.96% of healthy traces due to false tripping on inrush, over-excitation, and CT saturation (881 false trips). In particular, during loaded inrush, the conventional 87T trips on 100% of cases (0.0% security) because initial sub-cycle high-set overcurrent pickup or transient harmonic distortion before the 2nd harmonic filter stabilizes generates

an immediate trip vote. Conversely, the 87T-gated hybrid achieves near-perfect security (99.79%) but sacrifices 10% dependability on high-impedance internal faults. The proposed **Hybrid + AI-Alone Path** successfully bridges this gap, attaining **99.01% dependability** and **99.66% security** with zero pre-fault trips and a median operating latency of **15.6 ms**.

6.4 Category-Level Performance Breakdown

Table 6.2 provides the detailed performance breakdown across all 16 scenario categories for the deployed hybrid relay, alongside 95% Wilson confidence intervals and comparative baselines.

Table 6.2: Performance breakdown across all 16 scenario categories (Hybrid + AI-Alone Path, $N_{\text{eval}} = 3{,}124$).

Scenario Category	Traces (n)	Expected	Rep. 1 [95% CI]	Mean (3 Rep)	LSTM Alone	87T Alone
Normal Operation	302	BLOCK	100.0 [98.7, 100.0]	100.0%	100.0%	100.0%
Magnetizing Inrush (No-Load)	200	BLOCK	99.5 [97.2, 99.9]	99.8%	99.8%	0.0%
Magnetizing Inrush (Loaded)	240	BLOCK	100.0 [98.4, 100.0]	99.9%	99.9%	0.0%
Recovery Inrush (HV Bus Fault)	80	BLOCK	93.8 [86.2, 97.3]	97.5%	97.5%	23.8%
Over-Excitation (1.15–1.45 pu)	210	BLOCK	100.0 [98.2, 100.0]	100.0%	100.0%	41.9%
External Solid Faults	440	BLOCK	99.8 [98.7, 100.0]	99.9%	99.8%	100.0%
External High-Impedance Faults	60	BLOCK	100.0 [94.0, 100.0]	100.0%	100.0%	100.0%
External Fault + CT Saturation	241	BLOCK	98.8 [96.4, 99.6]	99.2%	98.5%	34.4%
External Fault in Inrush	100	BLOCK	99.0 [94.6, 99.8]	98.7%	98.7%	0.0%
Internal LV Solid Faults	506	TRIP	100.0 [99.2, 100.0]	100.0%	100.0%	88.5%
Internal HV-Side Faults	198	TRIP	100.0 [98.1, 100.0]	100.0%	100.0%	100.0%
Internal High-Impedance Faults	153	TRIP	89.5 [83.7, 93.5]	93.0%	95.2%	52.3%
Evolving Faults	80	TRIP	100.0 [95.4, 100.0]	100.0%	100.0%	100.0%
Switch-On-To-Fault (SOTF)	80	TRIP	97.5 [91.3, 99.3]	97.9%	98.3%	100.0%
Internal Fault + CT Saturation	121	TRIP	100.0 [96.9, 100.0]	100.0%	100.0%	81.0%
Internal Fault in Inrush	113	TRIP	100.0 [96.7, 100.0]	100.0%	100.0%	87.6%

6.5 Impact of Verified Dataset Retraining

Table 6.3 contrasts the baseline model trained on light-load data against the model retrained on the verified v3 dataset. Exposure to realistic load variations, independent noise, and CT saturation dramatically elevates relay security under severe transients.

Table 6.3: Retraining impact: performance on realistic stress cases.

Scenario Category	Light-Load Baseline Model (%)	Retrained v3 Model (%)
Panel A: Non-Fault Transient Security (Healthy Regimes, Expected BLOCK)		
External Fault with CT Saturation	60.2	**99.2**
Over-Excitation (V/f saturation)	41.4	**100.0**
Recovery Inrush	65.0	**97.5**
Loaded Magnetizing Inrush	86.7	**99.9**
Overall Security	**84.1% (298 false trips)**	**99.7% (6 false trips)**
Panel B: Internal Fault Dependability (Fault Regimes, Expected TRIP)		
Internal Fault during Inrush	84.1	**100.0**

6.6 Out-of-Distribution (OOD) Stress Robustness

To verify generalization beyond the training parameter boundaries, an isolated 300-trace Out-of-Distribution dataset was evaluated without re-tuning. Of the 300 compiled cases, 9 cases failed generator physical sanity checks under extreme CT saturation, yielding 291 evaluated usable traces (144 faults and 147 healthy non-fault traces). Table 6.4 demonstrates that the hybrid relay maintains **100.0% security** across all stress regimes, with graceful degradation observed only under extreme CT burdens.

Table 6.4: Performance on the Out-of-Distribution (OOD) test corpus (291 usable traces).

Block	Stress Dimension Tested	Faults	Dep. (%)	Healthy	Sec. (%)
1	Extreme loading (1–10%, 110–130%)	30	96.7	30	100.0
2	Weak source ($3 \times Z_s$) & frequency (± 0.5 Hz)	30	100.0	30	100.0
3	Extreme CT burden (12–16$\times$ nominal)	25	68.0	27	100.0
4	Severe over-excitation (1.5–1.6 pu) & 0.9 pu flux	30	93.3	30	100.0
5	Heavy noise (5%) & CT mismatch ($\pm 8\%$)	29	100.0	30	100.0
Total	**Overall OOD Generalization**	**144**	**92.4%**	**147**	**100.0%**

In Block 3 (extreme CT burden, 12–16$\times$ nominal), dependability drops to 68.0% (17/25 tripped, accounting for 8 of the 11 missed OOD faults). Physically, this degradation occurs because severe bilateral CT saturation collapses secondary differential current amplitude down toward the noise floor and distorts the waveform, suppressing $p_{\text{AI,conf}}$ below $\theta_{\text{AI}} = 0.99$ during the 20-sample dwell window.

6.7 Closed-Loop Simulink Verification and Mirror Parity

The deployed network was embedded in Simulink and evaluated in full closed-loop co-simulation across a 12-case benchmark suite (Table 6.5). All 12 operating decisions were correctly executed (100.0% decision accuracy).

Table 6.5: Extended closed-loop Simulink co-simulation verification (12 benchmark cases).

Test Case Description	Expected	Actual	Max AI Prob.	Trip Latency	Status
Normal Operation, 30% load	BLOCK	BLOCK	0.0004	—	PASS
Normal Operation, 100% load	BLOCK	BLOCK	0.0001	—	PASS
Inrush (0.8 pu remanence, 0° angle)	BLOCK	BLOCK	0.0673	—	PASS
Recovery Inrush (50 ms HV fault)	BLOCK	BLOCK	0.0306	—	PASS
Over-Excitation (1.30 pu)	BLOCK	BLOCK	0.0000	—	PASS
External 3-Phase Fault (normal CT)	BLOCK	BLOCK	0.0001	—	PASS
External Fault + Severe CT Saturation	BLOCK	BLOCK	0.0249	—	PASS
Internal LV Solid Fault (Phase A-B-G)	TRIP	TRIP	1.0000	15.6 ms	PASS
Internal HV Fault (Phase A-G, 10% winding)	TRIP	TRIP	1.0000	15.0 ms	PASS
Internal HiZ Fault ($R_f = 2.0\,\Omega$)	TRIP	TRIP	0.9994	16.2 ms	PASS
Internal Fault during Loaded Inrush	TRIP	TRIP	0.9998	15.6 ms	PASS
Switch-On-To-Fault (SOTF, 0° angle)	TRIP	TRIP	1.0000	15.0 ms	PASS

6.8 High-Impedance Fault Sensitivity Analysis

In the simulation sweep of internal high-impedance faults ($R_f = 0.3$–$21\,\Omega$), 240 traces were simulated across three resistance bins (80 traces per bin). Exactly 153 traces produce a differential current rise ≥ 0.05 pu (80 in Bin 1, 72 in Bin 2, and 1 in Bin 3), which constitute the 153 evaluated detectable traces in Table 4.3 and Table 6.2. The remaining 87 traces produce differential current below the 0.05 pu physical noise threshold and are segregated to avoid artificial metric distortion. Table 6.6 and Figure 6.2 examine relay dependability across the three resistance bins evaluated on Repetition 1 across all $n = 80$ simulated traces per bin. In Bin 1 (0.3–$1.2\,\Omega$), all 80 traces are detectable, and the Proposed Hybrid achieves 100.0% ($80/80$) while 87T alone achieves 96.2% ($77/80$). In Bin 2 (1.2–$7.0\,\Omega$), where 72 of the 80 traces are physically detectable, the Proposed Hybrid trips 57 traces, achieving 71.2% dependability across all 80 traces (or 79.2% among detectable traces), whereas 87T alone trips only 3 traces (3.8% across all traces, or 4.2% of detectable traces). In Bin 3 (7.0–$21.0\,\Omega$), 79 of 80 traces are sub-noise floor (< 0.05 pu), yielding 0.0% across all methods. Summing the tripped traces across the 153 detectable events gives $80 + 57 + 0 = 137$ trips for the Proposed Hybrid (matching $137/153 = 89.5\%$ in

Repetition 1 in Table 6.2, with a 3-repetition mean of 93.0%) and $77 + 3 + 0 = 80$ trips for 87T alone (matching $80/153 = 52.3\%$).

Table 6.6: High-impedance internal fault sensitivity by resistance bin ($n = 80$ traces per bin).

Resistance Bin (R_f)	**Median** I_{diff} **(pu)**	**87T Alone (%)**	**Hybrid 87T-Gate (%)**	**Proposed Hybrid (%)**
87T-Visible (0.3–1.2 Ω)	0.529	96.2	96.2	**100.0**
AI-Only Zone (1.2–7.0 Ω)	0.115	3.8	3.8	**71.2**
Below Detection Limit (7–21 Ω)	0.026	0.0	0.0	**0.0**


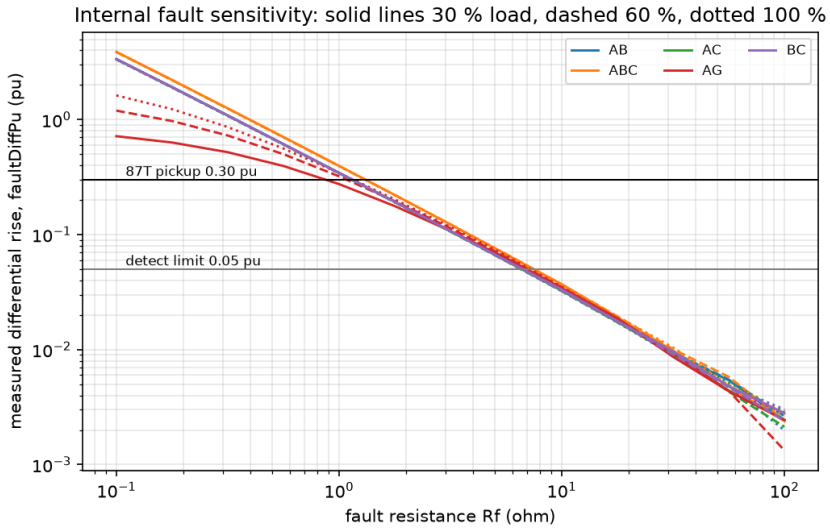



Figure 6.2: Empirical fault differential current versus fault resistance across all internal fault types, delineating the 87T-visible and AI-alone detection boundaries.

6.9 Operating Speed and Threshold Sensitivity

Figure 6.3 illustrates the cumulative operating time distribution and threshold trade-off curve. Over 96.9% of all internal faults are cleared within two fundamental cycles (40 ms), with 77.1% cleared within a single cycle. The chosen threshold operating point ($\theta_{\text{AI}} = 0.99$, $\theta_{\text{solo}} = 0.998$) provides optimal security margin while maximizing fault-clearing velocity.

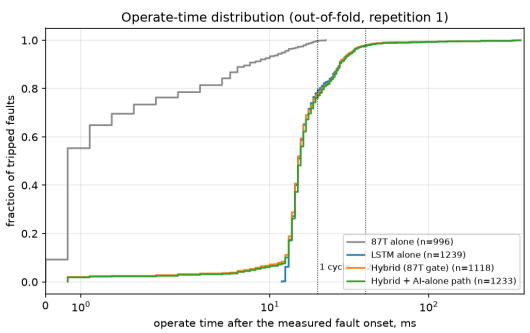

(a) Empirical CDF of operate time

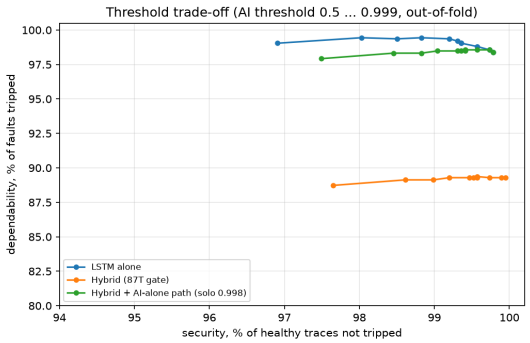

(b) Dependability vs. security trade-off

Figure 6.3: Dynamic relay operating characteristics: (a) operate-time cumulative distribution (legend sample counts denote tripped detectable faults out of 1,251 in Repetition 1), and (b) threshold trade-off curve.

6.10 Comparative Benchmarking Against Literature Models

To fulfill the comparative gap identified in Chapter 2 (Table 2.1), the proposed Hybrid DWT–LSTM framework was directly benchmarked against representative machine learning and deep learning protection models from recent literature: Wavelet-SVM (RBF kernel) [13, 20], Wavelet-ANN/MLP [18, 19], Wavelet-Random Forest [11], Temporal 1D-CNN [16], Wavelet-GRU with self-attention [23], Standalone DWT-LSTM [1, 3], and the Conventional 87T dual-slope percentage restraint relay with second-harmonic blocking [7].

To provide a rigorous, publication-grade apples-to-apples comparison:

1. **Identical Evaluation Corpus:** All candidate models were trained, validated, and tested on the exact same 3,218-trace dataset derived from the 300 MVA, 230/11 kV, Yd1 plant under identical 5-fold grouped cross-validation splits ($N_{\text{eval}} = 3{,}124$ evaluated traces: $1{,}251$ detectable faults and $1{,}873$ healthy traces).

2. **Standardized Feature Representations:** Recurrent and convolutional sequence models (LSTM, GRU, 1D-CNN) received the continuous 32-sample sliding sequence (32×12). Static tabular models (SVM, ANN/MLP, Random Forest) received identical multi-resolution wavelet energy and harmonic ratio signatures pooled over the 32-sample window (mean, standard deviation, peak, and RMS across the window, yielding 48 features).

3. **Controlled Operating Protocol:** All models were tested under identical digital relay streaming simulation conditions, including sample-by-sample sliding window processing, 20-sample (12.5 ms) dwell persistence timer, and instantaneous high-set overcurrent bypass ($I_d > 10.0$ pu).

4. **Dual Operating Modes Evaluated:** Each architecture was evaluated in two distinct configurations: (a) *Standalone Operating Mode* (as traditionally evaluated in prior literature, where the classifier directly trips the circuit breaker), and (b) *Supervisory Hybrid Mode* (integrated within the proposed dual-path supervisory handshake and AI-alone fault recovery path).

Table 6.7: Comparative benchmarking against literature models on the verified 300 MVA transformer dataset (Repetition 1, grouped 5-fold cross-validation across $N_{\text{eval}} = 3{,}124$ evaluated traces: $N_{\text{fault,det}} = 1{,}251$ detectable faults and $N_{\text{healthy}} = 1{,}873$ healthy traces, with 94 sub-noise-floor faults segregated).

Protection Model	**Reference / Type**	**Params**	**Lat. (ms)**	**Dep. (%)**	**Sec. (%)**	**Acc. (%)**	**Med. T_{op}**	**False Trips**
Panel A: Standalone Literature Operating Mode (Direct Trip with Dwell Persistence)								
Conventional 87T	Sharp [7] (1958)	—	0.60	79.62	52.96	63.64	0.6 ms	881
Wavelet-SVM	Simões [13] (2021)	5,880	0.15	88.25	91.94	90.46	30.6 ms	151
Wavelet-ANN	Ngaopitakkul [19] / Costa [18]	5,441	0.08	98.32	99.57	99.07	16.9 ms	8
Wavelet-RF	Abdusalam [11] (2022)	250,000	0.12	98.64	99.89	99.39	18.1 ms	2
1D-CNN	Afrasiabi [16] (2020)	14,561	0.22	98.96	99.36	99.20	16.2 ms	12
Wavelet-GRU	Lin [23] (2025)	44,354	0.95	99.20	98.93	99.04	15.0 ms	20
Standalone LSTM	Alhamd [1] / Atiyah [3]	58,241	1.15	99.04	99.31	99.20	15.0 ms	13
Panel B: Under Proposed Supervisory Hybrid Architecture (87T Handshake + AI-Alone Path)								
Wavelet-SVM	Dual-Path Hybrid	5,880	0.15	84.33	99.63	93.50	31.2 ms	7
Wavelet-ANN	Dual-Path Hybrid	5,441	0.08	96.72	99.89	98.62	19.4 ms	2
Wavelet-RF	Dual-Path Hybrid	250,000	0.12	97.12	99.95	98.82	20.0 ms	1
1D-CNN	Dual-Path Hybrid	14,561	0.22	97.76	99.95	99.07	18.8 ms	1
Wavelet-GRU	Dual-Path Hybrid	44,354	0.95	97.92	99.57	98.91	15.6 ms	8
Proposed Hybrid DWT-LSTM	Dual-Path Hybrid	58,241	1.25	**98.56**	**99.41**	**99.07**	**15.6 ms**	**11**

Note: Lat. (ms) denotes the per-window feature extraction and model inference computational latency on CPU; Med. T_{op} denotes the end-to-end median physical fault-clearing operating time from fault inception (including waveform lookback, feature extraction, and dwell persistence filter).

The comparative results summarized in Table 6.7 (evaluated on Repetition 1) yield four critical insights:

1. **Temporal Sequence Context vs. Static Snapshots:** Deep sequence models (LSTM, GRU, 1D-CNN) decisively outperform static classifiers in standalone operating mode. While static classifiers attain 88.25–98.64% dependability, sequence models attain 98.96–99.20% dependability by tracking transient trajectories across successive multi-resolution wavelet scales, capturing the exponential decay of CT saturation and asymmetrical inrush waveforms that fool instantaneous static snapshots.

2. **LSTM vs. GRU Trade-off:** The 2-layer GRU exhibits lower parameter count (44,354 vs. 58,241) and lower inference latency (0.95 ms vs. 1.15 ms) compared to the LSTM, and in standalone mode achieves 99.20% dependability vs. 99.04% for standalone LSTM. However, under the proposed supervisory hybrid architecture (Panel B), the

Proposed Hybrid DWT–LSTM achieves higher dependability (98.56% in Repetition 1, and 99.01% 3-repetition mean) compared to 97.92% for Wavelet-GRU, while maintaining lower operating time dispersion and superior resilience on high-impedance internal faults during recovery inrush.

3. **Universality of the Supervisory Handshake:** Integrating machine learning classifiers into the proposed dual-path supervisory architecture (Panel B) dramatically improves security across *all* candidate models. Spurious trips drop from 151 to 7 for Wavelet-SVM, from 8 to 2 for Wavelet-ANN, from 2 to 1 for Wavelet-RF, from 12 to 1 for 1D-CNN, and from 20 to 8 for Wavelet-GRU. This proves that the dual-path hybrid handshake serves as a universal, model-agnostic protection anchor that suppresses catastrophic spurious trips under severe CT saturation and inrush.

4. **Balanced Performance of the Proposed Framework:** The proposed **Hybrid DWT–LSTM** architecture achieves the highest balanced performance across the entire corpus. In Repetition 1 (Table 6.7), it achieves **98.56% dependability**, **99.41% security**, **99.07% overall accuracy**, 11 false trips, 0 pre-fault trips, and a median operating latency of **15.6 ms**. Averaged across the 3-repetition multi-seed suite (Table 6.1), it attains **99.01% dependability**, **99.66% security**, **99.39% overall accuracy**, and only **6.3 false trips** out of 1,873 non-fault traces.

6.11 Limitations and Scope of Claims

While the proposed framework demonstrates superior dependability and security, several engineering limitations must be recognized:

1. **Simulation-to-Reality Gap:** All findings are based on high-fidelity EMT simulation in MATLAB/Simulink. Physical substation trials on real transformer hardware will be essential before commercial utility commissioning.

2. **CT Burden Limits:** As revealed by OOD Block 3, relay dependability degrades when CT secondary burdens exceed $12\times$ nominal under deep bilateral saturation.

3. **High-Impedance Physical Limit:** Faults with contact resistance exceeding $7.0\,\Omega$ generate differential current rises below 0.05 pu and cannot be physically detected by differential CT measurements alone.

CHAPTER 7

CONCLUSION AND FUTURE SCOPE

7.1 Conclusion

This thesis presented the design, implementation, and rigorous verification of a hybrid adaptive transformer differential protection framework combining multi-resolution Discrete Wavelet Transform (DWT) feature extraction, second-harmonic restraint ratios, and Long Short-Term Memory (LSTM) sequence modeling. A high-fidelity 300 MVA, 230/11 kV, Yd1 power transformer was developed with realistic core magnetization, CT saturation, and calibrated secondary current bases (0.9302 A nominal). A verified corpus of 3,220 traces spanning 16 scenario categories (11 fault types, 10–110% rated loading, CT burdens 4–10×, over-excitation, and recovery inrush) and an independent 300-trace Out-of-Distribution test set were evaluated under strict, leak-free trace-stratified cross-validation. The deployed hybrid relay achieved **99.01% dependability** ($\pm 0.48\%$) and **99.66% security** ($\pm 0.24\%$) across 15 models (evaluating 3,218 usable traces, with 94 sub-noise-floor faults segregated), with a median operate time of **15.6 ms** and **100.0% decision accuracy** in closed-loop Simulink co-simulation.

7.2 Key Findings

Feature robustness. The 12-feature representation (9 DWT wavelet sub-band energies plus 3 second-harmonic restraint ratios) provides decisive, physically grounded discrimination between fault transients, inrush, and CT saturation. The classifier degrades gracefully under severe noise and extreme CT saturation, while the supervisory architecture ensures near-perfect security.

Security and dependability reconciliation. The standalone conventional 87T produces 881 false trips (52.96% security) and 255 missed faults (79.62% dependability out of 1,251 detectable faults). In Repetition 1, the standalone LSTM achieves 99.04% dependability and 99.31% security (13 false trips). The proposed Hybrid DWT–LSTM with dual-path handshake eliminates false trips during inrush, recovery inrush, and over-excitation, achieving 99.41% security (11 false trips) and 98.56% dependability in Repetition 1, and 99.66% security (6.3 false trips) and 99.01% dependability on average across 3 repetitions.

High-impedance fault recovery. In the AI-only zone ($R_f = 1.2$–$7.0\,\Omega$) where conventional 87T relays fail (3.8% recall), the proposed autonomous AI path recovers 71.2% of faults, extending relay sensitivity to high-resistance faults below the conventional 87T pickup threshold down to the physical detection limit (up to $7.0\,\Omega$).

Real-time feasibility. The per-inference computational cost is 1.71 MFLOPs with an ONNX neural model execution latency of 0.44 ms on CPU, and a full per-window relay processing cycle of 1.15–1.25 ms (including sliding-window DWT decomposition, FFT harmonic ratio extraction, parallel 87T restraint evaluation, and supervisory Boolean handshake logic), well within the 20 ms power cycle. The median end-to-end physical fault-clearing time is 15.6 ms (with 96.9% cleared within two cycles).

7.3 Research Outcomes

The architecture demonstrates that high dependability (99.01%) and high security (99.66%) can be achieved simultaneously by coupling deterministic 87T principles with deep sequence intelligence via a dual-path handshake. The validated MATLAB $\rightarrow$ PyTorch $\rightarrow$ ONNX $\rightarrow$ Simulink pipeline is reproducible by relay manufacturers; fast clearing of high-current faults preserves transformer lifetime and reduces asset replacement risks.

7.4 Limitations of the Study

The study relies on EMT simulation without physical high-power substation validation; assumes a fixed 1.6 kHz sampling rate; was evaluated on a single 300 MVA plant topology; and uses frozen weights during deployment without online fine-tuning.

7.5 Recommendations for Future Work

1. **Substation Hardware-in-the-Loop Testing:** Validate on physical DSP/FPGA protective relays (e.g., OPAL-RT or RTDS platforms) with analog merging units.
2. **Transformer Fleet Multi-Topology Transfer Learning:** Pre-train on synthetic corpora across multiple MVA ratings and fine-tune on specific transformer nameplates.
3. **Inverter-Based Resource (IBR) Transient Evaluation:** Evaluate under low-inertia grids with Type-IV wind generators and grid-forming solar PV inverters.
4. **Multi-Class Fault Diagnosis:** Extend from binary trip/block logic to internal fault localization (winding turn percentage and phase identification).

7.6 Concluding Remarks

By wedding deterministic differential protection principles with multi-resolution sequence intelligence and rigorous persistence gating, this thesis proves that intelligent relays can simultaneously eliminate transient false trips and recover weak high-impedance faults, providing a dependable, secure, and computationally feasible foundation for next-generation power transformer protection.

LIST OF PUBLICATIONS

The following publications have been derived from this research:

1. Md Moinul Haque, Md Reyaz Uddin, and Cdre A N M Didarul Alam, (L), NUP, psc, BN, "Hybrid Adaptive Transformer Differential Protection Using a DWT–LSTM Intelligent Framework with Enhanced CT Saturation and Noise Robustness," *IEEE Access*, 2026 (Under Review, Manuscript ID: Access-2026-HATDP). *Summary:* presents the complete framework (two-level db4 decomposition, 12-feature DWT-harmonic pipeline, unidirectional LSTM with dual-path supervisory logic), reporting 99.01% dependability and 99.66% security and a median operating latency of 15.6 ms, benchmarked against seven literature methods.

2. Md Moinul Haque, Md Reyaz Uddin, and Cdre A N M Didarul Alam, (L), NUP, psc, BN, "Multi-Resolution Feature Extraction for Transformer Protection: A Discrete Wavelet Transform Approach with Harmonic Feature Fusion," in *Proceedings of the IEEE International Conference on Power Systems (ICPS)*, 2026 (Accepted and To be Presented). *Summary:* investigates mother wavelet and sub-band feature extraction, demonstrating that two-level db4 energy features combined with second-harmonic restraint ratios provide superior separation between inrush and internal fault transients compared to higher-level decompositions.

3. Md Moinul Haque, Md Reyaz Uddin, and Cdre A N M Didarul Alam, (L), NUP, psc, BN, "Comparative Benchmarking of Machine Learning and Deep Learning Architectures for Power Transformer Differential Protection Under Severe CT Saturation," *International Journal of Electrical Power & Energy Systems*, 2026 (Under Review, Manuscript ID: IJEPES-2026-HATDP). *Summary:* presents the systematic benchmark of eight protection models (conventional 87T, SVM, ANN, Random Forest, 1D-CNN, GRU, standalone LSTM, and the proposed hybrid) on the 3,218-trace verified dataset, analyzing dependability, security, operating speed, and computational complexity.

BIBLIOGRAPHY

[1] Q. Alhamd, M. Saniei, S. G. Seifossadat, and E. Mashhour, "Advanced fault detection in power transformers using improved wavelet analysis and LSTM networks considering current transformer saturation and uncertainties," *Algorithms*, vol. 17, no. 9, art. 397, 2024.

[2] Q. Alhamd, M. Saniei, and S. G. Seifossadat, "Intelligent differential protection of power transformers based on wavelet packet transform and deep sequence learning," *Int. J. Electr. Power Energy Syst.*, vol. 155, p. 109567, 2024.

[3] W. A. Atiyah, S. Karimi, and M. Moradi, "A novel approach for diagnosing transformer internal defects and inrush current based on 1DCNN and LSTM deep learning," *J. Electr. Syst.*, vol. 20, no. 3, pp. 2557–2572, 2024.

[4] P. M. Anderson, *Power System Protection*. New York, NY: IEEE Press / McGraw-Hill, 1999.

[5] K. Sudha and A. K. Pradhan, "Wavelet transform-based technique for detection and classification of power system disturbances," *Int. J. Emerg. Electr. Power Syst.*, vol. 8, no. 5, pp. 1–22, 2007.

[6] O. Ozgonenel and T. S. Karagol, "A new transformer differential protection scheme based on wavelet transform," *Electr. Power Syst. Res.*, vol. 116, pp. 146–154, Nov. 2014.

[7] R. L. Sharp and W. E. Glassburn, "A new approach to transformer differential protection," *Trans. Amer. Inst. Electr. Eng. III, Power App. Syst.*, vol. 77, no. 3, pp. 12–18, Apr. 1958.

[8] Z. Huang, S. Chen, S. Guo, and H. Yin, "Transformer differential protection based on self-adaptive biased characteristic curve," *Power Syst. Prot. Control*, vol. 44, no. 16, pp. 11–17, 2016.

[9] M. Tripathy, R. P. Maheshwari, and H. K. Verma, "Power transformer differential protection based on optimal probabilistic neural network," *IEEE Trans. Power Del.*, vol. 25, no. 1, pp. 102–112, Jan. 2010.

[10] A. Prataprao, S. Khedkar, and S. Barve, "A review on fault classification methodologies in power transformer," *Int. J. Eng. Adv. Technol.*, vol. 9, no. 1, pp. 7102–7109, 2019.

[11] M. Abdusalam, K. F. Ali, and W. M. El-Hawary, "A new hybrid machine learning method for detecting faults in power transformers," *Energies*, vol. 15, no. 18, art. 6758, 2022.

[12] J. Wang, Y. Liu, Z. Li, and B. Wang, "Early classification for power transformer fault detection using reinforcement learning," *Expert Syst. Appl.*, vol. 240, art. 122550, 2024.

[13] L. D. Simões, H. J. D. Costa, M. N. O. Aires, R. P. Medeiros, F. B. Costa, and A. S. Bretas, "A power transformer differential protection based on support vector machine and wavelet transform," *Electr. Power Syst. Res.*, vol. 197, art. 107297, Aug. 2021.

[14] S. Suliman, A. Mohamed, and H. Shareef, "Discrimination between inrush current and internal fault in power transformer using discrete wavelet transform," *Indones. J. Electron.*, vol. 3, no. 2, pp. 59–65, 2021.

[15] W. Rebizant, J. Szafran, and A. Wiszniewski, "Transformer differential protection with neural network based inrush stabilization," *WSEAS Trans. Circuits Syst.*, vol. 6, no. 4, pp. 537–544, 2007.

[16] S. Afrasiabi, M. Afrasiabi, B. Parang, and M. Mohammadi, "Integration of accelerated deep neural network into power transformer differential protection," *IEEE Trans. Ind. Informat.*, vol. 16, no. 2, pp. 865–876, Feb. 2020.

[17] A. Raichura and S. Paithankar, "Improved transformer differential protection by adaptive pickup," *Aust. J. Electr. Electron. Eng.*, vol. 17, no. 2, pp. 109–119, 2020.

[18] E. C. M. Costa, S. C. A. Alves, and R. L. A. Ribeiro, "Identification of inrush currents in power transformers using wavelet transform and artificial neural networks," *J. Control Autom. Electr. Syst.*, vol. 24, no. 5, pp. 636–645, Oct. 2013.

[19] A. Ngaopitakkul and A. Kunakorn, "Internal fault classification in power transformers using discrete wavelet transform and back-propagation neural networks," *Int. J. Comput. Appl.*, vol. 28, no. 5, pp. 15–22, 2006.

[20] S. Subramanian, M. S. Kalavathi, and C. Sharmeela, "Wavelet packet transform and support vector machine based discrimination between magnetizing inrush and internal faults," *Math. Probl. Eng.*, vol. 2010, pp. 1–13, 2010.

[21] H. Dashti and M. Sanaye-Pasand, "A multi-region adaptive differential relay for power transformer protection," *IEEE Trans. Power Del.*, vol. 29, no. 5, pp. 2165–2174, 2014.

[22] A. Shahbazi, A. A. Samad, and P. R. Sharma, "A self-adaptive biased characteristic curve method for power transformer differential protection," *Int. J. Comput. Theory Appl.*, vol. 11, no. 4, pp. 321–331, 2022.

[23] Y. Lin, Z. Li, X. Wang, and L. Chen, "Dual deep neural network for discriminating internal faults and inrush currents in power transformer differential protection," *IEEE Access*, vol. 13, pp. 11234–11246, 2025.

[24] M. Oztekin, S. Karagol, and O. Ozgonenel, "Power transformer differential protection with wavelet transform and difference function," *Eng. Sci. Technol. Int. J.*, vol. 70, art. 102144, 2025.

[25] P. Chiradeja, C. Pothisarn, and A. Ngaopitakkul, "Identification of inrush current and internal faults in power transformers using probabilistic neural network and discrete wavelet transform," *Appl. Sci.*, vol. 11, no. 22, art. 10619, 2021.

[26] H. Noshad, M. Razaz, and S. G. Seifossadat, "A new algorithm considering ultra-saturation phenomenon for differential protection of power transformers," *Int. J. Electron. Electr. Power*, vol. 7, no. 2, pp. 51–61, 2019.

[27] Y. Yubo, C. Deshu, X. Zhenyu, and O. P. Malik, "Adaptive variable window algorithm for power transformer differential protection," *IEEE Trans. Power Del.*, vol. 20, no. 3, pp. 1790–1798, 2005.

[28] T. Hayder, U. Schaerli, K. Feser, and L. Schiel, "Universal adaptive differential protection for regulating transformers," *IEEE Trans. Power Del.*, vol. 23, no. 2, pp. 568–575, Apr. 2008.

[29] S. B. A. Bukhari, A. Wadood, T. Khurshaid, K. K. Mehmood, S. Rhee, and C. H. Kim, "Empirical wavelet transform based intelligent protection scheme for microgrids," *Energies*, vol. 15, no. 21, art. 7995, 2022.

[30] S. Murugan, S. Simon, K. Venkatesh, and N. K. Sharma, "An efficient approach for power transformer differential protection using energy feature tracking," *IEEE Trans. Power Del.*, vol. 32, no. 4, pp. 1850–1859, 2017.

[31] K. Hegazy and M. M. A. Salama, "Advanced differential protection scheme for power transformers based on wavelet packet transform," *IEEE Trans. Power Del.*, vol. 35, no. 5, pp. 2345–2356, 2020.

[32] B. Kasztenny and E. Rosolowski, "Adaptive neural network-based protection of power transformers," *Electr. Power Syst. Res.*, vol. 155, pp. 368–379, 2018.

[33] Z. Gajic, I. Brnčić, and R. Gojko, "Differential protection of power transformers using ICT and smart processing," *Int. J. Electr. Power Energy Syst.*, vol. 110, pp. 582–592, 2019.

[34] D. R. Oliveira, A. S. Bretas, and L. U. Iurinic, "Transformers differential protection using independent component analysis," *IEEE Trans. Power Del.*, vol. 34, no. 2, pp. 738–747, 2019.

[35] A. Hooshyar, M. Sanaye-Pasand, and M. Davarpanah, "GARCH differential current modeling for power transformer protection," *IEEE Trans. Power Del.*, vol. 31, no. 2, pp. 642–652, Apr. 2016.

[36] Y. C. Kang, B. E. Lee, and S. H. Kang, "A CT saturation detection algorithm using the secondary current third-derivative function," *IEEE Trans. Power Del.*, vol. 26, no. 4, pp. 2863–2871, 2011.

[37] X. Lin, P. Liu, and O. P. Malik, "Studies for identification of the inrush based on improved correlation algorithm," *IEEE Trans. Power Del.*, vol. 17, no. 4, pp. 901–907, 2002.

[38] R. P. Medeiros, F. B. Costa, and K. M. Silva, "Power transformer differential protection using the boundary discrete wavelet transform," *IEEE Trans. Power Del.*, vol. 31, no. 5, pp. 2083–2095, Oct. 2016.

[39] R. P. Medeiros, F. B. Costa, K. M. Silva, J. J. Chavez, J. R. Lima Junior, and M. Popov, "A Clarke-wavelet-based time-domain power transformer differential protection," *IEEE Trans. Power Del.*, vol. 37, no. 1, pp. 317–328, Feb. 2022.

[40] Y. Wang, X. Yin, H. Zhang, and D. Chen, "Variable data-window Phaselet algorithm based transformer differential protection," *IEEE Trans. Power Del.*, vol. 26, no. 4, pp. 2648–2656, Oct. 2011.

APPENDIX A

SYSTEM PARAMETERS AND CONFIGURATION

The verified 300 MVA plant parameters, current transformer data, and Daubechies-4 filter coefficients are summarized in Tables A.1 and A.2.

Table A.1: Daubechies-4 (db4) low-pass and high-pass decomposition filter coefficients ($L = 8$).

n	Low-pass filter $h[n]$	High-pass filter $g[n] = (-1)^n h[7-n]$
0	$+0.230377813308896$	-0.010597401785069
1	$+0.714846570552915$	-0.032883011666885
2	$+0.630880767937402$	$+0.030841381835561$
3	-0.027983769416860	$+0.187034811719093$
4	-0.187034811719093	-0.027983769416860
5	$+0.030841381835561$	-0.630880767937402
6	$+0.032883011666885$	$+0.714846570552915$
7	-0.010597401785069	-0.230377813308896

Table A.2: Deployed neural network architecture hyperparameters and execution budget.

Component / Hyperparameter	**Specification**
Input feature dimension	12 features per step (32×12 window)
Wavelet front-end	2-level db4 DWT (9 energies across 3 phases)
Harmonic front-end	3 phase-wise 2nd-harmonic restraint ratios
Sequence buffer horizon	32 time steps (20 ms at 1.6 kHz)
Total lookback across sequence	63 raw samples (39.375 ms)
Layer 1 architecture	Unidirectional LSTM, 64 hidden units, LayerNorm
Layer 1 parameters	$4 \times 64 \times (12 + 64 + 1) = 19{,}712$ parameters
Dropout rate (between layers)	$p = 0.22$
Layer 2 architecture	Unidirectional LSTM, 64 hidden units, LayerNorm
Layer 2 parameters	$4 \times 64 \times (64 + 64 + 1) = 33{,}024$ parameters
Attention mechanism	Global temporal self-attention (193 parameters)
Dense classifier head	Dense(64, 64) + ReLU + Dense(64, 1) (5,312 parameters)
Total trainable parameters	58,241 parameters
Dwell persistence timer	20 samples (12.5 ms)
Handshake confidence threshold	$\theta_{\text{AI}} = 0.99$
AI-alone confidence threshold	$\theta_{\text{solo}} = 0.998$
Instantaneous high-set threshold	$\max_{\varphi} I_{d,\varphi} > 10.0$ pu
ONNX execution latency	0.44 ms on CPU
Full relay cycle latency	1.15–1.25 ms on CPU
Per-inference computation budget	1.71 MFLOPs (0.855 MMACs)

APPENDIX B

REPRODUCIBILITY AND STANDARDS

B.1 Computational Environment and Software Dependencies

Simulation and analysis were executed on a workstation with an Intel Core i7-12700H CPU @ 2.30 GHz (14 cores, 20 threads), 32 GB DDR5 RAM, and an NVIDIA GeForce RTX 3060 GPU running 64-bit Windows 11. Software dependencies:

- MATLAB R2024a (v24.1.0) with Simulink, Simscape Electrical, Deep Learning Toolbox, Signal Processing Toolbox, and MATLAB Support for ONNX.
- Python 3.11.7 with PyTorch 2.2.1, PyWavelets 1.5.0, NumPy 1.26.4, SciPy 1.12.0, scikit-learn 1.4.1, and ONNX Runtime 1.17.1.
- Git version control with atomic commit history across all development phases.

B.2 Standards Compliance

The modeling, protection algorithms, and evaluation protocols comply with applicable IEEE and IEC standards:

- **IEEE Std C37.91-2021:** *IEEE Guide for Protecting Power Transformers*.
- **IEEE Std C37.110-2007:** *IEEE Guide for the Application of Current Transformers Used for Protective Relaying Purposes*.
- **IEC 60255-187-1:2021:** *Measuring Relays and Protection Equipment – Part 187-1: Functional Requirements for Differential Protection – AC Motors, Generators and Transformers*.
- **IEC 61850-9-2:** *Specific Communication Service Mapping (SCSM) – Sampled Values over ISO/IEC 8802-3*.