



SUNFLASER

OPTOELECTRONIC SOLUTIONS



Product Manual

Product Instruction
Parameter Description

SFA2000B

905 nm Miniature Laser Ranging Module

Disclaimer

- This product manual mainly provides the reference specifications and performance parameters of the product. If any specifications are not included in this document, please contact SunFlaser Optics Technology (Chengdu) Co., Ltd. directly for confirmation. Any changes to the contents of this manual or the specific specifications of the ranging module will not be notified separately.
- Without prior written permission from SunFlaser Optics Technology (Chengdu) Co., Ltd., this document shall not be reproduced, copied, or stored in any information storage system. It shall not be used for any unauthorized purposes or forwarded to any third party without explicit authorization from SunFlaser Optics Technology (Chengdu) Co., Ltd.
- Due to variations in actual product performance, this document is provided as an important reference for product specifications and parameters, but does not constitute any form of warranty. Any express or implied warranties regarding the product, including suitability for a specific purpose, shall be subject to the actual performance of the specific product.
- SunFlaser Optics Technology (Chengdu) Co., Ltd. reserves the right to revise this document without prior notice. This document may contain inaccurate descriptions or printing errors. We appreciate any feedback and will correct verified errors in future versions of the manual.
- At the time of publication, all descriptions, specifications, designs, and software programs contained in this document are valid. SunFlaser Optics Technology (Chengdu) Co., Ltd. reserves the right to modify the above information at any time without prior notice. If you have any questions regarding the use of this manual, please contact us promptly.

Safety Instructions

- The laser ranging module should not be viewed directly by the human eye. If observation is necessary, appropriate professional protective equipment must be used. Direct exposure to the laser beam is strictly prohibited to prevent potential eye injury.
- Avoid ranging on targets within the blind zone, especially highly reflective targets such as glass or polished metal surfaces. Avoid operating multiple ranging modules facing each other at close distances. Prevent high-energy laser sources from directly irradiating the receiving optics of the module. During assembly and debugging, keep the receiving lens covered at all times; otherwise, excessive echo signals may cause permanent damage to the detector.
- Pay attention to electrostatic discharge (ESD) protection: the electronic components of the laser ranging module are sensitive to electrostatic discharge. Do not touch any electronic components without proper protective measures.
- Do not touch the optical lenses directly with fingers or hard objects. Avoid using cleaning agents unless necessary, as they may cause irreversible damage to the lens coating and affect product performance.
- Do not use the product under direct sunlight. Do not store the product in highly polluted environments or outside the specified storage temperature range. Avoid exposing the laser ranging module to strong mechanical shocks, such as vibration, impact, or dropping. Avoid placing the module in environments with rapid temperature changes to prevent unpredictable effects on module performance.
- The laser ranging module adopts a certain level of sealing design. However, it is recommended to operate the product in environments with humidity below 80% and maintain a clean operating environment to extend the service life of the product.
- Do not attempt to disassemble, modify, or repair any part of the ranging module. Do not attempt to tamper with or adjust the performance of the module.
- Operate the laser ranging module strictly according to the instructions provided in this datasheet. Avoid sending any operating commands that are not specified in this document.

Table of Contents

Disclaimer	1
Safety Instructions.....	2
01 Product Overview.....	4
02 Product Illustration.....	4
03 Mechanical Dimensions.....	5
04 Product Performance Specifications.....	6
05 Electrical Interface	8
06 Communication Interface	9
07 Functions and Operation.....	10
08 Optical Window Selection and Recommendations	12
09 Maintenance Instructions.....	14
10 After-Sales Service.....	22
11 Contact Information.....	22
Appendix 1: Communication Protocol.....	23

01 Product Overview

SFA2000B is a laser ranging module designed to measure the distance of specific targets and provide accurate target distance information. It features excellent performance and simple operation.

The module operates at a 905 nm laser wavelength and communicates with the host computer through a TTL serial interface.

02 Product Illustration

The product diagram of the laser ranging module is shown below. It mainly consists of the following components:

- Circuit Assembly
- Receiving Antenna
- Transmitting Antenna

The overall structure is illustrated in the figure below.

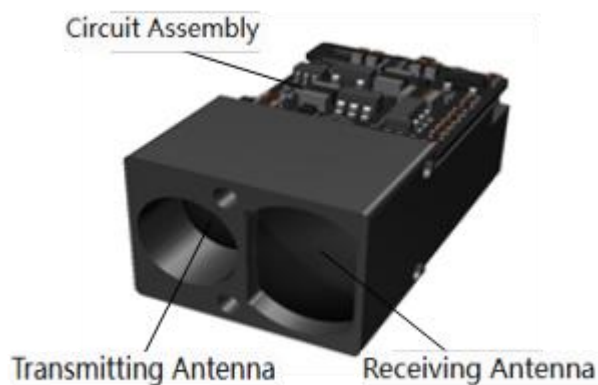


Figure 1 Product Diagram

03 Mechanical Dimensions

The interface dimensions are shown in the figure below, unit: mm.

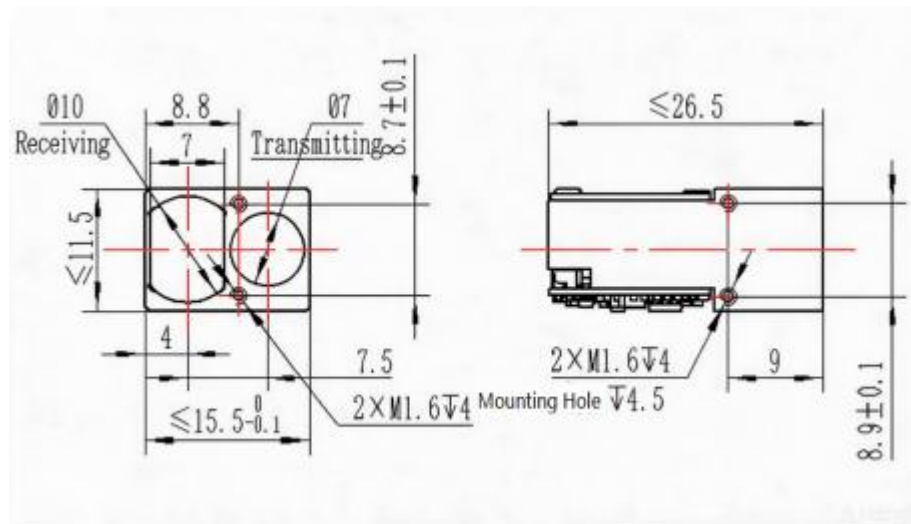


Figure 2: Opto-Mechanical Interface Diagram

04 Product Performance

Item	Performance Specifications
Center Wavelength	905 nm
Transmitting Aperture	Φ7 mm
Receiving Aperture	Φ10 mm×7 mm
Ranging Capability	≥2000 m (daytime, visibility ≥10 km, humidity ≤60%, building target)
Minimum Ranging Distance (Blind Zone)	≤3 m
Ranging Accuracy	±1 m (L ≤ 400 m), ±2 m (L > 400 m)
Measurement Success Rate	≥99%
Ranging Frequency	Single ranging, 1 Hz, adaptive 2 Hz, adaptive 3 Hz, adaptive 4 Hz
Baud Rate	115200 bps (default) / 9600 bps / 38400 bps / 57600 bps
Beam Divergence Angle	≤6 mrad
Stray Light Angle	±8°
Weight	≤6.5 g
Dimensions	≤26.5 mm×15.5 mm×11.5 mm
Electrical Interface	Host computer connector plug: 0.8WTB-6Y-2 Laser rangefinder connector socket: 0.8WTB-6AWB-01
Supply Voltage	3.3 V (expandable to 3.3 V–5 V)
Standby Power Consumption	≤0.2 W
Average Power Consumption	≤0.9 W @ 3.3 V @ 1 Hz
Peak Ranging Power Consumption	≤1.35 W @ 3.3 V
Peak Startup Current	≤550 mA
Leakage Current	< 100 uA

Item	Performance Specifications
Power-on Ranging Response Time	≤ 100 ms
Operating Temperature	-20°C to +60°C
Storage Temperature	-45°C to +70°C
Functions	Laser ranging / Serial port firmware update
Others	Beam Spot Orientation: Horizontal beam spot (parallel to the receiving and transmitting optical axis centerline) Air Tightness: The lens meets IP67 requirements. With the module fixed on the fixture and pressurized from the front end, at an air pressure of 30 kPa, the leakage rate is ≤ 1 sccm, which is considered compliant with IP67 protection for the front end (100% inspection). Environmental Protection: Complies with RoHS 2.0 requirements. Safety Standard: Complies with IEC 60825-1 requirements. Shock: The module withstands half-sine shock pulses along the optical axis direction with a peak acceleration of 1000G. Each pulse lasts 0.5 ms, for a total of 600 pulses. After testing, the module remains mechanically secure and meets all specified requirements. Vibration: Transportation vibration Sunlight False Alarm Angle: $< 30^\circ$

Note 1: Values marked with an asterisk (*) in the table are design values or theoretical calculation values and are for reference only.

Note 2: The nominal ranging distance and accuracy are achieved under conditions of visibility ≥ 10 km and relative humidity $\leq 60\%$. The ranging capability and accuracy may vary depending on different environments and target conditions. Actual performance shall be based on measured results.

If the rangefinder is used on a stabilized platform, ensure that the platform can maintain stable tracking of the target; otherwise, the ranging distance and accuracy may be affected.

05 Electrical Interface


Electrical Interface Requirements:

The pin definitions of the power supply and communication port on the rangefinder side are shown in the table below. The position of Pin 1 on the connector is shown in the figure below.

Table 2 Electrical Pin Definition of the Product

Pin No.	Label	Electrical Characteristics	Signal Direction
1	Power-EN	High level enables operation (3.3 V–5 V); floating or low level disables operation (<0.15 V)	Power enable pin
2	TTL_RXD	Signal input port	Host computer to rangefinder
3	TTL_TXD	Signal output port	Rangefinder to host computer
4	NC		
5	VCC		
6	GND		

Figure 3 Connector Pin 1 Location

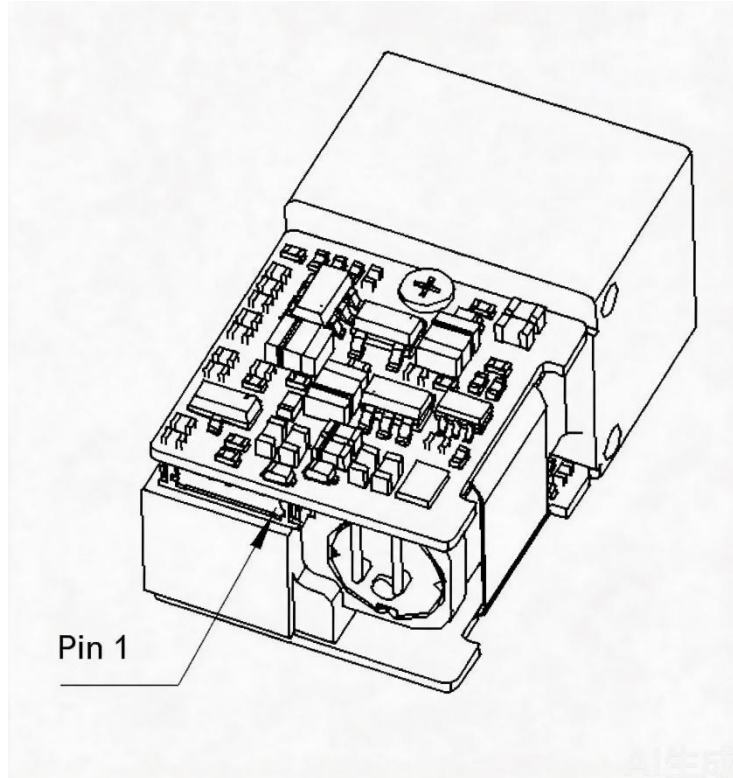

06 Communication Interface


Communication Interface Requirements:

- Baud Rate: 115200 bps (default) / 9600 bps / 38400 bps / 57600 bps;
- Single-byte transmission format: 1 start bit, 8 data bits, no parity bit, and 1 stop bit.
- Communication Protocol: Refer to Appendix 1.

07 Functions and Operation

1. Power-On Operation

- Before powering on, connect the laser ranging module, debugging cable, DC power supply, and host computer according to the electrical interface requirements as shown in the figure below (pay attention to the connector orientation).
- The module can be powered on by connecting the power supply.

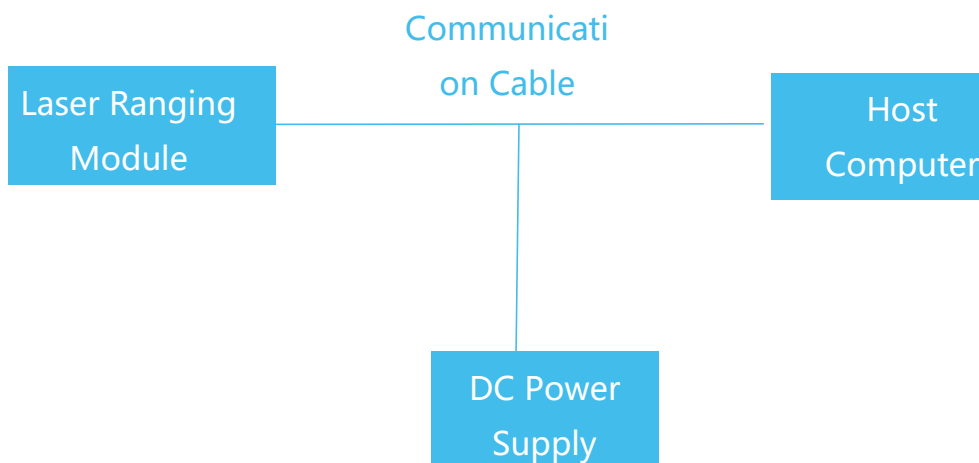

Connection Diagram

2. Power-Off Operation

- Before powering off, ensure that all operating processes and tasks have been completed (after the single ranging result has been returned or continuous ranging has been stopped).
- After confirmation, disconnect the power supply to complete the normal shutdown process.

3. Function Description

Ranging Mode Operation:

- Send the "Single Ranging" command to the laser ranging module. The module performs a single distance measurement and reports the ranging status and distance value.

- Send the "Continuous Ranging" command to the laser ranging module. The module continuously performs distance measurements and reports the ranging status and distance values.
- Send the "Stop Ranging" command to stop the ranging operation.

08 Optical Window Selection

1. Material Recommendation

The recommended optical window material is H-K9L optical glass from Chengdu Guangming Optical Glass. H-K9L is one of the most commonly used colorless optical glasses, suitable for laser wavelengths ranging from 300 nm to 2100 nm. It features excellent physical properties and high cost-effectiveness.

2. Processing Recommendations

The wedge angle tolerance of the optical window should be minimized. A wedge angle tolerance of $\leq 3'$ is recommended (tolerance grade $\leq$ Grade 7).

The optical surfaces of the window should be as smooth as possible. A recommended arithmetic average roughness (Ra) value is 0.012.

3. Coating Recommendations

For the 905 nm laser ranging module, it is recommended that the optical window be coated with an anti-reflection coating for the wavelength range of 855 nm to 955 nm, with a transmittance of $\geq 99.5\%$. Depending on the specific application environment, additional protective coatings such as hydrophobic coatings or hard coatings may be applied to the outer surface of the optical window. Other specifications shall comply with GJB2485-95, with a transmittance of $\geq 97\%$.

4. Optical Window Dimensions and Usage Recommendations



The effective aperture of the optical window depends on the specific product design. The window dimensions should ensure that the difference between the outer diameter of the optical window and its effective aperture is ≥ 2 mm, and the difference between the effective aperture and the outer diameter of the ranging module aperture is ≥ 1.5 mm. The schematic diagram is shown below.

Since the optical window absorbs a certain amount of laser energy, the window thickness is recommended to be controlled within 2–4 mm depending on its dimensions.

Due to the high transmittance of the optical window, it is recommended that the transmitting optical axis be parallel to the normal axis of the window. Meanwhile, the air gap between the optical window and the ranging module should be less than 0.5 mm. The positional relationship between the optical window and the two lens barrels is shown in the figure below.

During use, the optical window must be kept clean and transparent. The optical surface should be free from stains, fingerprints, dust, and other contaminants.

Optical Window Dimensions and Placement Diagram

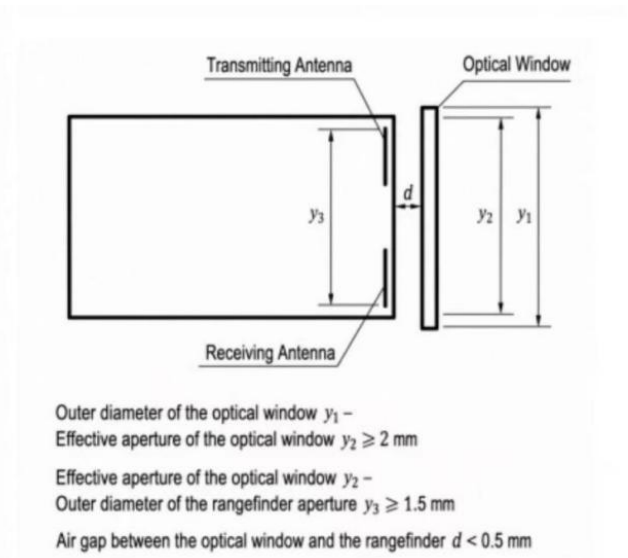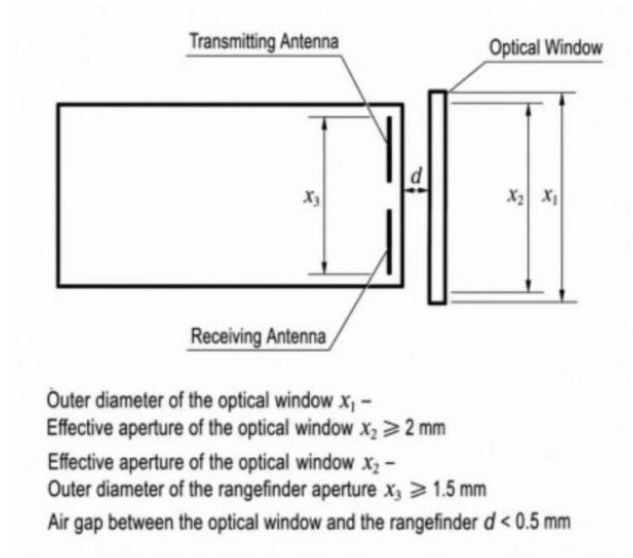

09 Maintenance Instructions

1. Packing List

The items supplied with the product are listed in the table below. (Optional accessories may not be included in the list. Please refer to the actual delivered items.)

No.	Item	Quantity	Remarks
1	Laser Ranging Module	1 unit	
2	Certificate of Conformity	1 copy	
3	Packaging Box	1 pcs	
4	Connector Plug	1 pcs	

2. Cleaning

2.1 Cleaning of Optical Components

- Dust particles should be removed using an air blower.
- Fingerprints should first be removed by gently wiping with degreased cotton dipped in a small amount of alcohol-ether mixture, followed by cleaning with a clean lens cleaning cloth.

2.2 Cleaning of Mechanical and Electronic Components

- Clean mechanical and electronic components with alcohol while the device is powered off, and allow them to air dry completely before use.
- Keep the ranging module, connector plug, and cables away from moisture and contaminants whenever possible.
- Ensure the equipment is completely dry before packaging.

3. Inspection and Maintenance

3.1 General Inspection

Visual inspection and power-on inspection shall be performed before the initial use of the product and after replacement of functional modules. For products in normal operation, only power-on inspection is required before use.

The visual inspection steps are as follows:

- Check whether the product appearance is normal.
- Check whether the cable connection is correct and ensure all connections are secure.
- The power-on inspection steps are as follows:
 - Perform the power-on procedure and check whether the standby current is within the specified range.
 - Start the self-test function to verify product operation.
 - Perform the shutdown procedure after completing the inspection.

3.2 Periodic Maintenance

The laser ranging module does not require regular maintenance under normal operating conditions. Maintenance is required if the product has been stored in a dust-free environment for more than one year. Maintenance mainly includes general inspection and power-on inspection.

General inspection shall be performed with the product powered off. The procedures are as follows:

- All markings and numbers on the product and test cable connectors (plugs and sockets) shall be correct and clearly visible.
- All screws on the panel shall be properly tightened.
- Ensure that the optical glass is free from visible defects or contaminants that may affect normal observation, including spots, pits, water stains, mold, fingerprints, dust particles, cracks, or other attachments.

A complete inspection and maintenance procedure shall be performed with the laser ranging module powered on, including:

- Turn on the product power supply.
- Perform the power-on procedure and verify that the standby current is within the specified range.
- Start the product self-test function and complete the self-test procedure.
- Complete the shutdown procedure.

4. Fault Analysis and Troubleshooting

The laser ranging module is a precision product. In the event of a failure, the complete unit must be returned to the manufacturer for fault analysis, diagnosis, and repair. Self-repair is strictly prohibited. Common fault symptoms and troubleshooting methods are listed in the table below.

Problem Description	Possible Causes of Failure	Troubleshooting Method	Evaluation Criteria	Solution / Corrective Action
No communication or abnormal communication	Power supply issue	Check whether the power supply has hardware or software wake-up enabled. Verify that the voltage setting is correct and ensure the	If the module operates normally after changing the voltage or power supply, the issue can be determined to	Set the correct voltage and current, or replace the power supply.

of the rangefinder module		protection current is properly configured. If the voltage is correct, try replacing the power supply and test again.	be caused by an incorrect power supply.	
	Connection cable issue	Check whether the wiring is secure, or replace the communication cable for testing (TTL communication cables should not be excessively long).	If communication is restored after rewiring or replacing the communication cable, the issue can be determined to be caused by a connection cable problem.	Rewire the connections or replace the communication cable.
		Check whether the wiring matches the interface pin definition.	If the module operates normally after confirming that the wiring matches the pin definition, the issue can be determined to be caused by incorrect wiring.	Reconnect the wiring according to the correct pin definition.
	Incorrect baud rate setting	1. Check whether the rangefinder status and baud rate settings are consistent with the communication protocol. 2. If the rangefinder supports baud rate configuration, change to the required baud rate and try communication again.	If communication operates normally after aligning the baud rate with the communication protocol, the issue can be determined to be caused by an incorrect baud rate setting.	Set the host computer baud rate to match the communication protocol.
	Incorrect communication command	Check the rangefinder status and verify whether the transmitted command is consistent with the communication protocol, and confirm that the command is in hexadecimal format.	If communication operates normally after confirming that the transmitted command matches the communication protocol, the issue can be determined to be caused by an incorrect communication command.	Send the correct command to the rangefinder module.
	Main control program issue	If communication fails during integration with the main controller, first check whether standalone communication is functioning normally.	If standalone communication works normally, the issue can be considered likely to be caused by a problem in the main control program.	It is recommended to check whether there are issues in the system-level program (e.g., whether the parity/check bits are correct, and whether the host computer data parsing and display are implemented correctly).
	Other causes (e.g., circuit failure, etc.)	Return to factory for inspection and troubleshooting.	Return to the factory for inspection and diagnosis.	Return to factory for repair.
The rangefinder returns invalid	Operational error /	Check whether the receiving or transmitting lens is blocked, and	If the rangefinder returns normal readings after	Remove the obstruction.

values.	improper operation.	ensure that there are no obstructions in the measurement environment (e.g., window glass, wall corners, etc.).	removing the obstruction, the issue can be considered likely caused by optical blockage.	
		Whether the ranging axis is aligned with the optical sighting axis.	If the rangefinder returns normal measurements after realignment, the issue can be determined to be caused by misalignment between the ranging axis and the optical sighting axis.	Realign the ranging and optical axes and perform measurement again.
	Other causes (e.g., circuit failure, detector, etc.)	Return to factory for inspection and troubleshooting.	Return to the factory for inspection and diagnosis.	Return to factory for repair.
False ranging results.	Electrical noise interference.	Block or point the rangefinder receiving lens toward open space (or away from the sun) and test whether false alarms still occur. If no false alarms are observed, the issue can be determined to be caused by optical noise interference. Further determine whether it is due to external ambient light or the system optical window (e.g., mismatch of wavelength band with the rangefinder, excessive tilt angle of the optical window, small aperture causing light blockage, or a contaminated optical window). Power the rangefinder module independently within the system and test whether false alarms still occur. If no false alarms are observed, the issue can be determined to be caused by electrical or communication noise interference.		It is recommended to address power supply noise issues by adding a larger common-mode filter in series, replacing the grounding capacitor with a 10 nF capacitor, and increasing the detection threshold (note that this may reduce system performance).
	Communication noise interference.	Power the rangefinder module independently within the system and test whether false alarms still occur. If no false alarms are observed, the issue can be determined to be caused by power supply noise interference. Operate the rangefinder module with communication only within the system and test whether false alarms still occur. If no false alarms are observed, the issue can be determined to be caused by communication noise interference.		It is recommended to address communication noise interference by adding a ferrite core (shielding magnetic ring) to the cable or increasing the threshold level (note that this may reduce system performance).
	Optical noise interference.	If false alarms still occur after the above steps, test the rangefinder module as a standalone unit (removed from the system and powered/communicated independently). If false alarms are still present, the issue can be determined to be caused by the rangefinder module itself or the power adapter.		It is recommended to address optical noise issues (optical window condition and test angle) and increase the detection threshold (note that this may reduce system performance).
	Other causes (e.g., circuit failure, etc.)	Return to factory for inspection and troubleshooting.	Return to the factory for inspection and diagnosis.	Return to factory for repair.

Insufficient performance capability of the rangefinder module.	Environmental conditions (weather-related factors).	Check whether the weather conditions include rain, snow, fog, or dust/sand, whether atmospheric visibility is too low, whether humidity is too high, or whether there are localized atmospheric turbulence effects, as well as any discrepancies between the environmental conditions and the test site.	If the ranging performance meets the technical specifications when the visibility is above the required threshold, the issue can be determined to be caused by environmental weather conditions.	Test the rangefinder performance under appropriate weather conditions.
	Optical window issue.	Determine, by checking the system configuration, whether the issue is caused by low optical window transmittance, incorrect wavelength band, contamination, small aperture causing light blocking, or excessive tilt angle. Remove the optical window and test the rangefinder module independently to observe whether its ranging performance is degraded. Also inspect whether the lens of the rangefinder is excessively contaminated.	If the ranging performance meets the specification requirements after removing the optical window, the issue can be determined to be caused by low transmittance of the host optical window. If the ranging performance meets the specification requirements after cleaning the rangefinder lens, the issue can be determined to be caused by low transmittance of the host optical window.	Replace the optical window according to the recommended selection and installation guidelines, or switch to a higher-performance rangefinder model. Clean the lens.
	Target size is too small or target reflectivity is too low.	Replace with another target. It is recommended to use targets such as buildings that are perpendicular to the optical axis, and avoid hollow or perforated targets as much as possible.	If the ranging performance meets the specification requirements after replacing with a higher-reflectivity or larger target, the issue can be determined to be caused by inappropriate target selection.	Replace the target, or switch to a higher-performance rangefinder model.
	Operating temperature exceeds the specified range of the rangefinder module.	When ranging performance degrades, send a self-test command to check the current operating temperature of the rangefinder module. After the temperature returns to normal, retest and observe whether the performance issue persists.	If the operating temperature exceeds the specified range when performance degrades, and the performance issue disappears after the temperature returns to normal, the issue can be determined to be caused by the operating environment exceeding the allowable	Operate the device within the specified operating temperature range.

			temperature range of the rangefinder module.	
	Other causes (e.g., circuit failure, low receiver sensitivity, etc.)	Return to factory for inspection and troubleshooting.	Return to the factory for inspection and diagnosis.	Return to factory for repair.
Accuracy out of tolerance.	Large variation in target reflectivity.	Confirm whether the tested target is a high-reflectivity target, and determine whether the issue is large data fluctuation or accuracy out of tolerance.	If the tested target is highly reflective and the ranging accuracy returns to normal after replacing it with a suitable target, the issue can be determined to be caused by excessive target reflectivity variation.	Replace the target. The use of highly reflective test targets is not recommended.
	Test operation issue.	Check whether the target has been properly aimed at.	If the ranging accuracy returns to normal after correctly aiming at the target, the issue can be determined to be caused by improper test operation.	Re-aim at the target.
	Instrument issue.	Verify the accuracy of the calibration instrument (possible calibration error).	If the ranging accuracy returns to normal after replacing with an accurately calibrated instrument, the issue can be determined to be caused by the test instrument.	Replace the calibration instrument.

5. Packaging, Transportation and Storage Requirements

5.1 Packaging

After unpacking, if the product needs to be stored again, it shall be repackaged using the original packaging. When the product needs to be returned to the manufacturer, the original packaging should be used whenever possible. If other packaging methods are adopted, they shall not cause any performance degradation or damage to the product.

5.2 Transportation

Repackaged products may be transported by road, railway, air, or sea. During transportation, the packaged product shall be securely fixed to the transport vehicle to prevent impact, rough handling, rain, snow, or other adverse conditions.

10 After-Sales Service

If a product failure occurs and the complete unit needs to be returned to the manufacturer for fault analysis, diagnosis, and repair, SunFlaser provides a one-year warranty service and lifetime technical support from the date of product delivery. During the warranty period, SunFlaser will provide free replacement or repair for problems caused by product quality issues. For failures caused by improper operation or other user-related factors, repair and replacement costs will be charged according to the actual situation.

This product is a precision optical instrument. Please handle and protect the product carefully during use. If you have any questions regarding operation, maintenance, or service, please contact our after-sales support team at any time.

11 Contact Information

Website: www.sunflaser.com

Tel: +86 186 2827 7862 (Sales Manager: Mr. Cao)

Address: No. 58, Zhenxing West 1st Road, Building 1, Room 201, Jinniu District, Chengdu, Sichuan, China

Appendix 1

Communication Protocol

1. Single Ranging Command

Note: Transmit checksum = Byte 3 + Byte 4 + Byte 5 + Byte 6 + Byte 7;

Receive checksum = Byte 1 + Byte 2 + Byte 3 + Byte 4 + Byte 5 + Byte 6 + Byte 7.

Command Sent to the Ranging Module

Byte	1	2	3	4	5	6	7	8
Description	0x55	0xAA	0x88	0xFF	0xFF	0xFF	0xFF	Checksum

Response from the Ranging Module

Byte	1	2	3	4	5	6	7	8
Description	0x55	0xAA	0x88	status	0xFF	DATA_H	DATA_L	Checksum

Status = 0: Single measurement failed;

DATA_H=0xFF, DATA_L=0xFF;

Status = 1: Single measurement successful;

DATA_H = High byte of the measurement result;

DATA_L = Low byte of the measurement result.

Note: After converting the returned data into a decimal value, divide the result by 10 to obtain the actual measured distance.

Example: DATA_H=0x4E and DATA_L=0x23. The converted decimal value is 20003, therefore the measured distance is dist = 2000.3 m.

2. Continuous Ranging Command

Note: Transmit checksum = Byte 3 + Byte 4 + Byte 5 + Byte 6 + Byte 7;

Receive checksum = Byte 1 + Byte 2 + Byte 3 + Byte 4 + Byte 5 + Byte 6 + Byte 7.

Command Sent to the Ranging Module

Byte	1	2	3	4	5	6	7	8
Description	0x55	0xAA	0x89	0xFF	0xFF	0xFF	0xFF	Checksum

Response from the Ranging Module

Byte	1	2	3	4	5	6	7	8
Description	0x55	0xAA	0x89	status	0xFF	DATA_H	DATA_L	Checksum

Status = 0: Continuous measurement failed;

DATA_H=0xFF, DATA_L=0xFF;

Status = 1: Continuous measurement successful;

DATA_H = High byte of the measurement result;

DATA_L = Low byte of the measurement result.

Freq = 0x89, 1 Hz ranging;

Freq = 0xA9, adaptive 2 Hz ranging;

Freq = 0xB9, adaptive 3 Hz ranging;

Freq = 0xC9, adaptive 4 Hz ranging;

Freq = 0xF9, optical axis calibration mode (the module returns the calibration status once after receiving the calibration command).

3. Stop Measurement Command

Command Sent to the Ranging Module

Byte	1	2	3	4	5	6	7	8
Description	0x55	0xAA	0x8E	0xFF	0xFF	0xFF	0xFF	Checksum

Response from the Ranging Module

Byte	1	2	3	4	5	6	7	8
Description	0x55	0xAA	0x8E	status	0xFF	0xFF	0xFF	Checksum

Status = 0: Failed to stop continuous measurement;

Status = 1: Continuous measurement stopped successfully.