

BASE - TOP VIEW (lid removed)

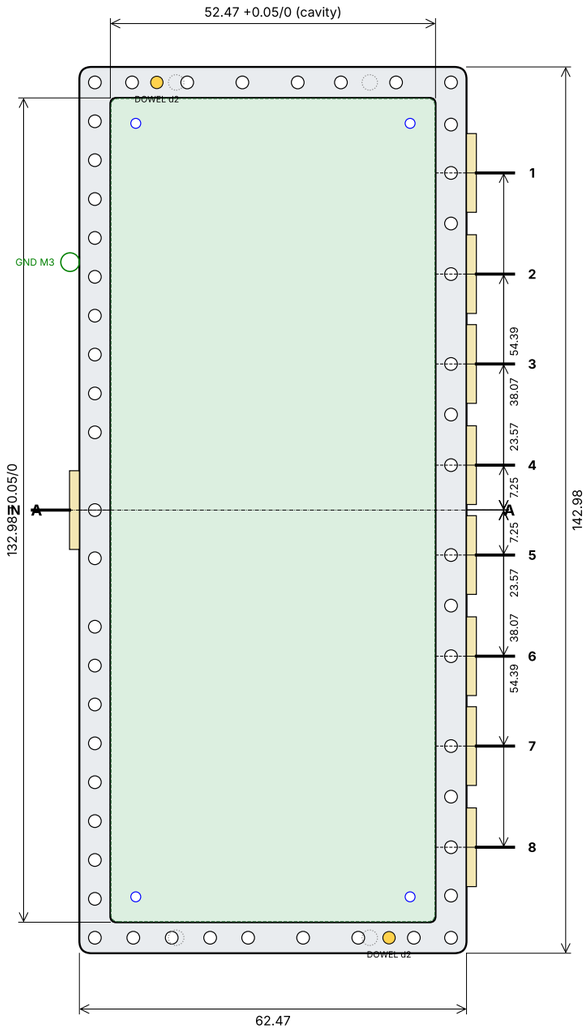


50 x M2.5 tap 4.6 deep (lid) 4 x M2 tap 3.5 deep (PCB, blue) 4 x M3 tap 6 deep from bottom (dotted)


CAGE (lid underside, viewed from below = mirrored in x)

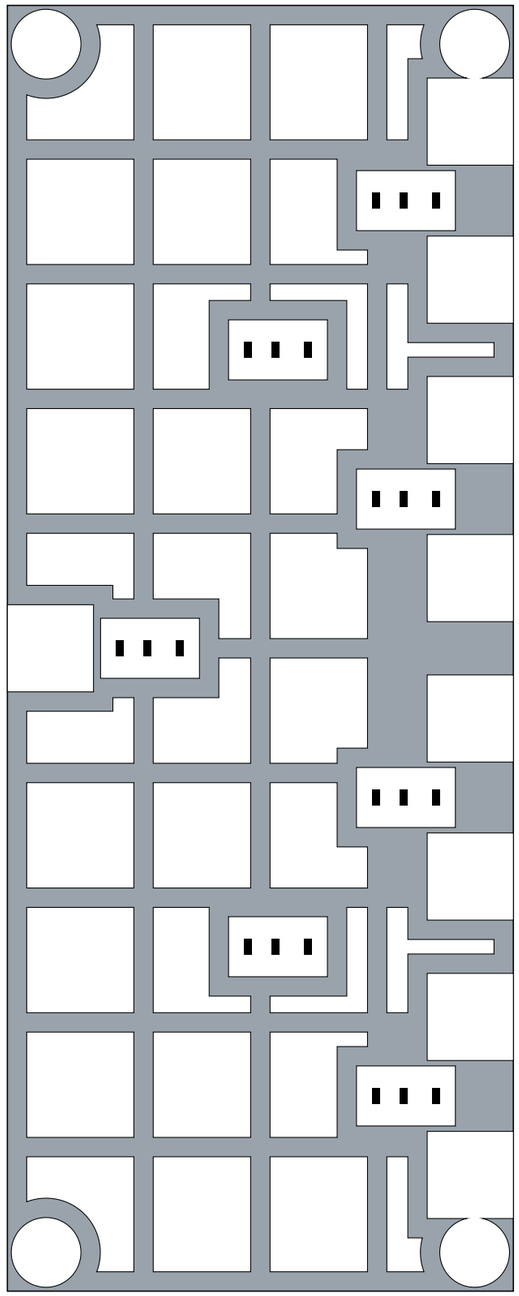


LID - TOP (engrave 0.3)

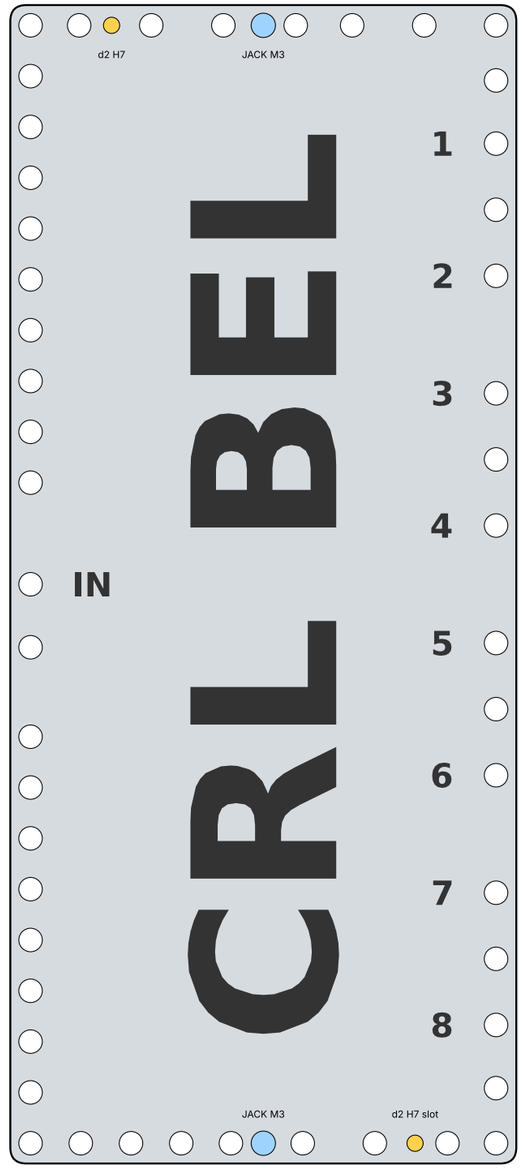

VIEW ON EAST WALL (connector face)

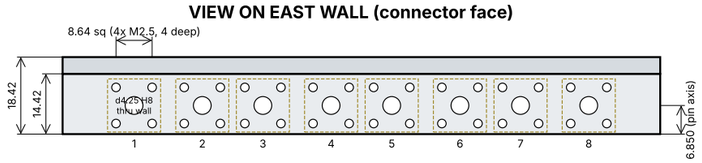

SECTION A-A (y = +0.5)

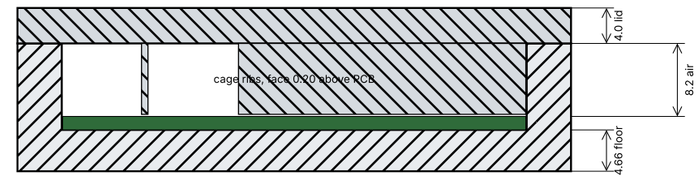

NOTES
1. Material Al 6061-T6; conductive chromate MIL-DTL-5541 Cl.3 (or Ni); outside may be black anodised, but NOT the lid seat, cage face, connector faces or the GND point.
2. ISO 2768-mK; cavity +0.05/0; lid seat and cage face flat 0.03, Ra 0.8.
3. Cage face 0.20 above the PCB top: fit 0.25 mm conductive elastomer sheet (e.g. CHO-SEAL 1298 / 1310) cut to the rib pattern.
4. PCB: customer DXF XBand_8Way_MSL_to_SL, t = 1.524 [ASSUMED] - confirm the stack-up; floor and cage height follow it.
5. 9 x H+S 23_SMA-50-0-272/133_N; pin on the 1.686 MSL launch, solder.
6. Output flanges 1.8 mm apart (board pitch 14.5): fit 2-3, 4-5, 6-7 in order.
7. Seam: conductive gasket on the lid seat recommended (X band).
8. Engrave 0.3: CRL BEL on the lid; IN / 1-8 ports; RF IN and GND on the west wall.
9. Lid located by 2 x d2 h6 × 8 dowels (ISO 8734), pressed 5 deep in the base; lid hole + slot H7.
10. Lid removal: 2 x M3 jack screws through the lid push on the wall top - never pry.
11. Assembly: board (M3 × 6, 0.5 N m) > connectors (M2.5 × 5, 0.35 N m, solder pins) > elastomer sheet on the cage > lid on dowels > 50 x M2.5 × 8 ISO 7380, 0.35 N m, cross pattern.
12. Break edges: lid top 0.6 × 45, base bottom 0.5 × 45, vertical R2.

CRL BEL

ANTENNA / RFM LAB

X-BAND 8-WAY POWER DIVIDER

CAGE HOUSING - BASE CRL-XB-PD8-01-01 / LID CRL-XB-PD8-01-02

DWG NO	REV	SCALE	SHEET
CRL-XB-PD8-01-DWG	A	NTS (mm)	1/1
DATE	**PROJECTION**	**OUTSIDE**	**CAD**
2026-10-16	1st angle	62.5 × 143.0 x 18.4	SolidCraft STEP AP242