

BASE - TOP VIEW (lid removed)

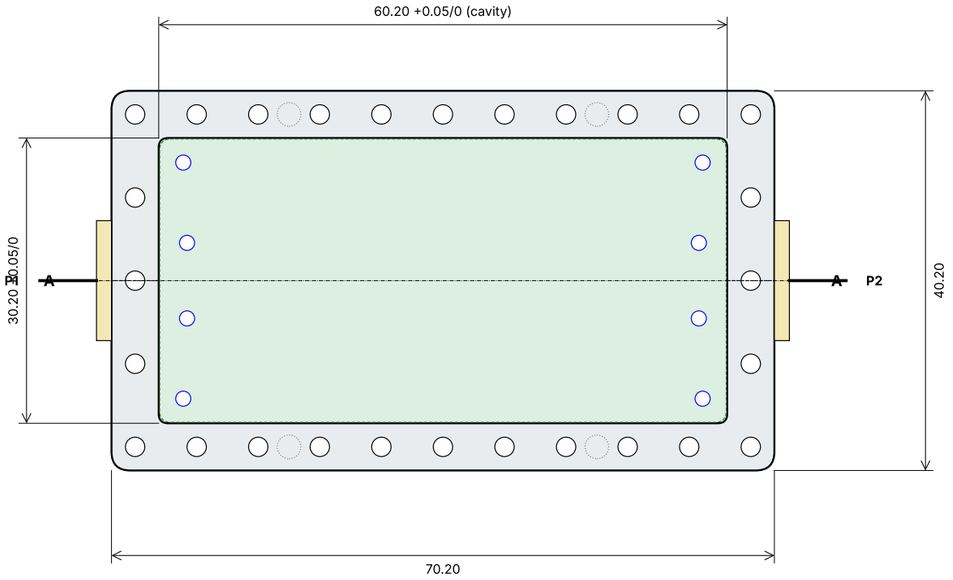


28 x M2.5 tap 4.6 deep (lid) 8 x M2 tap 3.5 deep (PCB, blue) 4 x M3 tap 6 deep from bottom (dotted)


VIEW ON WEST WALL (connector face)

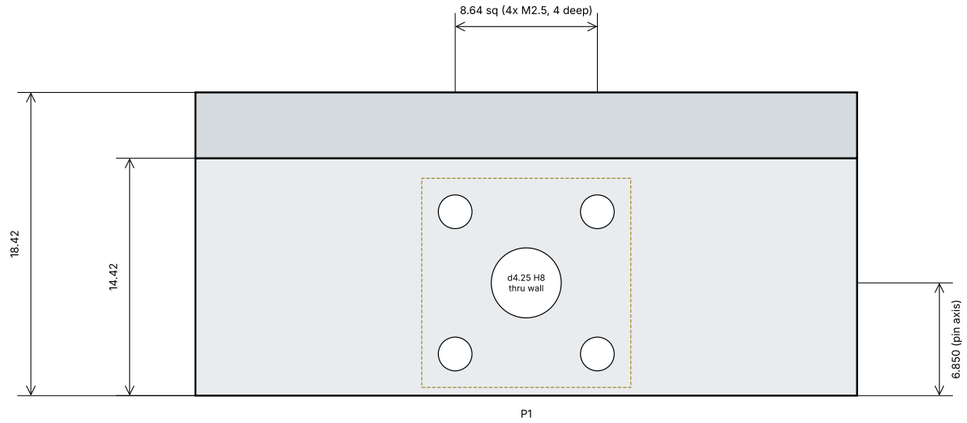

SECTION A-A

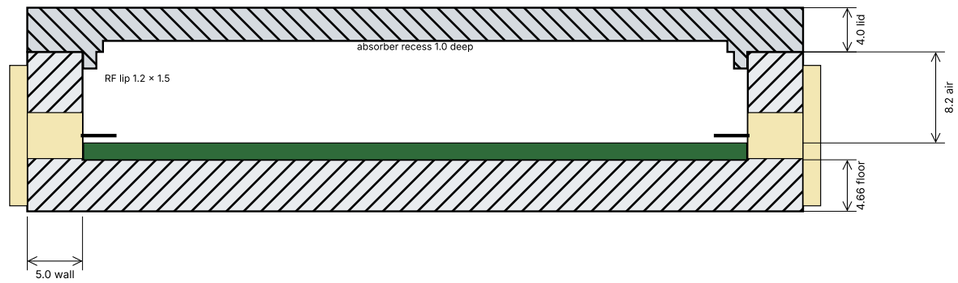

LID - TOP VIEW (engrave 0.3 deep, fill black optional)

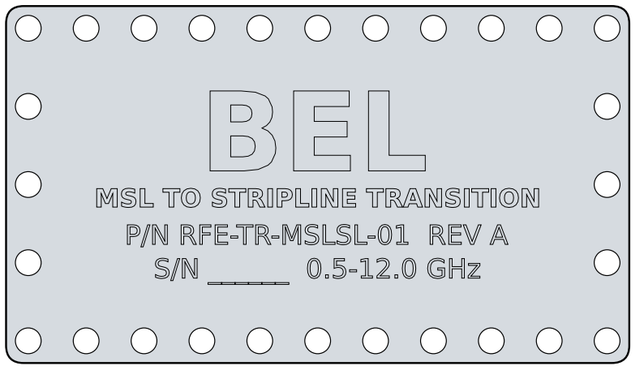

28 x d2.9 thru (M2.5 × 8 ISO 7380 button head)

NOTES
1. Material: Aluminium 6061-T6 (EN AW-6061 T6)
2. Finish: Chromate conversion MIL-DTL-5541 Type II Class 3 (conductive), clear; or Ni plating
3. Tolerances: ISO 2768-mK; bores and cavity +/-0.05; flatness of lid seat 0.05
4. Threads ISO 262 metric coarse, 6H. Break all sharp edges 0.2-0.3 x 45 deg, except the lid seat and lip.
5. Lid seat (wall top) and lid underside: Ra 0.8, flat 0.05 - RF contact surfaces, no paint/anodise there.
6. Connector bores d4.25 H8 coaxial with the tapped pattern within 0.05.
7. Connector: HUBER+SUHNER 23_SMA-50-0-272/133_N (item 23030310); pin 1.26 lies on the 50 ohm trace, solder.
8. Engrave 0.3 deep: logo / title / P/N / S/N on the lid, port labels on the walls.
9. PCB: 60.00 x 30.00 x 1.524 (2 x RO4350B 0.762 bonded (stripline inner layer)) - ASSUMED, confirm with the layout.
10. Optional: 1 mm RF absorber bonded in the lid recess (cavity modes in band, see report).
11. f_max 12.0 GHz: conductive elastomer gasket on the lid seat recommended (seam > lambda/4).

BILL OF MATERIALS

1	RFE-TR-MSLSL-01-01	Base, machined	qty 1
2	RFE-TR-MSLSL-01-02	Lid with RF lip, engraved	qty 1
3	23030310	HUBER+SUHNER 23_SMA-50-0-272/133_N (item 23030310)	qty 2
4	ISO 4762 M2.5 x 5	connector flange screw	qty 8
5	ISO 7380 M2.5 x 8	lid screw (button head)	qty 28
6	ISO 4762 M2 x 4	PCB hold-down / launch ground	qty 8
7	absorber sheet	RF absorber 1 mm, e.g. Laird Eccosorb MCS / ARC WAVE-X (cut	qty 1
8	RFE-TR-MSLSL-01-PCB	RF board (customer)	qty 1

BEL

MSL TO STRIPLINE TRANSITION

RF ENCLOSURE - BASE RFE-TR-MSLSL-01-01 / LID RFE-TR-MSLSL-01-02

DWG NO RFE-TR-MSLSL-01-DWG	REV A	SCALE NTS (dims in mm)	SHEET 1/1
DATE 2026-10-16	PROJECTION 1st angle	MASS base+lid see report	CAD SolidCraft STEP AP242