

BASE - TOP VIEW (lid removed)

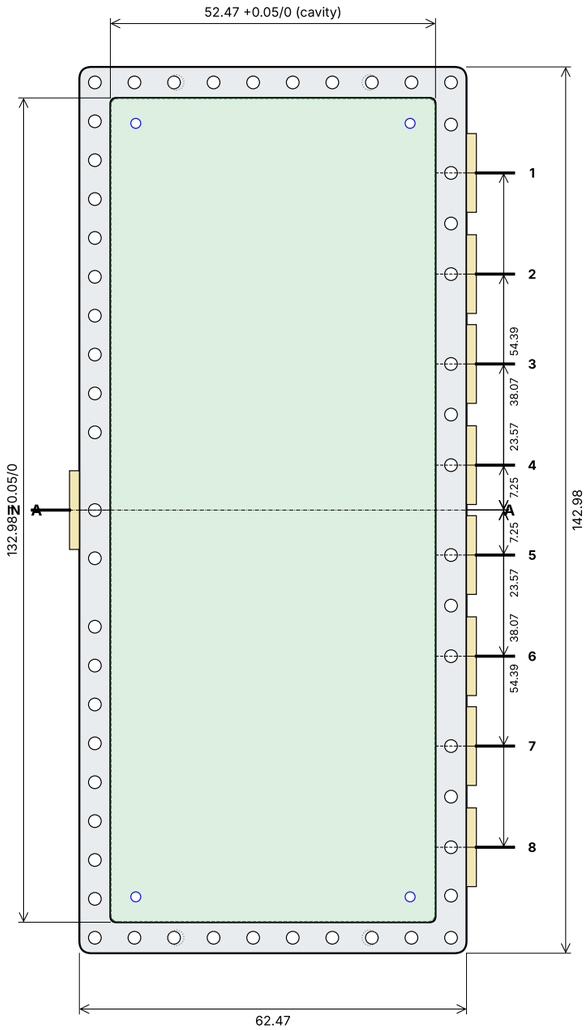


53 x M2.5 tap 4.6 deep (lid) 4 x M2 tap 3.5 deep (PCB, blue) 4 x M3 tap 6 deep from bottom (dotted)


CAGE (lid underside, viewed from below = mirrored in x)

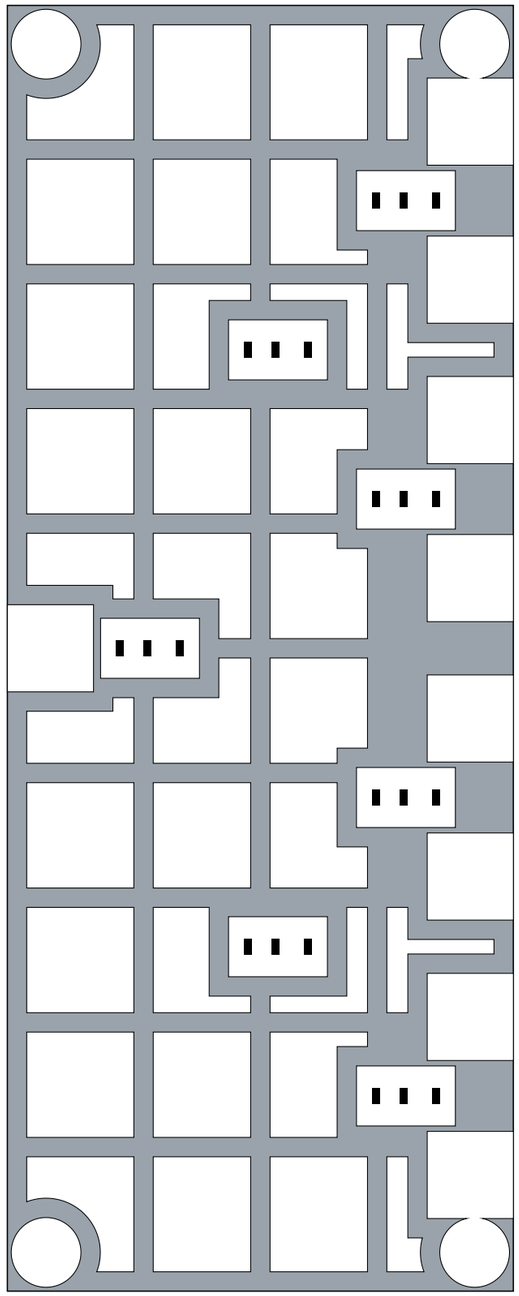


LID - TOP (engrave 0.3)

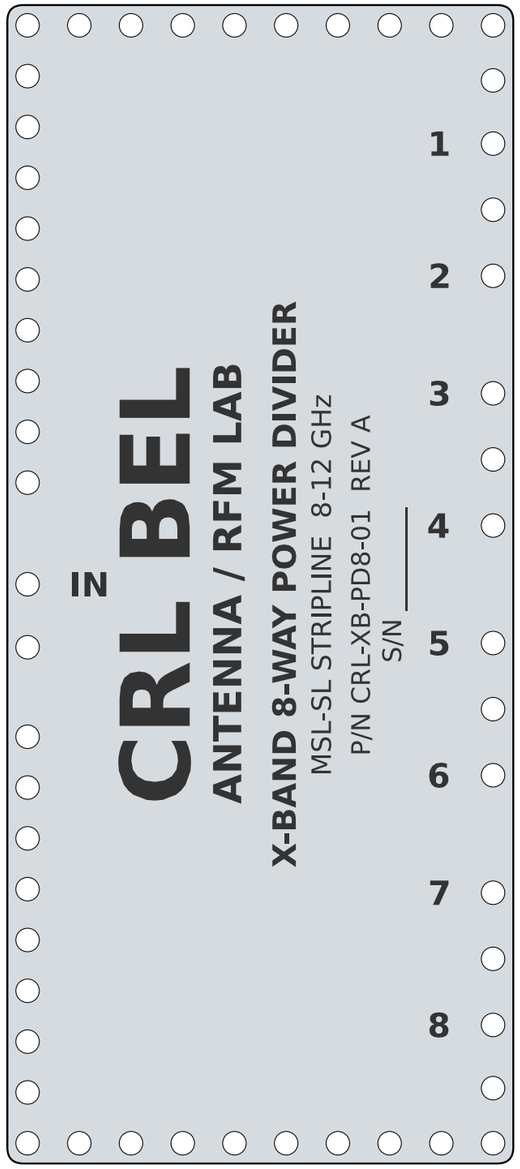

VIEW ON EAST WALL (connector face)

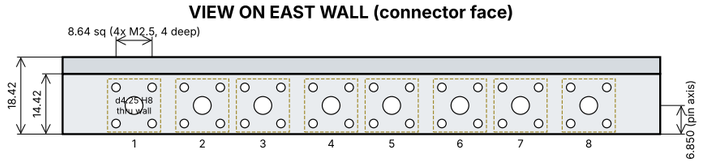

SECTION A-A (y = +0.5)

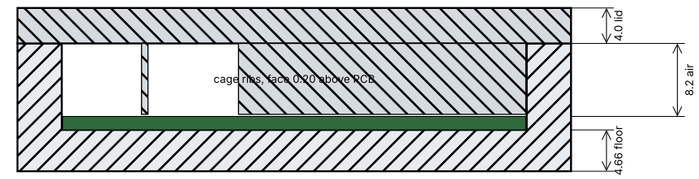

NOTES
1. Material Al 6061-T6; conductive chromate MIL-DTL-5541 Cl.3 (or Ni).
2. ISO 2768-mK; cavity +0.05/0; lid seat and cage face flat 0.03, Ra 0.8.
3. Cage face 0.20 above the PCB top: fit 0.25 mm conductive elastomer sheet (e.g. CHO-SEAL 1298 / 1310) cut to the rib pattern.
4. PCB: customer DXF XBand_8Way_MSL_to_SL, t = 1.524 [ASSUMED] - confirm the stack-up; floor and cage height follow it.
5. 9 x H+S 23_SMA-50-0-272/133_N; pin on the 1.686 MSL launch, solder.
6. Output flanges 1.8 mm apart (board pitch 14.5): fit 2-3, 4-5, 6-7 in order.
7. Seam: conductive gasket on the lid seat recommended (X band).
8. Engrave 0.3: CRL BEL / ANTENNA / RFM LAB / title / P/N / S/N / ports.

CRL BEL

ANTENNA / RFM LAB

X-BAND 8-WAY POWER DIVIDER

CAGE HOUSING - BASE CRL-XB-PD8-01-01 / LID CRL-XB-PD8-01-02

DWG NO	REV	SCALE	SHEET
CRL-XB-PD8-01-DWG	A	NTS (mm)	1/1
DATE	PROJECTION	OUTSIDE	CAD
2026-10-16	1st angle	62.5 × 143.0 x 18.4	SolidCraft STEP AP242