

Schematic Sheets

#	Name	File	Description
1	Main	SensWear_PPG	Optical AFE IC and connectors
2			
3			
4			


Revision History

Revision	Date	Description
A0	May 2025	Initial validation design on rigid PCB
B0	March 2026	Flexible PCB manufacturing updates




SensWear-V1R1

Designer/Engineer	Board Title		
Yusein Ali	SensWear-Hub		
Drawn By	Document Name		
Yusein Ali	SensWear-V1R1-Hub-		
Approved By	Ver.	Rev.	Date
Dariush Salami	1	B0	01.03.2026

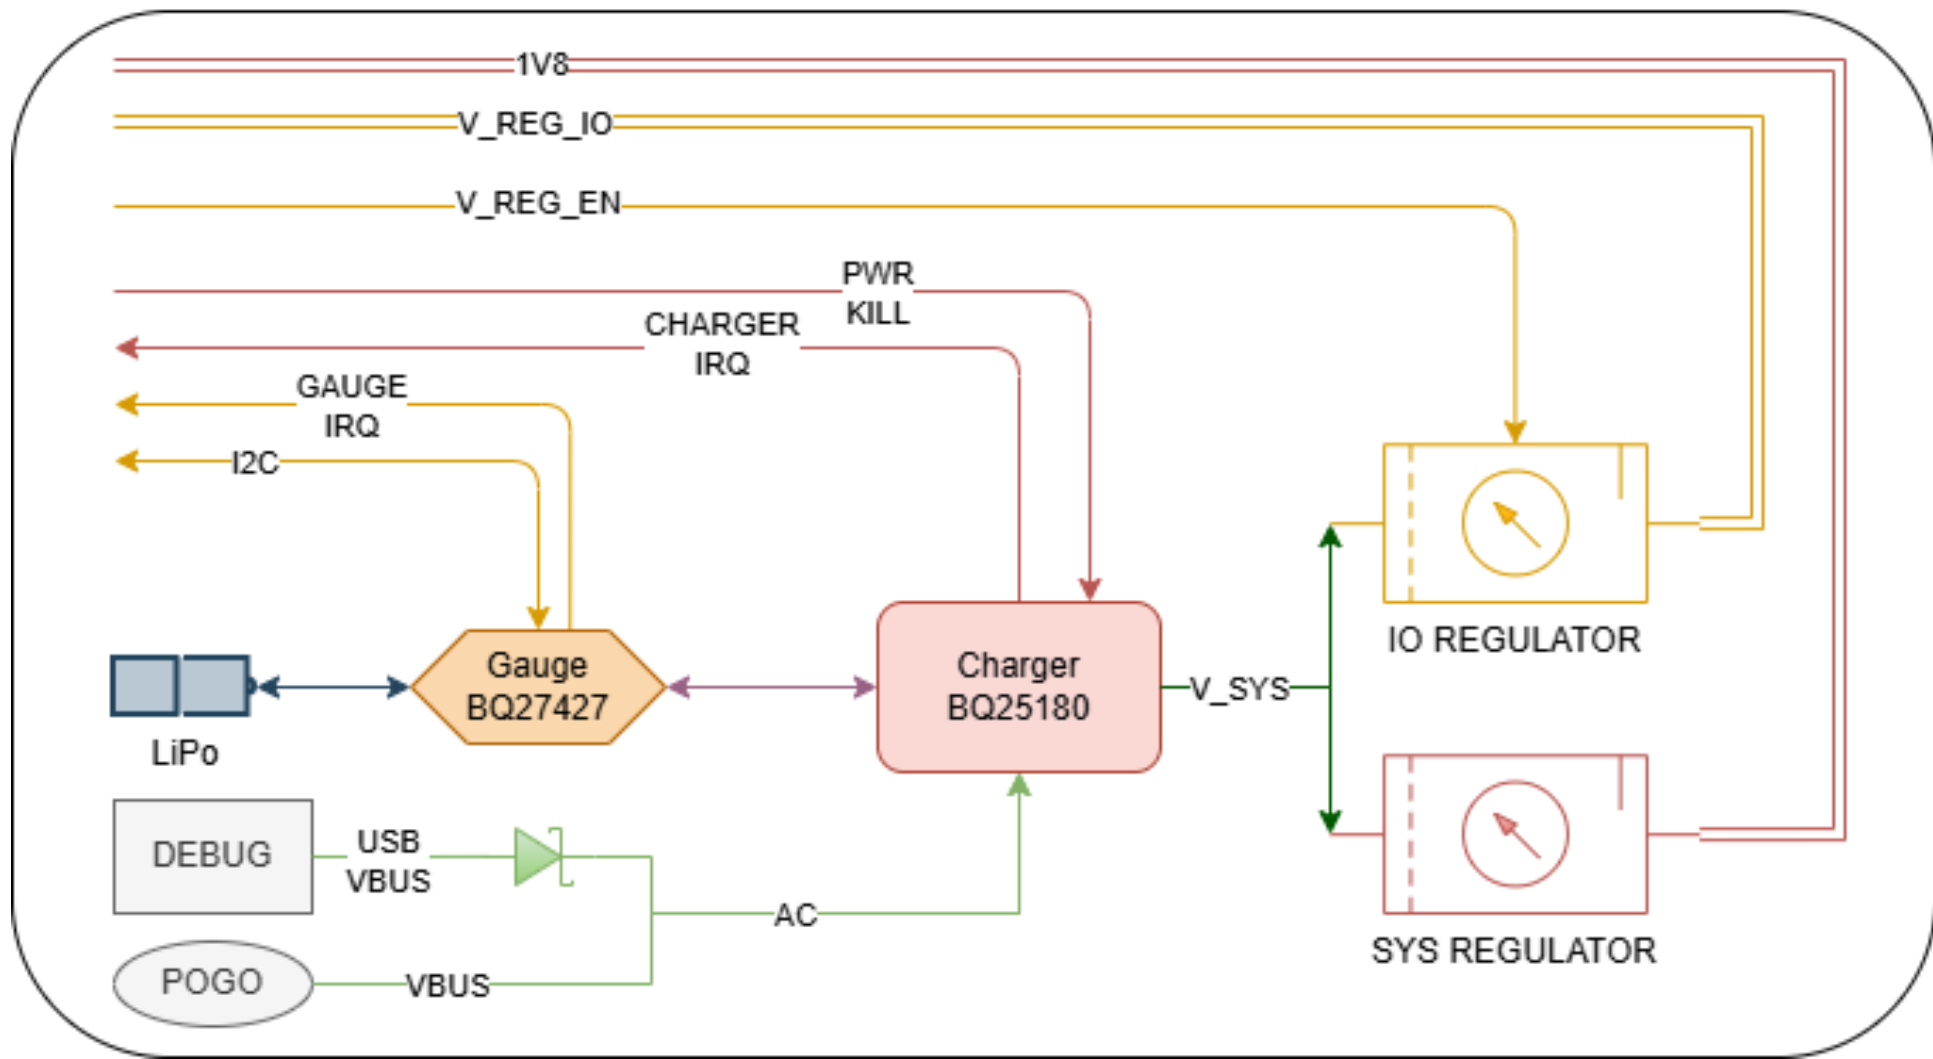


SensWear-V1R1

Designer/Engineer	Board Title		
Yusein Ali	SensWear-Hub		
Drawn By	Document Name		
Yusein Ali	SensWear-V1R1-Hub-		
Approved By	Ver.	Rev.	Date
Dariush Salami	1	B0	01.03.2026

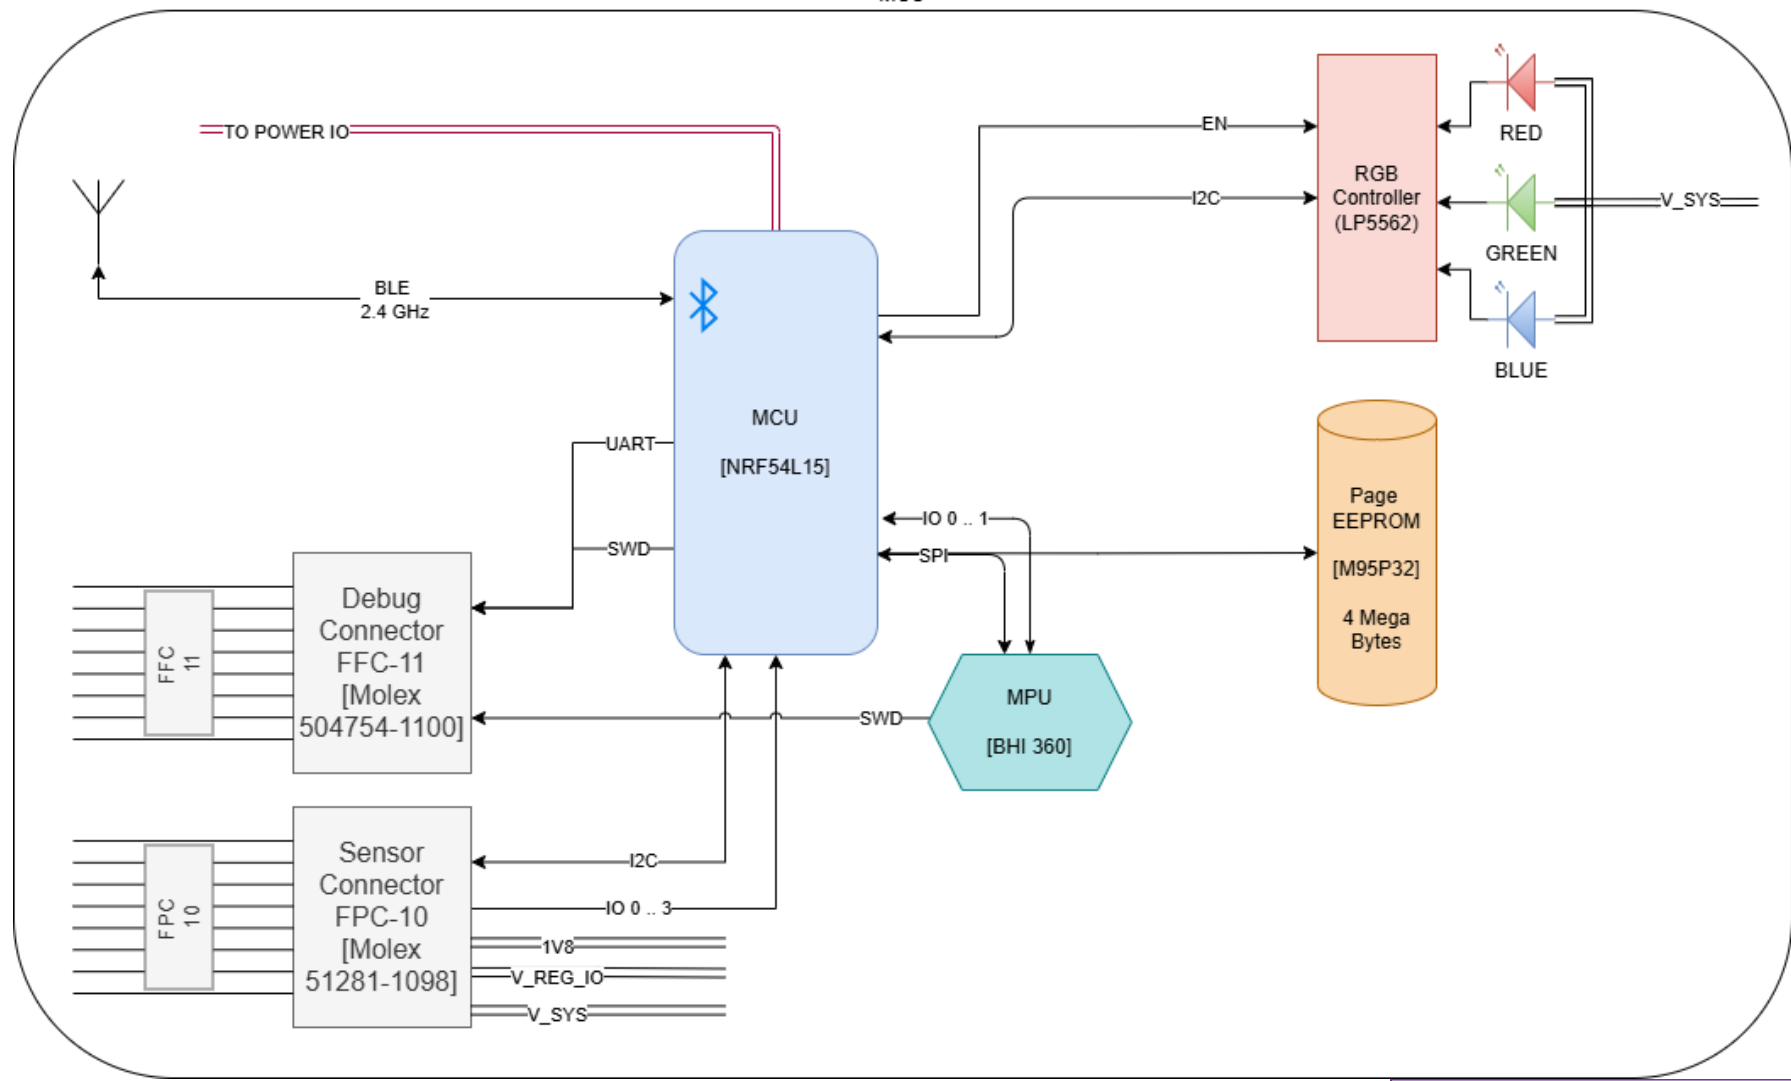

SensWear-V1R1

Designer/Engineer	Board Title		
Yusein Ali	SensWear-Hub		
Drawn By	Document Name		
Yusein Ali	SensWear-V1R1-Hub-		
Approved By	Ver.	Rev.	Date
Dariush Salami	1	B0	01.03.2026

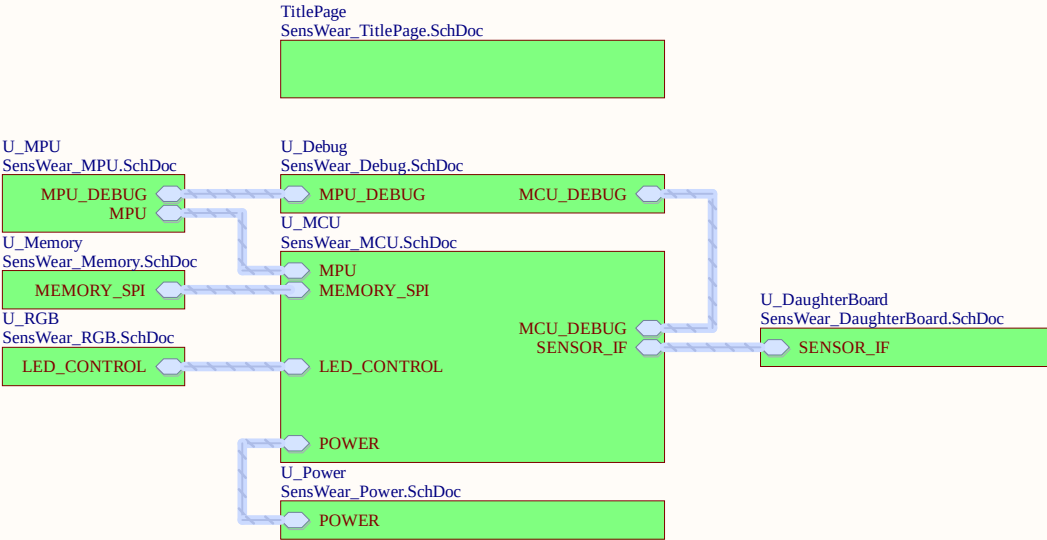

		SensWear-V1R1			
Designer/Engineer Yusein Ali		Board Title SensWear-Hub			
Drawn By Yusein Ali		Document Name SensWear-Main.SchDoc			
Approved By Dariush Salami	Rev. B0	Sheet	1	of	9
		Date	01.03.2026	Size	A4

nRF54L15 PERIPHERAL PIN ASSIGNMENTS

[UART] - Instance: UARTE20 (Peripheral Domain)

RXD : P0.03 (Input)
TXD : P0.04 (Output)

[SPI MASTER] - Instance: SPIM00 (MCU Domain - High Speed)

SCK : P2.01
MOSI : P2.02 (Dedicated IO0 Pad)
MISO : P2.04 (Dedicated IO1 Pad)
NOTE : These pins utilize dedicated hardware muxing.
Do not swap MOSI/MISO on these pins.

[I2C MASTER] - Instance: TWIM20 (Peripheral Domain)

SDA : P1.02
SCL : P1.03
REQ : External Pull-up Resistors required.

I2C ADDRESS TABLE (TWIM20)

SDA: P1.02 | SCL: P1.03

Device Type	Part Number	Hex (7-bit)	Binary (8-bit with R/W=x)
Buck Converter	TPSM831021	0x68	0100 001x
Touch Controller	MTCH6102	0x25	0100 101x
LED Driver	LP5562	0x30	0110 000x
Temp Sensor	MAX30208	0x50	1010 000x
Fuel Gauge	BQ27427	0x55	1010 101x
Pulse Oximeter	MAX30101	0x57	1010 111x
Haptic Driver	DRV2605L	0x5A	1011 010x
Battery Charger	BQ25180	0x6A	1101 010x

NOTE: 'x' = 0 for WRITE, 1 for READ.
Ensure 1.5k pull-ups on SDA/SCL lines.

SENSOR INTERFACE (GENERIC)

Logic Level: 1.8V (V_REG_IO Domain)

[SHARED CONTROL BUS]

Interface : I2C (TWIM20)
SDA : P1.02 (Pin 3)
SCL : P1.03 (Pin 4)
Pull-ups : 1.5k Ω to 1V8 (R15, R16) installed on board.

[SENSOR GPIOs / ANALOG INPUTS]

GPIO_0 : P1.11 / AIN4 (Pin 40)
- Capable of Analog Input (SAADC).
GPIO_1 : P1.04 / AIN0 (Pin 5)
- Capable of Analog Input (SAADC).
GPIO_2 : P1.05 / AIN1 (Pin 6)
- Capable of Analog Input (SAADC).
GPIO_3 : P2.10 (Pin 21)
- DIGITAL ONLY (No Analog function).
- High-speed capable (Port 2).

[POWER DOMAIN]

Supply : V_REG_IO (Switched Rail)
Control : V_REG_EN (P2.05) must be HIGH.
Note : Ensure sensors connected to these GPIOs are powered by V_REG_IO to avoid leakage currents when the sensor subsystem is OFF.

MCU (nRF54L15) DEBUG & DIAGNOSTIC INTERFACE
Logic Level: 1.8V (VDD_IO)

[SWD PROGRAMMING]

SWDIO : P0.25 / SWDIO (Pin 25)
- Bidirectional Data line.
- Has internal pull-up.
SWDCLK : P0.26 / SWDCLK (Pin 26)
- Clock input from debugger.
- Has internal pull-down.
RESET# : P0.30 / nRESET (Pin 30)
- Active Low System Reset.
- Mandatory for device recovery (un-bricking).

[UART CONSOLE] - Instance: UARTE20

MCU_RX : P0.03 (Pin 28)
- Input to nRF54. Connect to Debugger TX.
MCU_TX : P0.04 (Pin 29)
- Output from nRF54. Connect to Debugger RX.

[LAYOUT REQUIREMENTS]

- Connector: Ensure VRef (Pin 1) is connected to 1V8.
- Caps: Do NOT place external capacitors (>100pF) on SWD lines.
- UART: Route as differential pair if cable length > 10cm.


attach [P2](#) to DEBUG BOARD

- Attach SWD debugger to JTAG or SWD connectors
- Plug USB Type C cable to use UART for debug messages


[CRYSTAL X2 NOTE]

Type: 32.768 kHz (CL=12.5pF)
Caps: INTERNAL (Firmware Enabled).
Do NOT place external capacitors.

```
&I2C {
    status = "okay";
    load-capacitors = "internal";
    /* Calculation for 12.5pF Crystal:
    * C_pin = 2 * (C_load - C_stray)
    * C_pin = 2 * (12.5pF - 4pF) = 17pF
    */
    load-capacitance-femtofarad = <17000>;
};
```

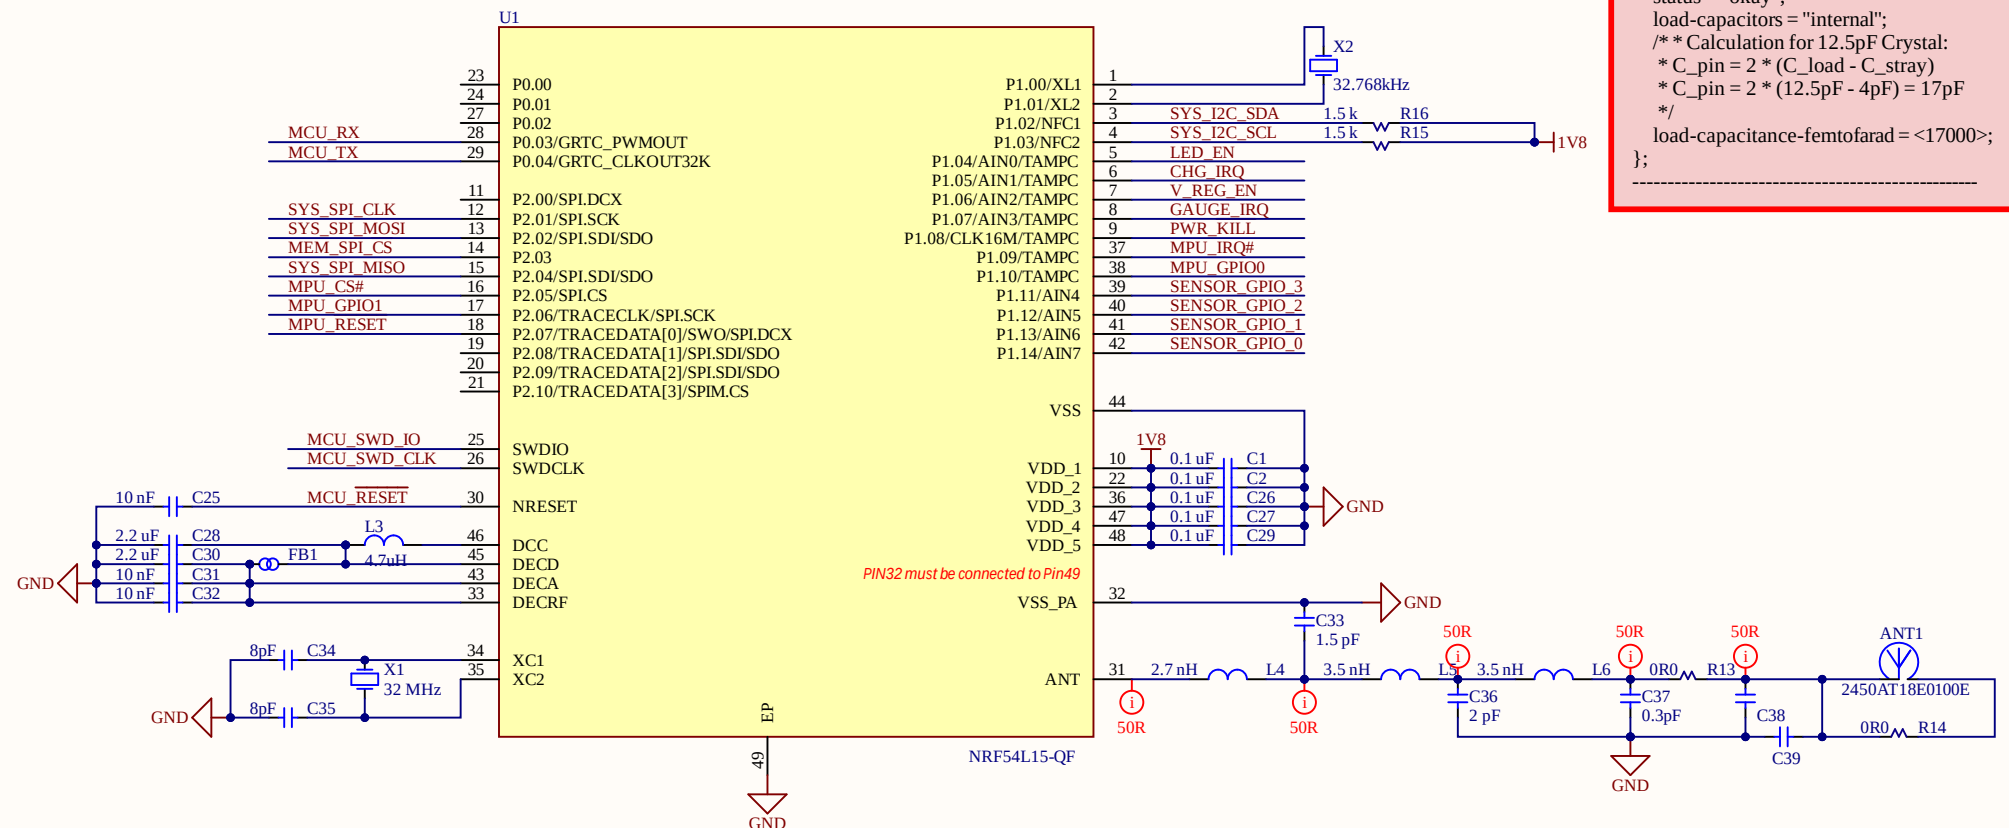

		SensWear-V1R1	
Designer/Engineer	Yusein Ali	Board Title	SensWear-Hub
Drawn By	Yusein Ali	Document Name	SensWear_MCU.SchDoc
Approved By	Dariush Salami	Rev.	B0
		Sheet	2 of 9
		Date	01.03.2026
		Size	A3

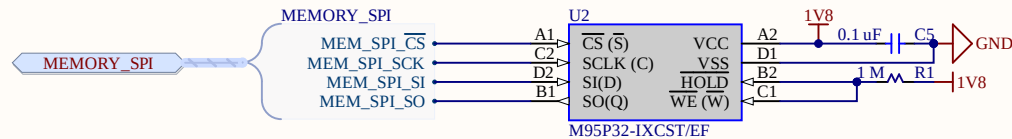

EXTERNAL MEMORY (EEPROM) USAGE NOTES

Part: M95P32-IXCST (STMicroelectronics)

Logic Level: 1.8V

[1. INTERFACE CONFIGURATION]

Protocol : SPI

Instance : SPIM00 (Shared Bus on Port 2)

Max Speed: 80 MHz (Device limit) / 32 MHz (MCU limit)

Mode : CPOL=0, CPHA=0 (Mode 0)

[2. PIN MAPPING]

Signal	nRF Pin	Mem Pin	Function
SPI SCK	P2.01	Pin C2	Serial Clock
SPI MOSI	P2.02	Pin D2	Serial Data In (SI)
SPI MISO	P2.04	Pin B1	Serial Data Out (SO)
MEM_CS#	P2.07	Pin A1	Chip Select (Active Low)

[3. HARDWARE CONFIGURATION]

HOLD# (Pin B2) : Pulled HIGH (1M Ω).

- Device suspend function disabled.

W# (Pin C1) : Pulled HIGH (1M Ω).

- Hardware Write Protection disabled.

- Memory is always writable.

[4. POWER & DECOUPLING]

Supply : 1V8 (Main System Rail).

Cap : 0.1uF (C5) placed near Pin A2/D1.

[5. PAGE WRITE NOTE]

The M95P32 is a Page EEPROM.

- Page Size: 64 Bytes.

- Unlike standard EEPROMs, it supports very fast
Page Write and Buffer Load instructions.




SensWear-V1R1


Designer/Engineer Yusein Ali	Board Title SensWear-Hub			
Drawn By Yusein Ali	Document Name SensWear_Memory.SchDoc			
Approved By Dariush Salami	Rev. B0	Sheet 3	of 9	Size A4
	Date	01.03.2026		

POWER


POWER



Power Supply




LiPo Gauge

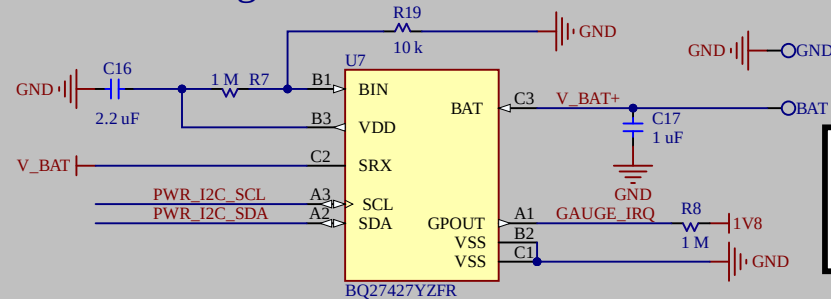

BATTERY PACK must have
- VBAT+
- VBAT -
pins.

LiPo Charger

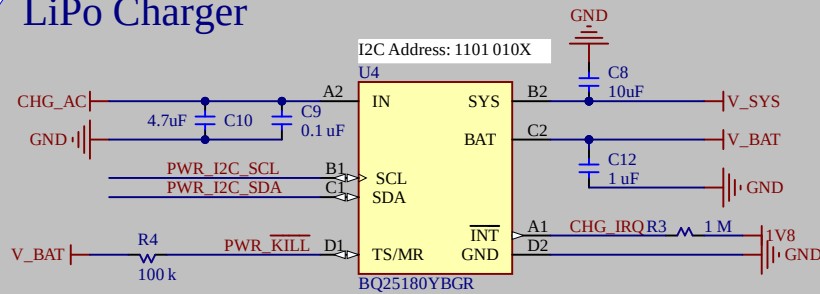

NO NTC is used in this design --
Rp = 1 M is required to allow different beta values of the NTC if we were to use one

1. @PWR_KILL can be used as long press based shutdown signal if it is needed.
2. CHG_AC must be connected to USB VBUS.
3. V_BAT is the supply from GAUGE, not BATTERY pack + terminal.

SYSTEM POWER SUBSYSTEM USAGE NOTES

Main Logic Level: 1.8V (Net: 1V8)
Control Bus: TWIM20 (SDA: P1.02, SCL: P1.03)

[1. POWER RAIL ARCHITECTURE]

V_BAT : Raw LiPo battery voltage.
V_SYS : System power managed by Charger (U4).
Feeds the buck regulators.
1V8 : Main MCU/Logic supply (Fixed 1.8V via U3).
Always ON if V_SYS is present.
V_REG_IO : Auxiliary Sensor supply (via U6).
MCU controlled (see below).

[3. I2C DEVICE CONFIGURATION (Bus TWIM20)]


Device | Ref | Address (7-bit) | Notes

LiPo Charger | U4 | 0x6A (Fixed) | BQ25180. No NTC used.
LiPo Fuel Gauge | U7 | 0x55 (Fixed) | BQ27427. Low-side sensing.
Sensor Regulator | U6 | 0x21 (Fixed) | TPSM831021. Vout set via I2C.

[4. CRITICAL HARDWARE NOTES]

- BATTERY CONN : Design uses Low-Side sensing (R7).
Battery connector MUST have separate
PACK- and PACK+ terminals routed to U7.
- NTC THERM : Not used in this design. Charger configured
to ignore TS pin (check R4/R1 resistors).

SYS Supply

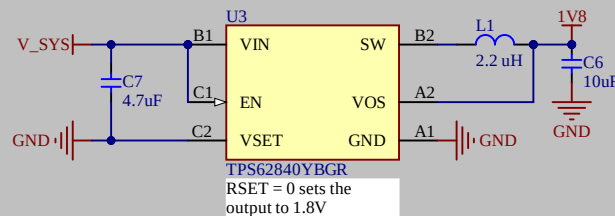

[2. CONTROL & INTERRUPTS - MCU CONNECTIONS]


PWR_KILL (P2.03) : System Shutdown / Ship Mode Control.
Connects to Charger (U4).
- Drive LOW to cut V_SYS output (Power Off).
- Drive HIGH to keep system active.

V_REG_EN (P2.05) : Sensor Regulator (U6) Enable.
- HIGH = Output ON.
- LOW = Output OFF.

CHG_IRQ (P2.09) : Charger Interrupt (Active Low, Open Drain).
Signals charging status changes, faults, etc.


GAUGE_IRQ (P2.08) : Fuel Gauge Interrupt (Active Low, Open Drain).
Signals low battery, state of charge changes.

SENSOR supply

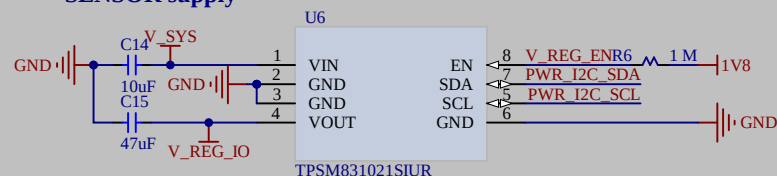

SensWear-V1R1

Designer/Engineer Yusein Ali	Board Title SensWear-Hub
Drawn By Yusein Ali	Document Name SensWear_Power.SchDoc
Approved By Dariush Salami	Rev. B0
	Sheet 4
	of 9
	Size A4
	Date 01.03.2026

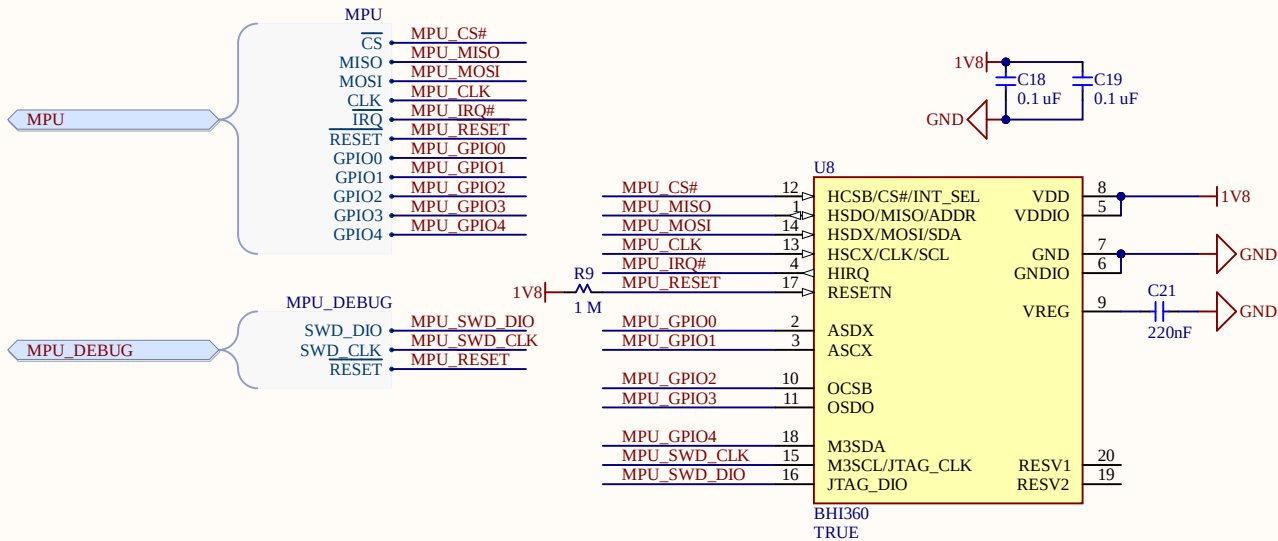

MOTION SENSOR (BHI360) USAGE NOTES

Logic Level: 1.8V (VDD_1 / 1V8)

[1. INTERFACE CONFIGURATION]

Protocol : SPI (4-Wire)

Instance : SPIM00 (High-Speed Port 2 Domain)

Speed : Up to 20 MHz supported (Init @ 2 MHz recommended)

Mode : CPOL=0, CPHA=0 (Mode 0) or Mode 3

[2. PIN MAPPING (nRF54 <-> BHI360)]

Signal	nRF Pin	BHI Pin	Function
SPI SCK	P2.01	Pin 13	Serial Clock
SPI MOSI	P2.02	Pin 14	Master Out / Slave In
SPI MISO	P2.04	Pin 1	Master In / Slave Out
MPU_CS#	P1.13	Pin 12	Chip Select (Active Low)
MPU_IRQ#	P2.00	Pin 4	Host Interrupt (Active Low)
MPU_RESET	P1.06	Pin 17	Reset (Active Low)

[3. AUXILIARY GPIOs]

MPU_GPIO	Pin	Function
MPU_GPIO0	P1.07	Pin 2 (Programmable)
MPU_GPIO1	P1.08	Pin 3 (Programmable)
MPU_GPIO2	P1.14	Pin 10 (Programmable)

MOTION SENSOR (BHI360) USAGE NOTES

Logic Level: 1.8V (VDD_1 / 1V8)

[4. BOOT & FIRMWARE LOAD SEQUENCE]

1. Power On: 1V8 Rail stable.
2. Reset: Pulse MPU_RESET (P1.06) LOW for >10us, then HIGH.
3. Wait: Delay 2ms for internal BHI boot.
4. Detect: Read 'Host Interface Control' register.
5. Upload: Burst write firmware RAM patch over SPI.
(Sensor does not function without this RAM patch).

[5. DEBUG NOTE]

JTAG Pins (15/16) are routed to the debug connector.
They are NOT connected to the nRF54 MCU.

BHI360 SENSOR DEBUGGING (JTAG)
Interface: 2-Wire JTAG (Compact JTAG)
Logic Level: 1.8V

[HARDWARE CONNECTION]

Connector: P2 (10-pin Debug Header)

Pin 9 : JTAG_DIO (Bi-directional Data)

- Net: MPU_SW_DIO
- Connected to BHI360 Pin 16

Pin 10 : JTAG_CLK (Clock)

- Net: MPU_SW_DIO
- Connected to BHI360 Pin 15

Pin 8 : RESET# (Active Low)

- Net: MPU_RESET
- Connected to BHI360 Pin 17

[CRITICAL SAFETY NOTE]

The MPU_RESET line is shared with the nRF54 MCU (Pin P1.06).

BEFORE connecting a JTAG debugger to the sensor:

1. The nRF54 firmware MUST configure P1.06 as a High-Impedance INPUT.
2. If the nRF54 drives this pin HIGH while the debugger pulls it LOW, you risk a short circuit damaging the MCU or Sensor.

[DEBUGGER SETTINGS]

Target Device : Bosch BHI360 (ARC EM4 Core)


Protocol : cJTAG (Compact JTAG / 2-wire)

Speed : 1 MHz - 4 MHz (Recommend starting slow)



SensWear-V1R1

Designer/Engineer	Board Title				
Yusein Ali	SensWear-Hub				
Drawn By	Document Name				
Yusein Ali	SensWear_MPU.SchDoc				
Approved By	Rev.	Sheet	5	of	9
Dariush Salami	B0	Date	01.03.2026		
				Size	A4

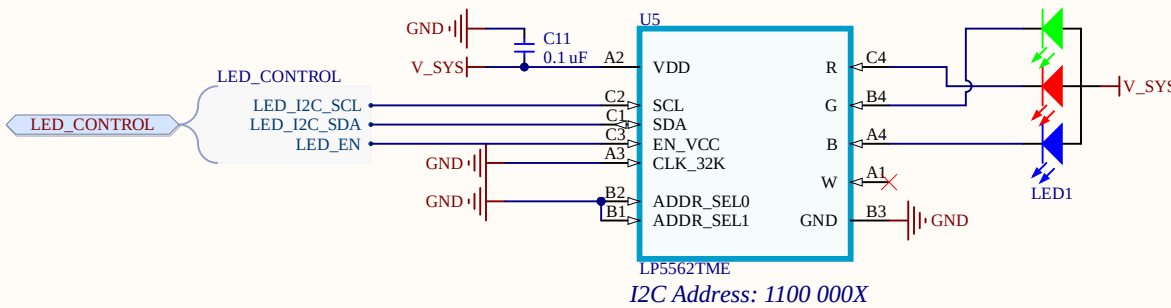

RGBW LED DRIVER (LP5562)
Logic Level: 1.8V

[CONTROL INTERFACE]
I2C Addr : 0x30 (7-bit)
(Requires A1=GND, A0=GND)
Bus : TWIM20 (SDA: P1.02, SCL: P1.03)


[HARDWARE ENABLE]
LED_EN : P2.06 (Pin 17 on nRF54)
Polarity : Active HIGH.

CRITICAL FIRMWARE NOTE:
1. Set P2.06 HIGH.
2. Wait 500μs (T_startup).
3. ONLY THEN attempt I2C communication.
(Chip ignores I2C when EN is Low).

[OUTPUT CHANNELS]
Type : Current Sinks (Connect LED Cathodes to pins).
R, G, B : Programmable (PWM or Pattern Engine).
W (White): Direct PWM control (often used for status).

[POWER SAVE]
To enter absolute lowest power (Shutdown):
Drive LED_EN (P2.06) -> LOW.

		SensWear-V1R1	
Designer/Engineer Yusein Ali		Board Title SensWear-Hub	
Drawn By Yusein Ali		Document Name SensWear_RGB.SchDoc	
Approved By Dariush Salami		Rev. B0	Sheet 6 of 9 Date 01.03.2026 Size A4

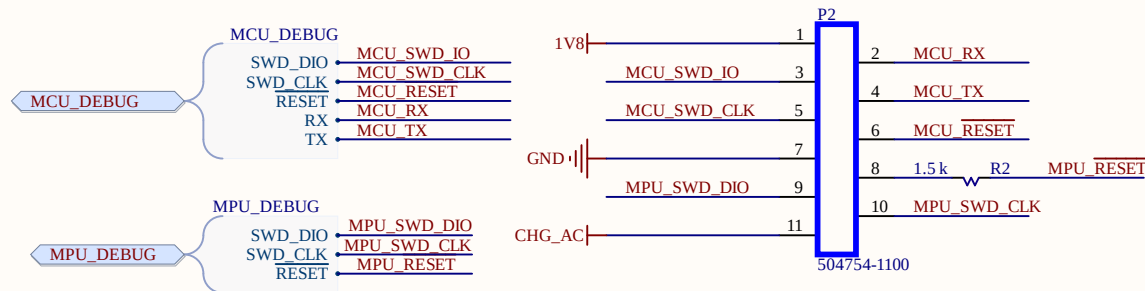

RESET LINE PROTECTION (MPU_RESET)

Component : Resistor (Series)

Value : 1.5kΩ

Location : Series between nRF54 Pin P1.06 and the Debug Connector (Pin 8).

Function : - Prevents short-circuit damage if nRF54 accidentally drives line HIGH while Debugger drives LOW.
- Current limited to ~1.2mA.

MCU (nRF54L15) DEBUG & DIAGNOSTIC INTERFACE

Logic Level: 1.8V (VDD_IO)

[SWD PROGRAMMING]

SWDIO : P0.25 / SWDIO (Pin 25)

- Bidirectional Data line.
- Has internal pull-up.

SWDCLK : P0.26 / SWDCLK (Pin 26)

- Clock input from debugger.
- Has internal pull-down.

RESET# : P0.30 / nRESET (Pin 30)

- Active Low System Reset.
- Mandatory for device recovery (un-bricking).

[UART CONSOLE] - Instance: UARTE20

MCU_RX : P0.03 (Pin 28)

- Input to nRF54. Connect to Debugger TX.

MCU_TX : P0.04 (Pin 29)

- Output from nRF54. Connect to Debugger RX.

[LAYOUT REQUIREMENTS]

1. Connector: Ensure VRef (Pin 1) is connected to 1V8.
2. Caps: Do NOT place external capacitors (>100pF) on SWD lines.
3. UART: Route as differential pair if cable length > 10cm.

attach **P2** to DEBUG BOARD

- Attach SWD debugger to JTAG or SWD connectors
- Plug USB Type C cable to use UART for debug messages

MPU DEBUG INTERFACE (BHI360)

Logic Level: 1.8V (VDDIO)

[JTAG / SWD CONNECTION] - Connector P2

MPU_SWD_DIO : Pin 9

- Connected to BHI360 Pin 16 (JTAG_DIO)
- Bi-directional Data

MPU_SWD_CLK : Pin 10

- Connected to BHI360 Pin 15 (JTAG_CLK)
- Clock Input

MPU_RESET# : Pin 8

- Active Low Reset
- Connected to BHI360 Pin 17 (RESETN)

[CRITICAL RESET NOTE]

The line 'MPU_RESET' is shared between:

1. External Debug Connector (Pin 8)
2. nRF54 MCU Pin P1.06 (Pin 7 on U1)

***WARNING*:** To debug the BHI360 via Connector P2, the nRF54 MCU must configure P1.06 as INPUT (High-Z) to avoid driving the line HIGH while the debugger tries to pull it LOW.

[DEBUGGER COMPATIBILITY]

Target Core : ARC EM4 (Fuser Core)

Interface : 2-Wire JTAG/SWD



SensWear-V1R1

Designer/Engineer

Yusein Ali

Drawn By

Yusein Ali

Approved By

Dariush Salami

Board Title

SensWear-Hub

Document Name

SensWear_Debug.SchDoc

Rev.

B0

Sheet

7

of

9

Size

A4

Date

01.03.2026


SCHEMATIC SHEET INDEX

Sheet	Document	Description
1	SensWear-Main.SchDoc	Main schematic
2	SensWear_MCU.SchDoc	MCU section
3	SensWear_Memory.SchDoc	Memory management
4	SensWear_Power.SchDoc	Power management
5	SensWear_MPU.SchDoc	IMU/Motion sensor
6	SensWear_RGB.SchDoc	RGB/Status LED
7	SensWear_Debug.SchDoc	Debug interface
8	SensWear_TitlePage.SchDoc	Title page
9	SensWear_DaughterBoard.SchDoc	Daughter board interface



SensWear-V1R1

Designer/Engineer	Board Title			
Yusein Ali	SensWear-Hub			
Drawn By	Document Name			
Yusein Ali	SensWear_TitlePage.SchDoc			
Approved By	Rev.	Sheet	8 of 9	Size A4
Dariush Salami	B0	Date	01.03.2026	

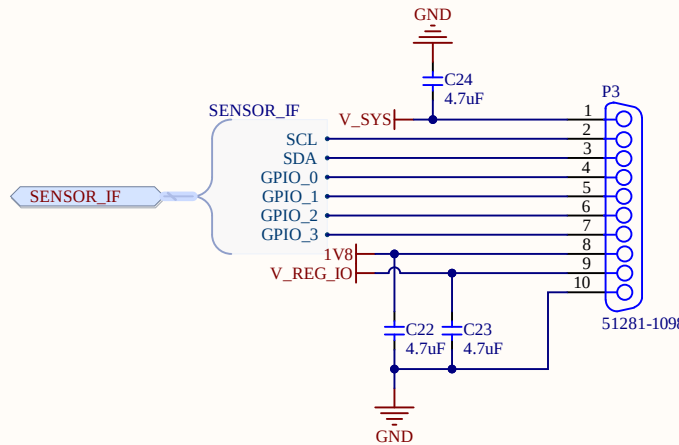

SENSOR POWER REGULATOR (U6) Part: TPSM831021SIUR

[HARDWARE CONFIGURATION]
Input : V_SYS (System Voltage)
Output : V_REG_IO (Sensor Logic Supply)
I2C Addr : 0x68 (7-bit)
(Factory programmed, VOUT configurable)

[CONTROL LOGIC]
ENABLE : V_REG_EN (P2.05)
- Active HIGH.
- Drive HIGH to power on sensors.
- Drive LOW to save power (0.1uA shutdown).

[FIRMWARE SEQUENCE]
1. Set P2.05 HIGH.
2. Wait 2ms (Soft-start time).
3. Initialize I2C sensors on the V_REG_IO rail.

[LAYOUT NOTE]
- 10uF Input Cap (C14) must be close to VIN.
- 47uF Output Cap (C15) must be close to VOUT.

SENSOR INTERFACE (GENERIC) Logic Level: 1.8V (V_REG_IO Domain)

[SHARED CONTROL BUS]
Interface : I2C (TWIM20)
SDA : P1.02 (Pin 3)
SCL : P1.03 (Pin 4)
Pull-ups : 1.5kΩ to 1V8 (R15, R16) installed on board.

[SENSOR GPIOs / ANALOG INPUTS]
GPIO_0 : P1.11 / AIN4 (Pin 40)
- Capable of Analog Input (SAADC).
GPIO_1 : P1.04 / AIN0 (Pin 5)
- Capable of Analog Input (SAADC).
GPIO_2 : P1.05 / AIN1 (Pin 6)
- Capable of Analog Input (SAADC).
GPIO_3 : P2.10 (Pin 21)
- DIGITAL ONLY (No Analog function).
- High-speed capable (Port 2).


[POWER DOMAIN]
Supply : V_REG_IO (Switched Rail)
Control : V_REG_EN (P2.05) must be HIGH.
Note : Ensure sensors connected to these GPIOs are powered by V_REG_IO to avoid leakage currents when the sensor subsystem is OFF.




SensWear-V1R1

Designer/Engineer Yusein Ali	Board Title SensWear-Hub
Drawn By Yusein Ali	Document Name SensWear_DaughterBoard.SchDoc
Approved By Dariush Salami	Rev. B0 Sheet 9 of 9 Date 01.03.2026 Size A4

View from Top side (Scale 5:1)

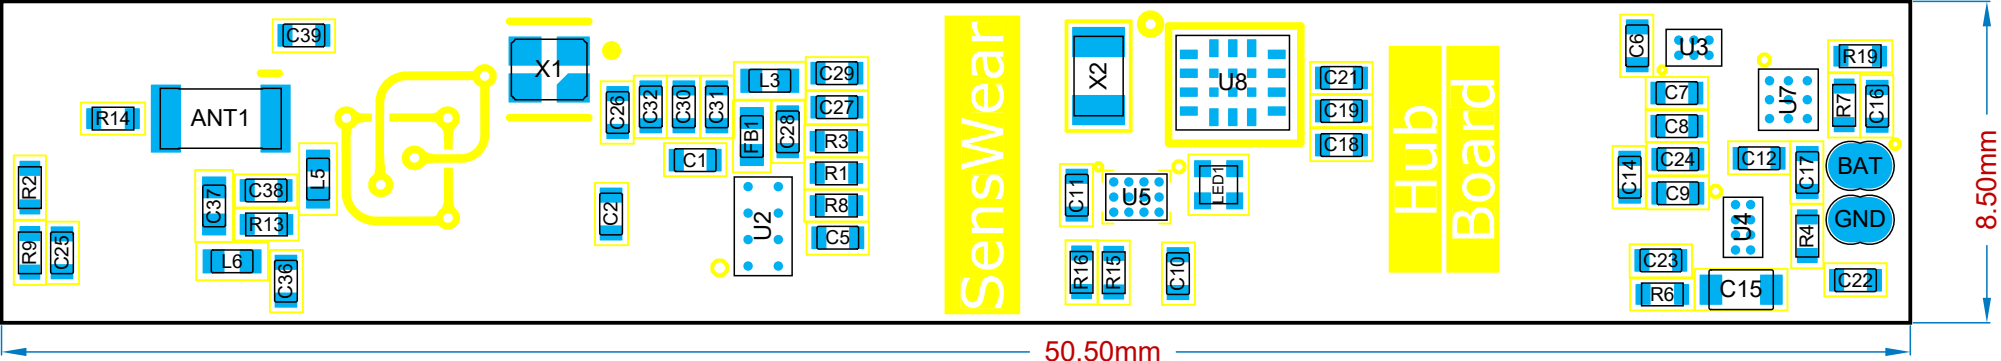

View from Bottom side (Scale 5:1)

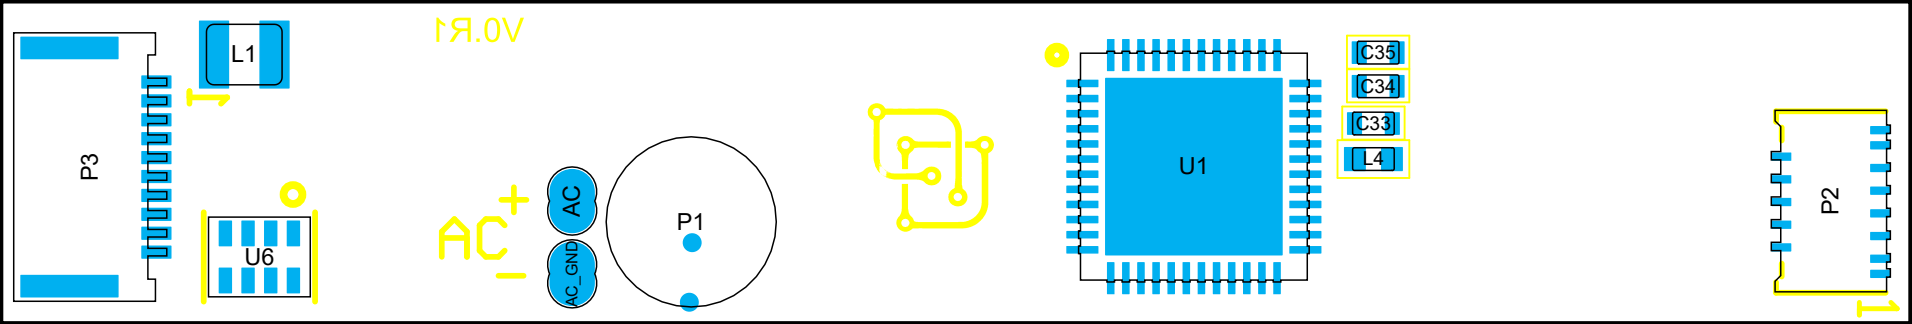

Bill Of Materials

Line #	Designator	Comment	Quantity
1	ANT1	2450AT18E0100E	1
2	C1, C2, C5, C9, C11, C18, C19, C26, C27, C29	0.1 uF	10
3	C6, C8, C14	10uF	3
4	C7, C10, C22, C23, C24	4.7uF	5
5	C12, C17	1 uF	2
6	C15	47uF	1
7	C16, C28, C30	2.2 uF	3
8	C21	220nF	1
9	C25, C31, C32	10 nF	3
10	C33	1.5 pF	1
11	C34, C35	8pF	2
12	C36	2 pF	1
13	C37	0.3pF	1
14	C38, C39	NC	2
15	FB1	BLM15AG121SN1D	1
16	L1	2.2 uH	1
17	L3	4.7uH	1
18	L4	2.7 nH	1
19	L5, L6	3.5 nH	2

Bill Of Materials

Line #	Designator	Comment	Quantity
20	LED1	SML-LX0404SIUPGUSB	1
21	P1	RM-1238-B02-41	1
22	P2	504754-1100	1
23	P3	51281-1098	1
24	R1, R3, R6, R7, R8, R9	1 M	6
25	R2, R15, R16	1.5 k	3
26	R4	100 k	1
27	R13, R14	0R0	2
28	R19	10 k	1
29	U1	NRF54L15-QF	1
30	U2	M95P32-IXCST/EF	1
31	U3	TPS62840YBGR	1
32	U4	BQ25180YBGR	1
33	U5	LP5562TME	1
34	U6	TPSM831021SIUR	1
35	U7	BQ27427YZFR	1
36	U8	BHI360	1
37	X1	32 MHz	1
38	X2	32.768kHz	1

		SensWear-V1R1		
Designer/Engineer		Board Title		
Yusein Ali		SensWear-Hub		
Drawn By		Document Name		
Yusein Ali		SensWear-Hub-assembly.PCBDwf		
Approved By		Ver.	Rev.	Date
Dariush Salami		1	B0	01.03.2026