

EXPERIMENT – 14

EMBEDDED C PROGRAM TO DISPLAY "HELLO WORLD" MESSAGE

AIM: To write an Embedded C program to display “HELLO WORLD” message using Keil software.


OBJECTIVES:

1. To configure the 8051 UART for serial communication.
2. To set Timer1 for 9600 baud rate.
3. To continuously transmit the “Hello World” message.

PROGRAM:

```
#include <reg51.h>
#include <stdio.h>
void main(void)
{
    SCON = 0x50;
    TMOD = 0x20;
    TH1 = 0xFD;
    TR1 = 1;
    TI = 1;
    while(1)
    {
        printf("Hello World ! \n ");
    }
}
```

OUTPUT IMAGE:

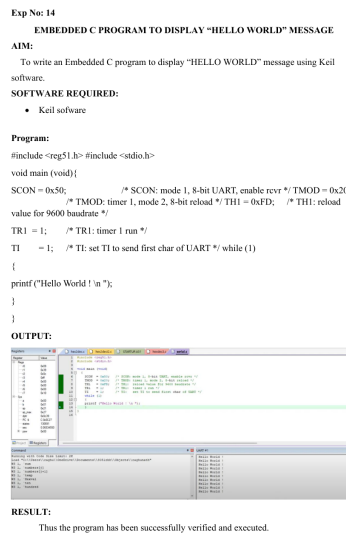

RESULT:

Thus the program has been successfully verified and executed.