

LEGEND

- C1

USB 3.0 micro-B edge X-, centre 39.01, body 13.00 wide
- C2

5 V DC barrel jack edge X-, centre 58.24, body 9.40 wide
- C3

SMA, TX edge X+, centre 20.45, body 10.00 wide
- C4

SMA, RX edge X+, centre 60.33, body 10.00 wide
- C5

SMB reference clock, right angle edge Y+, centre 91.25, body 8.00 wide
- U1


Third SMA position, unfitted edge Y-, centre 70.84
- U2

Expansion header, 2 x 20 at 1.27 mm edge Y-, centre 25.25
- U3

U.FL alternate, 2.1 mm inboard edge X+, centre 34.79
- U4

U.FL alternate, 2.1 mm inboard edge X+, centre 45.22
- U5

U.FL alternate, 1.4 mm inboard edge Y-, centre 57.66

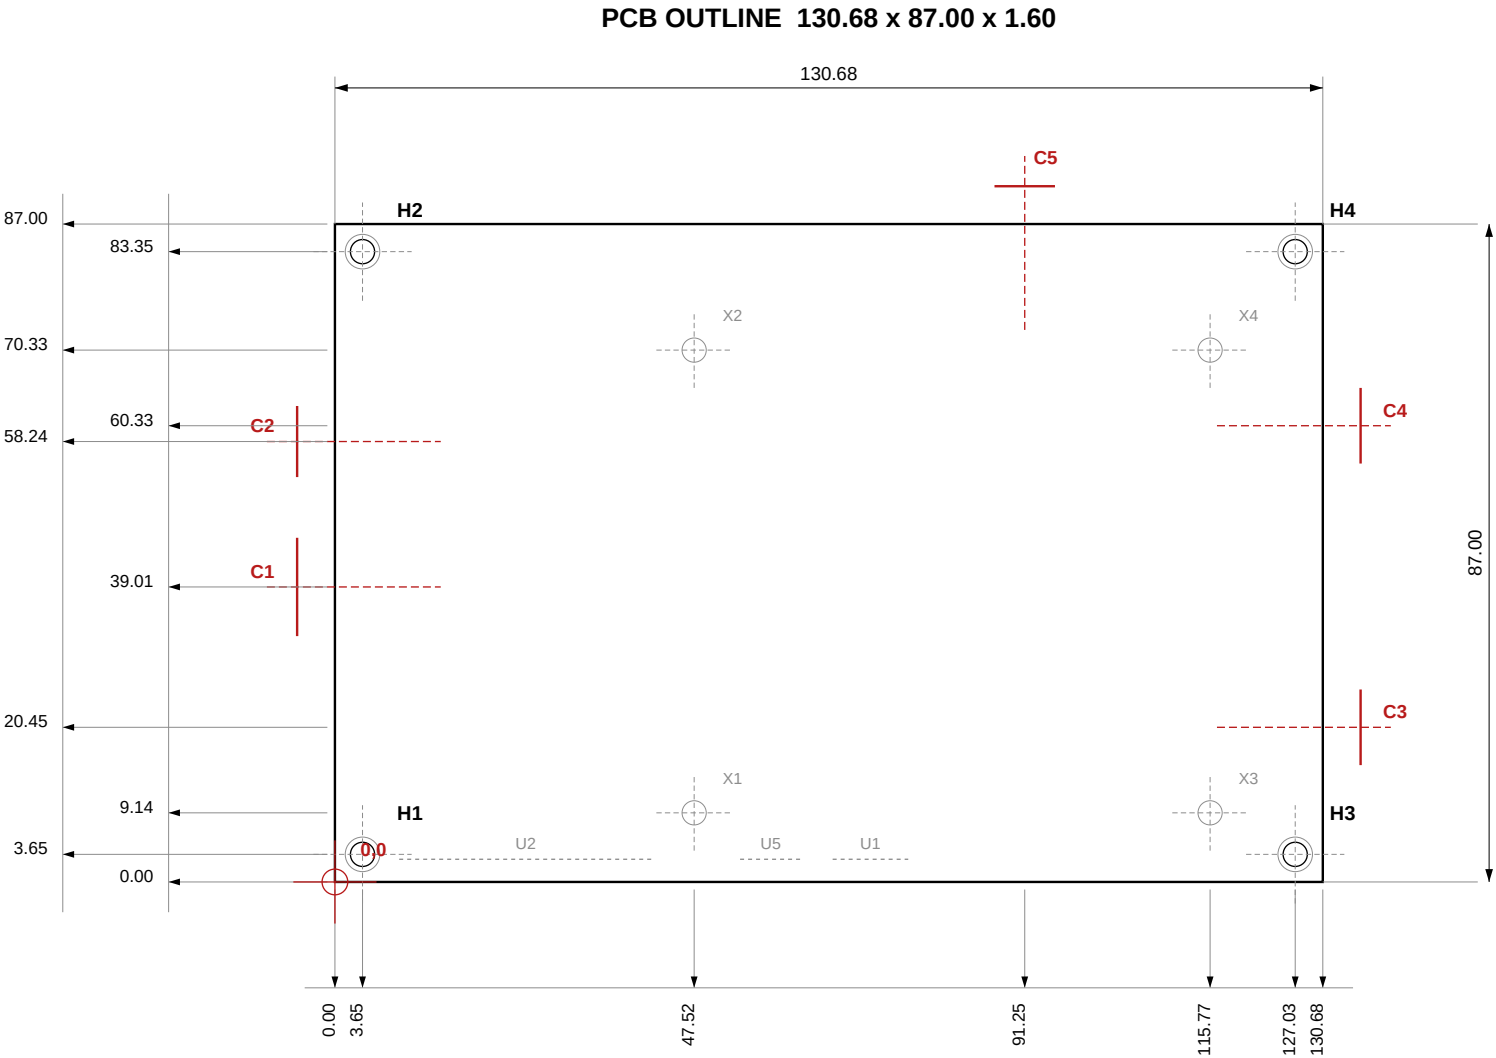

H1 to H4 mounting holes used by this case. 3.20 clearance shown solid, 0.180 in (4.57) DXF pad shown grey. Verify the drill size.

X1 to X4 further DXF holes, most likely XB-200 standoffs. Not used.

Red connector body centre and width at the board edge.

Grey features that get no wall opening.

PCB FEATURES (datum = bottom-left PCB corner)

Ref	Feature	X	Y	Note
H1	Mounting hole, case screw	3.65	3.65	3.20 clr
H2	Mounting hole, case screw	3.65	83.35	3.20 clr
H3	Mounting hole, case screw	127.03	3.65	3.20 clr
H4	Mounting hole, case screw	127.03	83.35	3.20 clr
X1	Mounting hole, unused	47.52	9.14	XB-200
X2	Mounting hole, unused	47.52	70.33	XB-200
X3	Mounting hole, unused	115.77	9.14	XB-200
X4	Mounting hole, unused	115.77	70.33	XB-200
C1	USB 3.0 micro-B	0.00	39.01	body 13.00
C2	5 V DC barrel jack	0.00	58.24	body 9.40
C3	SMA, TX	130.68	20.45	body 10.00
C4	SMA, RX	130.68	60.33	body 10.00
C5	SMB reference clock, right angle	91.25	87.00	body 8.00
U1	Third SMA position, unfitted	70.84	0.00	no opening
U2	Expansion header, 2 x 20 at 1.27 mm	25.25	0.00	no opening
U3	U.FL alternate, 2.1 mm inboard	130.68	34.79	no opening
U4	U.FL alternate, 2.1 mm inboard	130.68	45.22	no opening
U5	U.FL alternate, 1.4 mm inboard	57.66	0.00	no opening

WALL OPENINGS (datum = outside corner of the case)

Ref	Edge	Centre	Width	Height range
C1	X-	41.81	14.60	7.20 to 13.60
C2	X-	61.04	11.00	7.40 to 19.40
C3	X+	23.25	11.60	7.00 to 17.00
C4	X+	63.13	11.60	7.00 to 17.00
C5	Y+	94.05	9.60	7.20 to 15.60

Each opening also has an outer relief pocket 2.00 wider on every side, 1.40 deep, for cable overmoulds.

HEIGHT STACK-UP (from outside of base floor)

Outside of floor	0.00
Inside of floor	2.40
Standoff top, PCB underside	6.40
PCB top surface	8.00
Parting plane, base to lid	11.00
Cavity ceiling	22.00
Outside of lid	24.40


Overall 136.28 x 92.60 x 24.40

Cavity 131.48 x 87.80, wall 2.40, corner R3.00

Fasteners 4 x M3 through lid into M3 inserts, bore 4.00 x 5.00 deep

OPENING REFS

- C1 USB 3.0 micro-B centre 41.81, 14.60 wide, z 7.20 to 13.60
- C2 5 V DC barrel jack centre 61.04, 11.00 wide, z 7.40 to 19.40
- C3 SMA, TX centre 23.25, 11.60 wide, z 7.00 to 17.00
- C4 SMA, RX centre 63.13, 11.60 wide, z 7.00 to 17.00
- C5 SMB reference clock, right angle centre 94.05, 9.60 wide, z 7.20 to 15.60

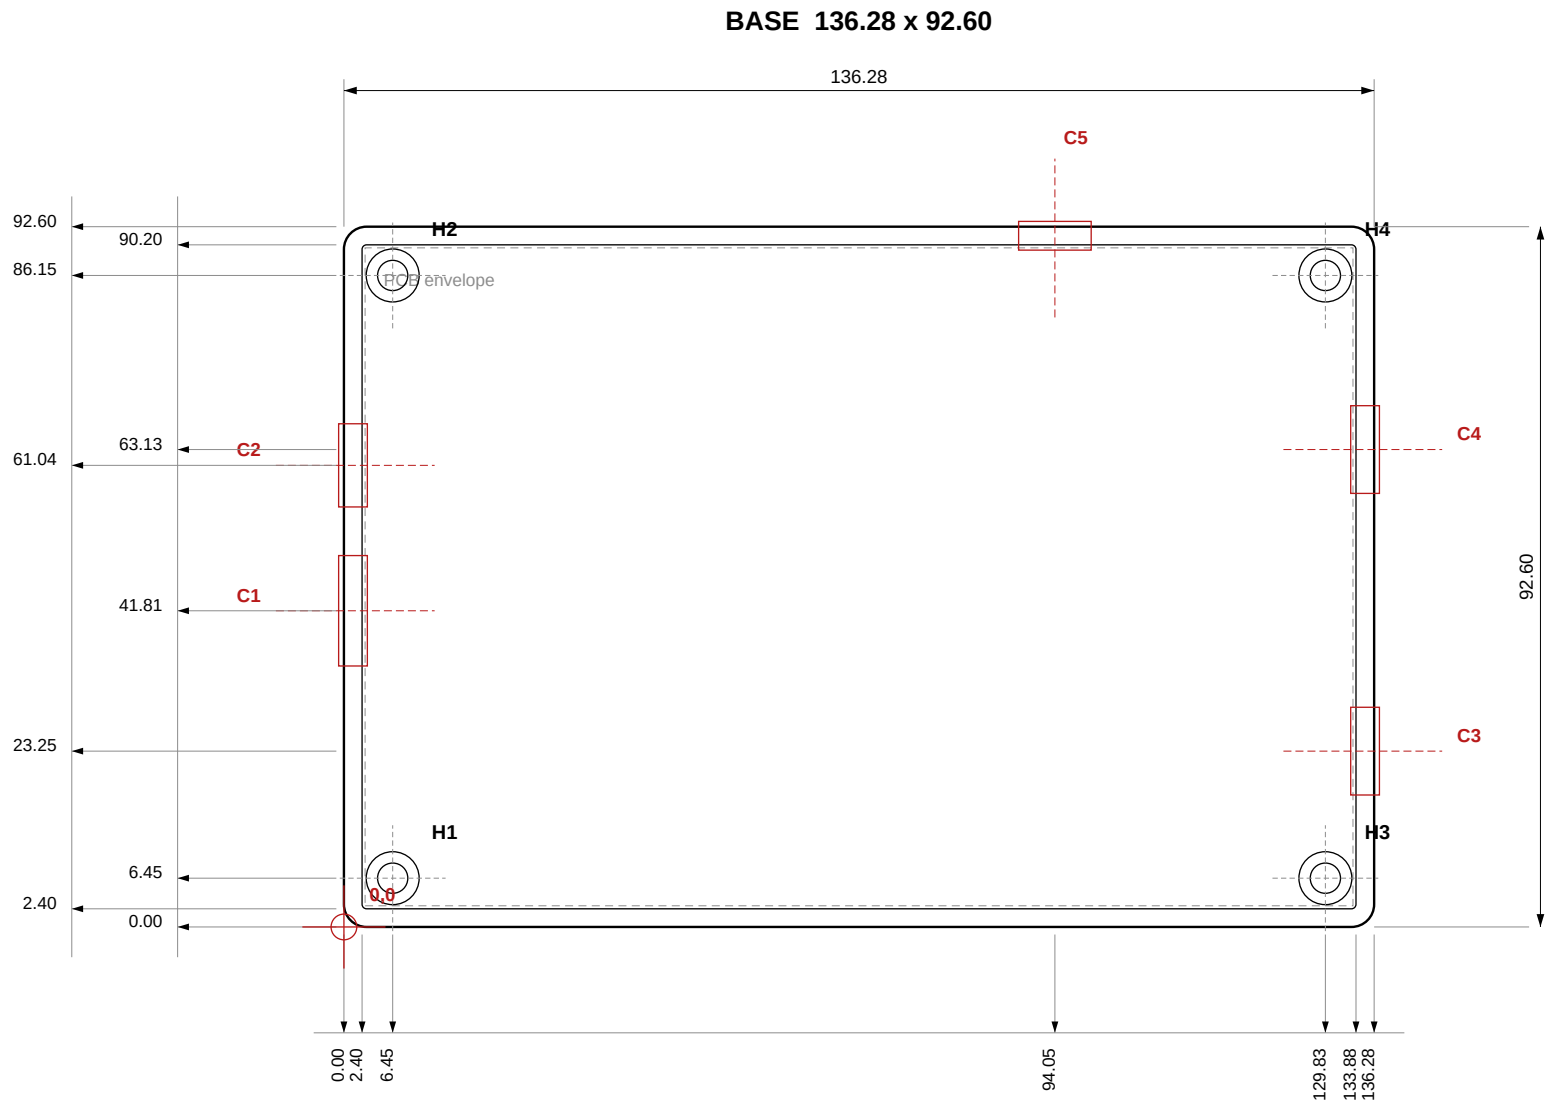


NOTES

- Standoff OD 7.00, height 4.00 above the floor.
- Insert bore 4.00 dia x 5.00 deep for M3 heat-set inserts.
- Wall reduced to 1.20 for the top 3.00 to form the lip rebate.
- Base height 11.00. Floor 2.40.


OPENING REFS

- C1 USB 3.0 micro-B centre 41.81, 14.60 wide, z 7.20 to 13.60
- C2 5 V DC barrel jack centre 61.04, 11.00 wide, z 7.40 to 19.40
- C3 SMA, TX centre 23.25, 11.60 wide, z 7.00 to 17.00
- C4 SMA, RX centre 63.13, 11.60 wide, z 7.00 to 17.00
- C5 SMB reference clock, right angle centre 94.05, 9.60 wide, z 7.20 to 15.60

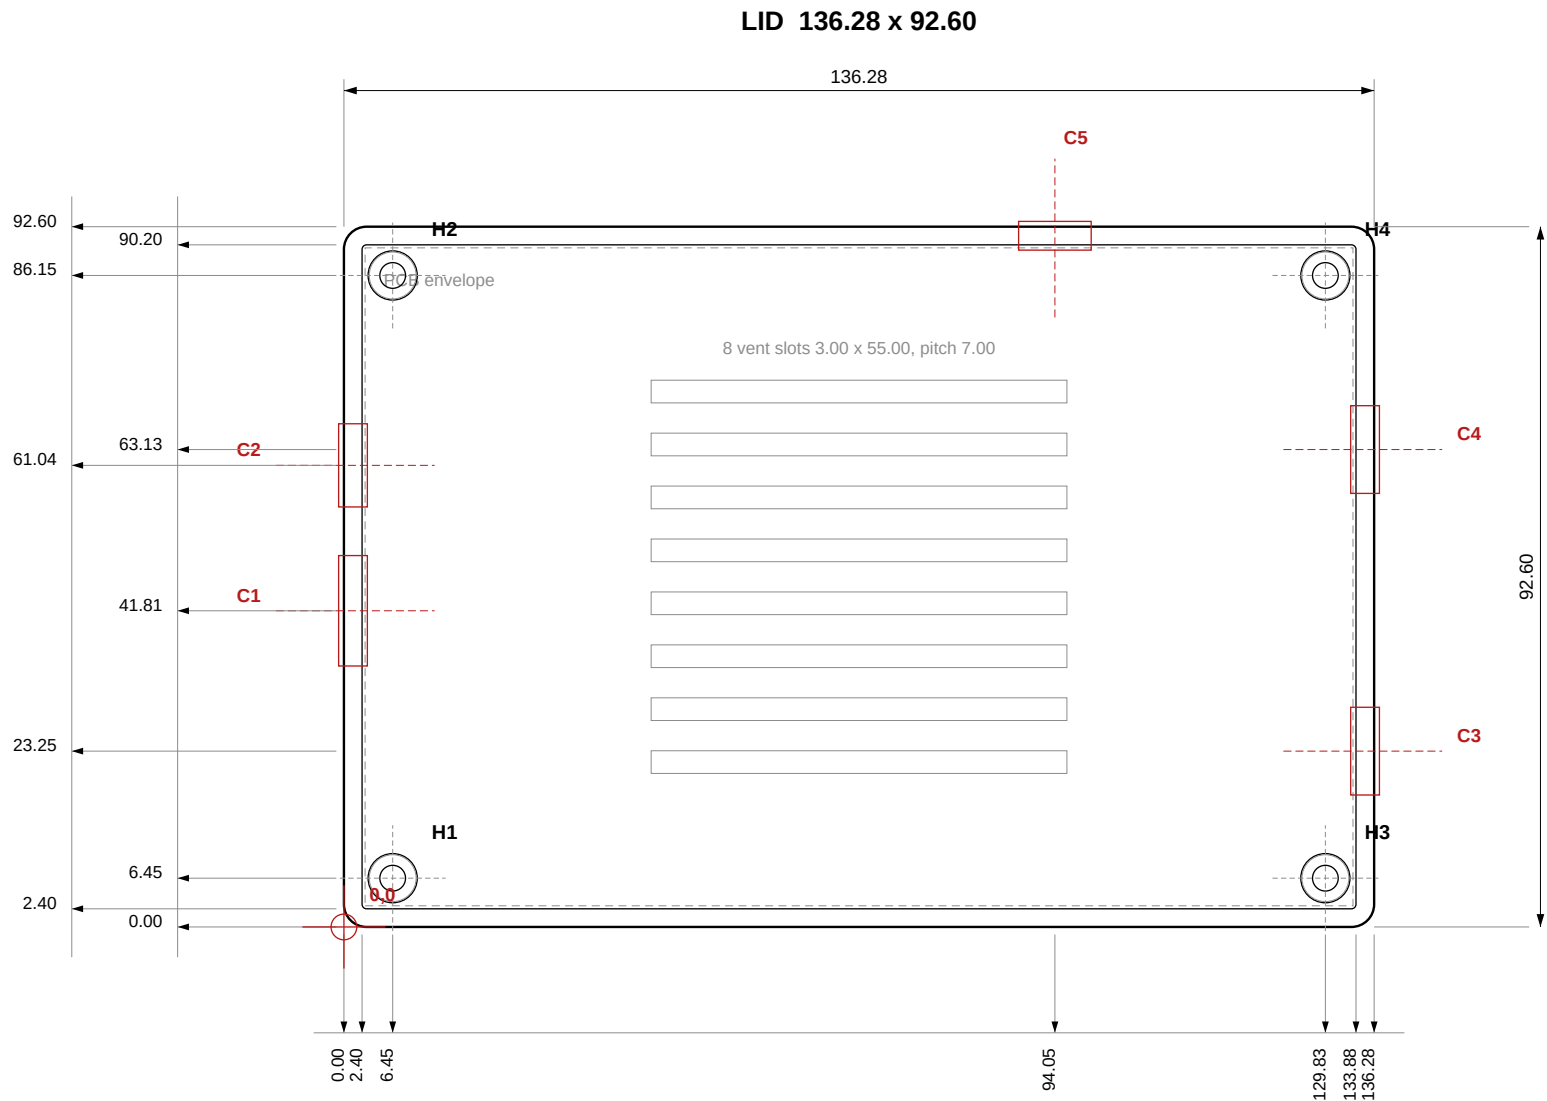


NOTES

- Boss OD 6.50, from PCB top face to cavity ceiling.
- Screw 3.40 clearance, counterbore 6.20 dia x 3.20 deep.
- Lip 1.20 thick x 3.00 deep, 0.20 slip fit each side.
- Lid height 13.40 above the parting plane. Top plate 2.40.

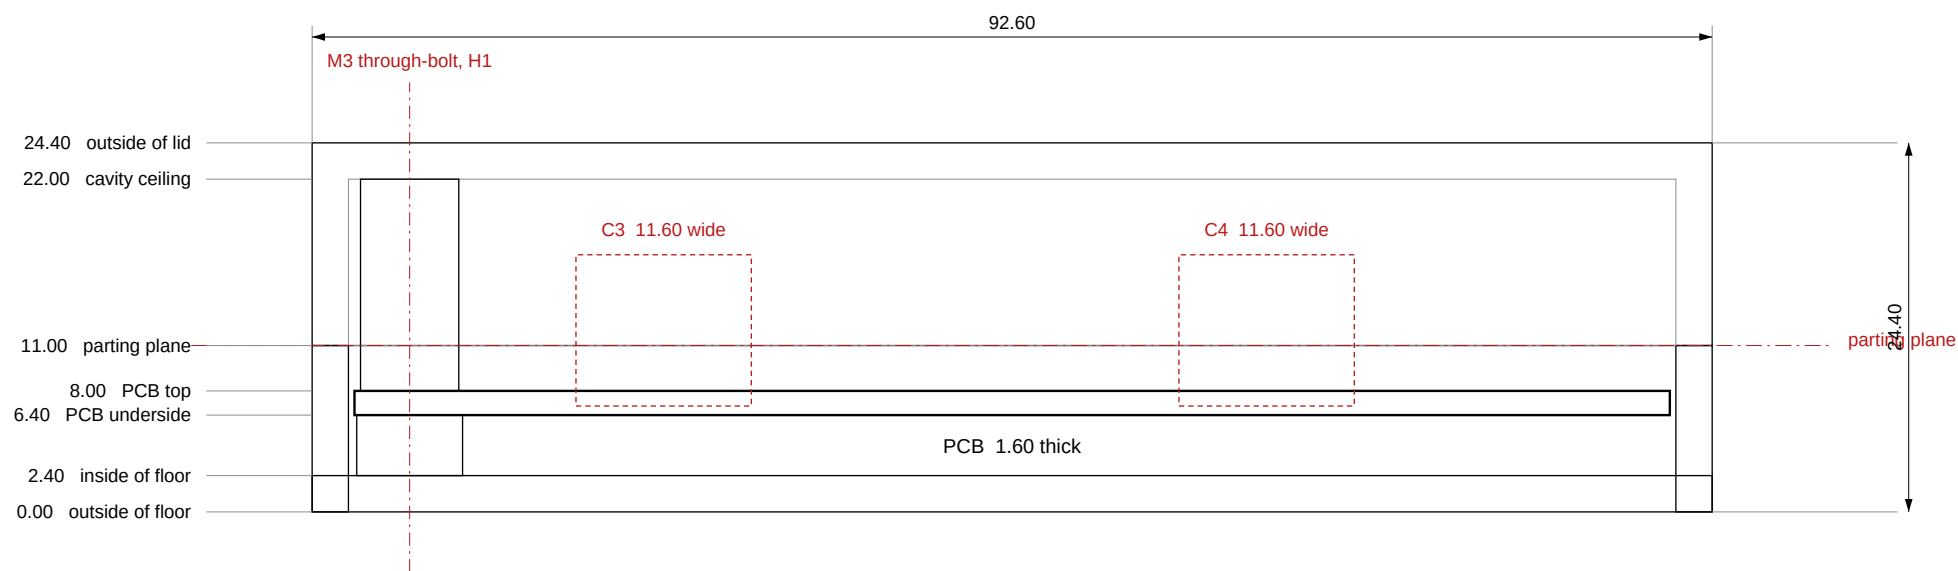

Cut plane runs parallel to the short PCB edge, 6.45 from the case datum, through openings C3 and C4 and the H1 screw column.
Drawn at 2:1. Values on the left are heights above the outside of the base floor.

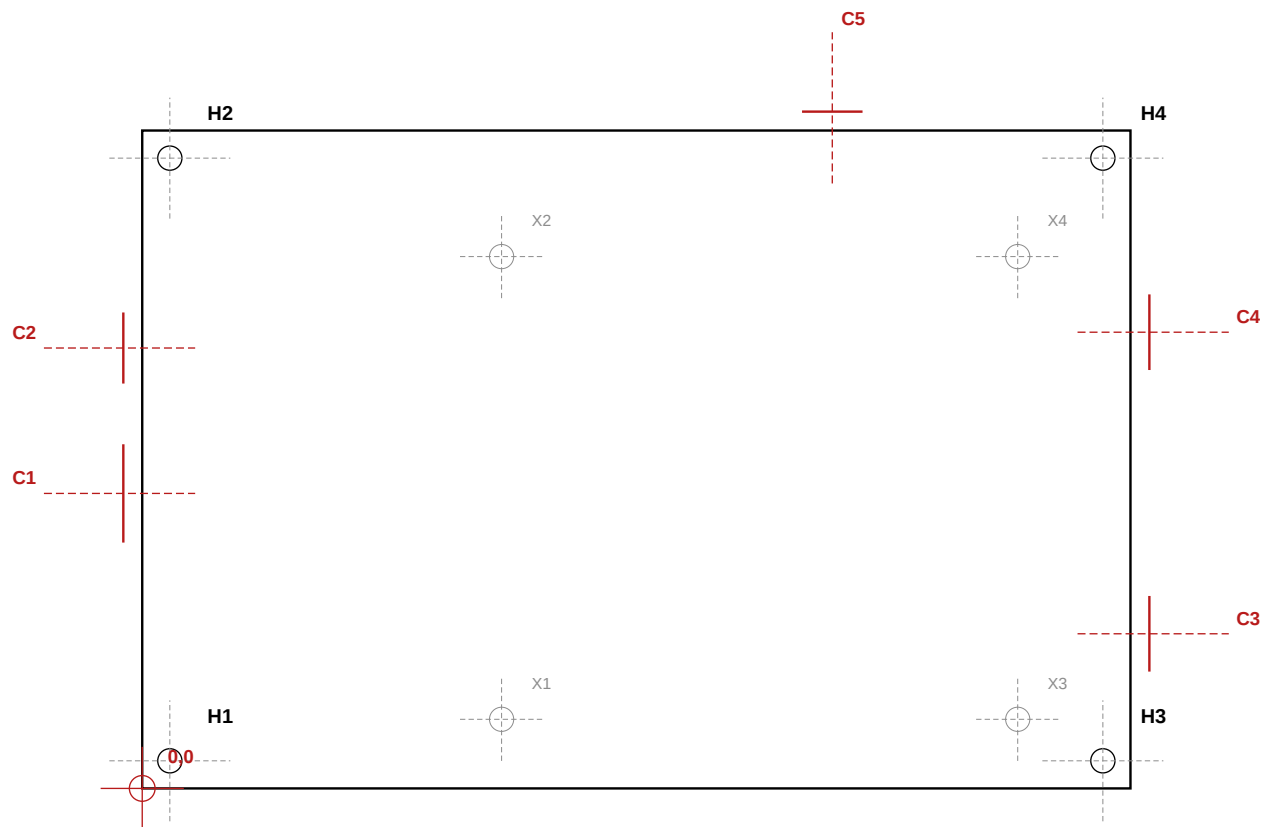

SCALE CHECK. This bar must measure exactly 100.0 mm.

If it does not, reprint with scaling set to 100 percent or actual size.

Lay the PCB on the outline. Every hole centre and connector centreline should sit under its mark.

Ticks outside the outline show connector body width; the dashed line is its centre.

bladeRF x40 enclosure

PRINT AT 100 PERCENT, NO FIT TO PAGE

All dimensions mm. Datum marked on each view.